Prüfbericht-Nr.: *Test report no.:*	**CN26CUF1 001**	**Auftrags-Nr.:** *Order no.:*	27200551	Seite 1 von 51 *Page 1 of 51*
Kunden-Referenz-Nr.: *Client reference no.:*	N/A	**Auftragsdatum:** *Order date:*	2025-11-03	
Auftraggeber: *Client:*	**Edifier International Limited** P.O. Box 6264 General Post Office, Hong Kong			
Prüfgegenstand: *Test item:*	Multimedia Speaker			
Bezeichnung / Typ-Nr.: *Identification / Type no.:*	R1850DB, EDF100004, EDF100022, EDF100023, R1855DB (Trademark: EDIFIER)			
Auftrags-Inhalt: *Order content:*	Type test			
Prüfgrundlage: *Test specification:*	EN 300 328 V2.2.2 (2019-07) EN 301 489-1 V2.2.3 (2019-11) EN 301 489-17 V3.3.1 (2024-09) EN 55032:2015+A11:2020 EN 55035:2017+A11:2020 EN IEC 61000-3-2:2019+A1 EN 61000-3-3:2013+A2 EN 62479:2010 EN 62368-1:2014+A11:2017		ETSI EN 300 328 V2.2.2 (2019-07) ETSI EN 301 489-1 V2.2.3 (2019-11) ETSI EN 301 489-17 V3.3.1 (2024-09) BS EN 55032:2015+A11:2020 BS EN 55035:2017+A11:2020 BS EN IEC 61000-3-2:2019+A1 BS EN 61000-3-3:2013+A2 BS EN 62479:2010 BS EN 62368-1:2014+A11:2017	
Wareneingangsdatum: *Date of sample receipt:*	2025-11-25			
Prüfmuster-Nr.: *Test sample no.:*	S25101023			
Prüfzeitraum: *Testing period:*	2025-11-25 – 2025-12-31			
Ort der Prüfung: *Place of testing:*	Guangdong Dongdian Testing Service Co.,Ltd.			
Prüflaboratorium: *Testing laboratory:*	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: *Test result*:*	Pass			



geprüft von: *tested by:*	x Signed by: Harry W. C. Wu	**genehmigt von:** *authorized by:*	x Signed by: Alex Lan
Datum: *Date:* 2026-03-16		**Ausstellungsdatum:** *Issue date:* 2026-03-16	
Stellung / Position	Project Manager	**Stellung** / Position	Authorizer

Sonstiges / *Other*:

This test report is based on original test report CN215XLV 001 add an alternative power board, add an alternative supply connection (AC inlet and detachable supply cord), add Model No. and upgraded test standards to latest version, all EMC items and Radiated Spurious Emissions of Radio Spectrum were arranged retest after engineering judgement and other test data are copy from original test report.

This report is for Article 3.2 Radio Spectrum, Article 3.1b EMC and Article 3.1a Health requirements only.

Refer to TÜV Rheinland report 60367009 004 for details of Article 3.1a Electrical Safety requirements.

Zustand des Prüfgegenstandes bei Anlieferung: Prüfmuster vollständig und unbeschädigt
Condition of the test item at delivery: *Test item complete and undamaged*

* Legende:	P(ass) = entspricht o.g. Prüfgrundlage(n)	F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	N/A = nicht anwendbar	N/T = nicht getestet
** Legend:*	*P(ass) = passed a.m. test specification(s)*	*F(ail) = failed a.m. test specification(s)*	*N/A = not applicable*	*N/T = not tested*

Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.
This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.

Anmerkungen
Remarks

1	Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben. Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden. *The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system.* *Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.*
2	Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature *As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature*
3	Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt. *Test clauses with remark of * are subcontracted to qualified subcontractors and descripted under the respective test clause in the report.* *Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.*
4	Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnisen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2023, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezueglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019. *The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the “Zero Guard Band Rule” and “Simple Acceptance” in accordance with ILAC G8:2019 and IEC Guide 115:2023, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.*

Test Summary

5.1.1 RF OUTPUT POWER
RESULT: Pass

5.1.2 DUTY CYCLE, TX-SEQUENCE, TX-GAP
RESULT: Not applicable

5.1.3 ACCUMULATED TRANSMIT TIME, FREQUENCY OCCUPATION AND HOPPING SEQUENCE
RESULT: Pass

5.1.4 HOPPING FREQUENCY SEPARATION
RESULT: Pass

5.1.5 MEDIUM UTILISATION (MU) FACTOR
RESULT: Not applicable

5.1.6 ADAPTIVITY
RESULT: Pass

5.1.7 OCCUPIED CHANNEL BANDWIDTH
RESULT: Pass

5.1.8 TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN
RESULT: Pass

5.1.9 TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN
RESULT: Pass

5.2.1 RECEIVER SPURIOUS EMISSIONS
RESULT: Pass

5.2.2 RECEIVER BLOCKING
RESULT: Pass

5.2.3 GEO-LOCATION CAPABILITY
RESULT: Not applicable

5.3.1 HARMONICS CURRENT EMISSION ON AC MAINS PORT
RESULT: Pass

5.3.2 VOLTAGE FLUCTUATIONS AND FLICKER ON AC MAINS
RESULT: Pass

5.3.3 CONDUCTED EMISSIONS
RESULT: Pass

5.3.4 RADIATED EMISSIONS
RESULT: Pass

5.3.5 ELECTROSTATIC DISCHARGES (ESD)
RESULT: Pass

5.3.6 RADIO FREQUENCY ELECTROMAGNETIC FIELD (RS)
RESULT: Pass

5.3.8 FAST TRANSIENTS (EFT)
RESULT: Pass

5.3.9 SURGE
RESULT: Pass

5.3.10 RADIO-FREQUENCY CONTINUOUS CONDUCTED (CS)
RESULT: Pass

5.3.11 VOLTAGE DIPS AND INTERRUPTIONS
RESULT: Pass

6.1.1 ELECTROMAGNETIC FIELDS

RESULT: *Pass*

Contents

1 GENERAL REMARKS 7
1.1 COMPLEMENTARY MATERIALS 7
2 TEST SITES 7
2.1 TEST FACILITIES 7
2.2 LIST OF TEST AND MEASUREMENT INSTRUMENTS 8
2.3 UNCERTAINTY OF MEASUREMENT 12
3 GENERAL PRODUCT INFORMATION 14
3.1 PRODUCT FUNCTION AND INTENDED USE 14
3.2 RATINGS AND SYSTEM DETAILS 14
3.3 INDEPENDENT OPERATION MODES 16
3.4 NOISE GENERATING AND NOISE SUPPRESSING PARTS 16
3.5 SUBMITTED DOCUMENTS 16
4 TEST SET-UP AND OPERATION MODES 17
4.1 PRINCIPLE OF CONFIGURATION SELECTION 17
4.2 TEST OPERATION AND TEST SOFTWARE 17
4.3 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT 17
4.4 COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE 18
5 TEST RESULTS ERM 19
5.1 TRANSMITTER REQUIREMENT & TEST SUITES 19
5.1.1 RF Output Power 19
5.1.2 Duty Cycle, TX-sequence, TX-gap 20
5.1.3 Accumulated Transmit Time, Frequency Occupation and Hopping Sequence 21
5.1.4 Hopping Frequency Separation 22
5.1.5 Medium Utilisation (MU) Factor 23
5.1.6 Adaptivity 24
5.1.7 Occupied Channel Bandwidth 25
5.1.8 Transmitter Unwanted Emissions in the Out-of-band Domain 26
5.1.9 Transmitter Unwanted Emissions in the Spurious Domain 27
5.2 RECEIVER REQUIREMENT & TEST SUITES 28
5.2.1 Receiver Spurious Emissions 28
5.2.2 Receiver Blocking 29
5.2.3 Geo-location Capability 30
5.3 TEST RESULTS OF EMC REQUIREMENT 31
5.3.1 Harmonics Current Emission on AC Mains port 31
5.3.2 Voltage Fluctuations and Flicker on AC Mains 32
5.3.3 Conducted Emissions 33
5.3.4 Radiated Emissions 34
5.3.5 Electrostatic Discharges (ESD) 35
5.3.6 Radio Frequency Electromagnetic Field (RS) 36
5.3.7 Fast Transients (EFT) 38
5.3.8 Surge 39
5.3.9 Radio-Frequency Continuous Conducted (CS) 40
5.3.10 Voltage Dips and Interruptions 42

6 SAFETY HUMAN EXPOSURE 43

6.1 HUMAN EXPOSURE TO ELECTROMAGNETIC FIELDS 10MHZ-300GHZ 43

6.1.1 *Electromagnetic Fields 43*

7 PHOTOGRAPHS OF THE TEST SET-UP 44

8 LIST OF TABLES 51

9 LIST OF PHOTOGRAPHS 51

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Test Results of Radio Spectrum.

Appendix B: Test Results of EMC.

2 Test Sites

2.1 Test Facilities

Guangdong Dongdian Testing Service Co.,Ltd.
Unit 2, Building 1, No.17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808

CNAS No.: L6451

The tests at the test sites have been conducted under the supervision of a TÜV engineer.

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

☒ RF Connected Test				
Equipment	Manufacturer	Model No.	Serial Number	Due Date
SIGNAL ANALYZER	R&S	FSQ26	101272	2026/03/28
Wideband Radio Communication Tester	R&S	CMW500	120259	2026/03/28
MXG Vector Signal Generator	KEYSIGHT	N5182B	MY59100192	2026/03/28
MXG Vector Signal Generator	Agilent	N5182A	MY19060405	2026/03/28
RF Control Unit	Tonscend	JS0806-2	158060010	2026/03/28
TEMP&HUMI Programmable Chamber	ZHIXIANG	ZXGDJS-150L	ZX170110-A	2026/03/28
Test Software	Tonscend	JS1120-3	Ver.3.2.22	N/A

☒ RF Radiated Test				
Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
Micro-Tronics filters	REBES	BRM50702	DDT-ZC03242	/
RF Cable	N/A	W24.02 HL-562	DDT-ZC04022	2026/03/28
RF cable	Yuhu Technology	JCTB810-NJ-NJ-9M	DDT-ZC02538	2026/03/28
RF cable	Zhongke Junchuang	JCT26S-NJ-NJ-1.5M	DDT-ZC02762	/
RF cable	Yuhu Technology	ZT26S-SMAJ-SMAJ-1M	DDT-ZC02037	2026/03/28
RF Cable	N/A	W13.02 AP1-X2	DDT-ZC04023	2026/03/28
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2026/03/28
Pre-amplifier	COM-POWER	PAM-118A	DDT-ZC01293	2026/08/10
High pass filter	Micro-Tronics	HPM50102	DDT-ZC00561	2026/03/28
EMI TEST RECEIVER	R&S	ESU26	DDT-ZC01909	2026/03/28
High pass filter	Micro-Tronics	HPM50108	DDT-ZC00560	2026/03/28
High Pass filter	Xi'an Xingbo	XBLBQ-GTA67	DDT-ZC02179	2026/03/28
Micro-Tronics filters	REBES	BRM50716	DDT-ZC03240	/
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2026/04/01
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC02050	2026/07/25
Hochgewinn-Hornantenne	SCHWARZBECK	BBHA 9120 D	DDT-ZC02129	2026/08/11
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2026/08/18
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2026/03/28

Harmonics Current Emission & Flicker

Equipment Name	Manufacturer	Model	Equipment No.	Cal. Due to	Cal. Date
Harmonics&Flicker Analyzer	emtest	DPA503N	DDT-ZC04145	2026-10-19	2025-10-20
Flicker impedance	AMETEK CTS	AIF 503N32.4	DDT-ZC04558	2026-10-19	2025-10-20
NET.CONTROL	EM TEST	N/A	DDT-ZC00795	/	/
Electronic Power Source	emtest	NetWave 20-400	DDT-ZC04144	2026-03-28	2025-03-29

Conducted emissions at AC mains power ports

Equipment Name	Manufacturer	Model	Equipment No.	Cal. Due to	Cal. Date
EMI Test Receiver	R&S	ESCI	DDT-ZC01972	2026-03-28	2025-03-29
Two Line V-Network	R&S	ENV216	DDT-ZC00586	2026-07-06	2025-07-07
Pulse Limiter	R&S	KH43101	DDT-ZC00747	2026-03-28	2025-03-29
Coaxial signal signal cable	H&S	RG214-5	DDT-ZC01817	2026-03-28	2025-03-29
Condected Radiated Software	Audix	E3	DDT-ZC00562	/	/
Two Line V-Network	R&S	ENV216	DDT-ZC02058	2026-07-06	2025-07-07

Radiated emissions test

2#3m chamber

Equipment Name	Manufacturer	Model	Equipment No.	Cal. Due to	Cal. Date
EMI Test Receiver	R&S	ESCI 3	DDT-ZC01972	2026-03-28	2025-03-29
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2026-08-18	2025-08-19
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC00246	2026-07-18	2025-07-19
RF Cable	H&S	RG214-11	DDT-ZC01497	2026-03-28	2025-03-29
EMI Test Software	Audix/TW	e3	DDT-ZC01252	/	/
Horn Antenna	SCHWARZBECK	BBHA9120 D	DDT-ZC01218	2026-08-13	2025-08-14
Preamplifier	COM-POWER	PAM-118A	DDT-ZC01489	2026-08-10	2025-08-11
Spectrum Analyzer	Agilent	E4440A	DDT-ZC01445	2026-03-28	2025-03-29
RF cable	Zhongke Junchuang	JCTB810-NJ-NJ-7M	DDT-ZC02759	2026-07-22	2025-07-23

Electrostatic discharge (ESD)

Equipment Name	Manufacturer	Model	Equipment No.	Cal. Due to	Cal. Date
ESD Generator	TESEQ AG	NSG 437	DDT-ZC00247	2026-08-15	2025-08-16

Radio Frequency Electromagnetic Fields (RS)

Equipment Name	Manufacturer	Model	Equipment No.	Cal. Due to	Cal. Date
MXG Vector Signal Generator	Agilent	N5182A	DDT-ZC00239	2026-07-06	2025-07-07
Power meter	Agilent	E4417A	DDT-ZC00934	2026-07-06	2025-07-07
Power sensor	Agilent	E9323A	DDT-ZC00938	2026-08-10	2025-08-11
Power sensor	Agilent	E9323A	DDT-ZC00939	2026-08-10	2025-08-11
Electric Field Sensors	DARE Instruments	CTR1001S	DDT-ZC02865	2026-11-03	2025-11-04
Power Amplifier	Wonder	HPA80M1000 M500	DDT-ZC00940	2026-07-06	2025-07-07
Power Amplifier	Wonder	HPA1000M25 00M300	DDT-ZC00941	2026-07-06	2025-07-07
Power Amplifier	Wonder	HPA2500M60 00M200	DDT-ZC00942	2026-07-06	2025-07-07
RS Test Software	SKET	EMC-S	DDT-ZC01455	/	/
Log-Periodic Antenna	schwarzbeck	STLP 9129	DDT-ZC04673	2026-10-19	2025-10-20
Audio Analyzer	R&S	UPL	DDT-ZC04520	2026-10-19	2025-10-20

Electrical fast transients(EFT)

Equipment Name	Manufacturer	Model	Equipment No.	Cal. Due to	Cal. Date
EFT Generator	EMC Partner	TRA3000F	DDT-ZC00546	2026-03-28	2025-03-29
Coupling Clamp EFT	EMC Partner	CN-EFT1000	DDT-ZC00547	2026-03-28	2025-03-29

Surge

Equipment Name	Manufacturer	Model	Equipment No.	Cal. Due to	Cal. Date
Lightning surge generator	SHANGHAI LIONCEL	LSG-512CB	DDT-ZC01536	2026-08-11	2025-08-12
Surge three-phase decoupling network	SHANGHAI LIONCEL	DN-533P	DDT-ZC01538	2026-08-11	2025-08-12
Surge three-phase coupling network	SHANGHAI LIONCEL	CN-533P	DDT-ZC01537	2026-08-11	2025-08-12
EMS test control system	SHANGHAI LIONCEL	SCU-614A	DDT-ZC01535	/	/
Surge three-phase coupling network decoupling network	SHANGHAI LIONCEL	CDN-5310P	DDT-ZC01539	2026-08-11	2025-08-12

Voltage Dips and Interruptions Test

Equipment Name	Manufacturer	Model	Equipment No.	Cal. Due to	Cal. Date
EFT Generator	EMC Partner	TRA3000F	DDT-ZC00546	2026-03-28	2025-03-29
DIPS TESTER	EMC Partner	EXT-TRA3000D	DDT-ZC00548	2026-03-28	2025-03-29

Radio-frequency continuous conducted (CS)

Equipment Name	Manufacturer	Model	Equipment No.	Cal. Due to	Cal. Date
Conducted Immunity Tester	FRANKONIA	CIT-10	DDT-ZC00551	2026-03-28	2025-03-29
CDN	SCHWARZBECK	CDN M2/M3PE 16A	DDT-ZC01558	2026-07-06	2025-07-07
Attenuation	BIRD	DAM75W (6dB)	DDT-ZC00555	2026-07-06	2025-07-07
EM Clamp	FRANKONIA	EMCL	DDT-ZC00556	2026-08-10	2025-08-11
CDN	SHANGHAI LIONCEL	CDN-M3-32	DDT-ZC01540	2026-07-06	2025-07-07
Test Software	FRANKONIA	IEC/EN61000-4-6	DDT-ZC00564	/	/
CS Test Software	SKET	EMC-S	DDT-ZC01429	/	/
CDN	FRANKONIA	CDNT8	DDT-ZC00553	2026-07-06	2025-07-07
Audio Analyzer	R&S	UPL16	DDT-ZC00245	2026-03-28	2025-03-29

Auxiliary Equipment

Equipment Name	Manufacturer	Model	Equipment No.	Cal. Due to	Cal. Date
Audio Analyzer	R&S	UPV	DDT-ZC01246	2026-07-06	2025-07-07
Wideband Radio Communication Tester	R&S	CMW500	120259	2026-03-28	2025-03-29

2.3 Uncertainty of Measurement

The value of the measurement uncertainty of each parameter is listed as below:

Table 2: Maximum Measurement Uncertainty

RF:

Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB (10 MHz ≤ f < 3.6 GHz);
	1.38 dB (3.6 GHz ≤ f < 8 GHz)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB (10 MHz ≤ f < 3.6 GHz);
	1.38 dB (3.6 GHz ≤ f < 8 GHz)
Frequencies Stability	6.7×10^{-8} (Antenna couple method)
	5.5×10^{-8} (Conducted method)
Conducted spurious emissions	0.86 dB (10 MHz ≤ f < 3.6 GHz);
	1.40 dB (3.6 GHz ≤ f < 8 GHz)
	1.66 dB (8 GHz ≤ f < 26.5 GHz)
Uncertainty for radio frequency (RBW < 20 kHz)	3×10^{-8}
Temperature	0.4 ℃
Humidity	2 %
Uncertainty for Radiation Emission test (9 kHz – 30 MHz)	3.44 dB
Uncertainty for Radiation Emission test (30 MHz - 1 GHz)	4.70 dB (Antenna Polarize: V)
	4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz - 40 GHz)	4.10 dB (1 - 6 GHz)
	4.40 dB (6 GHz - 18 GHz)
	3.54 dB (18 GHz - 26 GHz)
	4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power line conduction emission test	3.34dB (150KHz-30MHz)
	3.72dB (9KHz-150KHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

EMC:

Test Item	Uncertainty
Conducted disturbance at mains terminals	1#: 3.72dB (9 kHz to 150 kHz), 3.34dB (150 kHz to 30 MHz)
	2#: 3.75dB (9 kHz to 150 kHz), 3.39dB (150 kHz to 30 MHz)
	3#: 3.78dB (9 kHz to 150 kHz), 3.37dB (150 kHz to 30 MHz)
Uncertainty for radiation emission test (30 MHz-1 GHz)	1#: 4.94 dB (Antenna Polarize: V) 4.68 dB (Antenna Polarize: H)
	2#: 4.94 dB (Antenna Polarize: V) 4.68 dB (Antenna Polarize: H)
	3#: 4.96 dB (Antenna Polarize: V) 4.98 dB (Antenna Polarize: H)
	10m: 4.48 dB (Antenna Polarize: V) 4.64 dB (Antenna Polarize: H)
Uncertainty for radiation disturbance test (1 GHz to 6 GHz)	1#: 4.10 dB (1-6 GHz)
	3#: 4.54 dB (1-6 GHz)
Uncertainty for Flicker test	0.2%
Uncertainty for Harmonic test	5%
Uncertainty for Electrostatic discharge	Rise time: 4% Peak current: 3.1% Current at 30 ns: 3.1% Current at 60 ns: 3.1%
Uncertainty for Surge	Peak of the open-circuit voltage impulse: 3% Front time of the open-circuit voltage impulse: 5% Width of the open-circuit voltage impulse: 5% Peak of the short-circuit current impulse: 2.7% Front time of the short-circuit current impulse: 5% Duration of the short-circuit current impulse: 3%
Uncertainty for Electrical fast transients	Voltage rise time: 3.7% Peak voltage value: 3.4% Voltage pulse width: 3.7%
Uncertainty for Continuous conducted disturbances	0.25dB
Uncertainty for Continuous radio frequency disturbances	1.12dB
Uncertainty for Power-frequency magnetic fields	10%
Uncertainty for Voltage dips and interruptions	3.7%
Temperature	0.4 ℃
Humidity	2%
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3 General Product Information

3.1 Product Function and Intended Use

The product is an Multimedia Speaker with speaker and remote control. It supports Bluetooth function used for audio entertainment in house or similar environment.
All models R1850DB, EDF100004, EDF100022, EDF100023 and R1855DB are same except for the model number.
There are two alternative remote controllers (RC20G and RC18A) for this equipment.

Manufacturer: Beijing Edifier Technology Co., Ltd.
Address: 815, Floor 8, Shuangqiao Building, No.68, North Fourth Ring West Road, Haidian District, 100080 Beijing, P.R. China

Factory: Dongguan Edifier Technology Co., Ltd.
Address: No.2 Gongyedong Road, Songshan Lake Sci.&Tech. Industry Park, Dongguan, 523808 Guangdong, P.R. China

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 3: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment	Multimedia Speaker
Type Designation	R1850DB, EDF100004, EDF100022, EDF100023, R1855DB
Trade Mark	EDIFIER
Operating Voltage	AC 100-240V, 50/60Hz, 300mA
Technical Specification of Bluetooth (BDR & EDR)	
Operating Frequency band	2402 – 2480 MHz
Channel Number	79 channels
Channel separation	1MHz
Extreme Temperature Range	-20ºC to +45ºC
Modulation	GFSK, π/4DQPSK, 8DPSK
Antenna Type	PCB Antenna
Antenna Gain	2.48 dBi(Provide by the Client)

Table 4: RF Channel and Frequency of Bluetooth (BDR & EDR)

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
0	**2402.00**	20	2422.00	40	2442.00	60	2462.00
1	2403.00	21	2423.00	41	2443.00	61	2463.00
2	2404.00	22	2424.00	42	2444.00	62	2464.00
3	2405.00	23	2425.00	43	2445.00	63	2465.00
4	2406.00	24	2426.00	44	2446.00	64	2466.00
5	2407.00	25	2427.00	45	2447.00	65	2467.00
6	2408.00	26	2428.00	46	2448.00	66	2468.00
7	2409.00	27	2429.00	47	2449.00	67	2469.00
8	2410.00	28	2430.00	48	2450.00	68	2470.00
9	2411.00	29	2431.00	49	2451.00	69	2471.00
10	2412.00	30	2432.00	50	2452.00	70	2472.00
11	2413.00	31	2433.00	51	2453.00	71	2473.00
12	2414.00	32	2434.00	52	2454.00	72	2474.00
13	2415.00	33	2435.00	53	2455.00	73	2475.00
14	2416.00	34	2436.00	54	2456.00	74	2476.00
15	2417.00	35	2437.00	55	2457.00	75	2477.00
16	2418.00	36	2438.00	56	2458.00	76	2478.00
17	2419.00	37	2439.00	57	2459.00	77	2479.00
18	2420.00	38	2440.00	58	2460.00	**78**	**2480.00**
19	2421.00	**39**	**2441.00**	59	2461.00		

3.3 Independent Operation Modes

The basic operation modes are:

A. On, Bluetooth mode (BDR & EDR)
   1. Transmitting mode
      a. Low channel
      b. Middle channel
      c. High channel
   2. Receiving mode
      a. Low channel
      d. Middle channel
      b. High channel

B. On, Bluetooth playing
C. On, Line in 1
D. On, Line in 2
E. On, Optical in
F. On, coaxial in
G. On, sub out
H. Off

3.4 Noise Generating and Noise Suppressing Parts

For details refer to the Circuit Diagram.

3.5 Submitted Documents

- Block Diagram
- Schematics
- Rating Label
- User Manual

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

Immunity: The equipment under test (EUT) was configured to have its highest possible susceptibility against the tested phenomena. The test modes were adapted accordingly in reference to the instructions for use.

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5 and chapter 7.

According to clause 3.1, all test were applied on model EDF100022.

4.3 Special Accessories and Auxiliary Equipment

Table 5: List of Accessories and Auxiliary Equipment

Assistant equipment	Manufacturer	Model number	Description	other
Mobile Phone	HUAWEI	HMA-AL00	/	/
Mobile Phone	Apple	MT9T2CH/A	/	/
Mobile Phone	HUAWEI	HMA-AL00	/	/
Audio converter	N/A	ZH-AZ103	/	/
Mobile Phone	HUAWEI	VOG-AL00	/	/
Mobile Phone	Apple	MQ6K2CH/A	/	/
DVD Player	PIONEER	BDP-150	/	/
Dummy load	/	/	10 kΩ	/

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

5 Test Results ERM

5.1 Transmitter Requirement & Test Suites

5.1.1 RF Output Power

RESULT: **Pass**

Test Specification

Test standard	:	EN 300 328 V2.2.2
Test requirement	:	Clause 4.3.1.2 of EN 300 328
Limit	:	Clause 4.3.1.2.3 of EN 300 328
Test suites	:	Clause 5.4.2 of EN 300 328

Test Setup

Date of testing	:	2025-11-25 to 2025-12-31
Test voltage	:	AC 230V, 50Hz
Test environment	:	Normal and extreme temperature
Operation mode	:	A1
Ambient temperature	:	23.8 ℃
Relative humidity	:	46 %
Atmospheric pressure	:	101.4 kPa

For the measurement records, refer to the appendix A.

5.1.2 Duty Cycle, TX-sequence, TX-gap

RESULT: **Not applicable**

Test Specification

Test standard	:	EN 300 328 V2.2.2
Test requirement	:	Clause 4.3.1.3 of EN 300 328
Limit	:	Clause 4.3.1.3.3 of EN 300 328
Test suites	:	Clause 5.4.2 of EN 300 328

Exemption Conditions:

☒ These requirements apply to non-adaptive frequency hopping equipment or to adaptive frequency hopping equipment operating in non-adaptive mode.

☒These requirements apply to non-adaptive equipment or to adaptive equipment when operating in a non-adaptive mode. The equipment is using wide band modulations other than FHSS.

Conclusion:

The EUT is adaptive equipment and does not support non-adaptive mode, hence this requirement is not applicable.

5.1.3 Accumulated Transmit Time, Frequency Occupation and Hopping Sequence

RESULT: **Pass**

Test Specification

Test standard	:	EN 300 328 V2.2.2
Test requirement	:	Clause 4.3.1.4 of EN 300 328
Limit	:	Clause 4.3.1.4.3 of EN 300 328
Test suites	:	Clause 5.4.4 of EN 300 328

Test Setup

Date of testing	:	2025-11-25 to 2025-12-31
Test voltage	:	AC 230V, 50Hz
Test environment	:	Normal temperature
Operation mode	:	A1
Ambient temperature	:	23.8 ℃
Relative humidity	:	46 %
Atmospheric pressure	:	101.4 kPa

For the measurement records, refer to the appendix A.

5.1.4 Hopping Frequency Separation

RESULT: **Pass**

Test Specification

Test standard	:	EN 300 328 V2.2.2
Test requirement	:	Clause 4.3.1.5 of EN 300 328
Limit	:	Clause 4.3.1.5.3 of EN 300 328
Test suites	:	Clause 5.4.5 of EN 300 328

Test Setup

Date of testing	:	2025-11-25 to 2025-12-31
Test voltage	:	AC 230V, 50Hz
Test environment	:	Normal temperature
Operation mode	:	A1
Ambient temperature	:	23.8 ℃
Relative humidity	:	46 %
Atmospheric pressure	:	101.4 kPa

For the measurement records, refer to the appendix A.

5.1.5 Medium Utilisation (MU) Factor

RESULT: **Not applicable**

Test Specification

Test standard	:	EN 300 328 V2.2.2
Test requirement	:	Clause 4.3.1.6 of EN 300 328
Limit	:	Clause 4.3.1.6.3 of EN 300 328
Test suites	:	Clause 5.4.2 of EN 300 328

Exemption Conditions:

☒ This requirement does not apply to adaptive equipment unless operating in a non-adaptive mode.

Conclusion:

The EUT is adaptive equipment and does not support non-adaptive mode, hence this requirement is not applicable.

5.1.6 Adaptivity

RESULT: **Pass**

Test Specification

Test standard	:	EN 300 328 V2.2.2
Test requirement	:	Clause 4.3.1.7.2 of EN 300 328
Limit	:	Clause 4.3.1.7.2.2 of EN 300 328
Test suites	:	Clause 5.4.6 of EN 300 328

Test Setup

Date of testing	:	2025-11-25 to 2025-12-31
Test voltage	:	AC 230V, 50Hz
Test environment	:	Normal temperature
Operation mode	:	A1
Ambient temperature	:	23.8 ℃
Relative humidity	:	46 %
Atmospheric pressure	:	101.4 kPa

For the measurement records, refer to the appendix A.

5.1.7 Occupied Channel Bandwidth

RESULT: **Pass**

Test Specification

Test standard	:	EN 300 328 V2.2.2
Test requirement	:	Clause 4.3.1.8 of EN 300 328
Limit	:	Clause 4.3.1.8.3 of EN 300 328
Test suites	:	Clause 5.4.7 of EN 300 328

Test Setup

Date of testing	:	2025-11-25 to 2025-12-31
Test voltage	:	AC 230V, 50Hz
Test environment	:	Normal temperature
Operation mode	:	A1
Ambient temperature	:	23.8 ℃
Relative humidity	:	46 %
Atmospheric pressure	:	101.4 kPa

For the measurement records, refer to the appendix A.

5.1.8 Transmitter Unwanted Emissions in the Out-of-band Domain

RESULT: **Pass**

Test Specification

Test standard	:	EN 300 328 V2.2.2
Test requirement	:	Clause 4.3.1.9 of EN 300 328
Limit	:	Clause 4.3.1.9.3 of EN 300 328
Test suites	:	Clause 5.4.8 of EN 300 328

Test Setup

Date of testing	:	2025-11-25 to 2025-12-31
Test voltage	:	AC 230V, 50Hz
Test environment	:	Normal temperature
Operation mode	:	A1
Ambient temperature	:	23.8 ℃
Relative humidity	:	46 %
Atmospheric pressure	:	101.4 kPa

For the measurement records, refer to the appendix A.

5.1.9 Transmitter Unwanted Emissions in the Spurious Domain

RESULT: **Pass**

Test Specification

Test standard	:	EN 300 328 V2.2.2
Test requirement	:	Clause 4.3.1.10 of EN 300 328
Limit	:	Clause 4.3.1.10.3 of EN 300 328
Test suites	:	Clause 5.4.9 of EN 300 328

Test Setup

Date of testing	:	2025-11-25 to 2025-12-31
Test voltage	:	AC 230V, 50Hz
Test environment	:	Normal temperature
Operation mode	:	A1
Ambient temperature	:	Refer to test result
Relative humidity	:	Refer to test result
Atmospheric pressure	:	100.1 kPa

For the measurement records, refer to the appendix A.

5.2 Receiver Requirement & Test Suites

5.2.1 Receiver Spurious Emissions

RESULT: **Pass**

Test Specification

Test standard	:	EN 300 328 V2.2.2
Test requirement	:	Clause 4.3.1.11 of EN 300 328
Limit	:	Clause 4.3.1.11.3 of EN 300 328
Test suites	:	Clause 5.4.10 of EN 300 328

Test Setup

Date of testing	:	2025-11-25 to 2025-12-31
Test voltage	:	AC 230V, 50Hz
Test environment	:	Normal temperature
Operation mode	:	A2
Ambient temperature	:	Refer to test result
Relative humidity	:	Refer to test result
Atmospheric pressure	:	100.1 kPa

For the measurement records, refer to the appendix A.

5.2.2 Receiver Blocking

RESULT: **Pass**

Test Specification

Test standard	:	EN 300 328 V2.2.2
Test requirement	:	Clause 4.3.1.12 of EN 300 328
Limit	:	Clause 4.3.1.12.4 of EN 300 328
Test suites	:	Clause 5.4.11 of EN 300 328

Test Setup

Date of testing	:	2025-11-25 to 2025-12-31
Test voltage	:	AC 230V, 50Hz
Test environment	:	Normal temperature
Operation mode	:	A2
Ambient temperature	:	23.8 ℃
Relative humidity	:	46 %
Atmospheric pressure	:	101.4 kPa

For the measurement records, refer to the appendix A.

5.2.3 Geo-location Capability

RESULT: **Not applicable**

Test Specification

Test standard	:	EN 300 328 V2.2.2
Test requirement	:	Clause 4.3.1.13 of EN 300 328

Exemption Conditions:

This requirement only applies to equipment with geo-location capability as defined in clause 4.3.1.13.2.

Conclusion:

The EUT is adaptive equipment and does not support geo-location capability, hence this requirement is not applicable.

5.3 Test Results of EMC Requirement

5.3.1 Harmonics Current Emission on AC Mains port

RESULT: **Pass**

Test Specification

Test standard	:	EN 301 489-17 V3.3.1
Basic standard	:	EN 301 489-1 V2.2.3 EN IEC 61000-3-2: 2019 + A1
Test requirement	:	Clause 8.5 of EN 301 489-1 V2.2.3
Measured harmonics	:	2 - 40
Classification	:	Class A
Limit	:	Table 1 of EN IEC 61000-3-2: 2019+A1

The EUT's rated power is less than 75W and do not belong to lighting equipment, therefore harmonic current test is not applicable in accordance with Clause 7 of EN 61000-3-2: 2014.

5.3.2 Voltage Fluctuations and Flicker on AC Mains

RESULT: **Pass**

Test Specification

Test standard	:	EN 301 489-17 V3.3.1
Basic standard	:	EN 301 489-1 V2.2.3
		EN 61000-3-3:2013+A2
Test requirement	:	Clause 8.6 of EN 301 489-1 V2.2.3
Frequency range	:	0 – 2 kHz
Limit	:	Clause 5 of EN 61000-3-3:2013+A2

Test Setup

Date of testing	:	2025-11-25 to 2025-12-31
Test voltage	:	AC 230V, 50Hz
Operation mode	:	B, C, D, E, F, G
Test ports	:	AC mains terminals
Earthing	:	Not connected
Test configuration	:	Table-top
Ambient temperature	:	24.0 ℃
Relative humidity	:	56.0 %
Atmospheric pressure	:	101.4 kPa

For the measurement records, refer to the appendix B. (Only the worst case was recorded)

5.3.3 Conducted Emissions

RESULT: **Pass**

Test Specification

Test standard	:	EN 301 489-1 V2.2.3 EN 301 489-17 V3.3.1 EN 55032: 2015+A11:2020
Frequency range	:	0.15 - 30MHz
Classification	:	Class B
Limit	:	Clause 8.4.3 of EN 301 489-1 V2.2.3 Table A.10 of EN 55032: 2015+A11:2020
Kind of test site	:	Shielded room

Test Setup

Date of testing	:	2025-11-25 to 2025-12-31
Test voltage	:	AC 120V, 60Hz and AC 230V, 50Hz
Operation mode	:	B, C, D, E, F, G
Test ports	:	AC mains terminals
Earthing	:	Not connected
Test configuration	:	Table-top
Ambient temperature	:	Refer to test data
Relative humidity	:	Refer to test data
Atmospheric pressure	:	101.4 kPa

For the measurement records, refer to the appendix B. (Only the worst case were recorded)

5.3.4 Radiated Emissions

RESULT: **Pass**

Test Specification

Test standard	:	EN 301 489-1 V2.2.3 EN 301 489-17 V3.3.1 EN 55032: 2015+A11:2020
Frequency range	:	30 - 6000MHz
Classification	:	Class B
Limit	:	Clause 8.2.3 of EN 301 489-1 V2.2.3 Table A.4 and A.5 of EN 55032: 2015+ A11:2020
Kind of test site	:	3m Semi-Anechoic Chamber & 3m Full-Anechoic Chamber
Test ports	:	Enclosure

Test Setup

Date of testing	:	2025-11-25 to 2025-12-31
Test voltage	:	AC 120V, 60Hz and AC 230V, 50Hz
Operation mode	:	B, C, D, E, F, G
Earthing	:	Not connected
Test configuration	:	Table-top
Ambient temperature	:	Refer to test data
Relative humidity	:	Refer to test data
Atmospheric pressure	:	101.4 kPa

For the measurement records, refer to the appendix B. (Only the worst case were recorded)

5.3.5 Electrostatic Discharges (ESD)

RESULT: **Pass**

Test Specification

Test standard	:	EN 301 489-1 V2.2.3 EN 301 489-17 V3.3.1 EN 55035:2017 + A11:2020
Basic standard	:	EN 61000-4-2:2009
Test Requirement	:	Clause 9.3.1 of EN 301 489-1 V2.2.3 Table 1 of EN 55035:2017 + A11:2020
Test level	:	Contact discharge: ± 2.0kV, ± 4.0kV Air discharge: ± 2.0kV, ± 4.0kV, ± 8.0kV
Position	:	All exposed surfaces
Criterion	:	Clause 6.4 of EN 301 489-17 V3.3.1 Clause 8 and Annex G of EN 55035:2017 + A11:2020

Test Setup

Date of testing	:	2025-11-25 to 2025-12-31
Test voltage	:	AC 230V, 50Hz
Operation mode	:	B, C, D, E, F, G
Earthing	:	Not connected
Test configuration	:	Table-top
Ambient temperature	:	25.0 ℃
Relative humidity	:	50.0 %
Atmospheric pressure	:	101 kPa

Table 6: Test result of Electrostatic Discharges (ESD)

Operation mode	Test Voltage	Location	Result
B, C, D, E, F, G	± 2.0kV, ± 4.0kV / Contact	HCP	A*
		VCP	A*
		Conducted Enclosure	B**
	± 2.0kV, ± 4.0kV, ± 8.0kV / Air	Non-conducted Enclosure	A*
		Button	A*
		Slot	B**

*Remark: No degradation was observed during and after the tests.
During and after the test, the EUT PER was less than 10%.

5.3.6 Radio Frequency Electromagnetic Field (RS)

RESULT: **Pass**

Test Specification

Test standard	:	EN 301 489-1 V2.2.3 EN 301 489-17 V3.3.1 EN 55035:2017 + A11:2020
Basic standard	:	EN 61000-4-3:2006+A1+A2
Test Requirement	:	Clause 9.2.1 of EN 301 489-1 V2.2.3 Table 1 of EN 55035:2017
Test level	:	3V/m, (unmodulated, rms)
Modulation	:	80% AM by a sinusoidal signal of 1kHz
Frequency range	:	80MHz -6GHz
Criterion	:	Clause 6.3 of EN 301 489-17 V3.3.1 Clause 8 and Annex G of EN 55035:2017 + A11:2020

Test Setup

Date of testing	:	2025-11-25 to 2025-12-31
Test voltage	:	AC 230V, 50Hz
Operation mode	:	B, C, D, E, F, G
Earthing	:	Not connected
Test configuration	:	Table-top
Ambient temperature	:	22.0 ℃
Relative humidity	:	49.0 %
Atmospheric pressure	:	101.4 kPa

Table 7: Test result of Radio Frequency Electromagnetic Field (RS), for swept test

Test Frequency Band	Test port	Polarity	Location	Result
80MHz – 1000MHz	Enclosure	Vertical / Horizontal	Front	A*
			Rear	A*
			Left	A*
			Right	A*
Test Frequency Band	Test port	Polarity	Location	Result
1000MHz – 6000MHz	Enclosure	Vertical / Horizontal	Front	A*
			Rear	A*
			Left	A*
			Right	A*

Table 8: Test result of Radio Frequency Electromagnetic Field (RS), for spot test

Test Frequency	Test port	Polarity	Location	Result
1800MHz 2600MHz 3500MHz 5000MHz	Enclosure	Vertical / Horizontal	Front	A*
			Rear	A*
			Left	A*
			Right	A*

*Remark: No degradation was observed during and after the tests.
During and after the test, the EUT PER was less than 10%. The mearsured acoustic interference ratio was less than 20dB.

5.3.7 Fast Transients (EFT)

RESULT: **Pass**

Test Specification

Test standard	:	EN 301 489-1 V2.2.3 EN 301 489-17 V3.3.1 EN 55035: 2017 + A11:2020
Basic standard	:	EN 61000-4-4: 2004
Test Requirement	:	Clause 9.4.1 of EN 301 489-1 V2.2.3 Table 4 of EN 55035:2017 + A11:2020
Test level	:	±1kV
Test duration	:	≥60sec
Rise time	:	5/50ns
Repetition frequency	:	5kHz
Criterion	:	Clause 6.4 of EN 301 489-17 V3.3.1 Clause 8 and Annex G of EN 55035:2017 + A11:2020

Test Setup

Date of testing	:	2025-11-25 to 2025-12-31
Test voltage	:	AC 230V, 50Hz
Operation mode	:	B, C, D, E, F, G
Earthing	:	Not connected
Test configuration	:	Table-top
Ambient temperature	:	21.0℃
Relative humidity	:	45.0 %
Atmospheric pressure	:	101.4 kPa

Table 9: Test result of Electrical Fast Transients (EFT)

Test Mode	Coupling Method	Coupling Port	Test Level	Actual Performance
B, C, D, E, F, G	Direct Injection	Live + Neutral	±1kV	A*

Test Mode	Coupling Method	Coupling Port	Test Level	Actual Performance
B, C, D, E, F, G	Capacitive Clamp	Signal Ports (longer than 3 m)	±0.5kV	A*

*Remark: No degradation was observed during and after the tests.
During and after the test, the EUT PER was less than 10%.

5.3.8 Surge

RESULT: **Pass**

Test Specification

Test standard	:	EN 301 489-1 V2.2.3 EN 301 489-17 V3.3.1 EN 55035: 2017 + A11:2020
Basic standard		EN 61000-4-5: 2006
Test Requirement	:	Clause 9.8.1 of EN 301 489-1 V2.2.3 Table 4 of EN 55035:2017 + A11:2020
Test level	:	±1kV
Number of surges	:	5 (for each combination of parameters)
Repetition rate	:	Max. 1/min
Criterion	:	Clause 6.4 of EN 301 489-17 V3.3.1 Clause 8 and Annex G of EN 55035:2017 + A11:2020

Test Setup

Date of testing	:	2025-11-25 to 2025-12-31
Test voltage	:	AC 230V, 50Hz
Operation mode	:	B, C, D, E, F, G
Earthing	:	Not connected
Test configuration	:	Table-top
Ambient temperature	:	25.0 ℃
Relative humidity	:	41.0 %
Atmospheric pressure	:	101.4 kPa

Table 10: Test result of Surge

Test Mode	Coupling Port	Test Level (±kV)	Coupling Phase	Actual Performance
B, C, D, E, F, G	AC mains power port	± 1.0 kV line to line	0	A*
			π/2	A*
			π	A*
			3π/2	A*

*Remark: No degradation was observed during and after the tests.
During and after the test, the EUT PER was less than 10%.

5.3.9 Radio-Frequency Continuous Conducted (CS)

RESULT: **Pass**

Test Specification

Test standard	:	EN 301 489-1 V2.2.3 EN 301 489-17 V3.3.1 EN 55035: 2017 + A11:2020
Basic standard		EN 61000-4-6: 2007
Test Requirement	:	Clause 9.5.1 of EN 301 489-1 V2.2.3 Table 4 of EN 55035:2017 + A11:2020
Frequency range	:	0.15 - 80 MHz
Source impedance	:	150Ω
Test level	:	For EN 301 489-1: 3V, (unmodulated, r.m.s.) For EN 55035: 3V (150KHz – 10MHz) 3 to 1V (10MHz – 30MHz), 1V (30MHz – 80MHz)
Modulation	:	AM 80%, 1kHz sine-wave
Sweep mode	:	automatic
Sweep rate	:	$<1.5\times10^{-3}$ decade / sec.
Criterion	:	Clause 6.3 of EN 301 489-17 V3.3.1 Clause 8 and Annex G of EN 55035:2017 + A11:2020

Test Setup

Date of testing	:	2025-11-25 to 2025-12-31
Test voltage	:	AC 230V, 50Hz
Operation mode	:	B, C, D, E, F, G
Earthing	:	Not connected
Test configuration	:	Table-top
Ambient temperature	:	23.0 ℃
Relative humidity	:	45.0%
Atmospheric pressure	:	101.4 kPa

Table 11: Test result of Injected Currents / Conducted Susceptibility (CS), for EN 301 489-1

Test Frequency Band	Coupling Method	Test Port	Test Level	Actual Performance
150KHz – 80MHz	Direct Injection	AC mains power port	3.0 V	A*

Test Frequency Band	Coupling Method	Test Port	Test Level	Actual Performance
150KHz – 80MHz	Capacitive Clamp	Signal Ports (longer than 3 m)	3.0 V	A*

Table 12: Test result of Injected Currents / Conducted Susceptibility (CS), for EN 55035

Test Frequency Band	Coupling Method	Test Port	Test Level	Actual Performance
150KHz – 10MHz	Direct Injection	AC mains power port	3.0 V	A*
10MHz – 30MHz	Direct Injection	AC mains power port	3.0V to 1.0V	A*
30MHz – 80MHz	Direct Injection	AC mains power port	1.0 V	A*

Test Frequency Band	Coupling Method	Test Port	Test Level	Actual Performance
150KHz – 10MHz	Capacitive Clamp	Signal Ports (longer than 3 m)	3.0 V	A*
10MHz – 30MHz	Capacitive Clamp	Signal Ports (longer than 3 m)	3.0V to 1.0V	A*
30MHz – 80MHz	Capacitive Clamp	Signal Ports (longer than 3 m)	1.0 V	A*

*Remark: No degradation was observed during and after the tests. During and after the test, the EUT PER was less than 10%. The mearsured acoustic interference ratio was less than 20dB.

5.3.10 Voltage Dips and Interruptions

RESULT: **Pass**

Test Specification

Test standard	:	EN 301 489-1 V2.2.3 EN 301 489-17 V3.3.1 EN 55035: 2017 + A11:2020
Basic standard		EN 61000-4-11: 2004
Test Requirement	:	Clause 9.7.1 of EN 301 489-1 V2.2.3 Table 4 of EN 55035:2017 + A11:2020
Test level and durations	:	Voltage Dips: 100% reduction for 0.5 period 100% reduction for 1 periods 30% reduction for 25 periods Voltage interruptions: 0% reduction for 250 period
Criterion	:	Clause 6.4 of EN 301 489-17 V3.3.1 Clause 8 and Annex G of EN 55035:2017 + A11:2020

Test Setup

Date of testing	:	2025-11-25 to 2025-12-31
Test voltage	:	AC 230V, 50Hz
Operation mode	:	B, C, D, E, F, G
Earthing	:	Not connected
Test configuration	:	Table-top
Ambient temperature	:	21.0 ℃
Relative humidity	:	45.0%
Atmospheric pressure	:	101.4 kPa

Table 13: Test result of Voltage Dips and Interruptions

Test Mode	Coupling Port	Voltage Reduction (%)	Reduction Duration (in Period)	Actual Performance
B, C, D, E, F, G	AC mains power port	100%	0.5	A*
		100%	1	A*
		30%	25	A*
		100%	250	B**

*Remark: No degradation was observed during and after the tests. During and after the test, the EUT PER was less than 10%.
**Remark: Temporary loss of function or degradation of performance which ceases after the disturbance ceases, and from which the equipment under test recovers its normal performance, without operator intervention.

6 Safety Human Exposure

6.1 Human Exposure to Electromagnetic Fields 10MHz-300GHz

6.1.1 Electromagnetic Fields

RESULT: **Pass**

Test Specification

Test standard : EN 62479: 2010

The maximum measured peak power of EUT is only 12.13 dBm (16.331mW).


According to EN 62479:2010 clause 4.2, if the average total radiated power emitted by apparatus operating in the frequency range 10MHz-300GHz is less than or equal to 13.01dBm(20mW), then the apparatus is deemed to comply with the basic restrictions without testing.

7 Photographs of the Test Set-Up


Photograph 1: Set-up for Radio Spectrum Testing, Normal and Extreme Condition



Photograph 2: Set-up for Transmitter & Receiver Spurious Emissions, below 1GHz

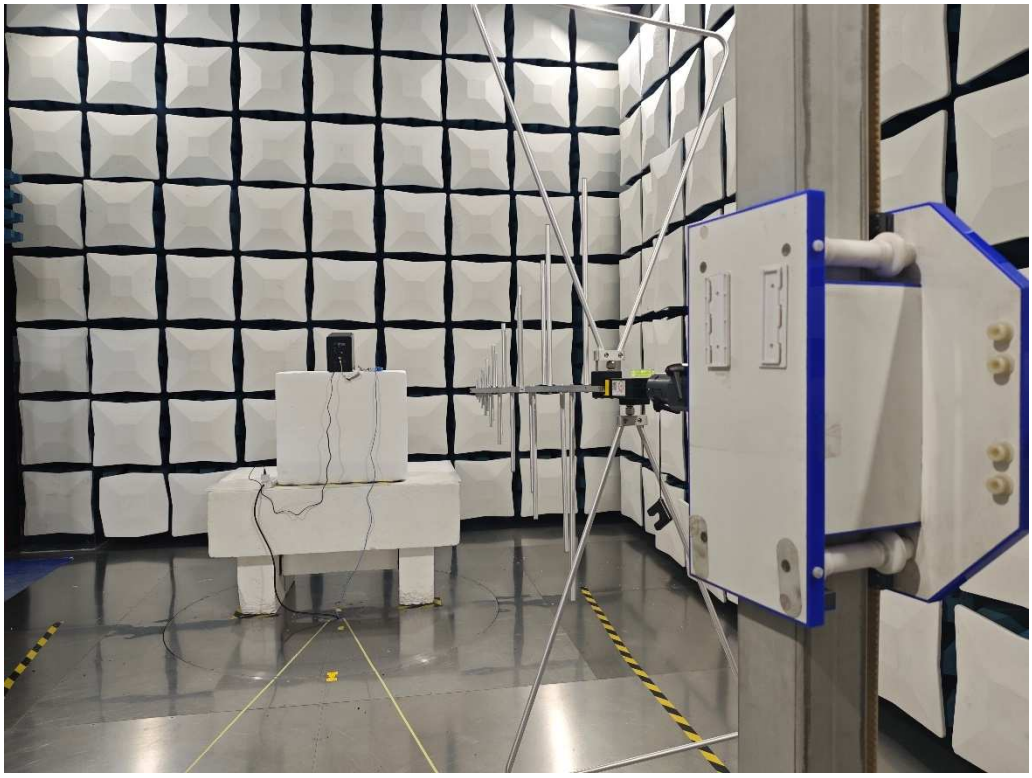


Photograph 3: Set-up for Transmitter & Receiver Spurious Emissions, above 1GHz

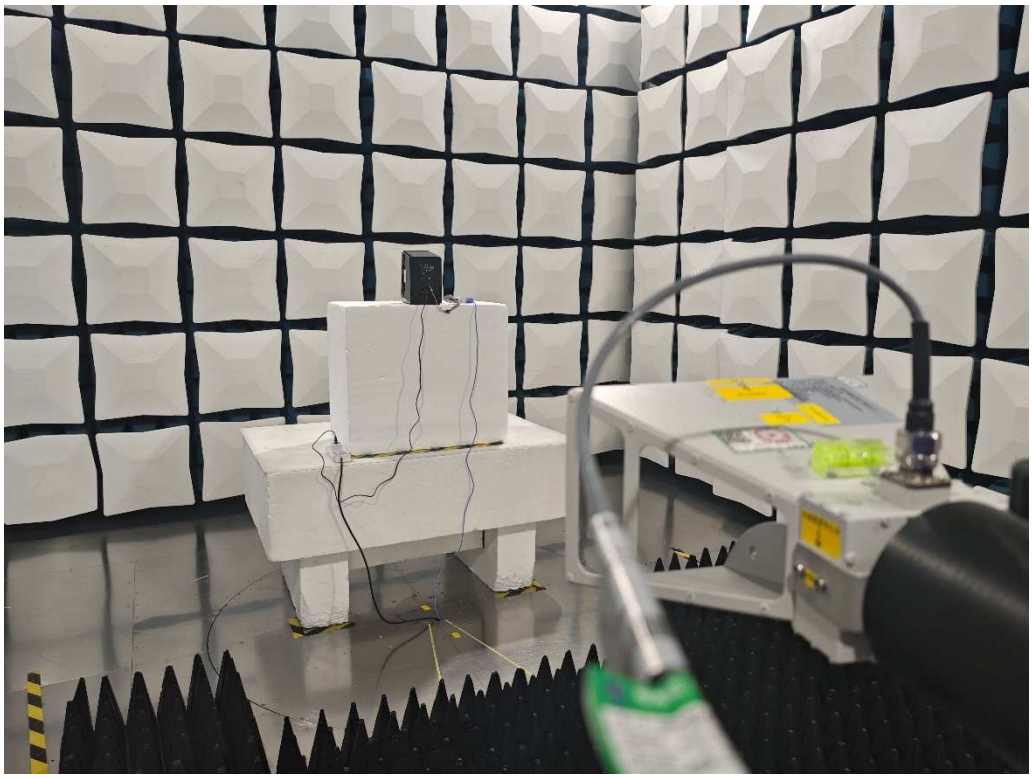


Photograph 4: Set-up for Flicker




Photograph 5: Set-up for Conducted Emission on AC Mains

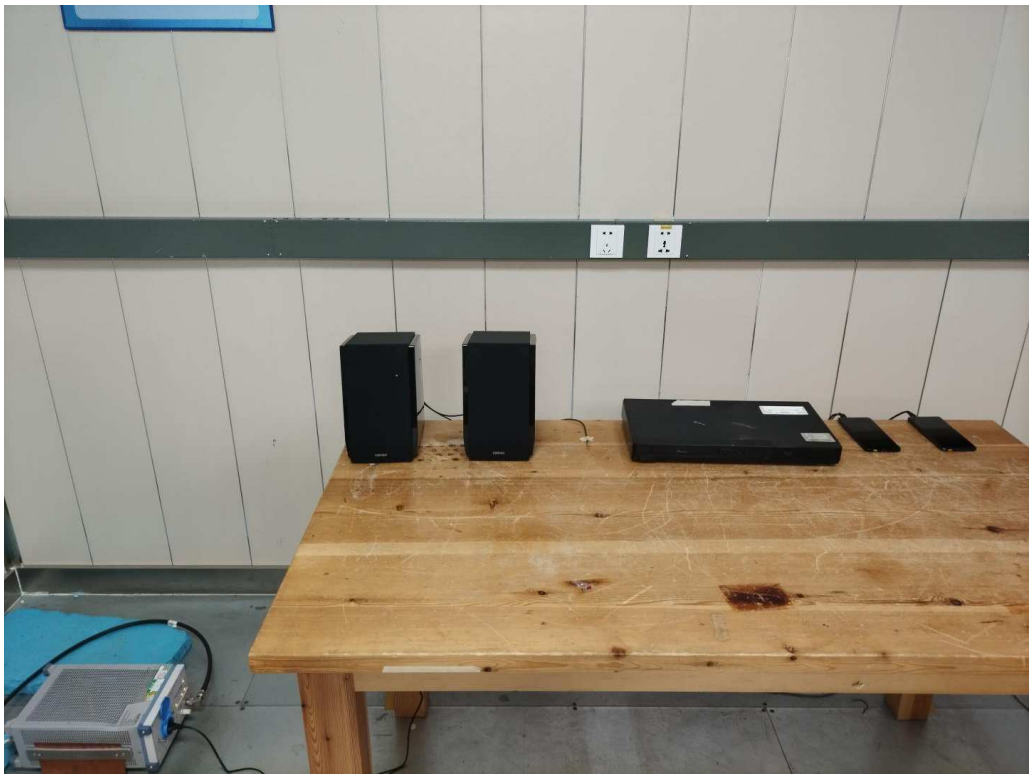


Photograph 6: Set-up for Radiated Emission, Below 1GHz

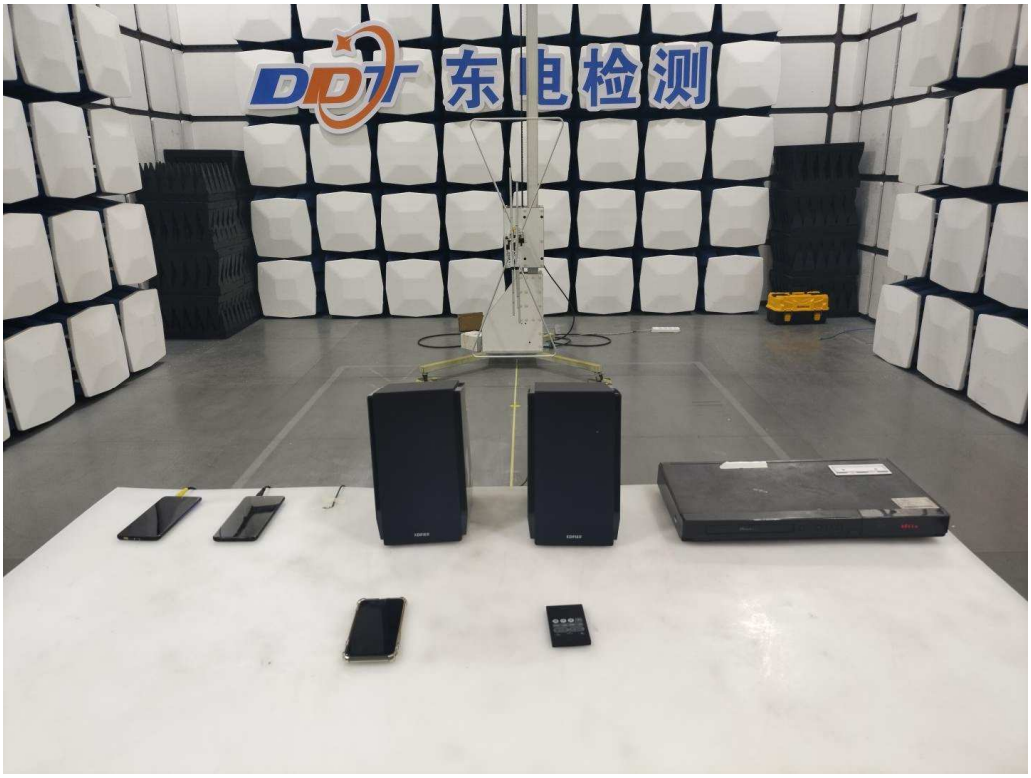


Photograph 7: Set-up for Radiated Emission, Above 1GHz

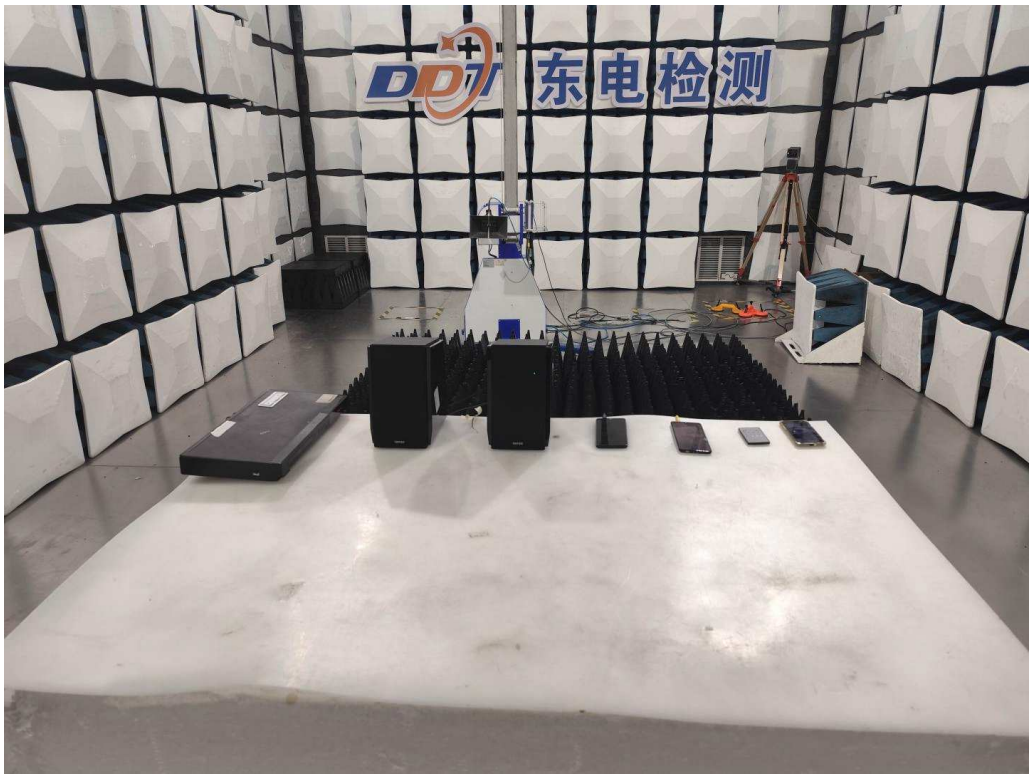


Photograph 8: Set-up for Radio Frequency Electromagnetic Fields (RS)

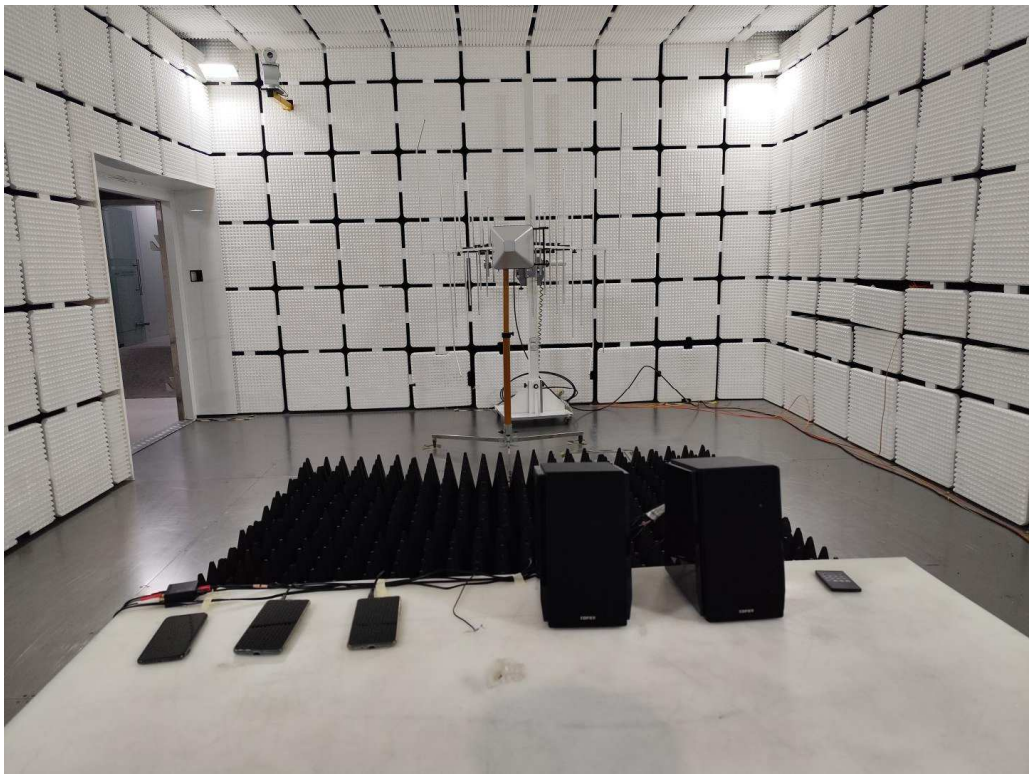


Photograph 9: Setup for Electrostatic Discharges (ESD)

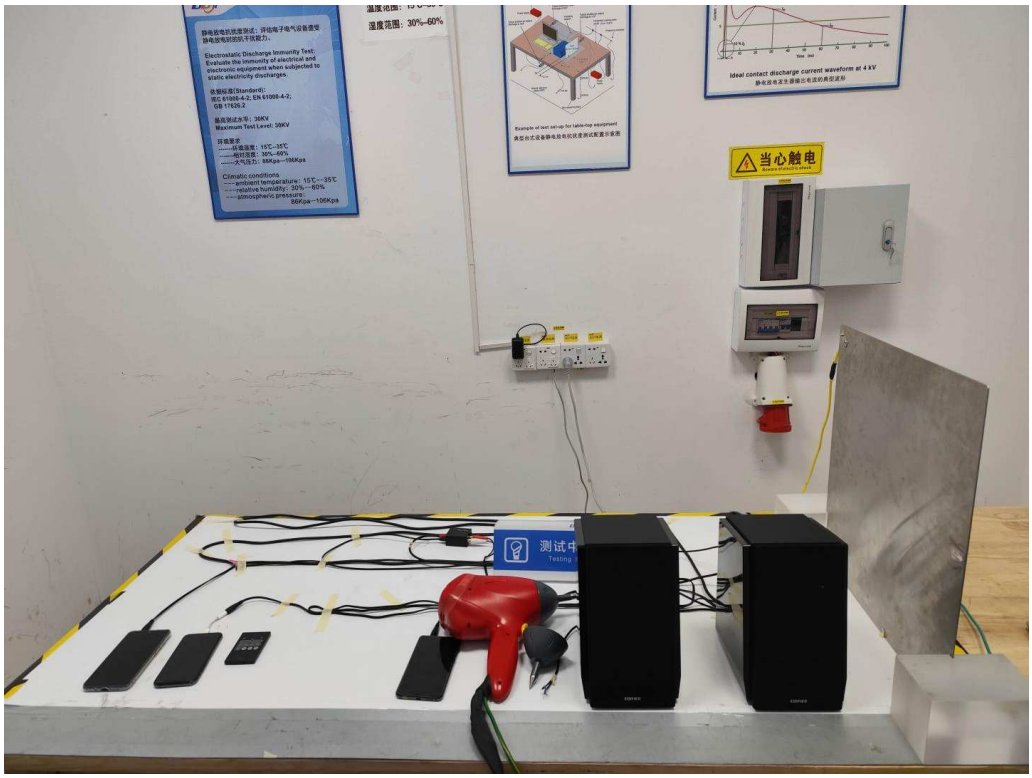

Photograph 10: Setup for Radio-frequency continuous conducted (CS)

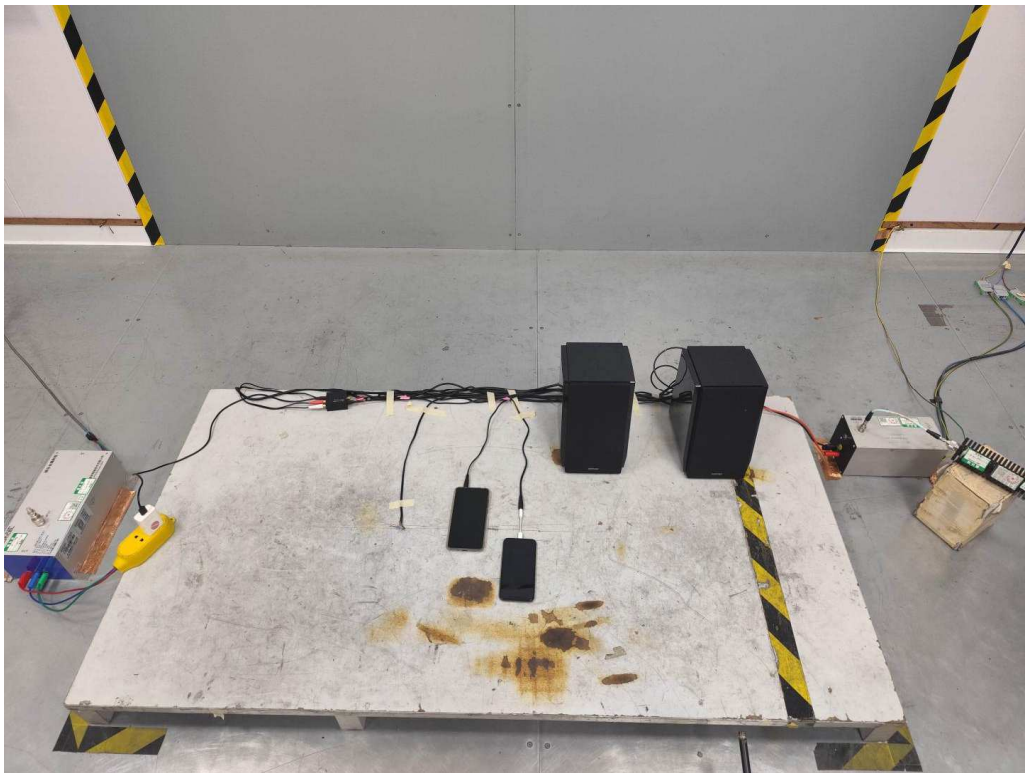

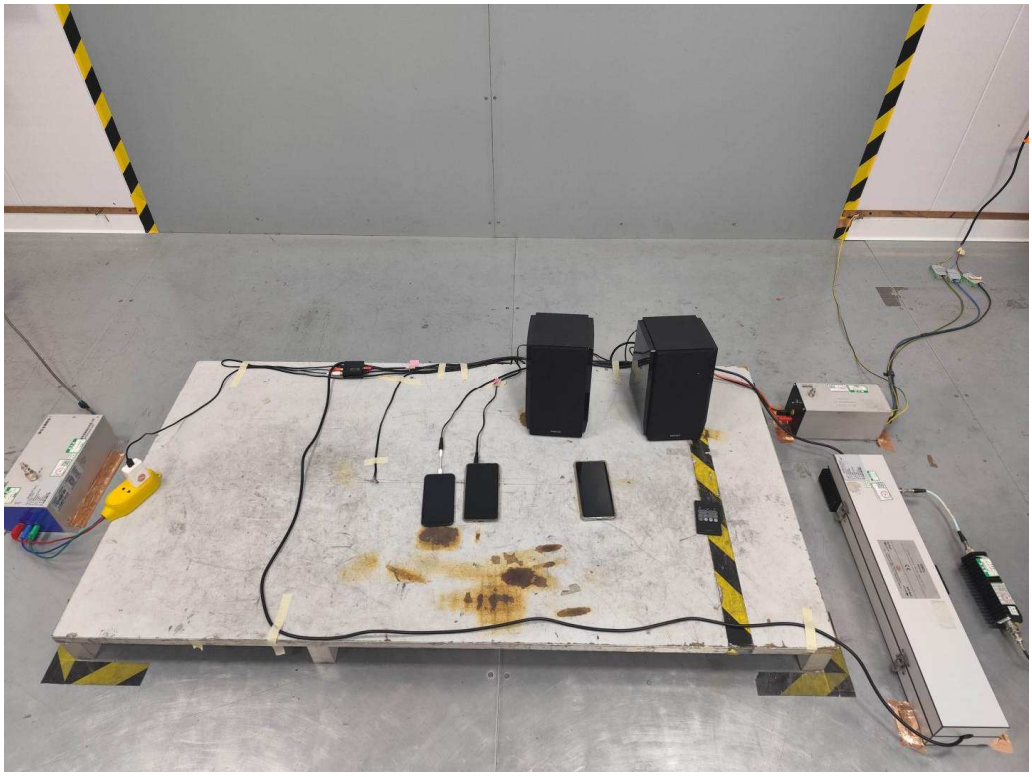

Photograph 11: Setup for Surge



Photograph 12: Setup for Fast Transients (EFT), Voltage dips and interruptions





8 List of Tables

Table 1: List of Test and Measurement Equipment 8
Table 2: Maximum Measurement Uncertainty 12
Table 3: Technical Specification of EUT 14
Table 4: RF Channel and Frequency of Bluetooth (BDR & EDR) 15
Table 5: List of Accessories and Auxiliary Equipment 17
Table 6: Test result of Electrostatic Discharges (ESD) 35
Table 7: Test result of Radio Frequency Electromagnetic Field (RS), for swept test 37
Table 8: Test result of Radio Frequency Electromagnetic Field (RS), for spot test 37
Table 9: Test result of Electrical Fast Transients (EFT) 38
Table 10: Test result of Surge 39
Table 11: Test result of Injected Currents / Conducted Susceptibility (CS), for EN 301 489-1 40
Table 12: Test result of Injected Currents / Conducted Susceptibility (CS), for EN 55035 41
Table 13: Test result of Voltage Dips and Interruptions 42

9 List of Photographs

Photograph 1: Set-up for Radio Spectrum Testing, Normal and Extreme Condition 44
Photograph 2: Set-up for Transmitter & Receiver Spurious Emissions, below 1GHz 44
Photograph 3: Set-up for Transmitter & Receiver Spurious Emissions, above 1GHz 45
Photograph 4: Set-up for Flicker 45
Photograph 5: Set-up for Conducted Emission on AC Mains 46
Photograph 6: Set-up for Radiated Emission, Below 1GHz 46
Photograph 7: Set-up for Radiated Emission, Above 1GHz 47
Photograph 8: Set-up for Radio Frequency Electromagnetic Fields (RS) 47
Photograph 9: Setup for Electrostatic Discharges (ESD) 48
Photograph 10: Setup for Radio-frequency continuous conducted (CS) 48
Photograph 11: Setup for Surge 49
Photograph 12: Setup for Fast Transients (EFT), Voltage dips and interruptions 50

Appendix A

Test Results of Radio Spectrum


1 APPENDIX A.1 : RF OUTPUT POWER 2
2 APPENDIX A.2 : ACCUMULATED TRANSMIT TIME 9
3 APPENDIX A.3 : FREQUENCY OCCUPATION 12
4 APPENDIX A.4 : HOPPING SEQUENCE 18
5 APPENDIX A.5: HOPPING FREQUENCY SEPARATION 20
6 APPENDIX A.6: OCCUPIED CHANNEL BANDWIDTH 22
7 APPENDIX A.7: ADAPTIVITY 29
8 APPENDIX A.8: RECEIVER BLOCKING 31
9 APPENDIX A.9 : TX UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN 33
10 APPENDIX A.10: TEST PLOTS OF TRANSMITTER UNWANTED EMISSION IN THE SPURIOUS DOMAIN 37
11 APPENDIX A.11: TEST PLOTS OF RECEIVER SPURIOUS EMISSION 45

1 Appendix A.1 : RF output power


The RF output power is the mean equivalent isotropically radiated power (EIRP) during a transmission burst. Only the worst case for all test modes reported.

Test Condition	TestMode	Antenna	Channel	EIRP[dBm]	Limit[dBm]	Verdict
NTNV	DH1	Ant1	Hop	11.56	20	PASS
	DH5	Ant1	Hop	12.13	20	PASS
	2DH1	Ant1	Hop	11.59	20	PASS
	2DH5	Ant1	Hop	11.69	20	PASS
	3DH1	Ant1	Hop	11.43	20	PASS
	3DH5	Ant1	Hop	11.70	20	PASS
LTNV	DH1	Ant1	Hop	11.58	20	PASS
	DH5	Ant1	Hop	12.13	20	PASS
	2DH1	Ant1	Hop	11.60	20	PASS
	2DH5	Ant1	Hop	11.66	20	PASS
	3DH1	Ant1	Hop	11.44	20	PASS
	3DH5	Ant1	Hop	11.72	20	PASS
HTNV	DH1	Ant1	Hop	11.57	20	PASS
	DH5	Ant1	Hop	12.13	20	PASS
	2DH1	Ant1	Hop	11.61	20	PASS
	2DH5	Ant1	Hop	11.68	20	PASS
	3DH1	Ant1	Hop	11.46	20	PASS
	3DH5	Ant1	Hop	11.73	20	PASS


NTNV_DH1_Ant1_Hop

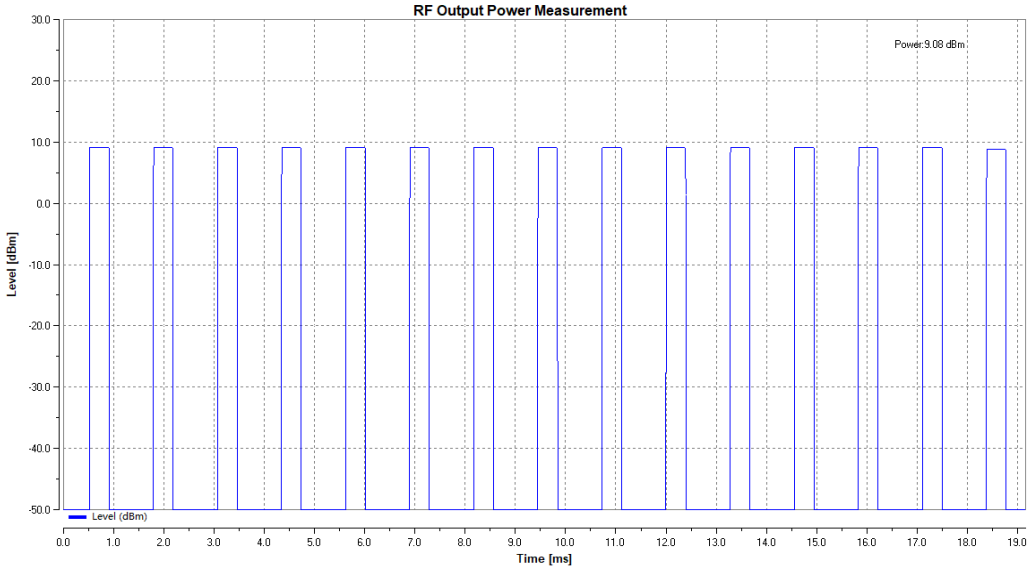


NTNV_DH5_Ant1_Hop

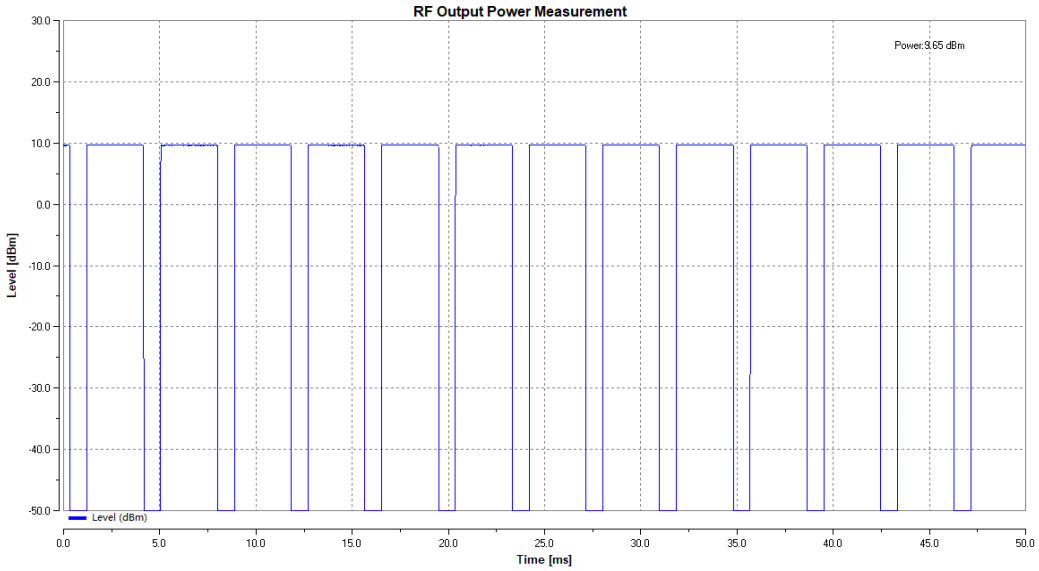


NTNV_2DH1_Ant1_Hop

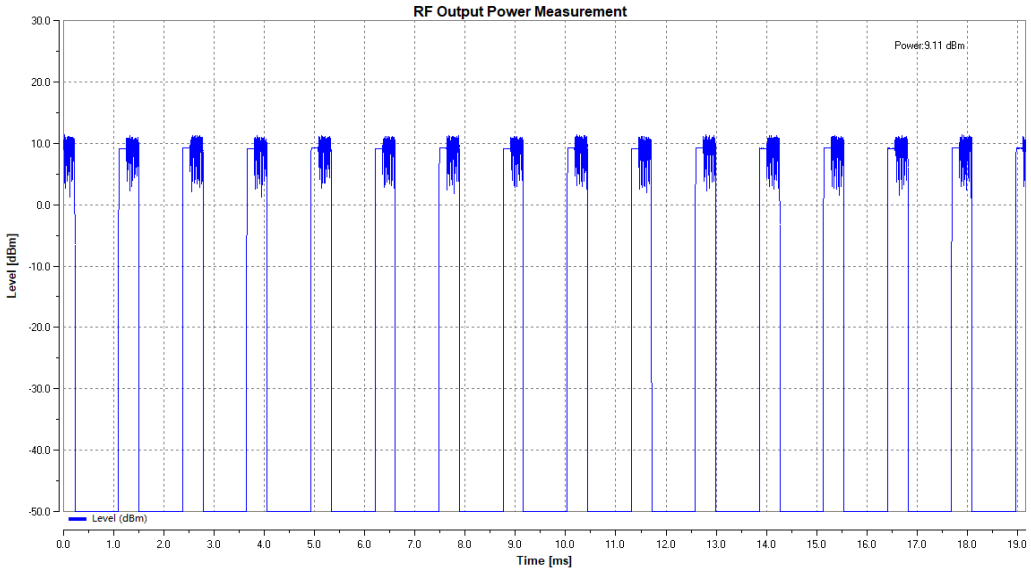


NTNV_2DH5_Ant1_Hop

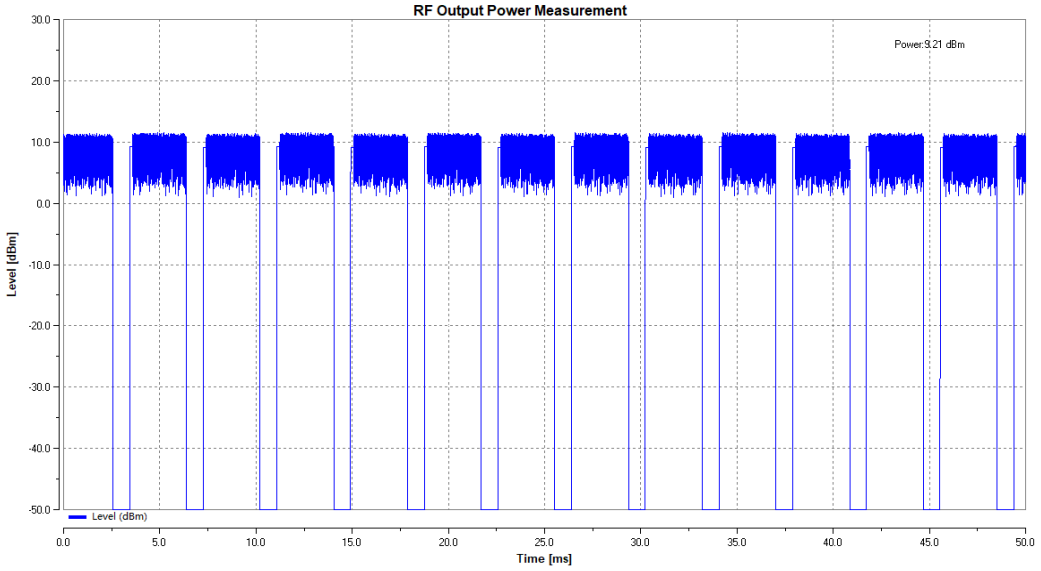


NTNV_3DH1_Ant1_Hop

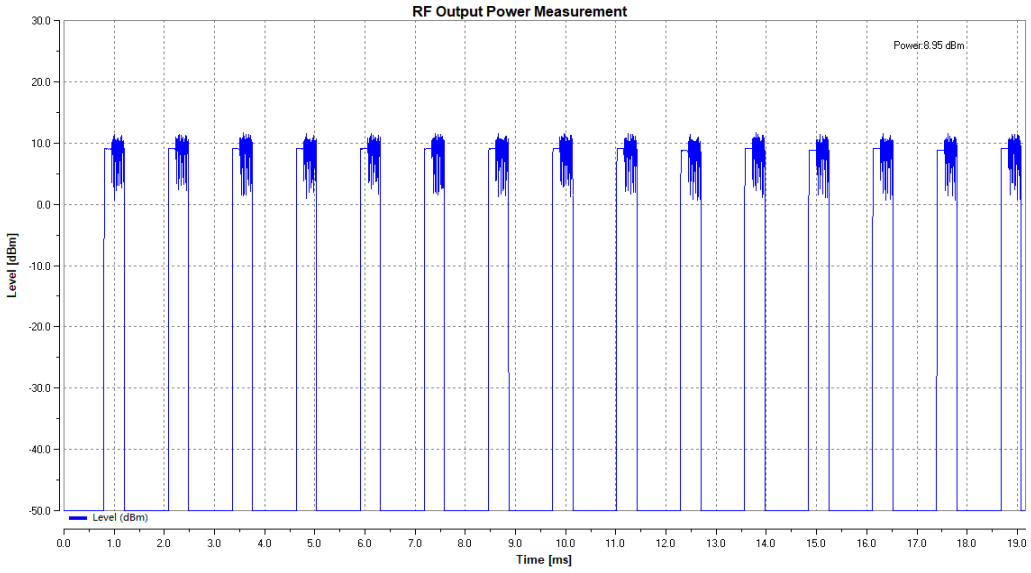


NTNV_3DH5_Ant1_Hop

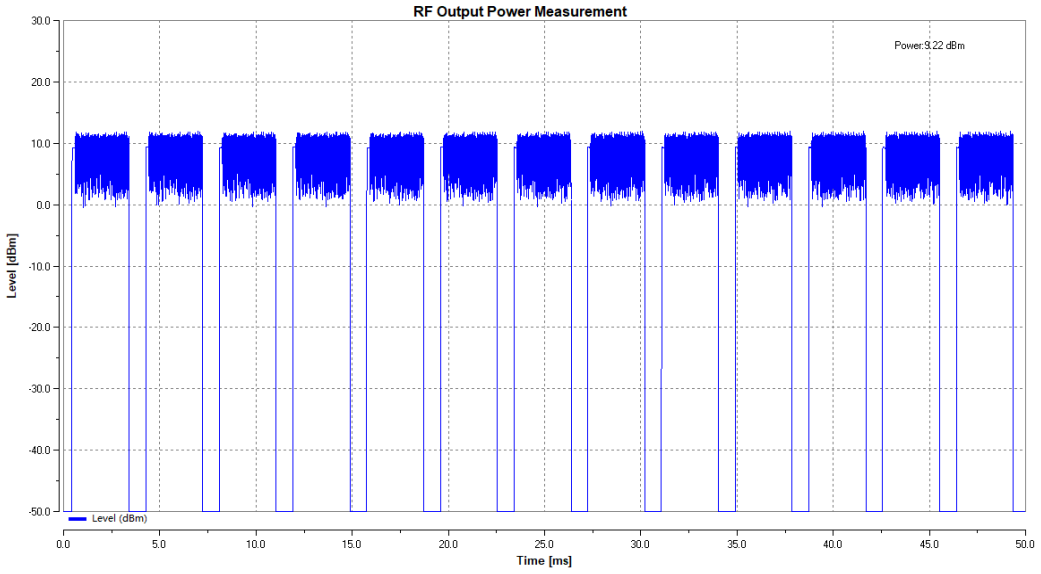


LTNV_DH1_Ant1_Hop

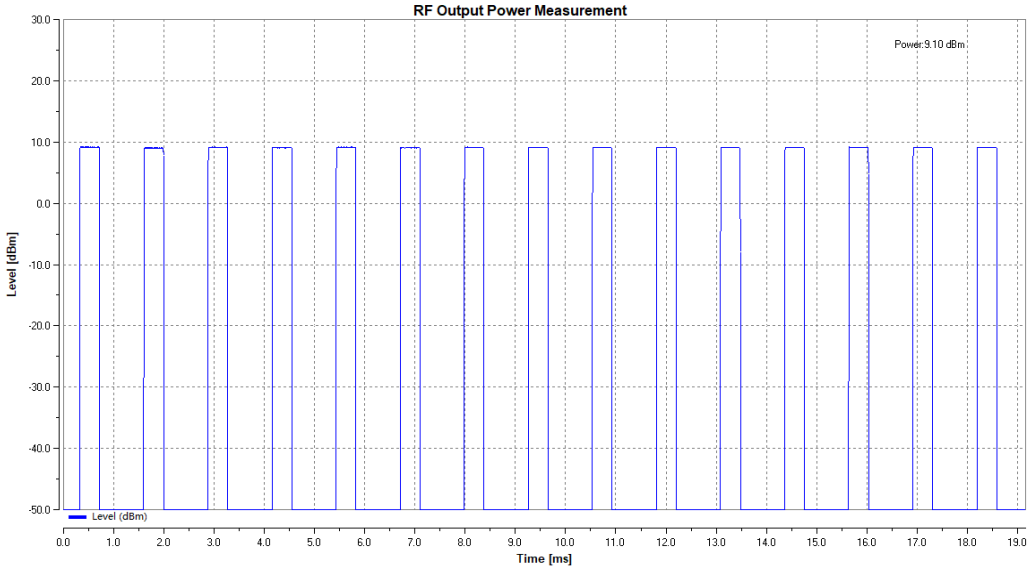


LTNV_DH5_Ant1_Hop

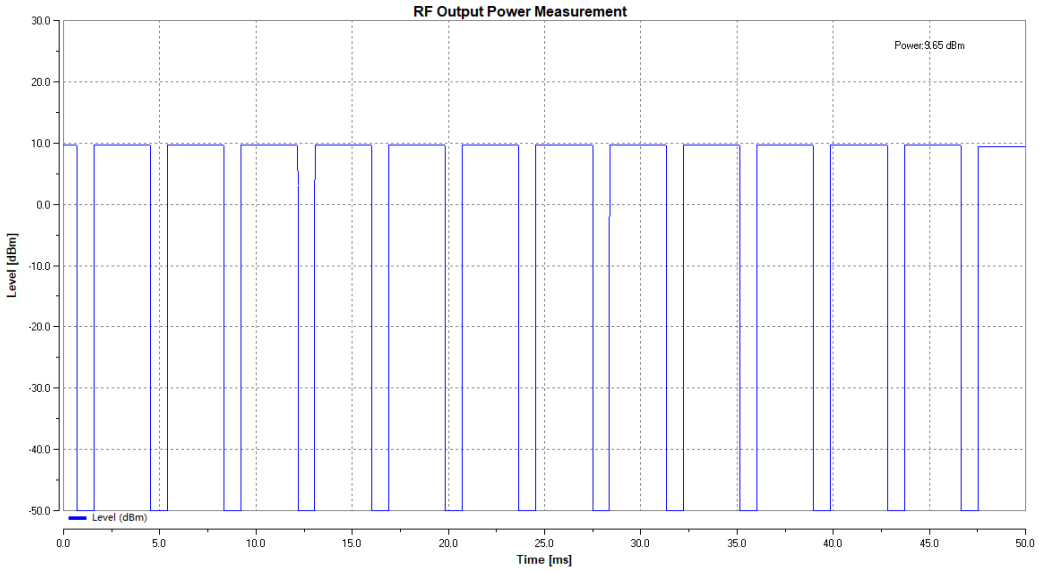


LTNV_2DH1_Ant1_Hop

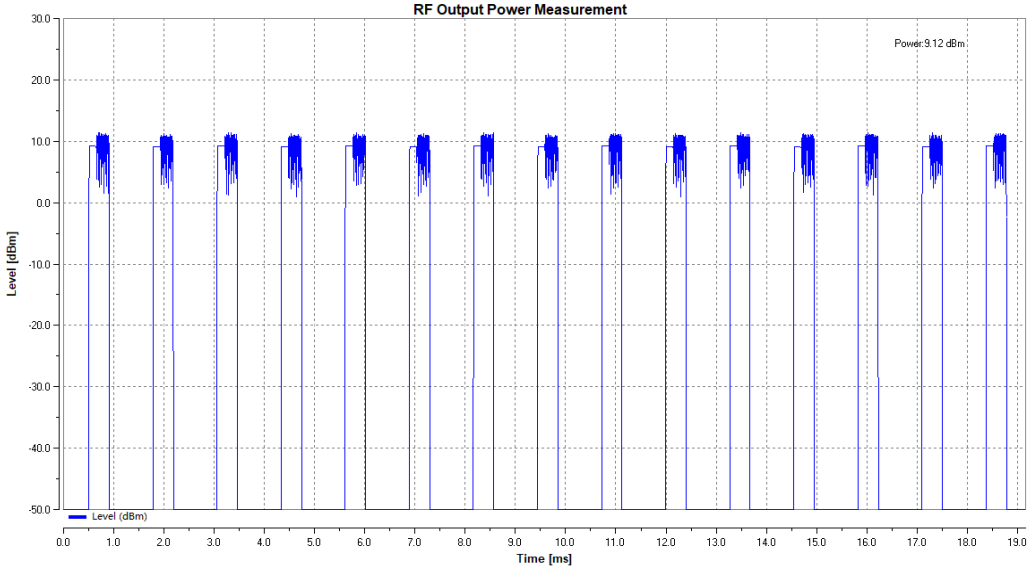


LTNV_2DH5_Ant1_Hop

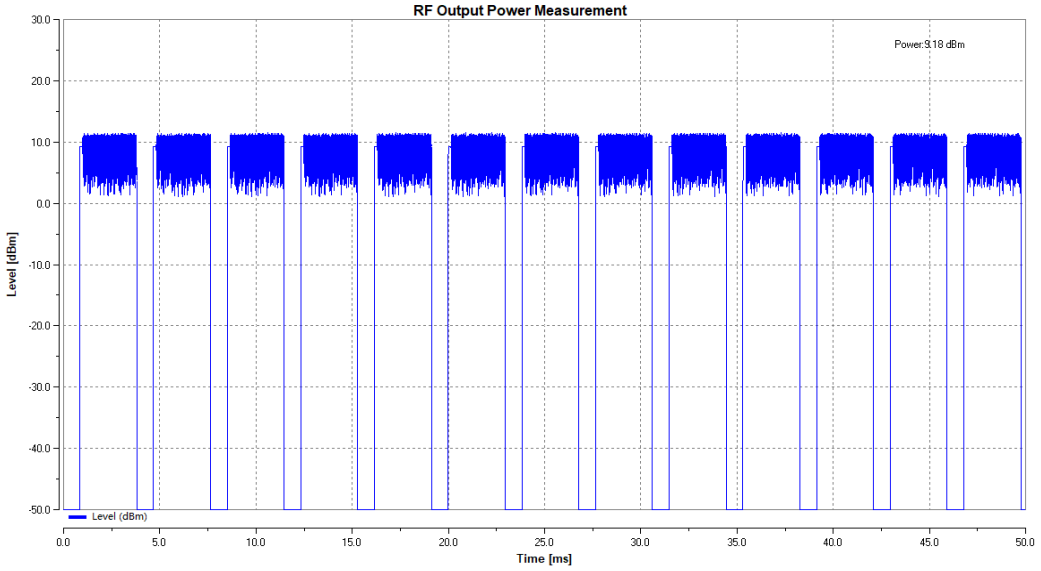


LTNV_3DH1_Ant1_Hop

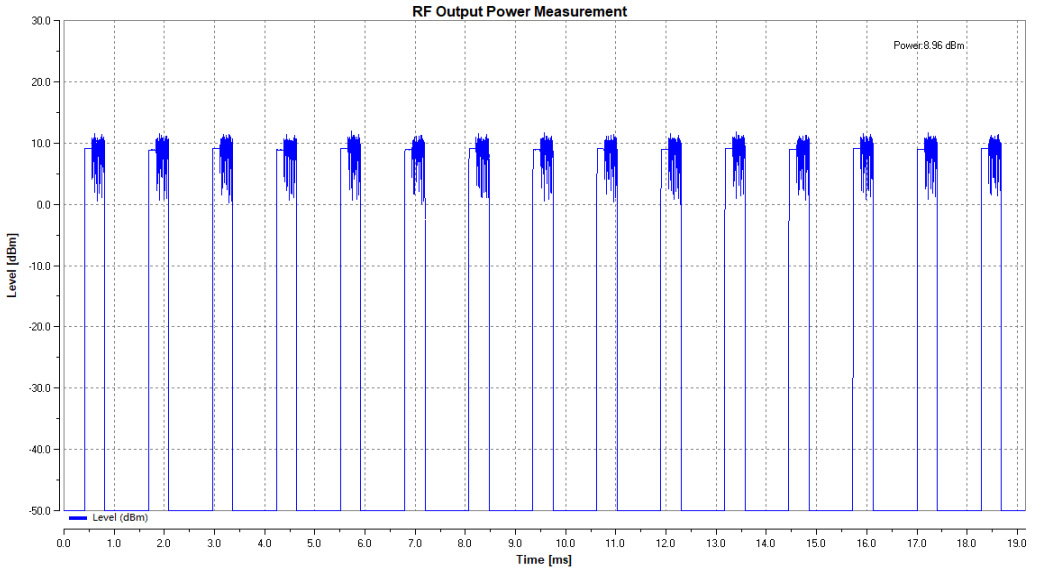


LTNV_3DH5_Ant1_Hop

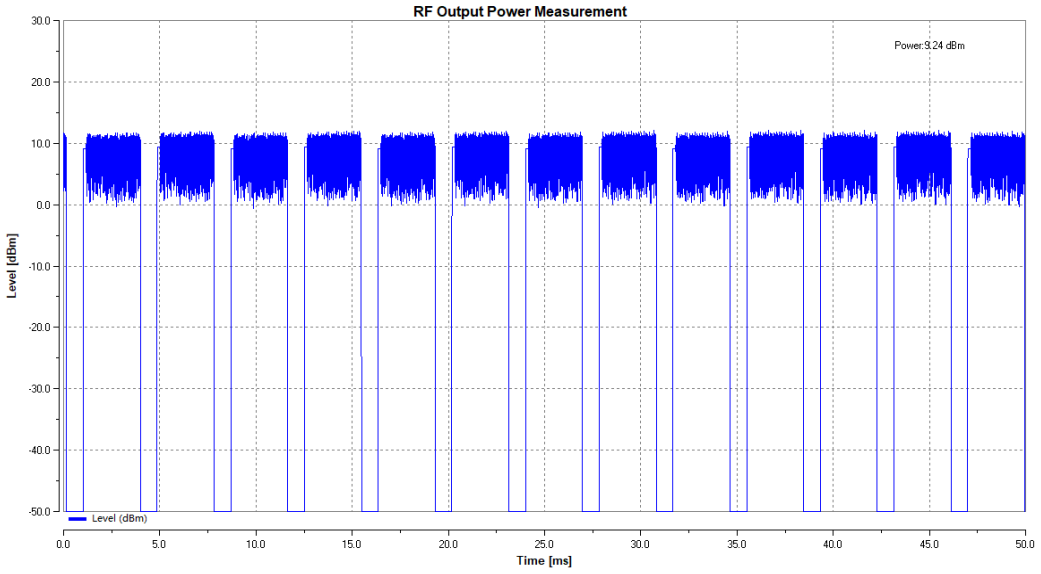


HTNV_DH1_Ant1_Hop

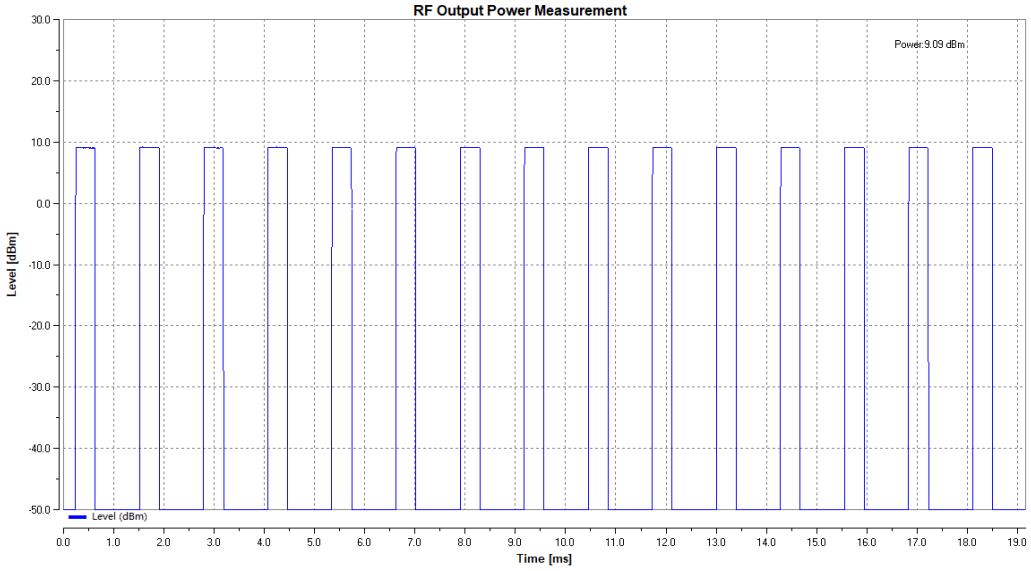


HTNV_DH5_Ant1_Hop

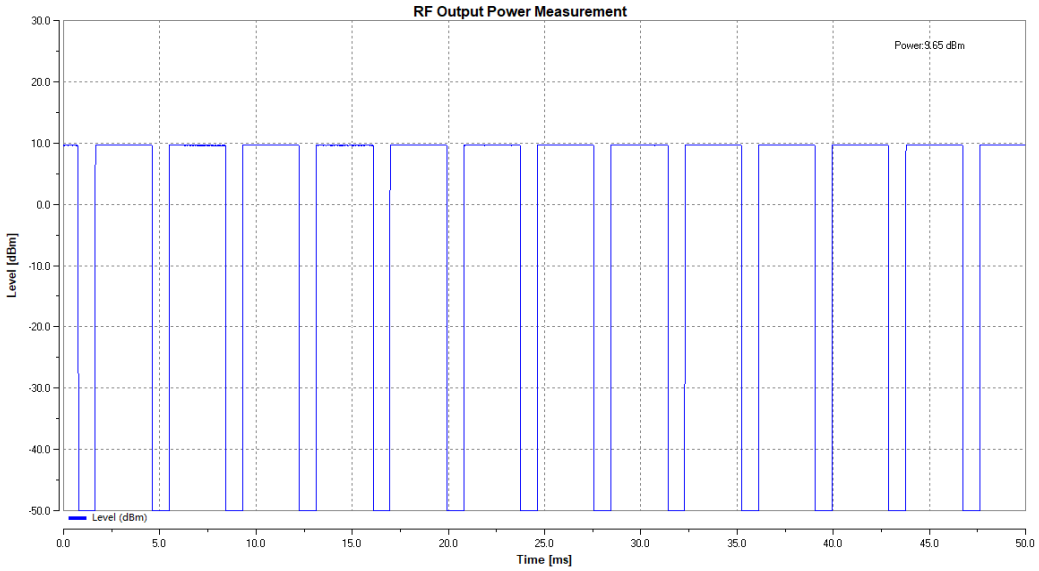


HTNV_2DH1_Ant1_Hop

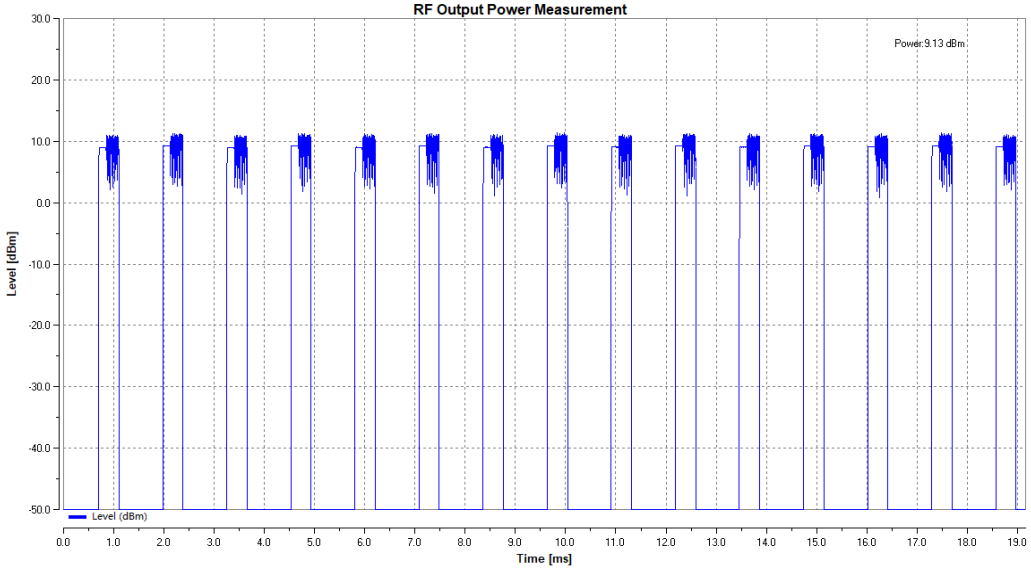


HTNV_2DH5_Ant1_Hop

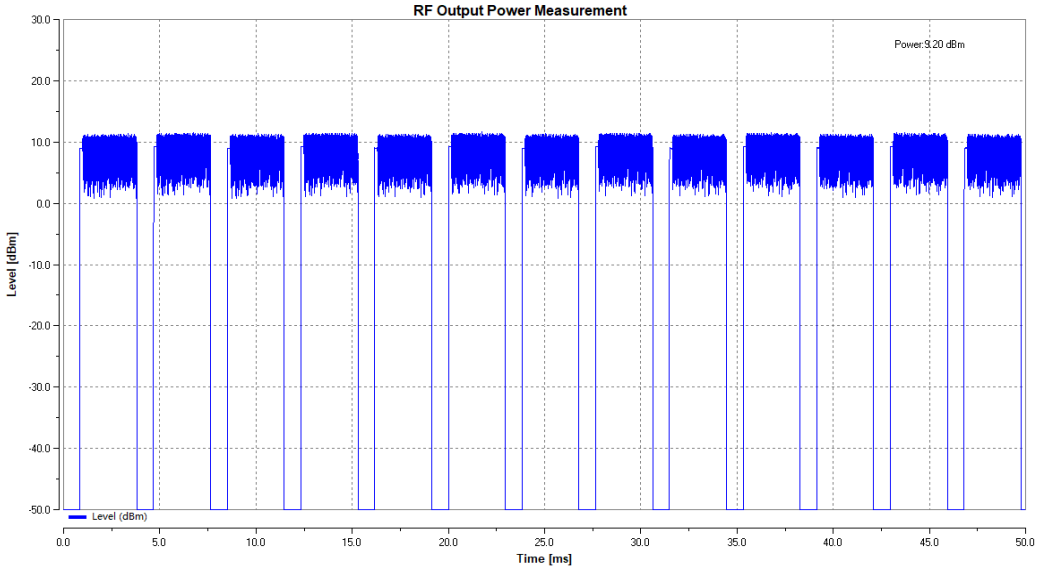

HTNV_3DH1_Ant1_Hop

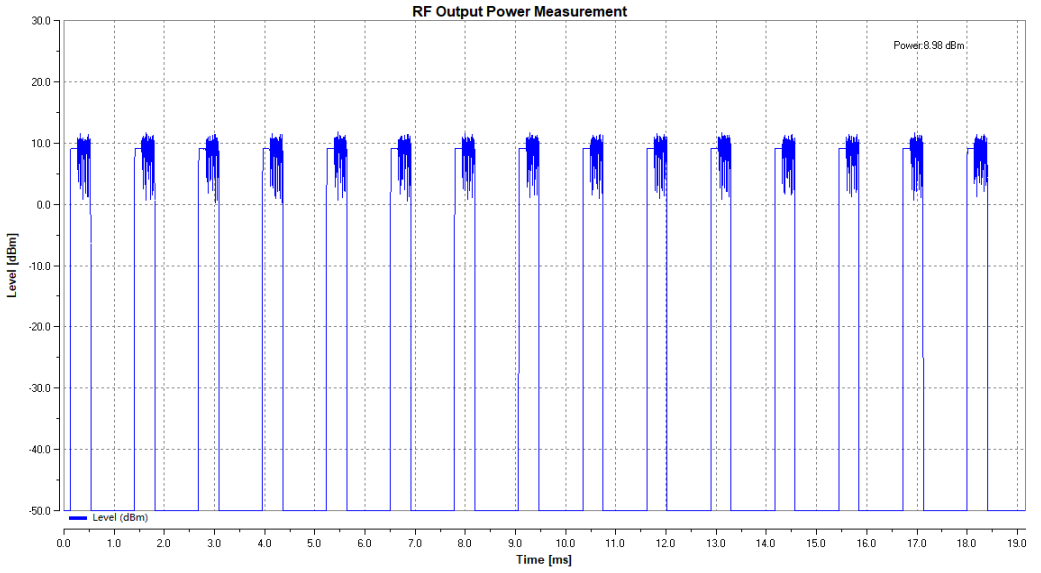


HTNV_3DH5_Ant1_Hop

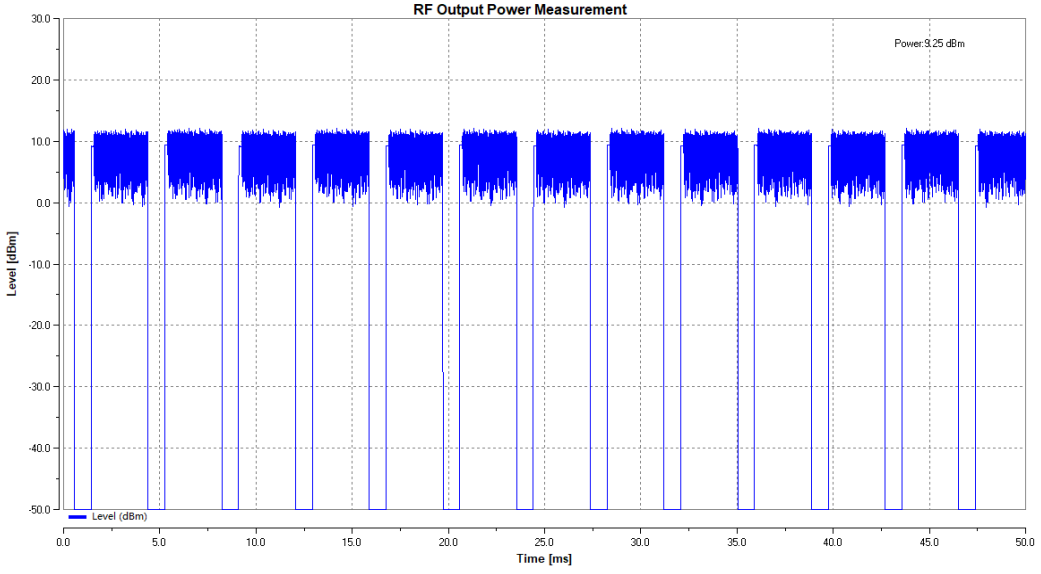


2 Appendix A.2 : Accumulated Transmit Time

TestMode	Antenna	Channel	Result [ms]	Limit[ms]	Verdict
DH5	Ant1	Hop_2402	364.441	400	PASS
		Hop_2480	362.335	400	PASS
2DH5	Ant1	Hop_2402	369.708	400	PASS
		Hop_2480	365.494	400	PASS
3DH5	Ant1	Hop_2402	368.654	400	PASS
		Hop_2480	369.708	400	PASS


DH5_Ant1_Hop_2402

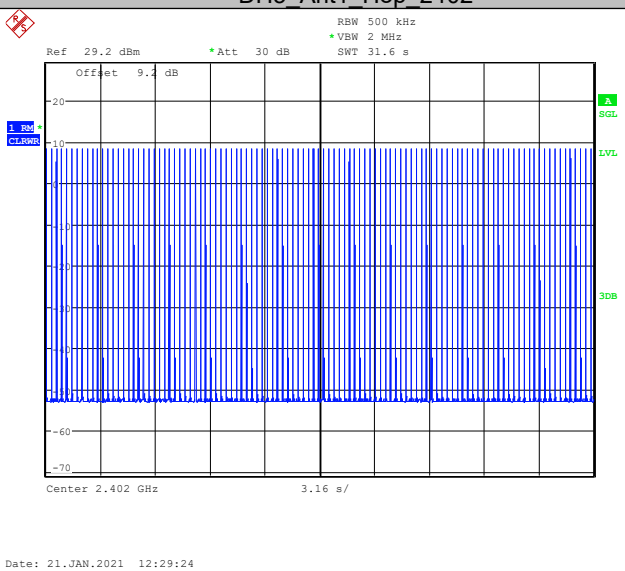

DH5_Ant1_Hop_2480

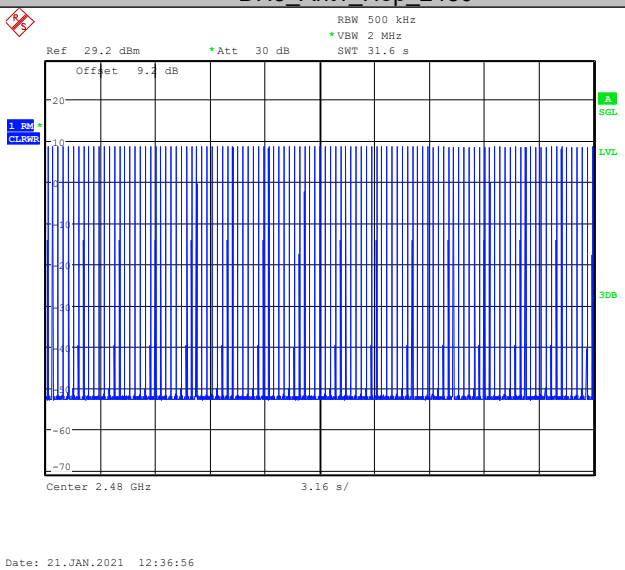


2DH5_Ant1_Hop_2402

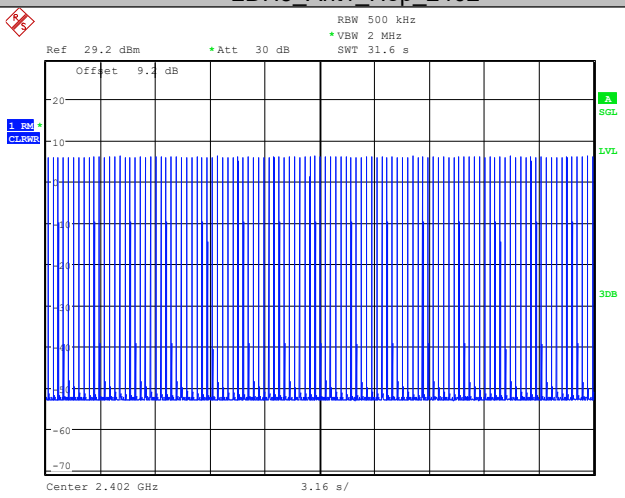


Date: 21.JAN.2021 12:39:23

2DH5_Ant1_Hop_2480

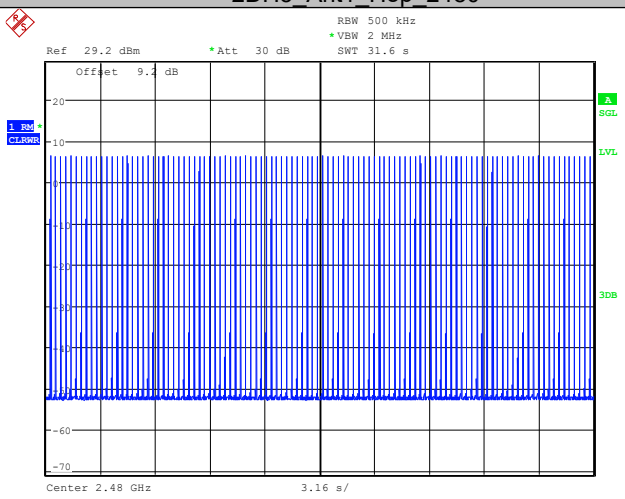


Date: 21.JAN.2021 12:50:40

3DH5_Ant1_Hop_2402

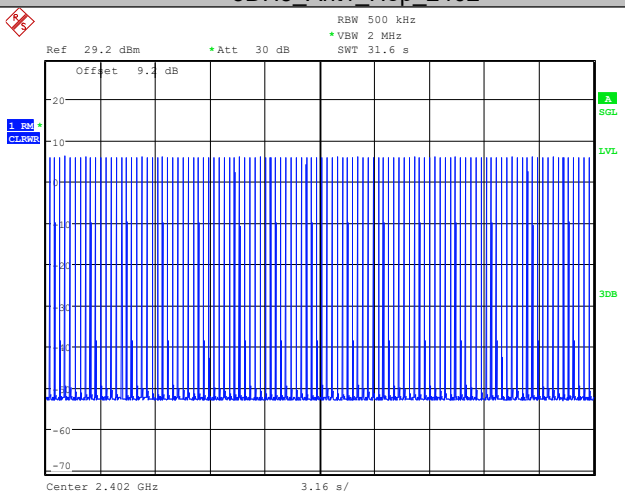

Date: 21.JAN.2021 12:53:11

3DH5_Ant1_Hop_2480

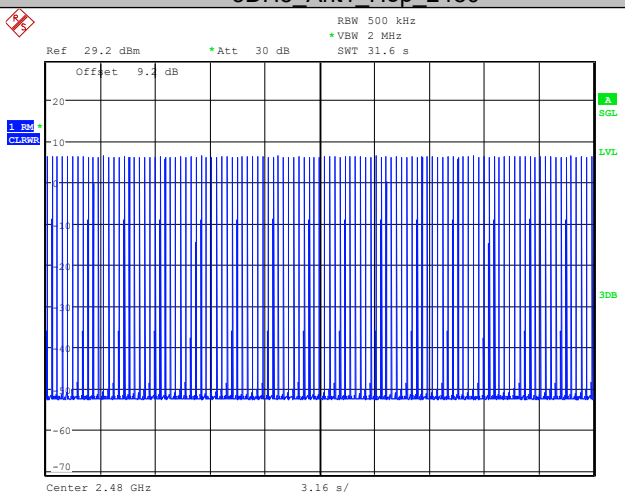



Date: 21.JAN.2021 13:13:15

3 Appendix A.3 : Frequency Occupation


TestMode	Antenna	Channel	Result [Num.]	Limit [Num.]	Verdict
DH5	Ant1	Hop_2402	3	1	PASS
		Hop_2480	3	1	PASS
2DH5	Ant1	Hop_2402	3	1	PASS
		Hop_2480	3	1	PASS
3DH5	Ant1	Hop_2402	3	1	PASS
		Hop_2480	3	1	PASS

DH5_Ant1_Hop_2402

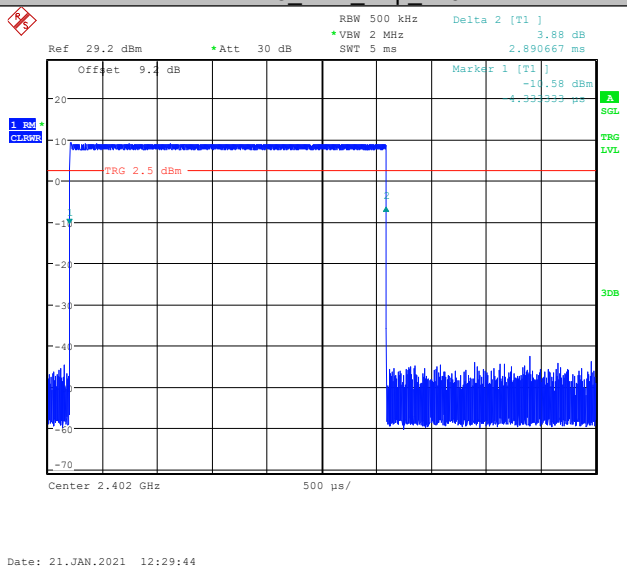


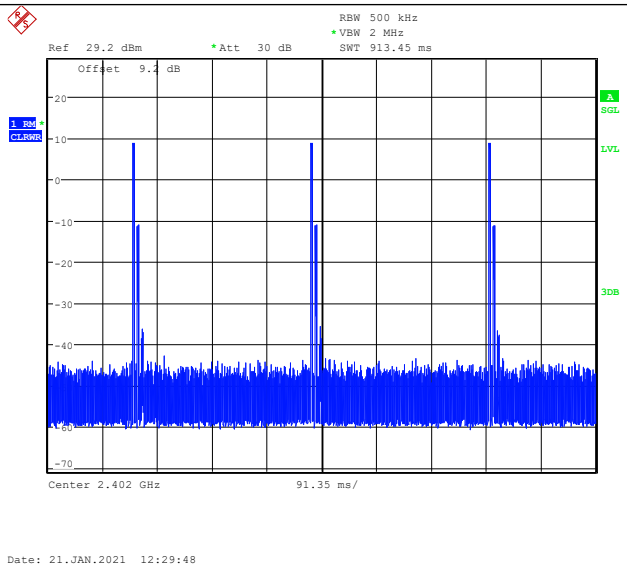

DH5_Ant1_Hop_2480

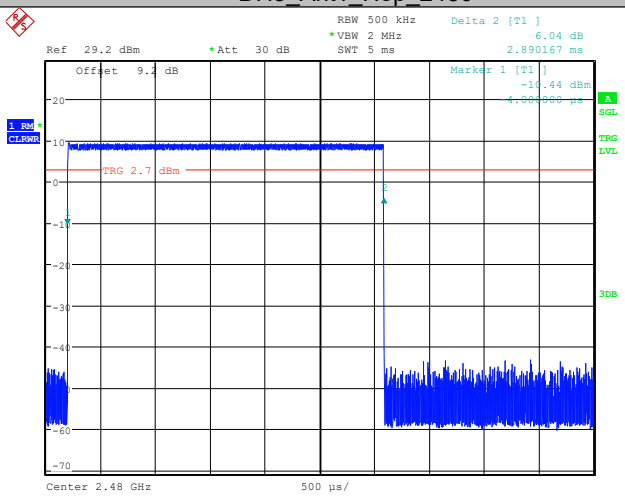


Date: 21.JAN.2021 12:37:16

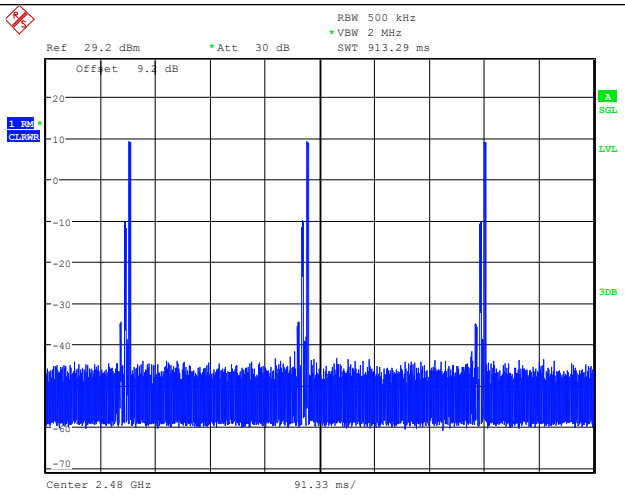


Date: 21.JAN.2021 12:37:20

2DH5_Ant1_Hop_2402

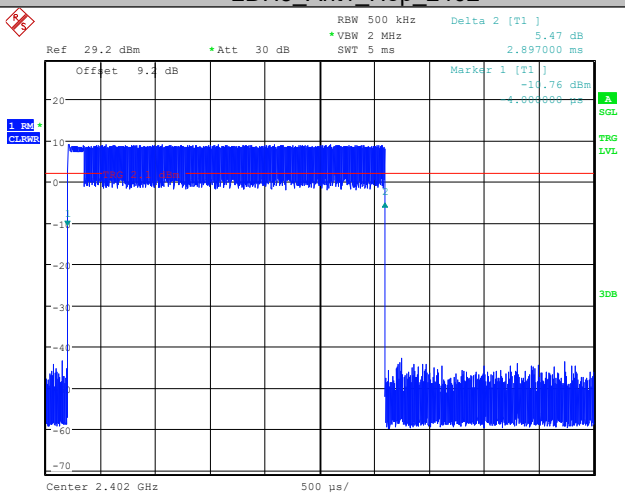


Date: 21.JAN.2021 12:39:43

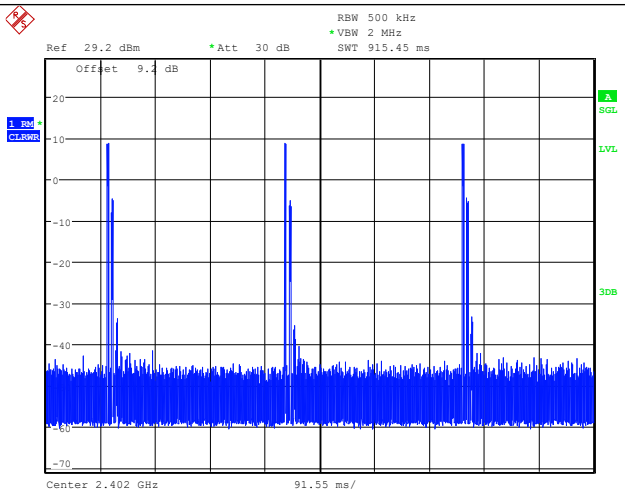


Date: 21.JAN.2021 12:39:46

2DH5_Ant1_Hop_2480

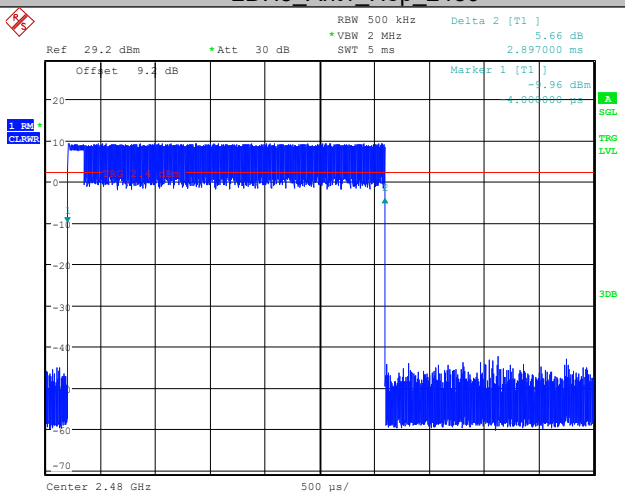


Date: 21.JAN.2021 12:51:00

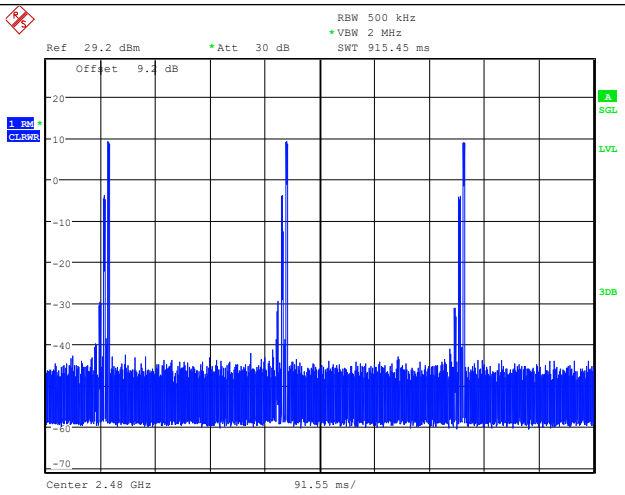


Date: 21.JAN.2021 12:51:03

3DH5_Ant1_Hop_2402

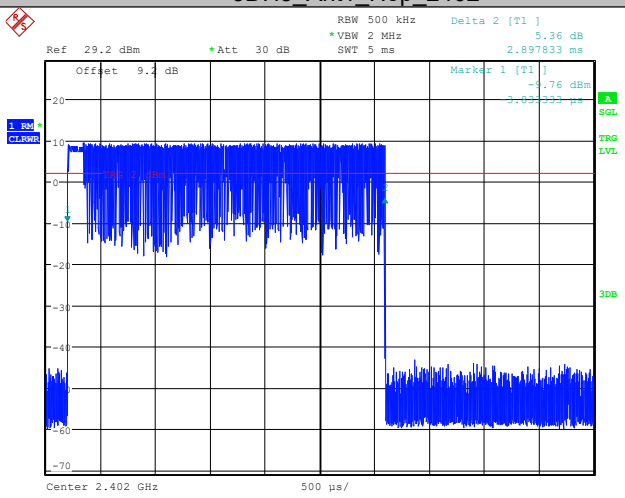


Date: 21.JAN.2021 12:53:31

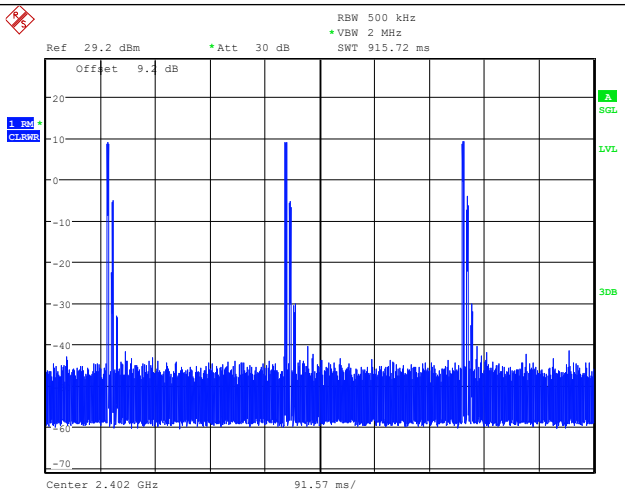


Date: 21.JAN.2021 12:53:34

3DH5_Ant1_Hop_2480

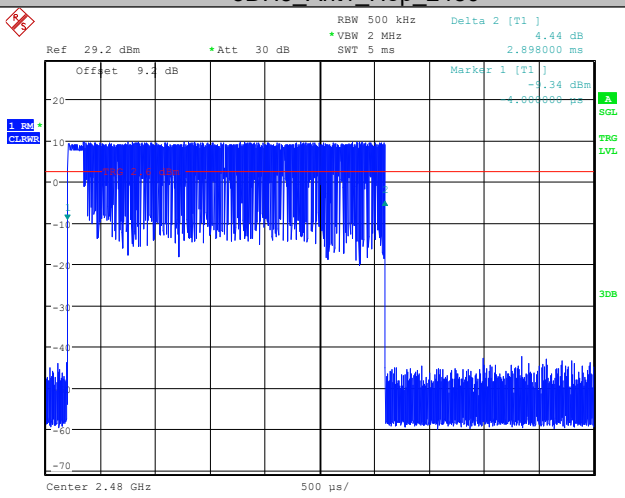

Date: 21.JAN.2021 13:13:34

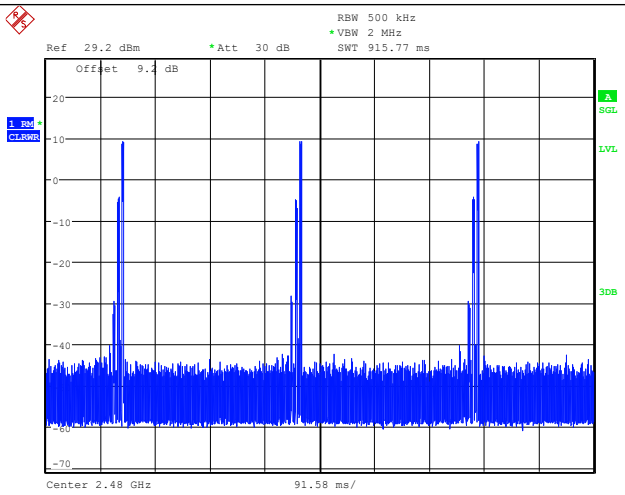


Date: 21.JAN.2021 13:13:38

4 Appendix A.4 : Hopping Sequence


TestMode	Antenna	Channel	Hop. [Num.]	Limit[Num.]	Band Use [%]	Limit [%]	Verdict
DH5	Ant1	Hop_2402	79	15	96.31	70	PASS
2DH5	Ant1	Hop_2402	79	15	96.63	70	PASS
3DH5	Ant1	Hop_2402	79	15	96.79	70	PASS

DH5_Ant1_Hop_2402

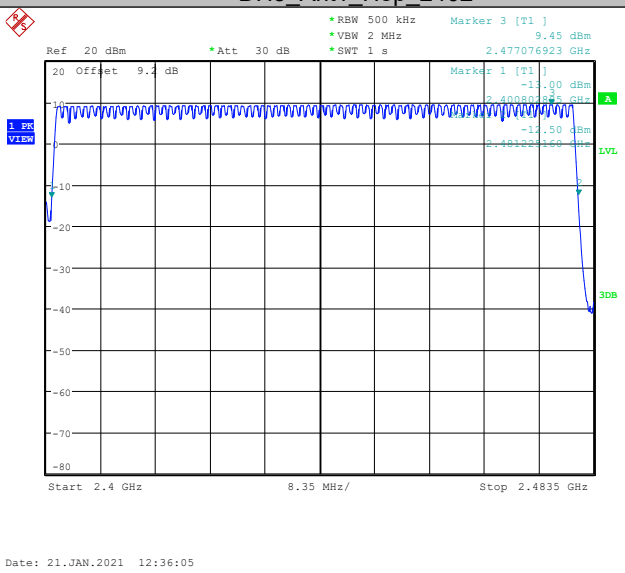


Date: 21.JAN.2021 12:36:05

2DH5_Ant1_Hop_2402

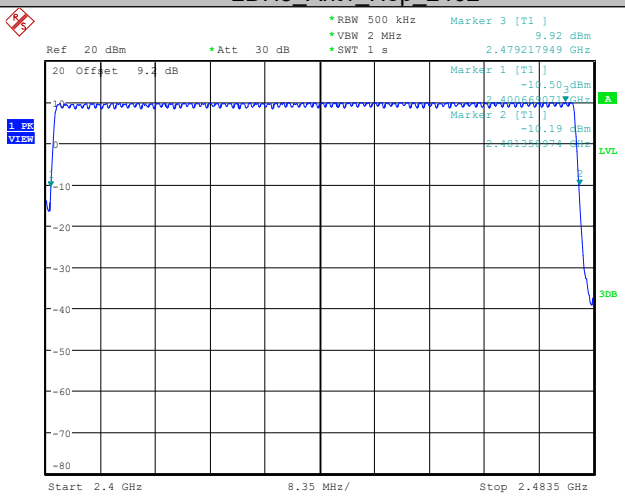

Date: 21.JAN.2021 12:49:35


3DH5_Ant1_Hop_2402

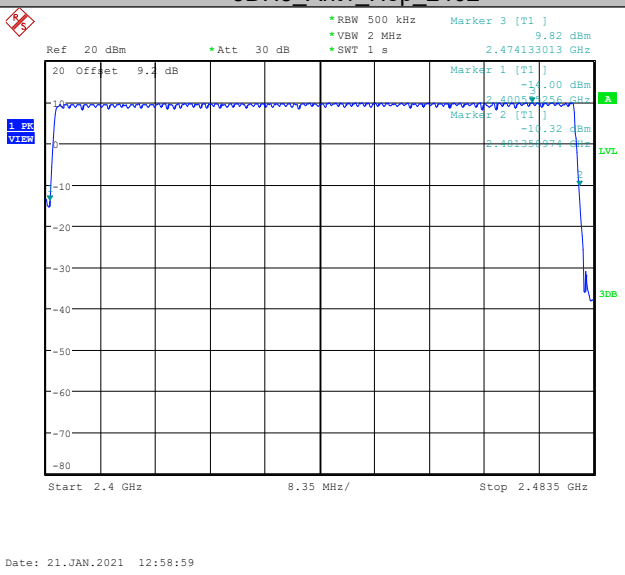


5 Appendix A.5: Hopping Frequency Separation

TestMode	Antenna	Channel	Result [MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1	0.100	PASS
2DH5	Ant1	Hop	1	0.100	PASS
3DH5	Ant1	Hop	1	0.100	PASS


DH5_Ant1_Hop

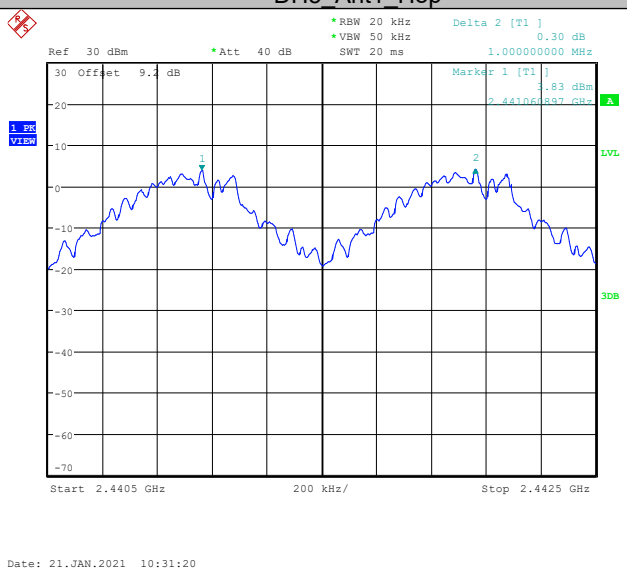

2DH5_Ant1_Hop

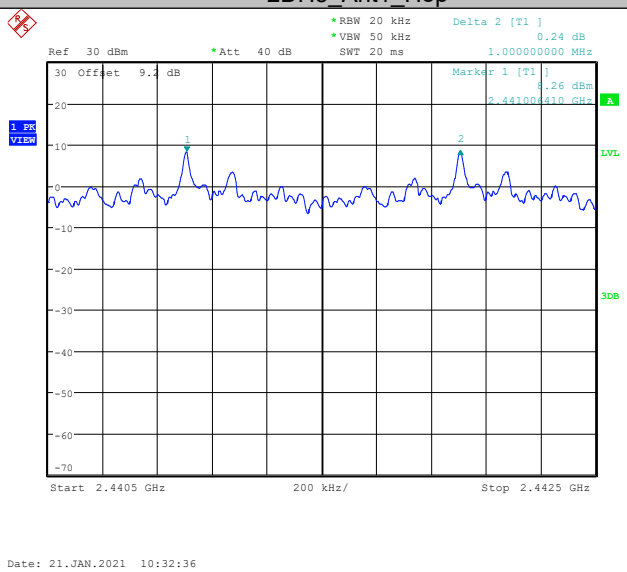


3DH5_Ant1_Hop

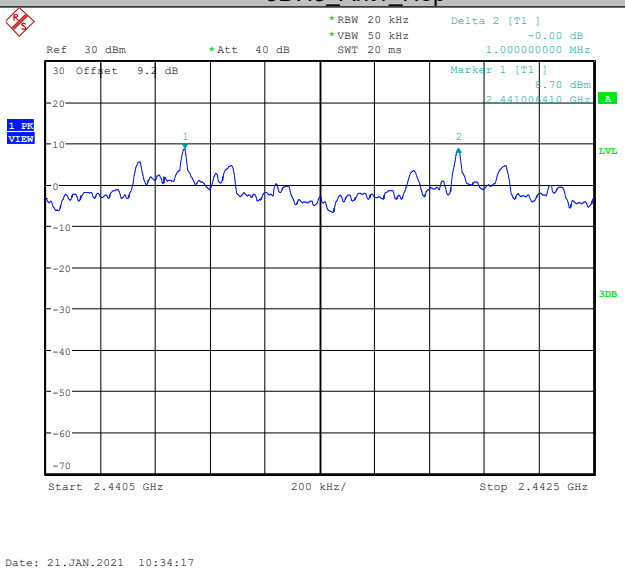

6 Appendix A.6: Occupied Channel Bandwidth


TestMode	Antenna	Channel	OCB[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH1	Ant1	2402	0.86	2401.5760	2402.4360	2400 to 2483.5	PASS
		2441	0.86	2440.5760	2441.4360	2400 to 2483.5	PASS
		2480	0.86	2479.5760	2480.4360	2400 to 2483.5	PASS
DH5	Ant1	2402	0.886	2401.5620	2402.4480	2400 to 2483.5	PASS
		2441	0.886	2440.5620	2441.4480	2400 to 2483.5	PASS
		2480	0.884	2479.5620	2480.4460	2400 to 2483.5	PASS
2DH1	Ant1	2402	1.17	2401.4040	2402.5740	2400 to 2483.5	PASS
		2441	1.17	2440.4040	2441.5740	2400 to 2483.5	PASS
		2480	1.17	2479.4040	2480.5740	2400 to 2483.5	PASS
2DH5	Ant1	2402	1.206	2401.4040	2402.6100	2400 to 2483.5	PASS
		2441	1.21	2440.4020	2441.6120	2400 to 2483.5	PASS
		2480	1.208	2479.4040	2480.6120	2400 to 2483.5	PASS
3DH1	Ant1	2402	1.17	2401.4280	2402.5980	2400 to 2483.5	PASS
		2441	1.17	2440.4280	2441.5980	2400 to 2483.5	PASS
		2480	1.17	2479.4280	2480.5980	2400 to 2483.5	PASS
3DH5	Ant1	2402	1.216	2401.3940	2402.6100	2400 to 2483.5	PASS
		2441	1.218	2440.3920	2441.6100	2400 to 2483.5	PASS
		2480	1.216	2479.3940	2480.6100	2400 to 2483.5	PASS

DH1_Ant1_2402

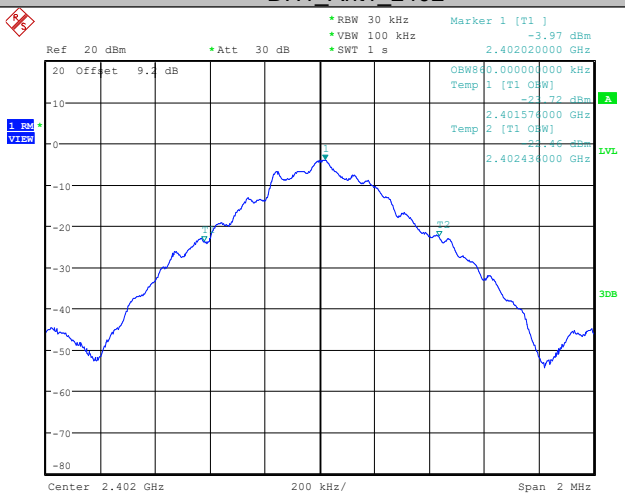


Date: 21.JAN.2021 10:37:16

DH1_Ant1_2441

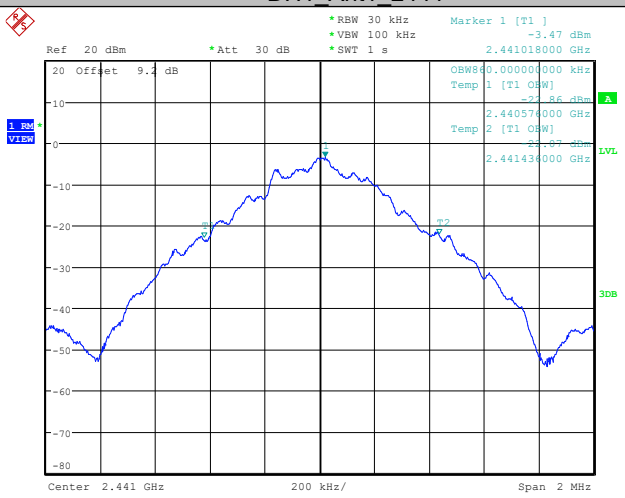


Date: 21.JAN.2021 10:37:40

DH1_Ant1_2480

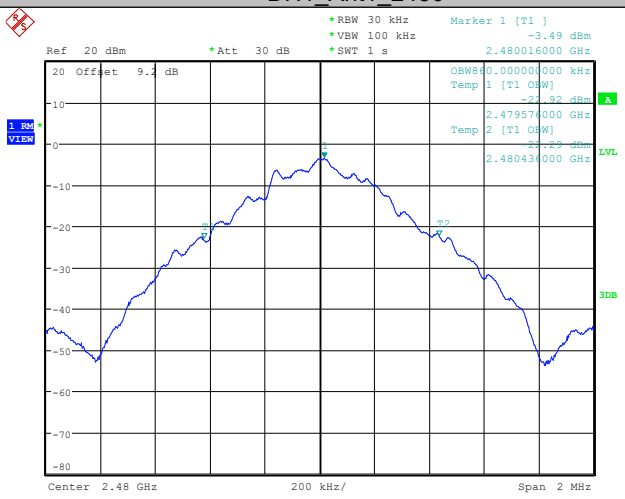


Date: 21.JAN.2021 10:38:04

DH5_Ant1_2402

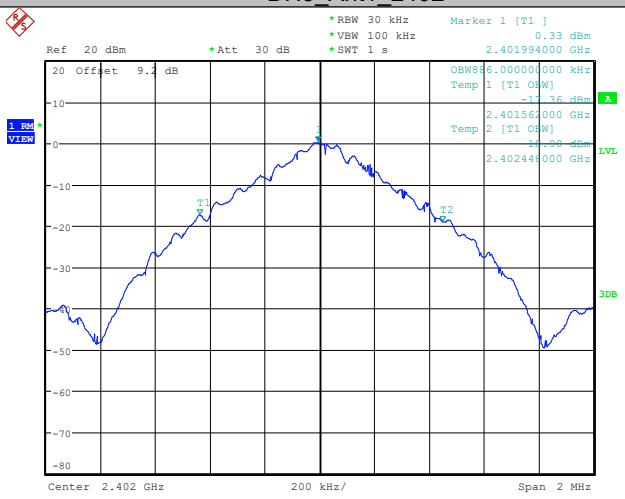


Date: 21.JAN.2021 10:27:44

DH5_Ant1_2441

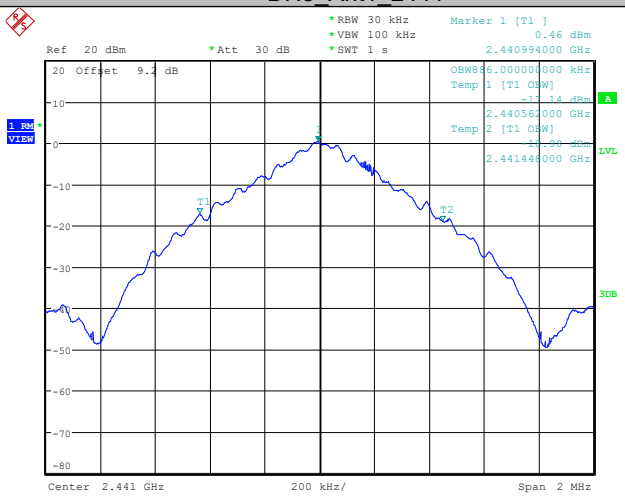


Date: 21.JAN.2021 10:28:13

DH5_Ant1_2480

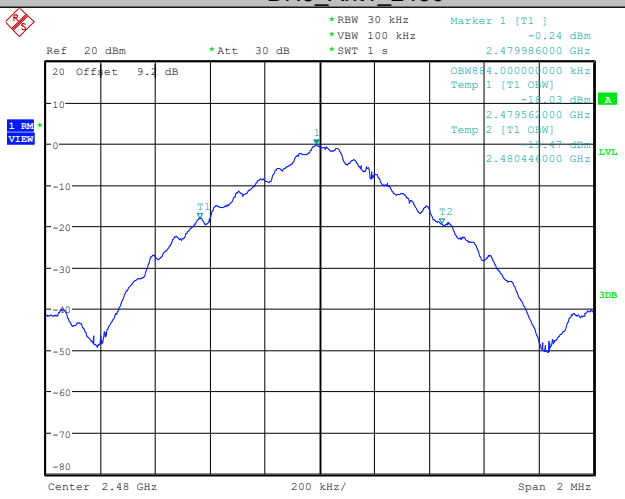


Date: 21.JAN.2021 10:28:33

2DH1_Ant1_2402

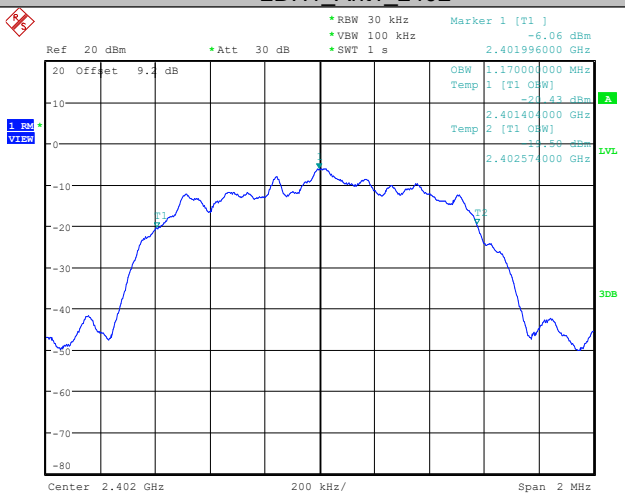


Date: 21.JAN.2021 10:38:39

2DH1_Ant1_2441

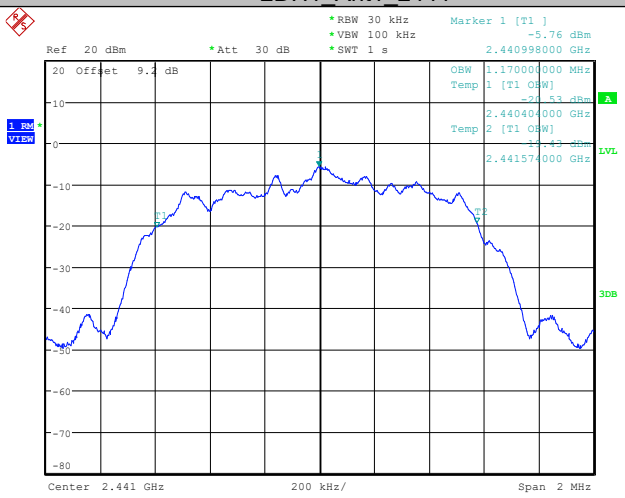


Date: 21.JAN.2021 10:39:04

2DH1_Ant1_2480

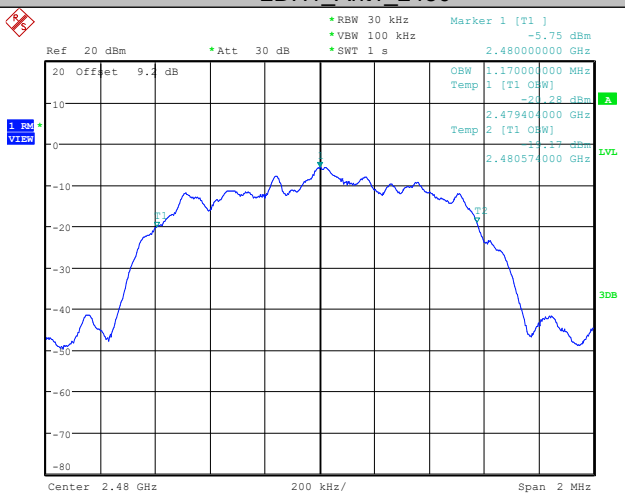


Date: 21.JAN.2021 10:39:27

2DH5_Ant1_2402

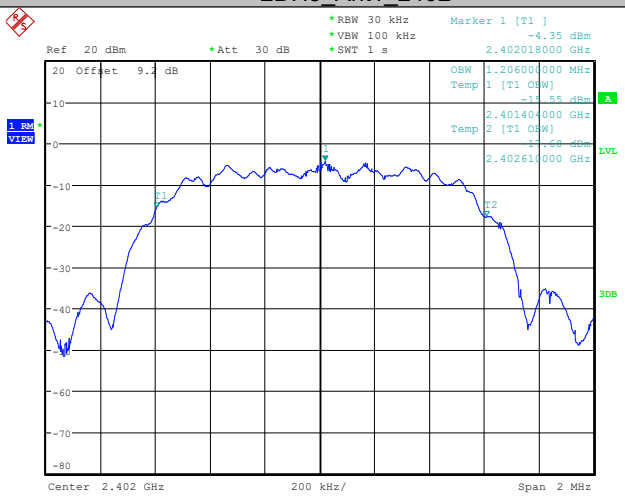


Date: 21.JAN.2021 10:29:02

2DH5_Ant1_2441

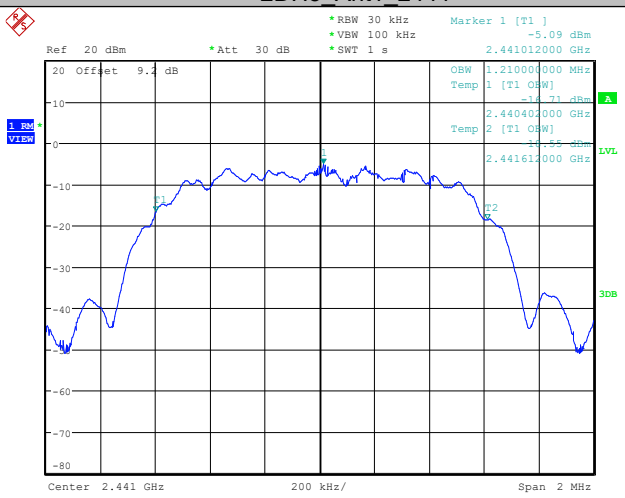


Date: 21.JAN.2021 10:29:25

2DH5_Ant1_2480

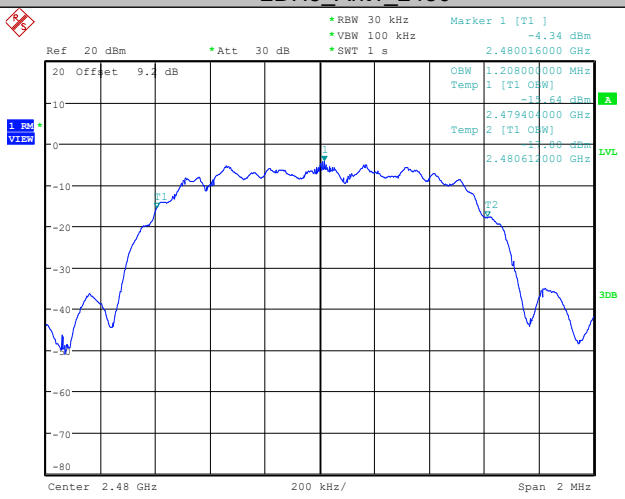


Date: 21.JAN.2021 10:30:17

3DH1_Ant1_2402

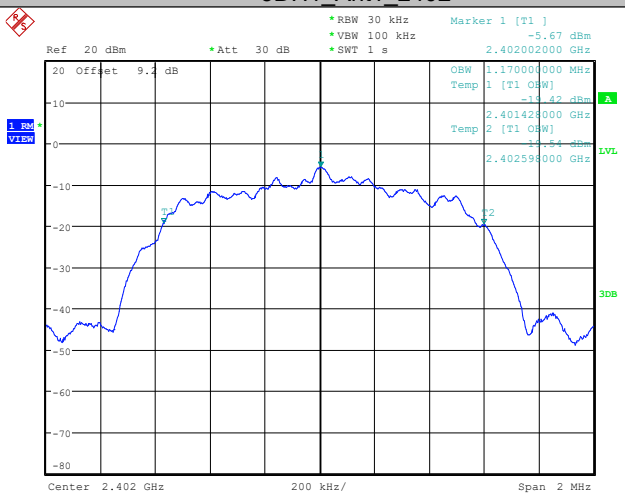


Date: 21.JAN.2021 10:39:51

3DH1_Ant1_2441

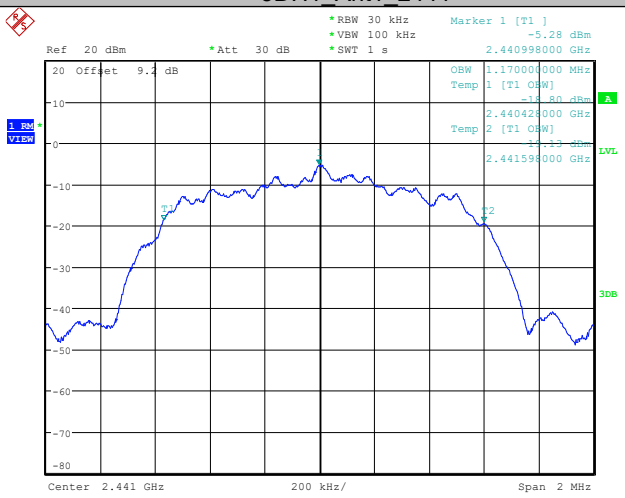


Date: 21.JAN.2021 10:40:12

3DH1_Ant1_2480

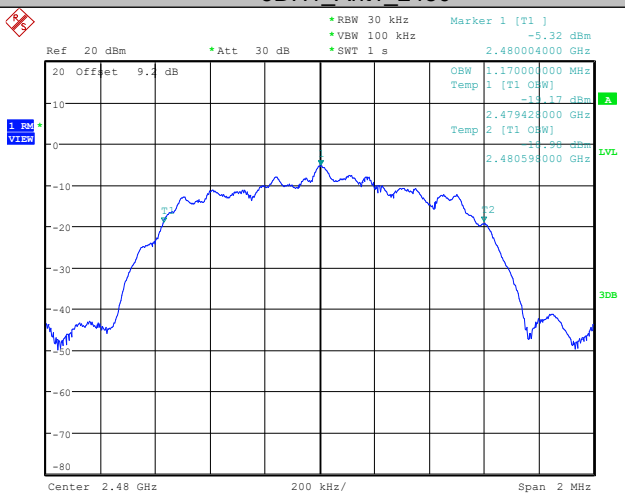


Date: 21.JAN.2021 10:40:32

3DH5_Ant1_2402

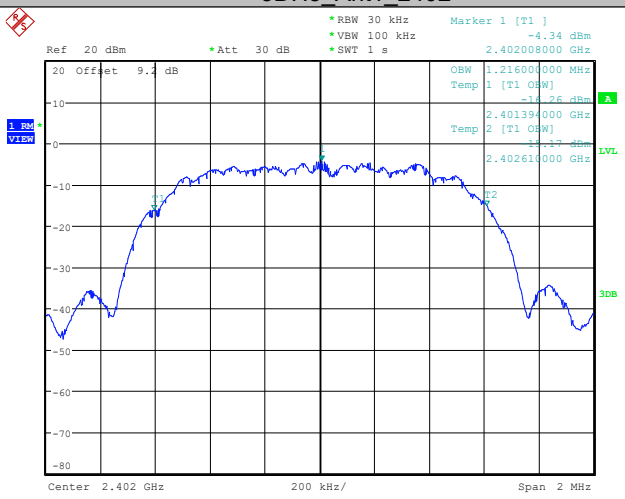


Date: 21.JAN.2021 10:35:09

3DH5_Ant1_2441

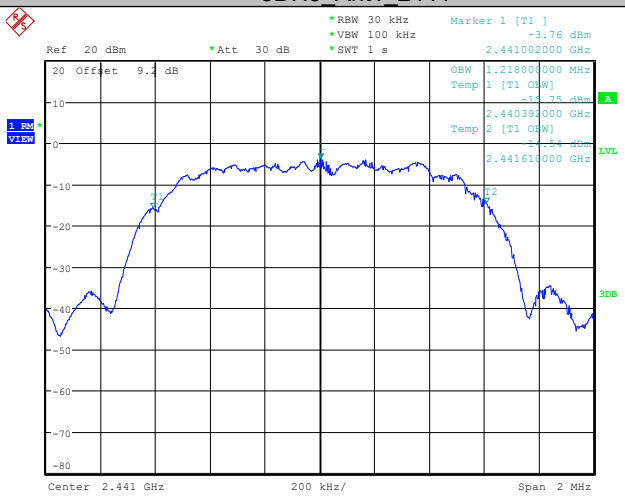

Date: 21.JAN.2021 10:35:28

3DH5_Ant1_2480

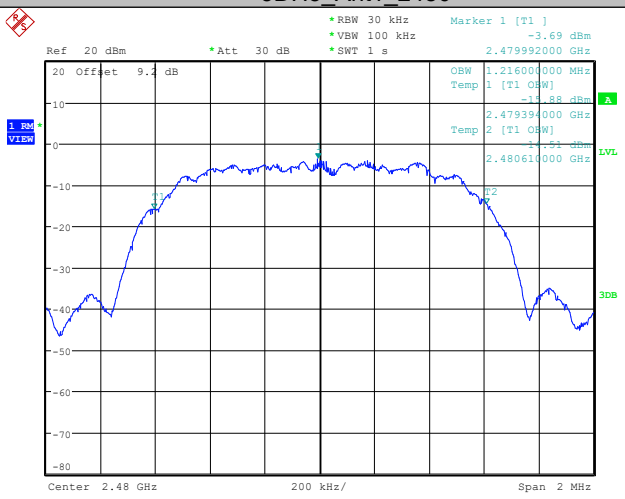


Date: 21.JAN.2021 10:36:44


7 Appendix A.7: Adaptivity

TestMode	Antenna	Channel	Max.COT [ms]	Limit[ms]	Min.Idel Time[ms]	Limit[ms]	Verdict
DH5	Ant2	Hop_2402	0.381	40	1.100	0.100	PASS


TestMode	Antenna	Channel	Add Signal Type	Add Signal Time[ms]	Add Signal Level[dbm]	Max. Short Time [%]	Limit [%]	Verdict
DH5	Ant1	Hop_2402	AWGN	2101	-61.50	3.40	10	PASS
			CW	62121	-35.00	3.00	10	PASS


DH5_Ant1_Hop_2402

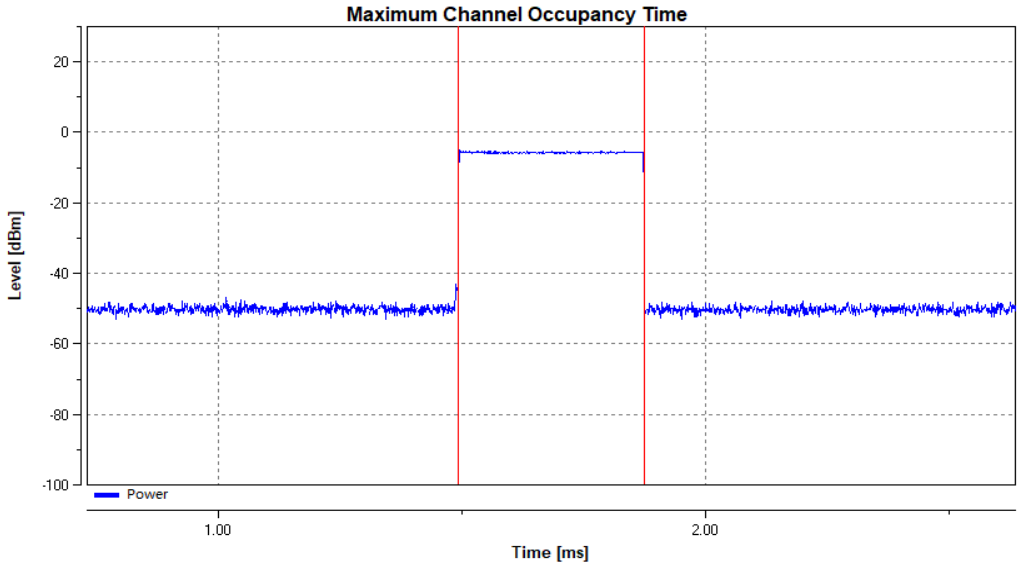


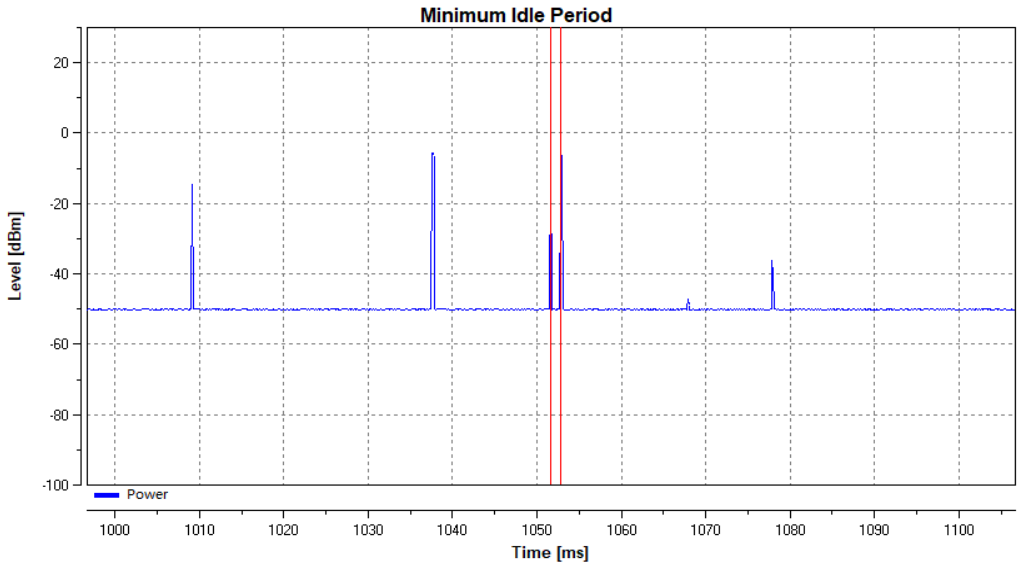

DH5_Ant1_Hop_2402

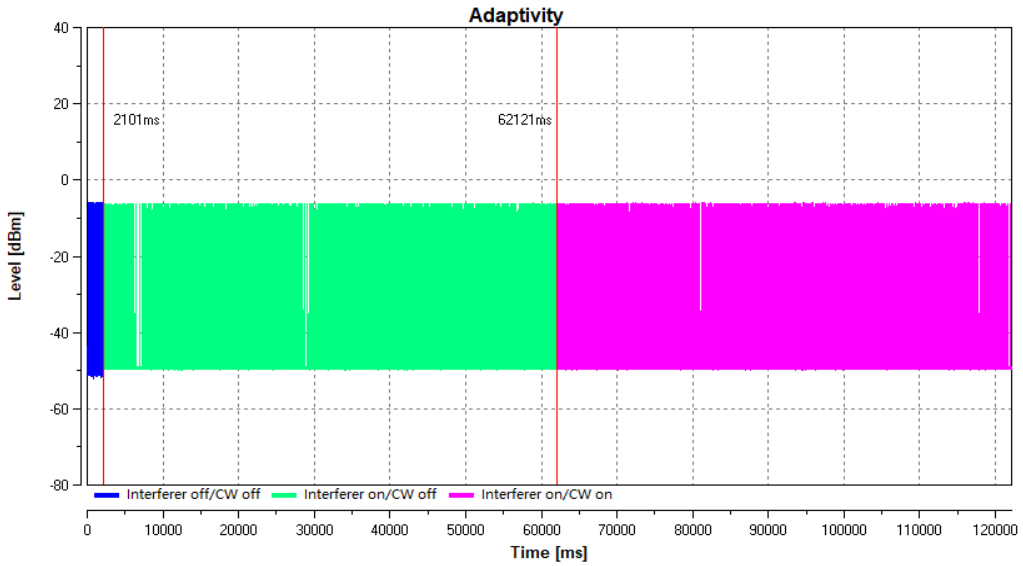

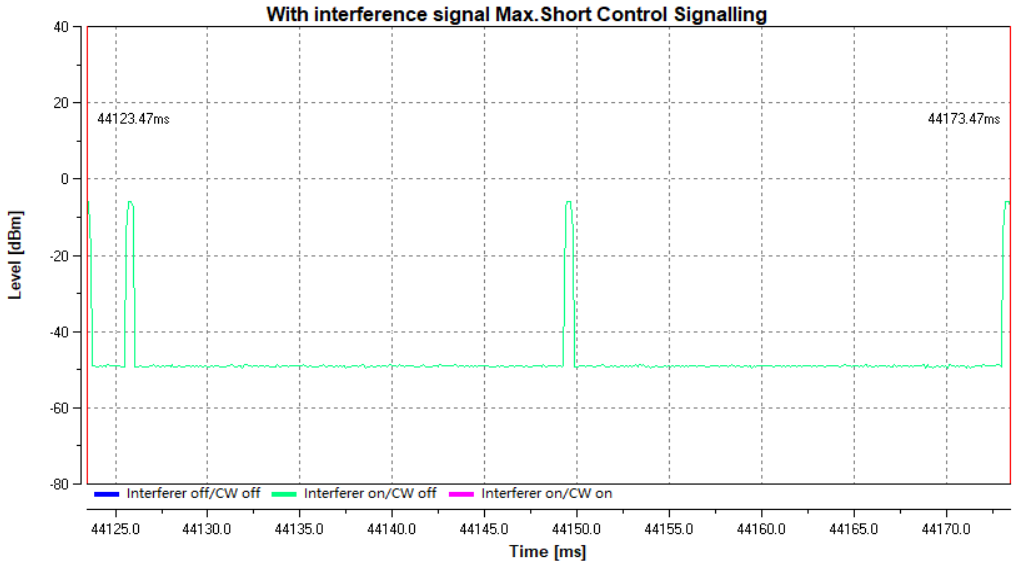

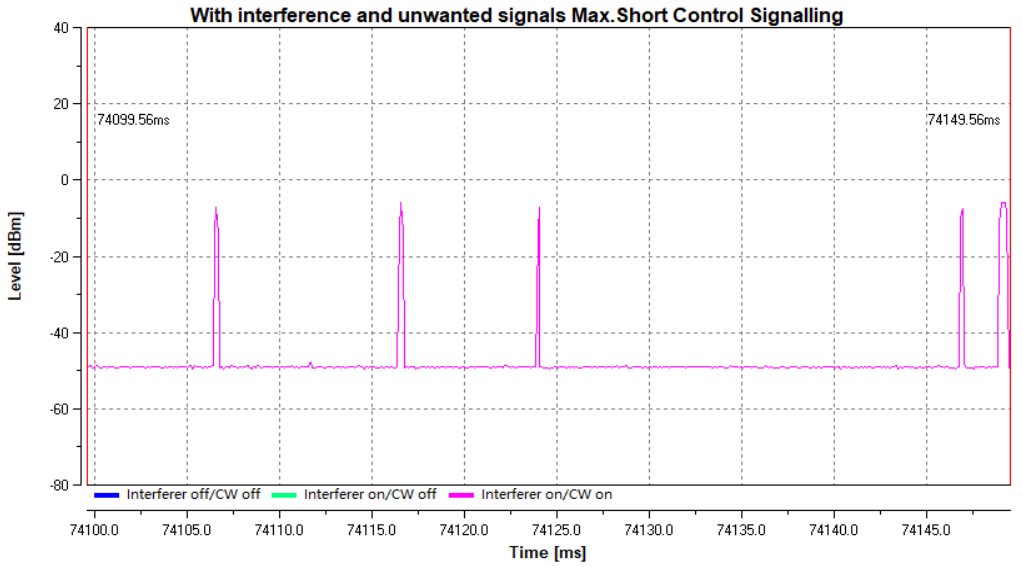


8 Appendix A.8: Receiver Blocking


TestMode	Antenna	Channel	Pmin [dBm]	Wanted signal [dBm]	Freq. [MHz]	CW [dBm]	PER [%]	Limit [%]	Verdict
DH1	Ant1	Hop	---	-77.18	2300	-31.52	5.39	<=10	PASS
			---	-77.18	2330	-31.52	3.38	<=10	PASS
			---	-77.18	2360	-31.52	2.82	<=10	PASS
			---	-71.18	2380	-31.52	0.70	<=10	PASS
			---	-71.18	2504	-31.52	1.09	<=10	PASS
			---	-77.18	2524	-31.52	2.72	<=10	PASS
			---	-77.18	2584	-31.52	4.03	<=10	PASS
			---	-77.18	2674	-31.52	3.38	<= 10	PASS
2DH1	Ant1	Hop	---	-75.84	2300	-31.52	2.34	<=10	PASS
			---	-75.84	2330	-31.52	2.53	<=10	PASS
			---	-75.84	2360	-31.52	2.25	<=10	PASS
			---	-69.84	2380	-31.52	0.60	<=10	PASS
			---	-69.84	2504	-31.52	0.60	<=10	PASS
			---	-75.84	2524	-31.52	3.29	<=10	PASS
			---	-75.84	2584	-31.52	3.85	<=10	PASS
			---	-75.84	2674	-31.52	5.93	<= 10	PASS
3DH1	Ant1	Hop	---	-75.84	2300	-31.52	4.94	<=10	PASS
			---	-75.84	2330	-31.52	4.85	<=10	PASS
			---	-75.84	2360	-31.52	3.93	<=10	PASS
			---	-69.84	2380	-31.52	1.96	<=10	PASS
			---	-69.84	2504	-31.52	2.06	<=10	PASS
			---	-75.84	2524	-31.52	4.21	<=10	PASS
			---	-75.84	2584	-31.52	5.29	<=10	PASS
			---	-75.84	2674	-31.52	5.75	<= 10	PASS

Note: The EUT is category 1 receiver.

DH1_Ant1_Hop

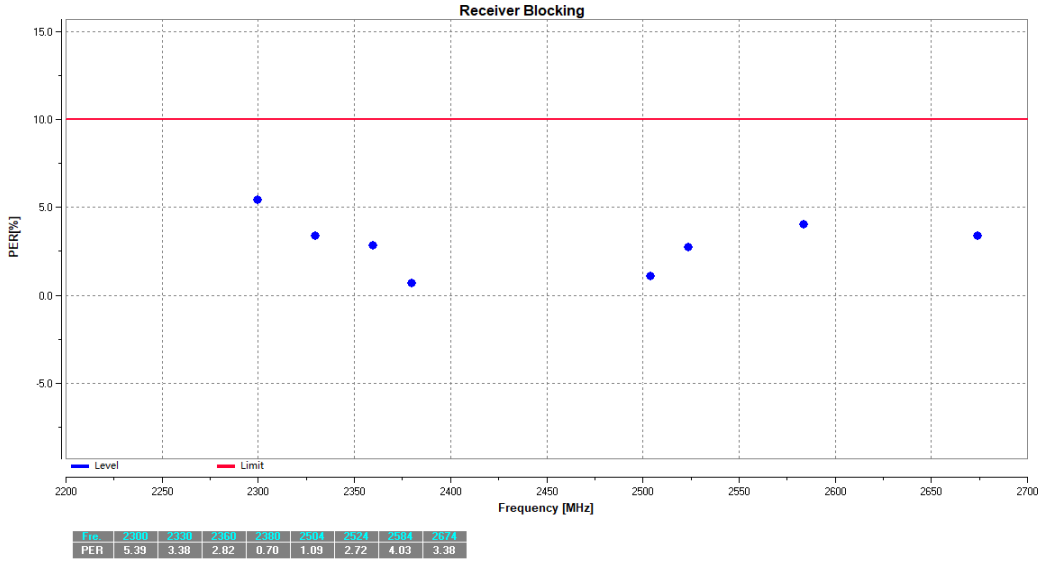


2DH1_Ant1_Hop

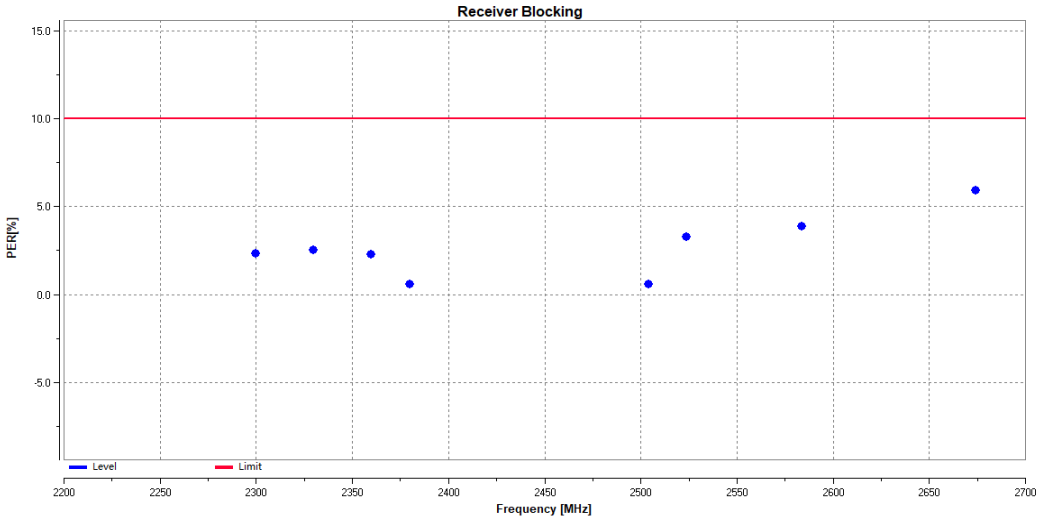

Fre.	2300	2330	2360	2380	2504	2524	2584	2674
PER	2.34	2.53	2.25	0.60	0.60	3.29	3.85	5.93

3DH1_Ant1_Hop

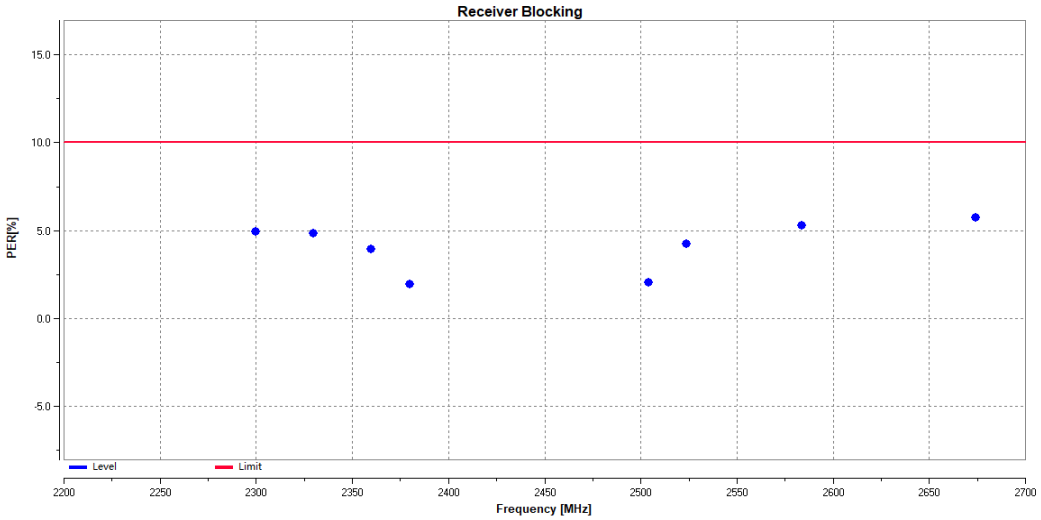


Fre.	2300	2330	2360	2380	2504	2524	2584	2674
PER	4.94	4.85	3.93	1.96	2.06	4.21	5.29	5.75


9 Appendix A.9 : Tx unwanted emissions in the out-of-band domain

TestMode	Antenna	Channel	Freq. [MHz]	Level[dBm]	Limit[dBm]	Verdict
DH5	Ant1	Hop	2398.5	-52.71	-20.00	PASS
			2399.5	-15.11	-10.00	PASS
			2484	-43.55	-10.00	PASS
			2485	-55.07	-20.00	PASS
2DH5	Ant1	Hop	2398.084	-42.90	-20.00	PASS
			2398.292	-26.00	-20.00	PASS
			2399.292	-39.96	-10.00	PASS
			2399.5	-15.16	-10.00	PASS
			2484	-43.27	-10.00	PASS
			2484.208	-54.47	-10.00	PASS
			2485.208	-42.19	-20.00	PASS
			2485.416	-53.71	-20.00	PASS
3DH5	Ant1	Hop	2398.068	-54.76	-20.00	PASS
			2398.284	-52.59	-20.00	PASS
			2399.284	-36.30	-10.00	PASS
			2399.5	-15.34	-10.00	PASS
			2484	-46.61	-10.00	PASS
			2484.216	-53.61	-10.00	PASS
			2485.216	-41.47	-20.00	PASS
			2485.432	-53.21	-20.00	PASS


DH5_Ant1_Hop_2400MHz-2BW to 2400MHz

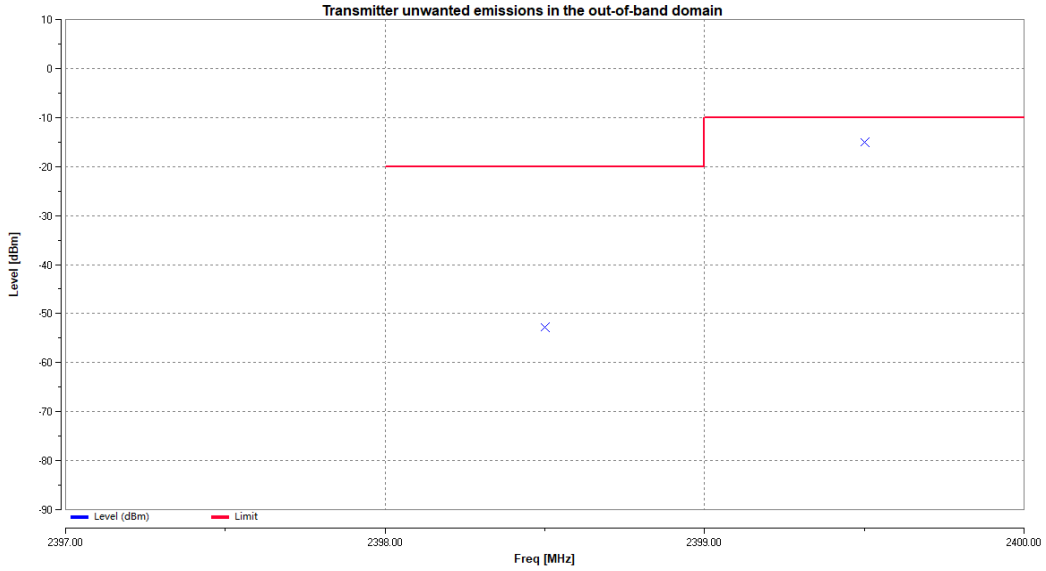


DH5_Ant1_Hop_2483.5MHz to 2483.5MHz+2BW

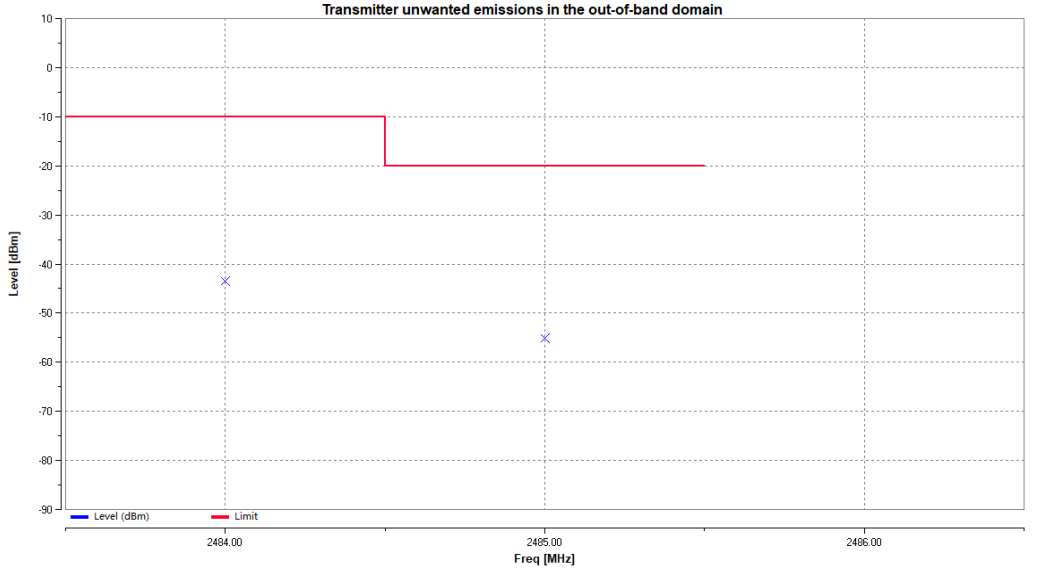


2DH5_Ant1_Hop_2400MHz-2BW to 2400MHz

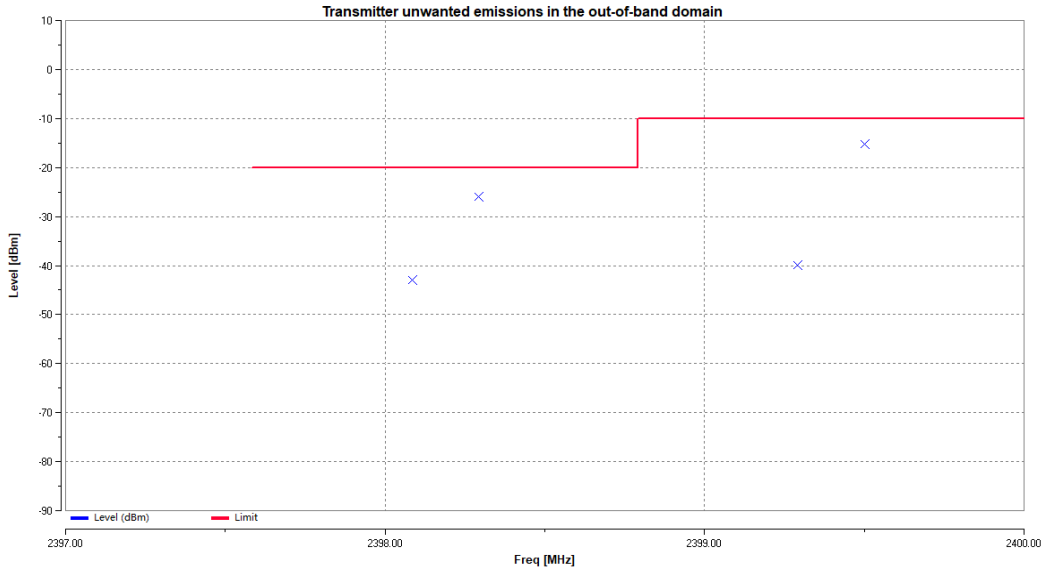


2DH5_Ant1_Hop_2483.5MHz to 2483.5MHz+2BW

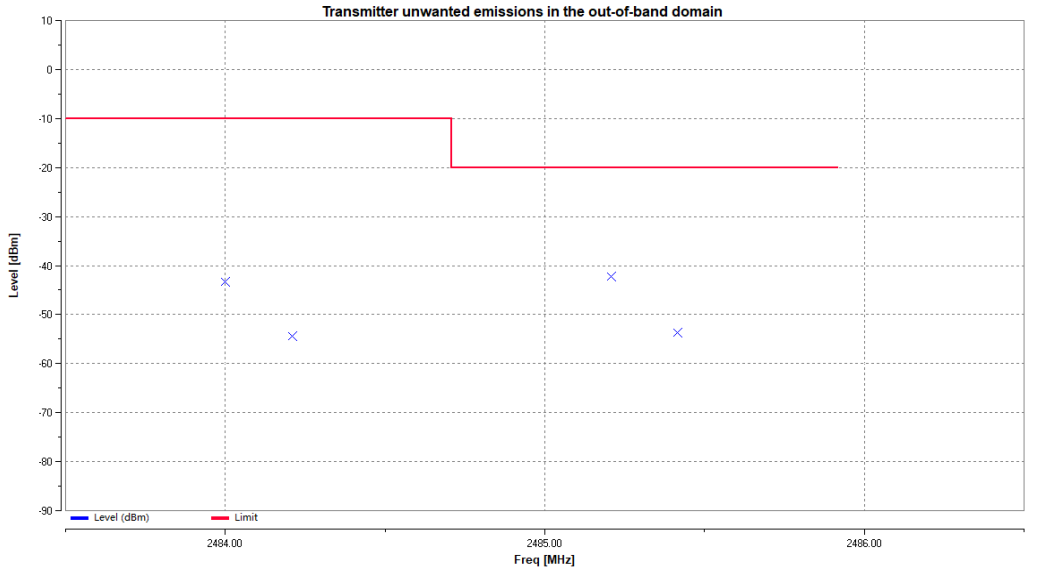

3DH5_Ant1_Hop_2400MHz-2BW to 2400MHz

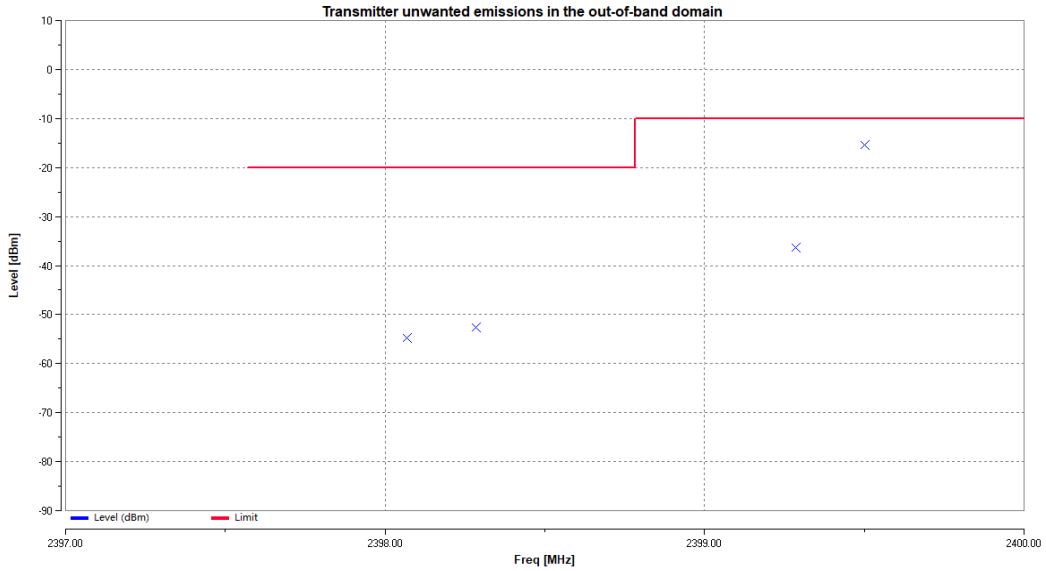

3DH5_Ant1_Hop_2483.5MHz to 2483.5MHz+2BW

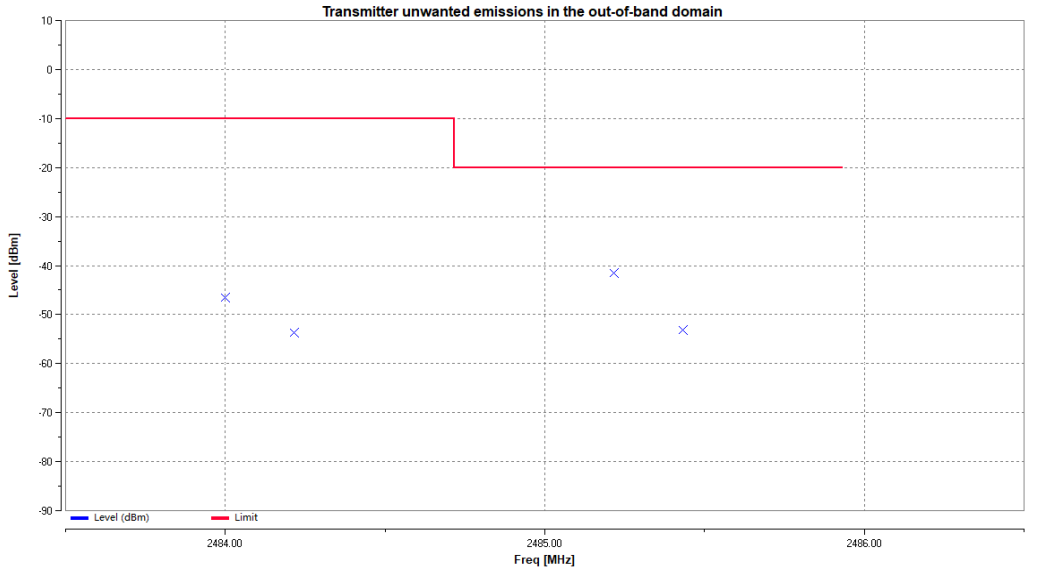


10 Appendix A.10: Test Plots of Transmitter Unwanted Emission in the spurious domain

TX DH5 2480MHz Mode

Condition: Temp:24.9°C;Humi:49.7% **Test Site**: DDT Chamber 3#

File Path: d:\ts\2025 report date\Q25101023-9E\CE Below 1G BT\5

Memo: Sample Number:S25101023-016

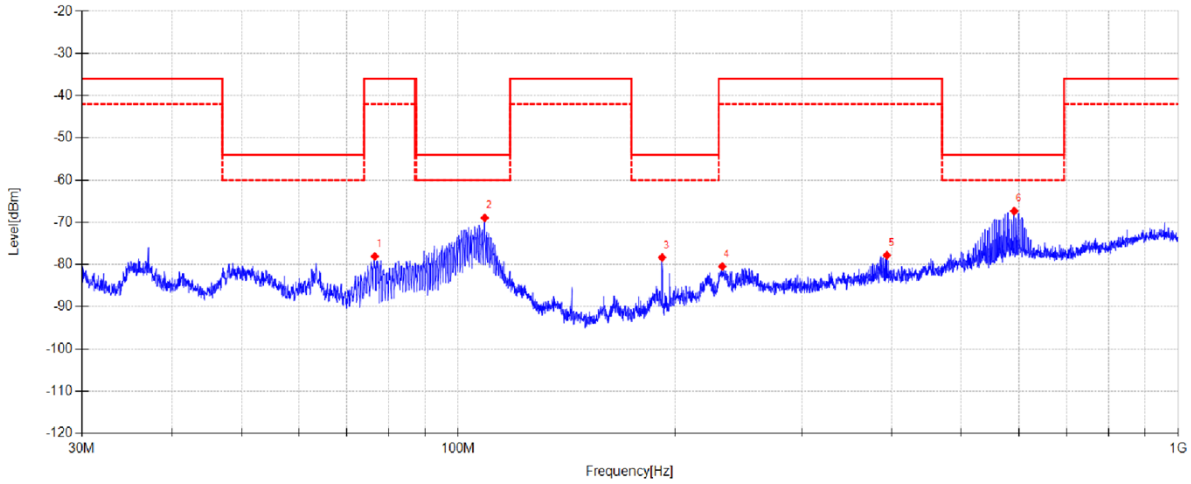

Suspected Data List

NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Type
1	76.551	40.50	-118.55	-78.05	-36.00	42.05	PK	Horizontal	ERP
2	108.848	47.83	-116.75	-68.92	-54.00	14.92	PK	Horizontal	ERP
3	191.943	38.45	-116.78	-78.33	-54.00	24.33	PK	Horizontal	ERP
4	232.600	33.58	-114.03	-80.45	-36.00	44.45	PK	Horizontal	ERP
5	393.822	31.70	-109.51	-77.81	-36.00	41.81	PK	Horizontal	ERP
6	591.865	37.87	-105.21	-67.34	-54.00	13.34	PK	Horizontal	ERP


Note:
1. Level = Reading + Factor.
2. Factor = Antenna Factor + Cable Loss - Preamp Gain + Site Loss Factor - 107.
3. Test setup: RBW: 100 kHz, VBW: 300 kHz, Sweep time: auto.

TX DH5 2480MHz Mode

Condition: Temp:24.9°C;Humi:49.7% **Test Site**: DDT Chamber 3#

File Path: d:\ts\2025 report date\Q25101023-9E\CE Below 1G BT\6

Memo: Sample Number:S25101023-016

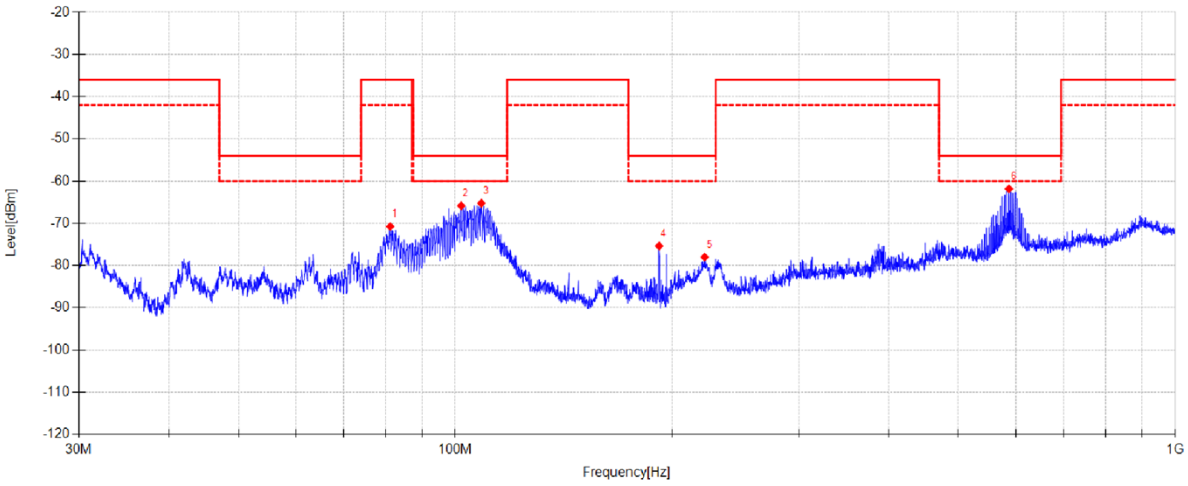

Suspected Data List

NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Type
1	81.196	46.30	-117.03	-70.73	-36.00	34.73	PK	Vertical	ERP
2	101.905	45.48	-111.35	-65.87	-54.00	11.87	PK	Vertical	ERP
3	108.695	46.57	-111.83	-65.26	-54.00	11.26	PK	Vertical	ERP
4	191.943	39.28	-114.64	-75.36	-54.00	21.36	PK	Vertical	ERP
5	221.925	36.04	-114.03	-77.99	-54.00	23.99	PK	Vertical	ERP
6	587.730	41.44	-103.28	-61.84	-54.00	7.84	PK	Vertical	ERP


Note:
1. Level = Reading + Factor.
2. Factor = Antenna Factor + Cable Loss - Preamp Gain + Site Loss Factor - 107.
3. Test setup: RBW: 100 kHz, VBW: 300 kHz, Sweep time: auto.

TX DH5 2402MHz Mode

Condition: Temp:24.9°C;Humi:49.7% **Test Site**: DDT 3# Chamber

File Path: d:\ts\2025 report date\Q25101023-9E\CE Below 1G BT\7

Memo: Sample Number:S25101023-016

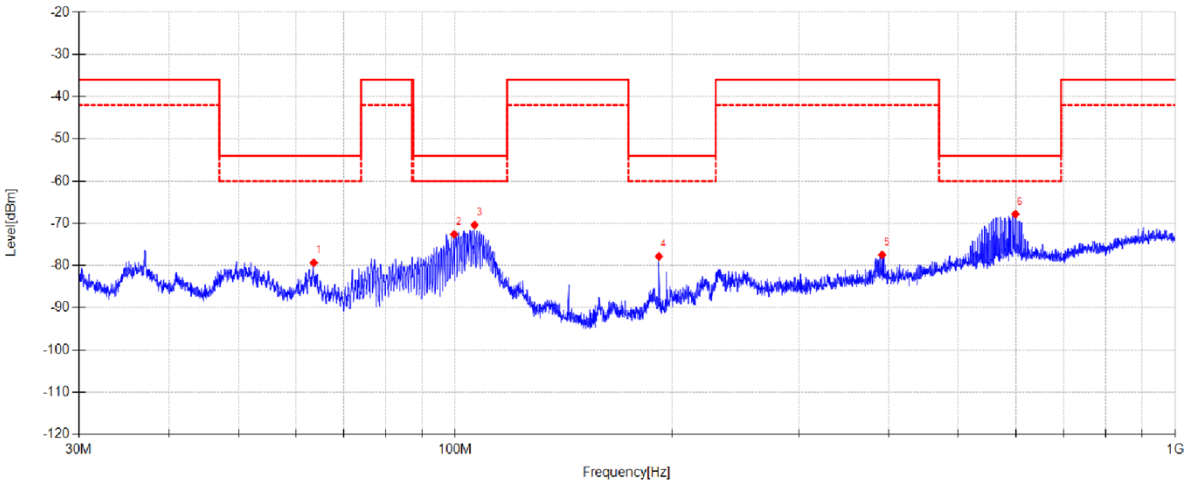

Suspected Data List

NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Type
1	63.571	36.01	-115.35	-79.34	-54.00	25.34	PK	Horizontal	ERP
2	99.644	43.68	-116.25	-72.57	-54.00	18.57	PK	Horizontal	ERP
3	106.358	46.21	-116.59	-70.38	-54.00	16.38	PK	Horizontal	ERP
4	191.808	38.94	-116.78	-77.84	-54.00	23.84	PK	Horizontal	ERP
5	391.619	32.09	-109.55	-77.46	-36.00	41.46	PK	Horizontal	ERP
6	599.803	37.04	-104.86	-67.82	-54.00	13.82	PK	Horizontal	ERP


Note:
1. Level = Reading + Factor.
2. Factor = Antenna Factor + Cable Loss - Preamp Gain + Site Loss Factor - 107.
3. Test setup: RBW: 100 kHz, VBW: 300 kHz, Sweep time: auto.

TX DH5 2402MHz Mode

Condition: Temp:24.9°C;Humi:49.7% **Test Site**: DDT Chamber 3#

File Path: d:\ts\2025 report date\Q25101023-9E\CE Below 1G BT\8

Memo: Sample Number:S25101023-016

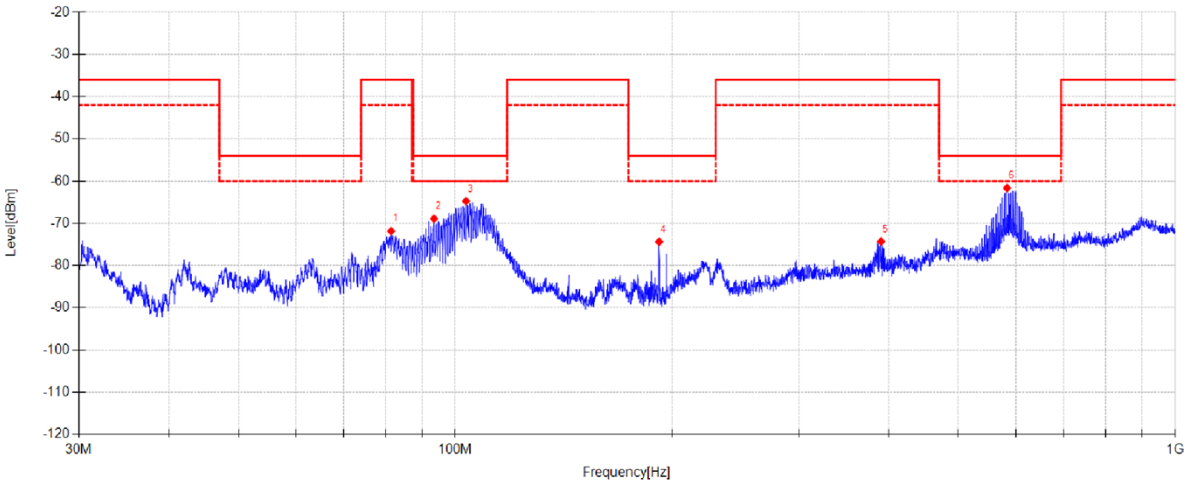


Suspected Data List

NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Type
1	81.424	45.10	-116.93	-71.83	-36.00	35.83	PK	Vertical	ERP
2	93.419	43.56	-112.43	-68.87	-54.00	14.87	PK	Vertical	ERP
3	103.489	46.71	-111.46	-64.75	-54.00	10.75	PK	Vertical	ERP
4	191.943	40.29	-114.64	-74.35	-54.00	20.35	PK	Vertical	ERP
5	390.248	33.61	-107.90	-74.29	-36.00	38.29	PK	Vertical	ERP
6	584.033	41.80	-103.45	-61.65	-54.00	7.65	PK	Vertical	ERP

Note:
1. Level = Reading + Factor.
2. Factor = Antenna Factor + Cable Loss - Preamp Gain + Site Loss Factor - 107.
3. Test setup: RBW: 100 kHz, VBW: 300 kHz, Sweep time: auto.

Test Date:	2025-12-17	**Tested By**:	Li Xiongbin
Test Mode:	TX DH5 2480MHz Mode	**Power Supply**:	AC 230V/50Hz
Condition:	Temp:24.9°C;Humi:49.7%	**Test Site**:	DDT 3# Chamber
File Path:	d:\ts\2025 report date\Q25101023-9E\CE Above 1G BT\1		
Memo:	Sample Number:S25101023-016 Power Setting:250		

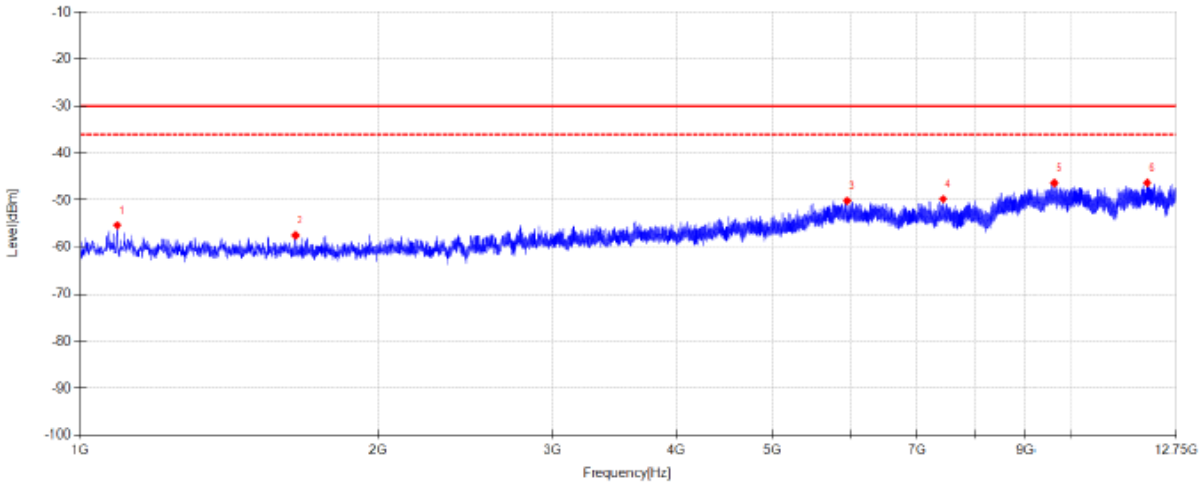


Suspected Data List

NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Type
1	1090.083	49.12	-104.46	-55.34	-30.00	25.34	PK	Horizontal	EIRP
2	1649.677	47.15	-104.61	-57.46	-30.00	27.46	PK	Horizontal	EIRP
3	5950.667	44.18	-94.32	-50.14	-30.00	20.14	PK	Horizontal	EIRP
4	7439.979	44.41	-94.15	-49.74	-30.00	19.74	PK	Horizontal	EIRP
5	9595.615	42.98	-89.31	-46.33	-30.00	16.33	PK	Horizontal	EIRP
6	11912.323	42.24	-88.53	-46.29	-30.00	16.29	PK	Horizontal	EIRP

Note:
1. Level = Reading + Factor.
2. Factor = Antenna Factor + Cable Loss + Filter Factor - Preamp Gain + Site Loss Factor - 107.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date:	2025-12-17	**Tested By**:	Li Xiongbin
Test Mode:	TX DH5 2480MHz Mode	**Power Supply**:	AC 230V/50Hz
Condition:	Temp:24.9°C;Humi:49.7%	**Test Site**:	DDT 3# Chamber
File Path:	d:\ts\2025 report date\Q25101023-9E\CE Above 1G BT\2		
Memo:	Sample Number:S25101023-016 Power Setting:250		

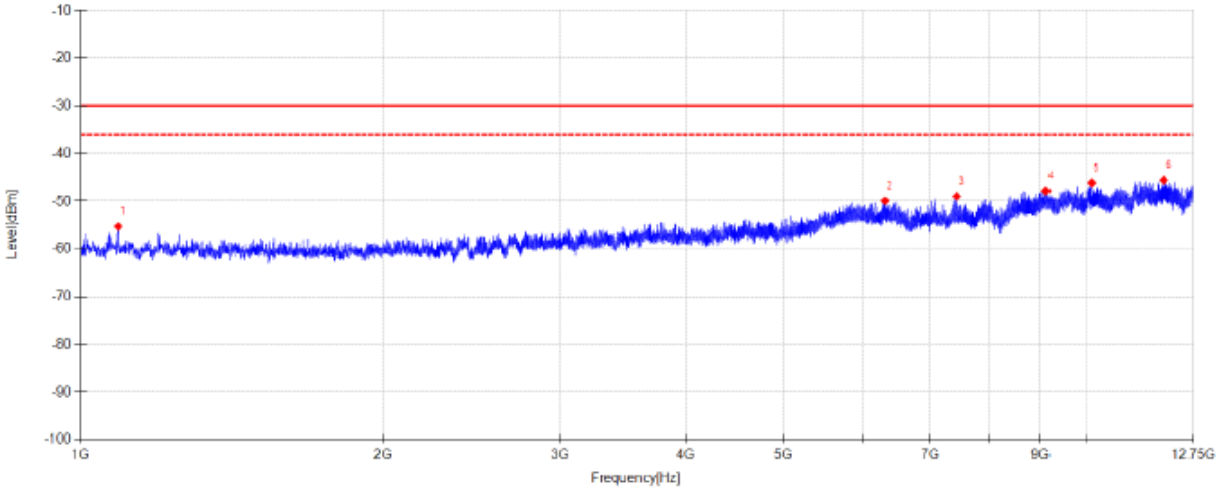


Suspected Data List

NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Type
1	1090.083	48.82	-104.09	-55.27	-30.00	25.27	PK	Vertical	EIRP
2	6312.469	44.41	-94.31	-49.90	-30.00	19.90	PK	Vertical	EIRP
3	7439.979	45.10	-94.05	-48.95	-30.00	18.95	PK	Vertical	EIRP
4	9115.333	42.14	-89.95	-47.81	-30.00	17.81	PK	Vertical	EIRP
5	10096.948	43.25	-89.41	-46.16	-30.00	16.16	PK	Vertical	EIRP
6	11907.917	42.32	-87.92	-45.60	-30.00	15.60	PK	Vertical	EIRP

Note:
1. Level = Reading + Factor.
2. Factor = Antenna Factor + Cable Loss + Filter Factor - Preamp Gain + Site Loss Factor - 107.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date:	2025-12-17	**Tested By**:	Li Xiongbin
Test Mode:	TX DH5 2480MHz Mode	**Power Supply**:	AC 230V/50Hz
Condition:	Temp:24.9°C;Humi:49.7%	**Test Site**:	DDT 3# Chamber
File Path:	d:\ts\2025 report date\Q25101023-9E\CE Above 1G BT\3		
Memo:	Sample Number:S25101023-016 Power Setting:250		

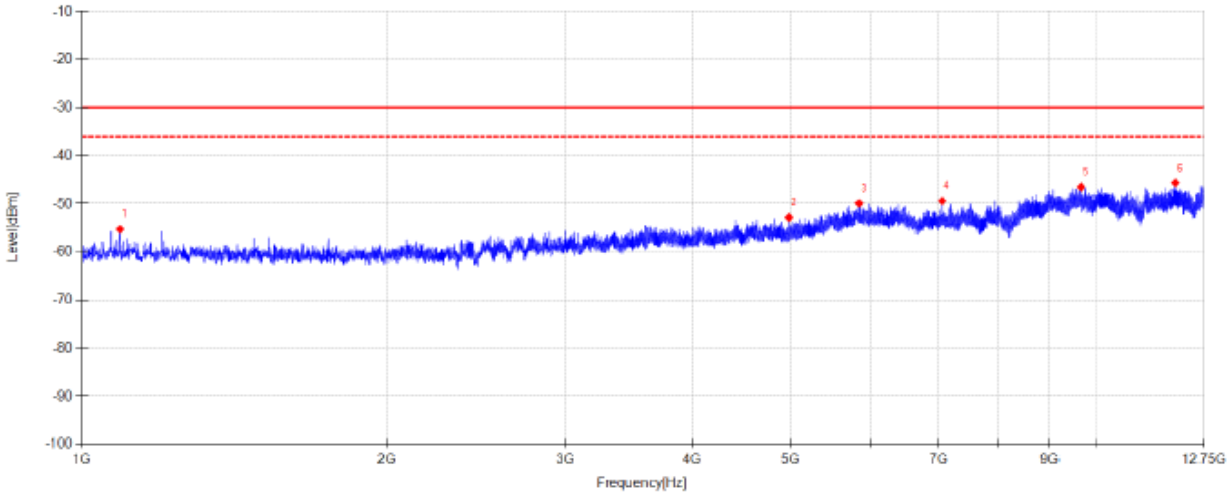


Suspected Data List

NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Type
1	1090.573	49.19	-104.46	-55.27	-30.00	25.27	PK	Horizontal	EIRP
2	4983.740	45.60	-98.39	-52.79	-30.00	22.79	PK	Horizontal	EIRP
3	5842.958	44.88	-94.77	-49.89	-30.00	19.89	PK	Horizontal	EIRP
4	7059.573	45.23	-94.61	-49.38	-30.00	19.38	PK	Horizontal	EIRP
5	9639.677	42.77	-89.27	-46.50	-30.00	16.50	PK	Horizontal	EIRP
6	11941.208	42.84	-88.49	-45.65	-30.00	15.65	PK	Horizontal	EIRP

Note:
1. Level = Reading + Factor.
2. Factor = Antenna Factor + Cable Loss + Filter Factor - Preamp Gain + Site Loss Factor - 107.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date:	2025-12-17	**Tested By**:	Li Xiongbin
Test Mode:	TX DH5 2480MHz Mode	**Power Supply**:	AC 230V/50Hz
Condition:	Temp:24.9°C;Humi:49.7%	**Test Site**:	DDT 3# Chamber
File Path:	d:\ts\2025 report date\Q25101023-9E\CE Above 1G BT\4		
Memo:	Sample Number:S25101023-016 Power Setting:250		

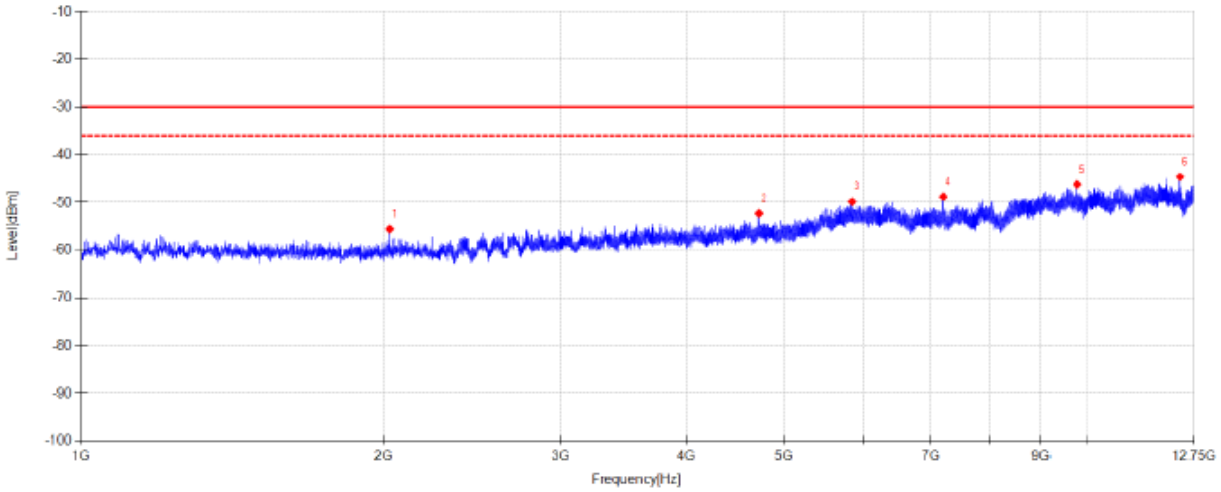


Suspected Data List

NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Type
1	2027.146	48.79	-104.39	-55.60	-30.00	25.60	PK	Vertical	EIRP
2	4723.281	47.22	-99.47	-52.25	-30.00	22.25	PK	Vertical	EIRP
3	5845.406	45.01	-94.82	-49.81	-30.00	19.81	PK	Vertical	EIRP
4	7206.448	45.71	-94.47	-48.76	-30.00	18.76	PK	Vertical	EIRP
5	9750.813	43.48	-89.68	-46.20	-30.00	16.20	PK	Vertical	EIRP
6	12339.729	43.39	-88.01	-44.62	-30.00	14.62	PK	Vertical	EIRP

Note:
1. Level = Reading + Factor.
2. Factor = Antenna Factor + Cable Loss + Filter Factor - Preamp Gain + Site Loss Factor - 107.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

11 Appendix A.11: Test Plots of Receiver Spurious Emission

Test Date:	2025-12-17	**Tested By**:	Li Xiongbin
Test Mode:	RX DH5 2402MHz Mode	**Power Supply**:	AC 230V/50Hz
Condition:	Temp:24.9°C;Humi:49.7%	**Test Site**:	DDT 3# Chamber
File Path:	d:\ts\2025 report date\Q25101023-9E\CE Below 1G BT\1		
Memo:	Sample Number:S25101023-016		

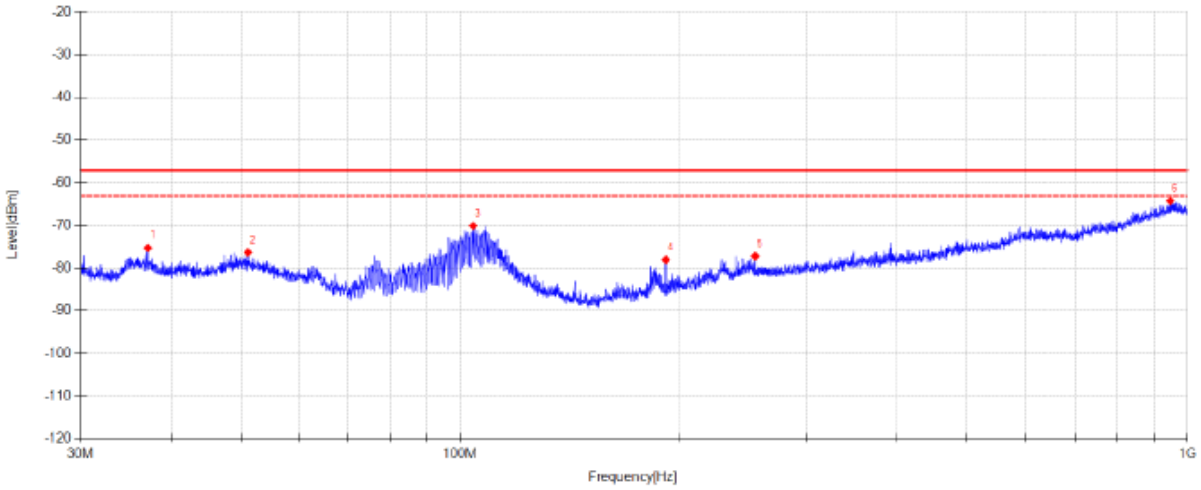


Suspected Data List

NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Type
1	37.127	37.66	-112.94	-75.28	-57.00	18.28	PK	Horizontal	ERP
2	51.008	35.01	-111.37	-76.36	-57.00	19.36	PK	Horizontal	ERP
3	104.217	46.33	-116.46	-70.13	-57.00	13.13	PK	Horizontal	ERP
4	192.078	38.71	-116.77	-78.06	-57.00	21.06	PK	Horizontal	ERP
5	254.977	35.48	-112.72	-77.24	-57.00	20.24	PK	Horizontal	ERP
6	946.777	34.61	-98.91	-64.30	-57.00	7.30	PK	Horizontal	ERP

Note:
1. Level = Reading + Factor.
2. Factor = Antenna Factor + Cable Loss - Preamp Gain + Site Loss Factor - 107.
3. Test setup: RBW: 100 kHz, VBW: 300 kHz, Sweep time: auto.

Test Date:	2025-12-17	**Tested By**:	Li Xiongbin
Test Mode:	RX DH5 2402MHz Mode	**Power Supply**:	AC 230V/50Hz
Condition:	Temp:24.9°C;Humi:49.7%	**Test Site**:	DDT 3# Chamber
File Path:	d:\ts\2025 report date\Q25101023-9E\CE Below 1G BT\2		
Memo:	Sample Number:S25101023-016		

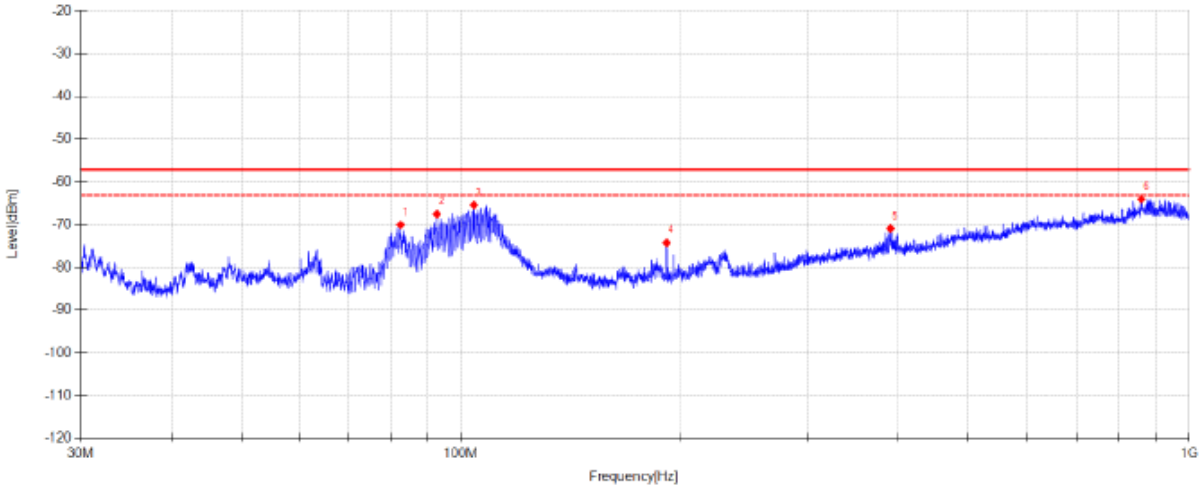


Suspected Data List

NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Type
1	82.631	46.34	-116.38	-70.04	-57.00	13.04	PK	Vertical	ERP
2	92.701	45.07	-112.57	-67.50	-57.00	10.50	PK	Vertical	ERP
3	104.217	46.08	-111.52	-65.44	-57.00	8.44	PK	Vertical	ERP
4	191.943	40.45	-114.64	-74.19	-57.00	17.19	PK	Vertical	ERP
5	390.248	36.95	-107.90	-70.95	-57.00	13.95	PK	Vertical	ERP
6	858.856	35.07	-99.14	-64.07	-57.00	7.07	PK	Vertical	ERP

Note:
1. Level = Reading + Factor.
2. Factor = Antenna Factor + Cable Loss - Preamp Gain + Site Loss Factor - 107.
3. Test setup: RBW: 100 kHz, VBW: 300 kHz, Sweep time: auto.

Test Date:	2025-12-17	**Tested By**:	Li Xiongbin
Test Mode:	RX DH5 2480MHz Mode	**Power Supply**:	AC 230V/50Hz
Condition:	Temp:24.9°C;Humi:49.7%	**Test Site**:	DDT 3# Chamber
File Path:	d:\ts\2025 report date\Q25101023-9E\CE Below 1G BT\3		
Memo:	Sample Number:S25101023-016		

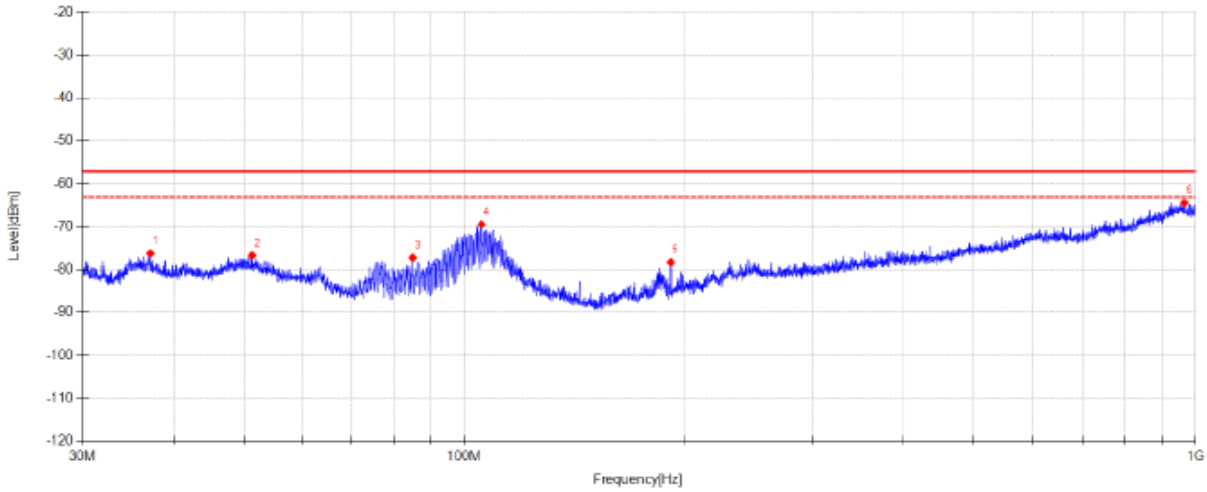


Suspected Data List

NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Type
1	37.153	36.67	-112.93	-76.26	-57.00	19.26	PK	Horizontal	ERP
2	51.223	34.69	-111.42	-76.73	-57.00	19.73	PK	Horizontal	ERP
3	85.041	40.93	-118.20	-77.27	-57.00	20.27	PK	Horizontal	ERP
4	105.615	47.09	-116.55	-69.46	-57.00	12.46	PK	Horizontal	ERP
5	191.943	38.48	-116.78	-78.30	-57.00	21.30	PK	Horizontal	ERP
6	964.872	34.58	-99.08	-64.50	-57.00	7.50	PK	Horizontal	ERP

Note:
1. Level = Reading + Factor.
2. Factor = Antenna Factor + Cable Loss - Preamp Gain + Site Loss Factor - 107.
3. Test setup: RBW: 100 kHz, VBW: 300 kHz, Sweep time: auto.

Test Date:	2025-12-17	**Tested By**:	Li Xiongbin
Test Mode:	RX DH5 2480MHz Mode	**Power Supply**:	AC 230V/50Hz
Condition:	Temp:24.9°C;Humi:49.7%	**Test Site**:	DDT 3# Chamber
File Path:	d:\ts\2025 report date\Q25101023-9E\CE Below 1G BT\4		
Memo:	Sample Number:S25101023-016		

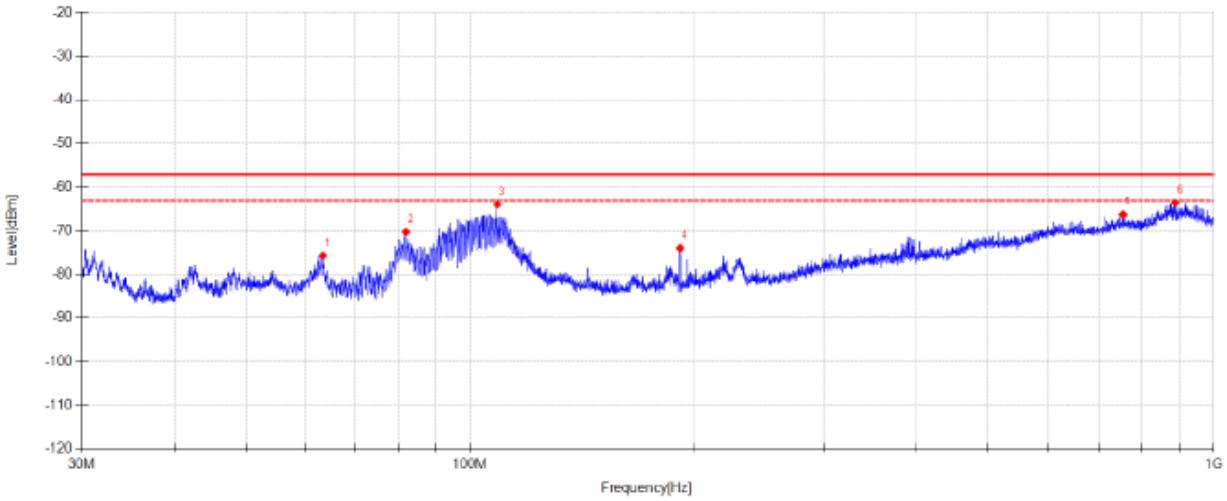


Suspected Data List

NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Type
1	63.393	41.15	-116.84	-75.69	-57.00	18.69	PK	Vertical	ERP
2	81.997	46.39	-116.67	-70.28	-57.00	13.28	PK	Vertical	ERP
3	108.848	47.86	-111.85	-63.99	-57.00	6.99	PK	Vertical	ERP
4	191.943	40.69	-114.64	-73.95	-57.00	16.95	PK	Vertical	ERP
5	754.371	34.43	-100.75	-66.32	-57.00	9.32	PK	Vertical	ERP
6	887.009	33.75	-97.34	-63.59	-57.00	6.59	PK	Vertical	ERP

Note:
1. Level = Reading + Factor.
2. Factor = Antenna Factor + Cable Loss - Preamp Gain + Site Loss Factor - 107.
3. Test setup: RBW: 100 kHz, VBW: 300 kHz, Sweep time: auto.

Test Date:	2025-12-17	**Tested By**:	Li Xiongbin
Test Mode:	RX DH5 2480MHz Mode	**Power Supply**:	AC 230V/50Hz
Condition:	Temp:24.9°C;Humi:49.7%	**Test Site**:	DDT 3# Chamber
File Path:	d:\ts\2025 report date\Q25101023-9E\CE Above 1G BT\5		
Memo:	Sample Number:S25101023-016		

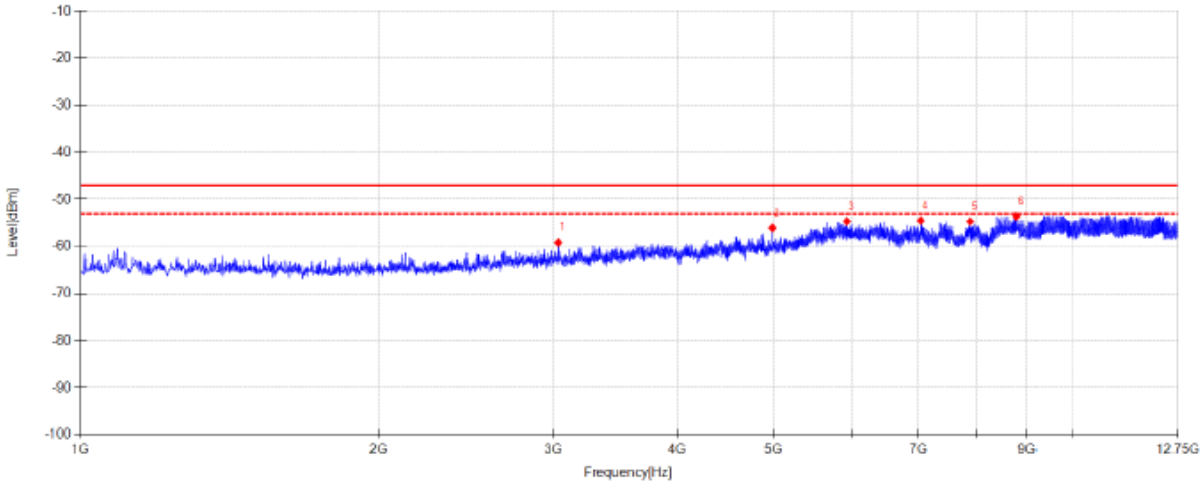


Suspected Data List

NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Type
1	3033.925	43.52	-102.64	-59.12	-47.00	12.12	PK	Horizontal	EIRP
2	4989.125	42.29	-98.37	-56.08	-47.00	9.08	PK	Horizontal	EIRP
3	5929.125	39.76	-94.41	-54.65	-47.00	7.65	PK	Horizontal	EIRP
4	7040.675	40.16	-94.65	-54.49	-47.00	7.49	PK	Horizontal	EIRP
5	7894.900	38.88	-93.57	-54.69	-47.00	7.69	PK	Horizontal	EIRP
6	8790.250	36.89	-90.45	-53.56	-47.00	6.56	PK	Horizontal	EIRP

Note:
1. Level = Reading + Factor.
2. Factor = Antenna Factor + Cable Loss + Filter Factor - Preamp Gain + Site Loss Factor - 107.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date:	2025-12-17	**Tested By**:	Li Xiongbin
Test Mode:	RX DH5 2480MHz Mode	**Power Supply**:	AC 230V/50Hz
Condition:	Temp:24.9°C;Humi:49.7%	**Test Site**:	DDT 3# Chamber
File Path:	d:\ts\2025 report date\Q25101023-9E\CE Above 1G BT\6		
Memo:	Sample Number:S25101023-016		

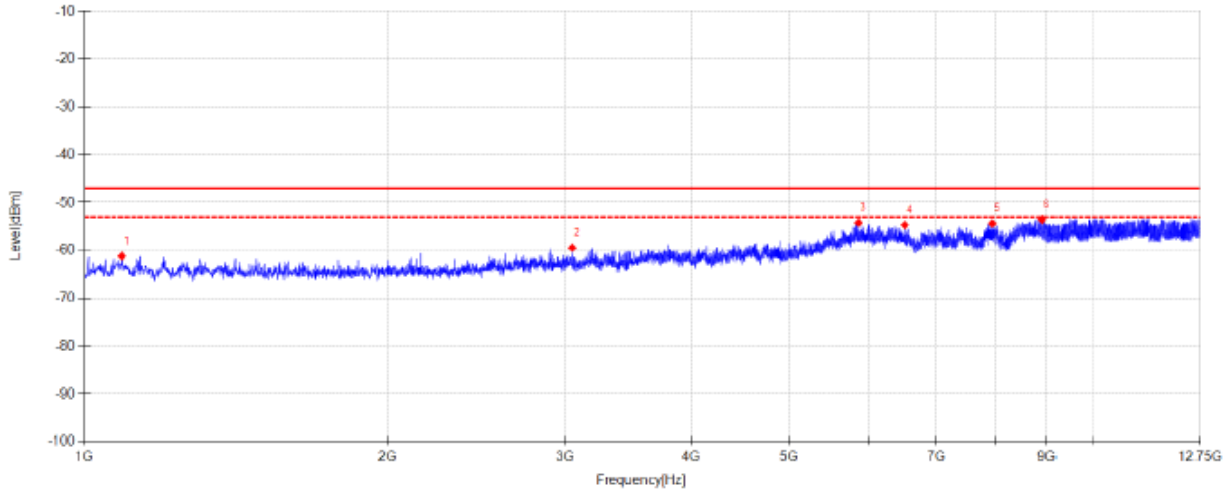


Suspected Data List

NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Type
1	1089.300	42.88	-104.09	-61.21	-47.00	14.21	PK	Vertical	EIRP
2	3048.025	43.13	-102.55	-59.42	-47.00	12.42	PK	Vertical	EIRP
3	5860.975	40.53	-94.74	-54.21	-47.00	7.21	PK	Vertical	EIRP
4	6515.450	39.79	-94.47	-54.68	-47.00	7.68	PK	Vertical	EIRP
5	7957.175	38.73	-93.10	-54.37	-47.00	7.37	PK	Vertical	EIRP
6	8914.800	36.75	-90.26	-53.51	-47.00	6.51	PK	Vertical	EIRP

Note:
1. Level = Reading + Factor.
2. Factor = Antenna Factor + Cable Loss + Filter Factor - Preamp Gain + Site Loss Factor - 107.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date:	2025-12-17	**Tested By**:	Li Xiongbin
Test Mode:	RX DH5 2402MHz Mode	**Power Supply**:	AC 230V/50Hz
Condition:	Temp:24.9°C;Humi:49.7%	**Test Site**:	DDT 3# Chamber
File Path:	d:\ts\2025 report date\Q25101023-9E\CE Above 1G BT\7		
Memo:	Sample Number:S25101023-016		

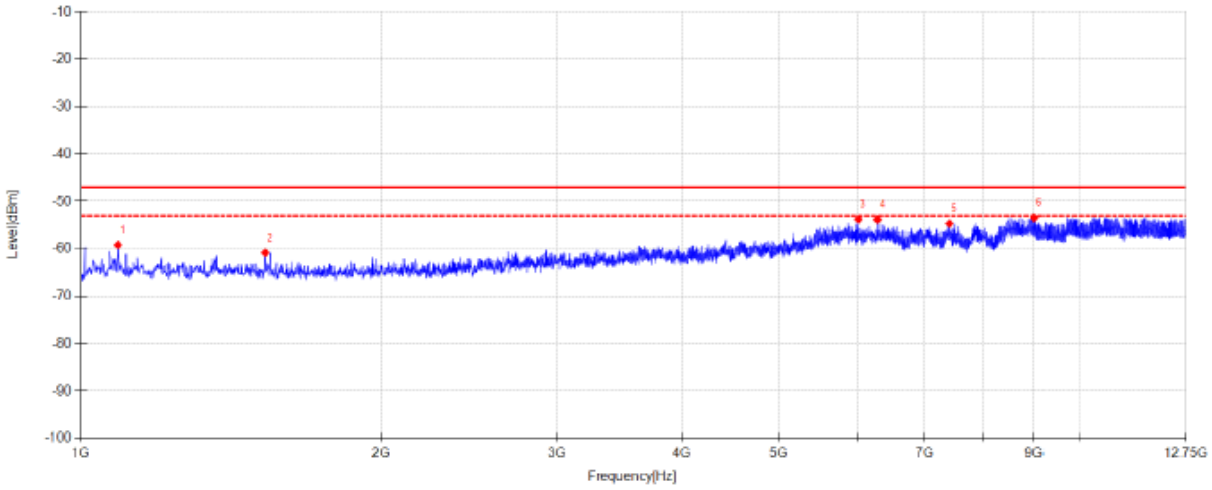


Suspected Data List

NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Type
1	1089.300	45.30	-104.46	-59.16	-47.00	12.16	PK	Horizontal	EIRP
2	1529.925	43.72	-104.58	-60.86	-47.00	13.86	PK	Horizontal	EIRP
3	6010.200	40.39	-94.11	-53.72	-47.00	6.72	PK	Horizontal	EIRP
4	6281.625	40.47	-94.27	-53.80	-47.00	6.80	PK	Horizontal	EIRP
5	7414.325	39.50	-94.17	-54.67	-47.00	7.67	PK	Horizontal	EIRP
6	9015.850	36.23	-89.65	-53.42	-47.00	6.42	PK	Horizontal	EIRP

Note:
1. Level = Reading + Factor.
2. Factor = Antenna Factor + Cable Loss + Filter Factor - Preamp Gain + Site Loss Factor - 107.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Date:	2025-12-17	**Tested By**:	Li Xiongbin
Test Mode:	RX DH5 2402MHz Mode	**Power Supply**:	AC 230V/50Hz
Condition:	Temp:24.9°C;Humi:49.7%	**Test Site**:	DDT 3# Chamber
File Path:	d:\ts\2025 report date\Q25101023-9E\CE Above 1G BT\8		
Memo:	Sample Number:S25101023-016		

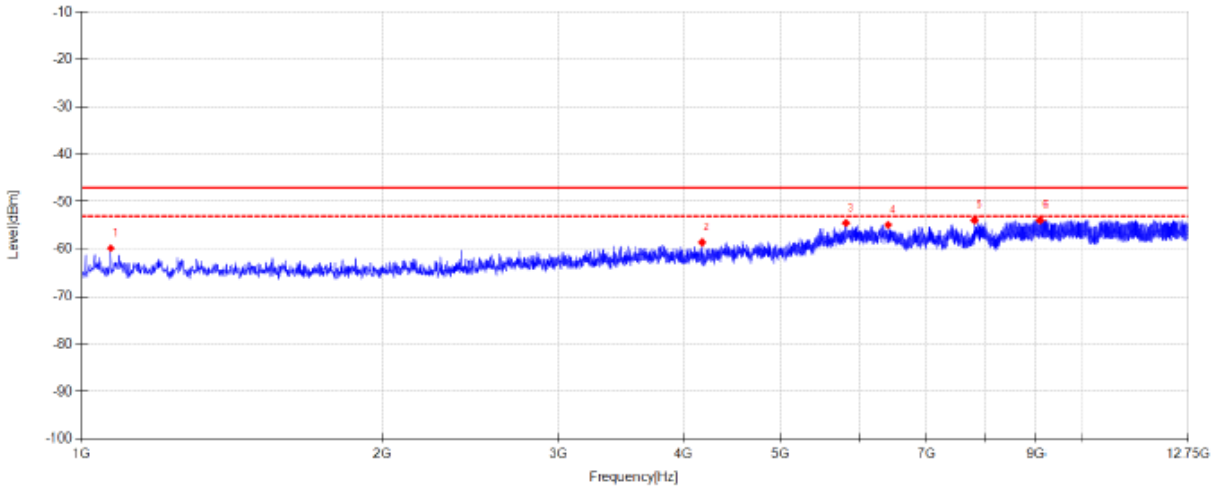

Suspected Data List

NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Detector	Polarity	Type
1	1069.325	44.30	-104.08	-59.78	-47.00	12.78	PK	Vertical	EIRP
2	4176.025	42.22	-100.72	-58.50	-47.00	11.50	PK	Vertical	EIRP
3	5816.325	40.50	-94.96	-54.46	-47.00	7.46	PK	Vertical	EIRP
4	6408.525	39.53	-94.39	-54.86	-47.00	7.86	PK	Vertical	EIRP
5	7820.875	39.52	-93.35	-53.83	-47.00	6.83	PK	Vertical	EIRP
6	9094.575	36.10	-89.95	-53.85	-47.00	6.85	PK	Vertical	EIRP

Note:
1. Level = Reading + Factor.
2. Factor = Antenna Factor + Cable Loss + Filter Factor - Preamp Gain + Site Loss Factor - 107.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Appendix B

Test Results of EMC

1 APPENDIX B.1: TEST PLOTS OF FLICKER.....2
2 APPENDIX B.2: TEST PLOTS OF CONDUCTED EMISSION.....5
3 APPENDIX B.3 : RADIATED EMISSIONS, BELOW 1GHZ.....25
4 APPENDIX B.4 : RADIATED EMISSIONS, ABOVE 1GHZ.....45

1 Appendix B.1: Test Plots of Flicker

Test Report

Report Number :	Multimedia Speaker
Test Object :	IEC 61000-3-3 (Ed3-2) - General Test conditions (230V - 50Hz)
Test Standard :	Shaotao Huang
Tester :	Guangdong Dongdian Testing Service Co., Ltd.
Company :	12/10/2025 10:02:52 AM
Test Date :	Multimedia Speaker

Result

E.U.T. :	PASS

Test Object / Product

Name :	Multimedia Speaker	Operation Mode :	Bluetooth mode
Serial Number :	S25101023-015	Connection :	/
Description :	EDF100022		

Climatic Conditions

Temperature :	24 °C	Pressure :	101 kPa	Humidity :	56 %

Flicker Results

Standard Specific Results for IEC 61000-3-3 (Edition 3.2)

Standard Group: Industry

Standard Name: IEC 61000-3-3 (Edition 3.2)
Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection

Test Condition: General Test Conditions

Analysis Status: PASS

Flicker Measurements Settings	
Main Line:	230V, 50Hz
Flicker Meter:	230V / 50Hz
Flicker Impedance:	Zref
Observation Time:	1 × 10 min
Measurements:	1


Flicker Measurements						
	Last V_{rms} [V]	P_{lt}	Max P_{st}	Max d_c [%]	Max d_{max} [%]	Max T_{max} [s]
Line 1:	230.89	0.034	0.077	0	< 0.2	0
Limits:		0.65	1	3.3	4	0.5
Results:		PASS	PASS	PASS	PASS	PASS


Flicker Individual Measurements												
Measurement	P_{st} [ ]			d_c [%]			d_{max} [%]			T_{max} [s]		
	Value	Limit	Result	Value	Limit	Result	Value	Limit	Result	Value	Limit	Result
#1	0.08	1.00	PASS	0.00	3.30	PASS	< 0.2	4.00	PASS	0.00	0.50	PASS

Pst Data

Flicker (Line 1)

Meas. No.	P0,1	P1s	P3s	P10s	P50s	Pst	dc [%]	dmax [%]	Tmax [s]
1	0.016	0.014	0.013	0.012	0.006	0.077	0	0.117	0

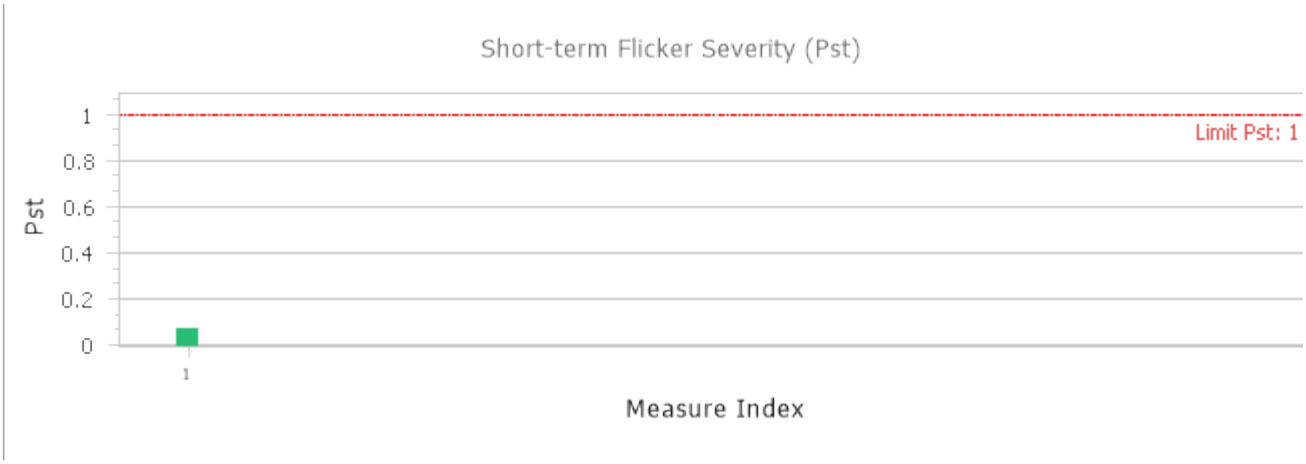


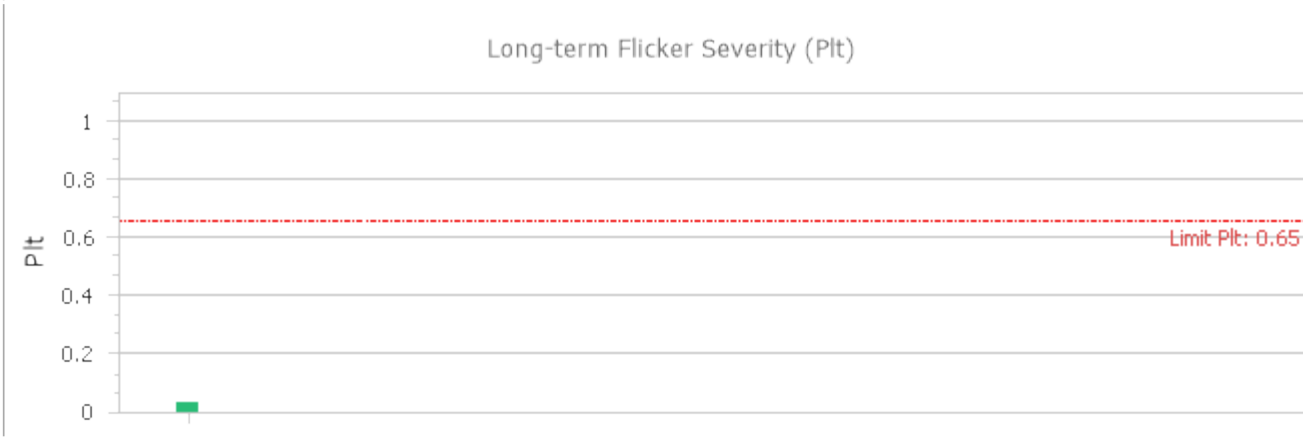

2 Appendix B.2: Test Plots of Conducted Emission

Test Site	: DDT 5# Shield Room	D:\2025 report data\Q25101023-8E\1222 CE.EM6	
Test Date	: 2025-12-22	**Tested By**	: Jiahao Yang
Power Supply	: AC 240V/50Hz	**Test Mode**	: AUX in mode
Condition	: Temp:22.1°C,Humi:29.5%,Press:101.9kPa	**LISN**	: 2025 2# 216/LINE
Sample No.	: S25101023-015		

Data: 50

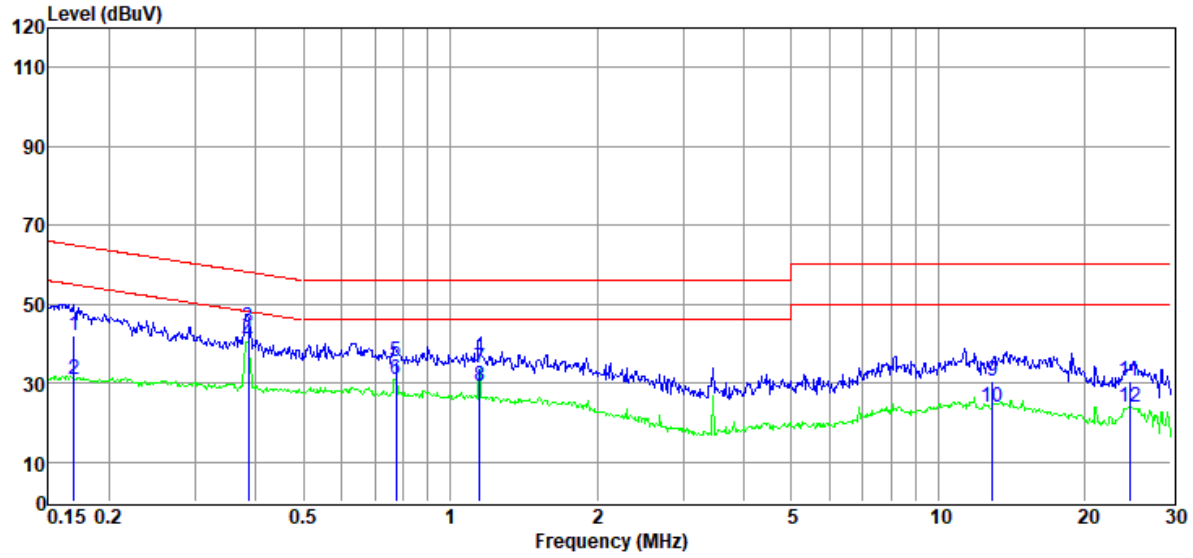


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBµV)	Limit Line (dBµV)	Margin (dB)	Detector	Phase
1	0.17	22.50	9.48	0.05	10.20	42.23	64.99	22.76	QP	LINE
2	0.17	11.16	9.48	0.05	10.20	30.89	54.99	24.10	Average	LINE
3	0.39	24.28	9.48	0.09	10.29	44.14	58.17	14.03	QP	LINE
4	0.39	20.58	9.48	0.09	10.29	40.44	48.17	7.73	Average	LINE
5	0.78	15.42	9.51	0.14	10.37	35.44	56.00	20.56	QP	LINE
6	0.78	10.97	9.51	0.14	10.37	30.99	46.00	15.01	Average	LINE
7	1.15	13.87	9.48	0.19	10.40	33.94	56.00	22.06	QP	LINE
8	1.15	9.34	9.48	0.19	10.40	29.41	46.00	16.59	Average	LINE
9	12.92	10.41	9.68	0.30	10.18	30.57	60.00	29.43	QP	LINE
10	12.92	3.68	9.68	0.30	10.18	23.84	50.00	26.16	Average	LINE
11	24.66	10.15	9.69	0.38	10.31	30.53	60.00	29.47	QP	LINE
12	24.66	3.41	9.69	0.38	10.31	23.79	50.00	26.21	Average	LINE

Note: 1. Result Level = Read Level +LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

Test Site	: DDT 5# Shield Room	D:\2025 report data\Q25101023-8E\1222 CE.EM6	
Test Date	: 2025-12-22	**Tested By**	: Jiahao Yang
Power Supply	: AC 240V/50Hz	**Test Mode**	: AUX in mode
Condition	: Temp:22.1°C,Humi:29.5%,Press:101.9kPa	**LISN**	: 2025 2# 216/NEUTRAL
Sample No.	: S25101023-015		

Data: 52

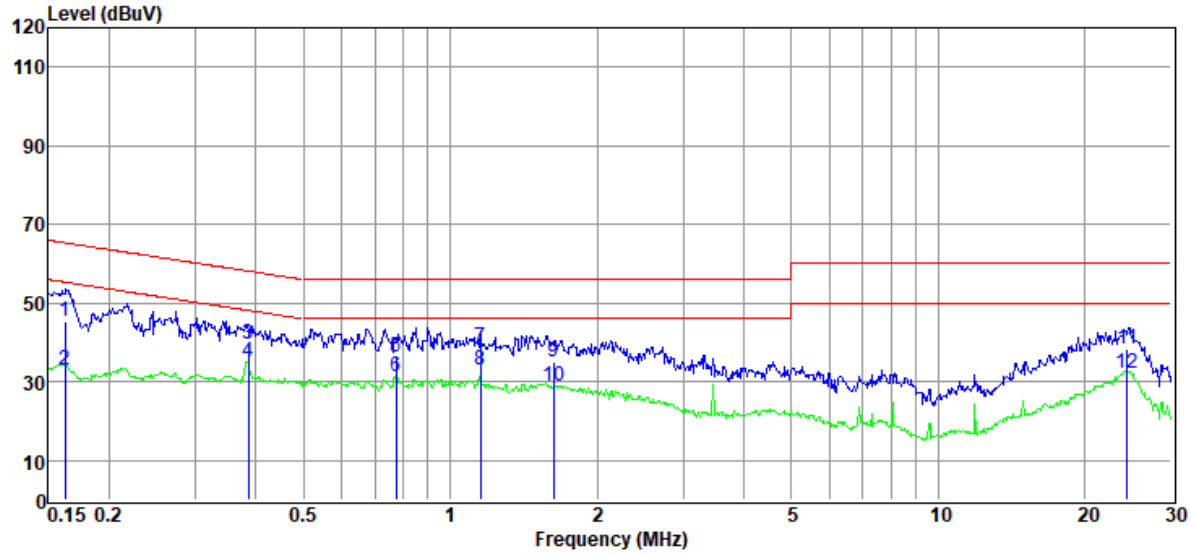


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBµV)	Limit Line (dBµV)	Margin (dB)	Detector	Phase
1	0.16	25.53	9.49	0.05	10.21	45.28	65.34	20.06	QP	NEUTRAL
2	0.16	13.13	9.49	0.05	10.21	32.88	55.34	22.46	Average	NEUTRAL
3	0.39	19.73	9.48	0.09	10.29	39.59	58.17	18.58	QP	NEUTRAL
4	0.39	15.19	9.48	0.09	10.29	35.05	48.17	13.12	Average	NEUTRAL
5	0.78	16.48	9.48	0.14	10.37	36.47	56.00	19.53	QP	NEUTRAL
6	0.78	11.51	9.48	0.14	10.37	31.50	46.00	14.50	Average	NEUTRAL
7	1.15	18.61	9.49	0.19	10.40	38.69	56.00	17.31	QP	NEUTRAL
8	1.15	12.97	9.49	0.19	10.40	33.05	46.00	12.95	Average	NEUTRAL
9	1.63	15.14	9.50	0.20	10.39	35.23	56.00	20.77	QP	NEUTRAL
10	1.63	8.78	9.50	0.20	10.39	28.87	46.00	17.13	Average	NEUTRAL
11	24.40	17.61	9.94	0.38	10.31	38.24	60.00	21.76	QP	NEUTRAL
12	24.40	11.43	9.94	0.38	10.31	32.06	50.00	17.94	Average	NEUTRAL

Note: 1. Result Level = Read Level +LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

Test Site	: DDT 5# Shield Room	D:\2025 report data\Q25101023-8E\1222 CE.EM6			
Test Date	: 2025-12-22	**Tested By**	: Jiahao Yang		
Power Supply	: AC 120V/60Hz	**Test Mode**	: AUX in mode		
Condition	: Temp:22.1°C,Humi:29.5%,Press:101.9kPa	**LISN**	: 2025 2# 216/NEUTRAL		
Sample No.	: S25101023-015				

Data: 54

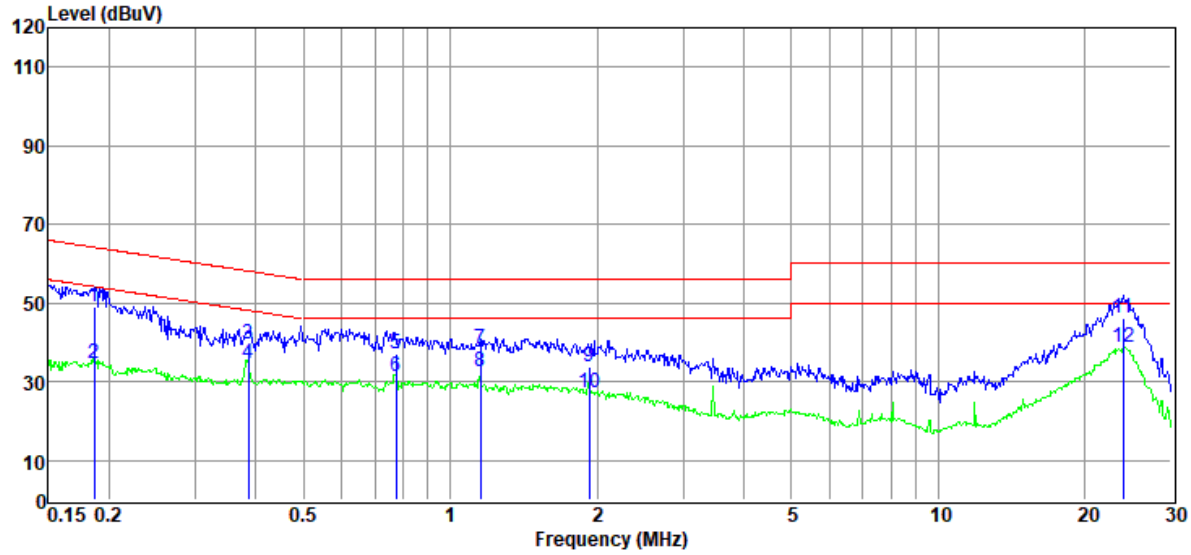


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBµV)	Limit Line (dBµV)	Margin (dB)	Detector	Phase
1	0.19	29.24	9.49	0.05	10.20	48.98	64.20	15.22	QP	NEUTRAL
2	0.19	14.75	9.49	0.05	10.20	34.49	54.20	19.71	Average	NEUTRAL
3	0.39	19.55	9.48	0.09	10.29	39.41	58.17	18.76	QP	NEUTRAL
4	0.39	14.94	9.48	0.09	10.29	34.80	48.17	13.37	Average	NEUTRAL
5	0.78	17.09	9.48	0.14	10.37	37.08	56.00	18.92	QP	NEUTRAL
6	0.78	11.52	9.48	0.14	10.37	31.51	46.00	14.49	Average	NEUTRAL
7	1.15	18.19	9.49	0.19	10.40	38.27	56.00	17.73	QP	NEUTRAL
8	1.15	12.61	9.49	0.19	10.40	32.69	46.00	13.31	Average	NEUTRAL
9	1.93	13.85	9.50	0.21	10.39	33.95	56.00	22.05	QP	NEUTRAL
10	1.93	7.14	9.50	0.21	10.39	27.24	46.00	18.76	Average	NEUTRAL
11	23.89	25.75	9.94	0.37	10.31	46.37	60.00	13.63	QP	NEUTRAL
12	23.89	17.94	9.94	0.37	10.31	38.56	50.00	11.44	Average	NEUTRAL

Note: 1. Result Level = Read Level +LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

Test Site	: DDT 5# Shield Room	D:\2025 report data\Q25101023-8E\1222 CE.EM6	
Test Date	: 2025-12-22	**Tested By**	: Jiahao Yang
Power Supply	: AC 120V/60Hz	**Test Mode**	: AUX in mode
Condition	: Temp:22.1°C,Humi:29.5%,Press:101.9kPa	**LISN**	: 2025 2# 216/LINE
Sample No.	: S25101023-015		

Data: 56

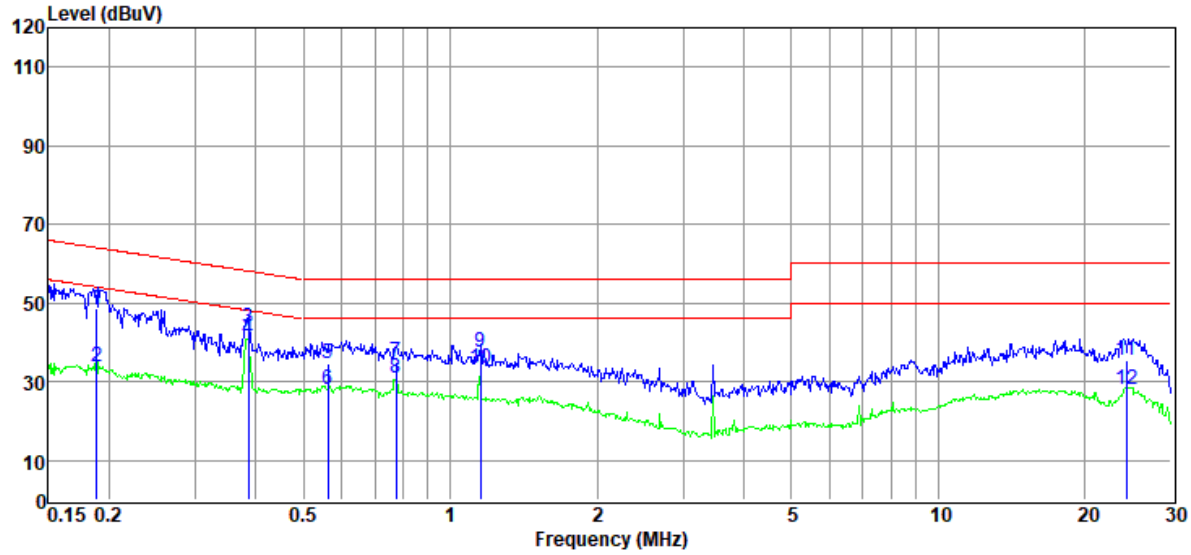


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBµV)	Limit Line (dBµV)	Margin (dB)	Detector	Phase
1	0.19	28.84	9.47	0.05	10.20	48.56	64.11	15.55	QP	LINE
2	0.19	13.91	9.47	0.05	10.20	33.63	54.11	20.48	Average	LINE
3	0.39	24.01	9.48	0.09	10.29	43.87	58.17	14.30	QP	LINE
4	0.39	20.88	9.48	0.09	10.29	40.74	48.17	7.43	Average	LINE
5	0.56	14.80	9.50	0.11	10.33	34.74	56.00	21.26	QP	LINE
6	0.56	8.11	9.50	0.11	10.33	28.05	46.00	17.95	Average	LINE
7	0.78	15.18	9.51	0.14	10.37	35.20	56.00	20.80	QP	LINE
8	0.78	11.09	9.51	0.14	10.37	31.11	46.00	14.89	Average	LINE
9	1.15	17.48	9.48	0.19	10.40	37.55	56.00	18.45	QP	LINE
10	1.15	13.41	9.48	0.19	10.40	33.48	46.00	12.52	Average	LINE
11	24.27	15.10	9.70	0.37	10.31	35.48	60.00	24.52	QP	LINE
12	24.27	7.73	9.70	0.37	10.31	28.11	50.00	21.89	Average	LINE

Note: 1. Result Level = Read Level +LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

Test Site	: DDT 5# Shield Room	D:\2025 report data\Q25101023-8E\1222 CE.EM6	
Test Date	: 2025-12-22	**Tested By**	: Jiahao Yang
Power Supply	: AC 120V/60Hz	**Test Mode**	: PC in mode
Condition	: Temp:22.1°C,Humi:29.5%,Press:101.9kPa	**LISN**	: 2025 2# 216/LINE
Sample No.	: S25101023-015		

Data: 58

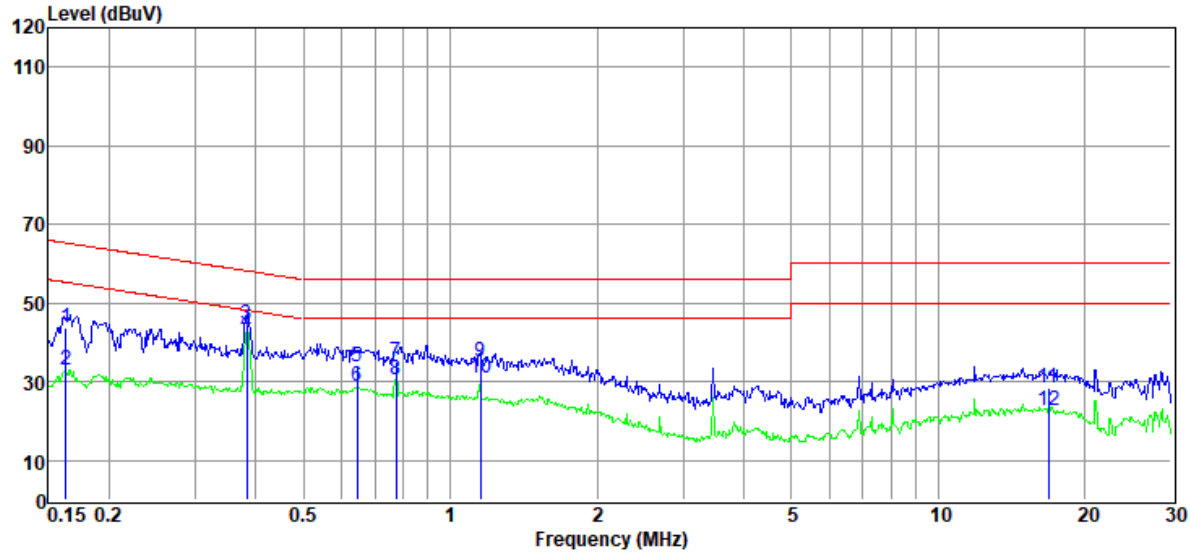


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBµV)	Limit Line (dBµV)	Margin (dB)	Detector	Phase
1	0.16	24.04	9.47	0.05	10.21	43.77	65.30	21.53	QP	LINE
2	0.16	13.22	9.47	0.05	10.21	32.95	55.30	22.35	Average	LINE
3	0.38	24.83	9.48	0.09	10.29	44.69	58.21	13.52	QP	LINE
4	0.38	22.70	9.48	0.09	10.29	42.56	48.21	5.65	Average	LINE
5	0.64	13.87	9.48	0.12	10.35	33.82	56.00	22.18	QP	LINE
6	0.64	8.81	9.48	0.12	10.35	28.76	46.00	17.24	Average	LINE
7	0.78	15.18	9.51	0.14	10.37	35.20	56.00	20.80	QP	LINE
8	0.78	10.68	9.51	0.14	10.37	30.70	46.00	15.30	Average	LINE
9	1.15	14.85	9.48	0.19	10.40	34.92	56.00	21.08	QP	LINE
10	1.15	10.91	9.48	0.19	10.40	30.98	46.00	15.02	Average	LINE
11	16.84	8.08	9.79	0.33	10.25	28.45	60.00	31.55	QP	LINE
12	16.84	2.11	9.79	0.33	10.25	22.48	50.00	27.52	Average	LINE

Note: 1. Result Level = Read Level +LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

Test Site	: DDT 5# Shield Room	D:\2025 report data\Q25101023-8E\1222 CE.EM6	
Test Date	: 2025-12-22	**Tested By**	: Jiahao Yang
Power Supply	: AC 120V/60Hz	**Test Mode**	: PC in mode
Condition	: Temp:22.1°C,Humi:29.5%,Press:101.9kPa	**LISN**	: 2025 2# 216/NEUTRAL
Sample No.	: S25101023-015		

Data: 60

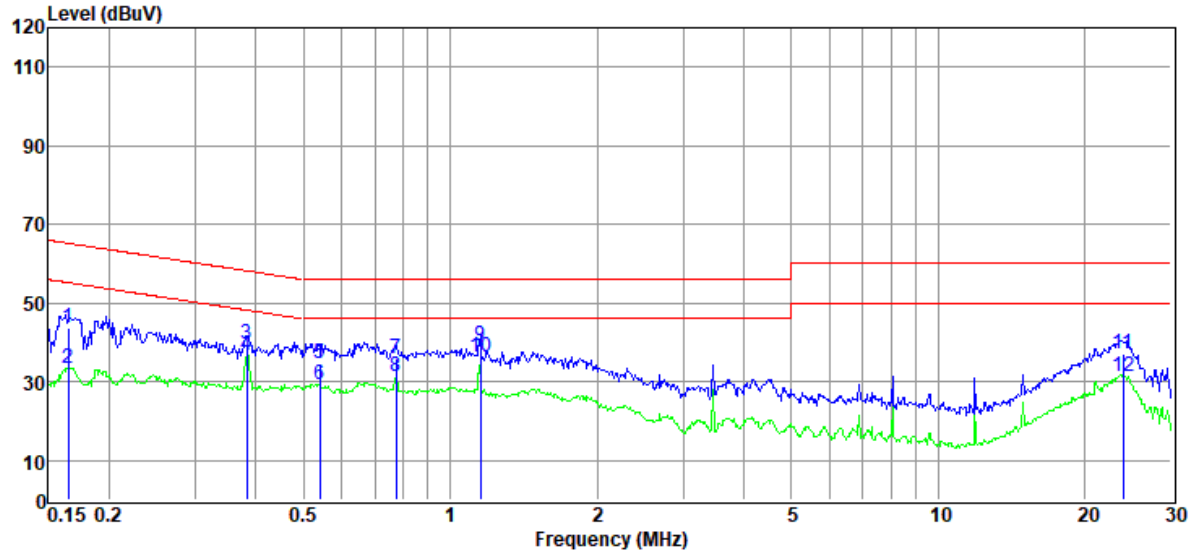


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBµV)	Limit Line (dBµV)	Margin (dB)	Detector	Phase
1	0.17	24.13	9.49	0.05	10.21	43.88	65.21	21.33	QP	NEUTRAL
2	0.17	13.56	9.49	0.05	10.21	33.31	55.21	21.90	Average	NEUTRAL
3	0.38	19.81	9.48	0.09	10.29	39.67	58.21	18.54	QP	NEUTRAL
4	0.38	16.88	9.48	0.09	10.29	36.74	48.21	11.47	Average	NEUTRAL
5	0.54	14.80	9.48	0.11	10.33	34.72	56.00	21.28	QP	NEUTRAL
6	0.54	9.16	9.48	0.11	10.33	29.08	46.00	16.92	Average	NEUTRAL
7	0.78	15.79	9.48	0.14	10.37	35.78	56.00	20.22	QP	NEUTRAL
8	0.78	11.16	9.48	0.14	10.37	31.15	46.00	14.85	Average	NEUTRAL
9	1.15	19.00	9.49	0.19	10.40	39.08	56.00	16.92	QP	NEUTRAL
10	1.15	16.35	9.49	0.19	10.40	36.43	46.00	9.57	Average	NEUTRAL
11	23.89	16.37	9.94	0.37	10.31	36.99	60.00	23.01	QP	NEUTRAL
12	23.89	10.91	9.94	0.37	10.31	31.53	50.00	18.47	Average	NEUTRAL

Note: 1. Result Level = Read Level +LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

Test Site	: DDT 5# Shield Room	D:\2025 report data\Q25101023-8E\1222 CE.EM6	
Test Date	: 2025-12-22	**Tested By**	: Jiahao Yang
Power Supply	: AC 240V/50Hz	**Test Mode**	: PC in mode
Condition	: Temp:22.1°C,Humi:29.5%,Press:101.9kPa	**LISN**	: 2025 2# 216/NEUTRAL
Sample No.	: S25101023-015		

Data: 62

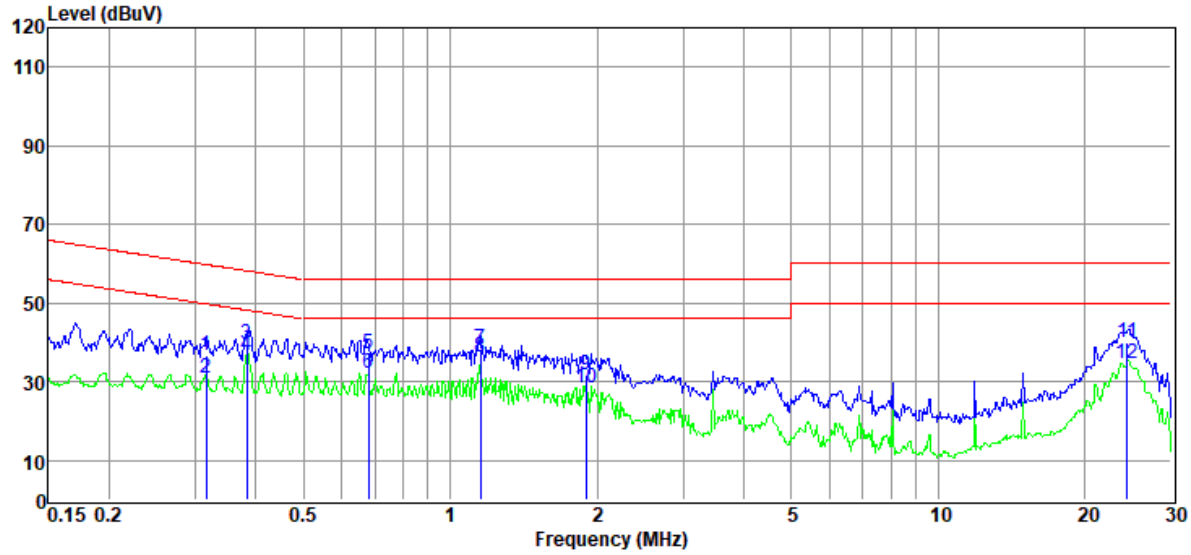


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBµV)	Limit Line (dBµV)	Margin (dB)	Detector	Phase
1	0.32	16.89	9.48	0.08	10.26	36.71	59.80	23.09	QP	NEUTRAL
2	0.32	11.29	9.48	0.08	10.26	31.11	49.80	18.69	Average	NEUTRAL
3	0.38	19.84	9.48	0.09	10.29	39.70	58.21	18.51	QP	NEUTRAL
4	0.38	16.75	9.48	0.09	10.29	36.61	48.21	11.60	Average	NEUTRAL
5	0.68	17.10	9.49	0.12	10.36	37.07	56.00	18.93	QP	NEUTRAL
6	0.68	12.20	9.49	0.12	10.36	32.17	46.00	13.83	Average	NEUTRAL
7	1.15	18.38	9.49	0.19	10.40	38.46	56.00	17.54	QP	NEUTRAL
8	1.15	16.06	9.49	0.19	10.40	36.14	46.00	9.86	Average	NEUTRAL
9	1.90	11.61	9.50	0.21	10.39	31.71	56.00	24.29	QP	NEUTRAL
10	1.90	8.23	9.50	0.21	10.39	28.33	46.00	17.67	Average	NEUTRAL
11	24.40	19.32	9.94	0.38	10.31	39.95	60.00	20.05	QP	NEUTRAL
12	24.40	13.80	9.94	0.38	10.31	34.43	50.00	15.57	Average	NEUTRAL

Note: 1. Result Level = Read Level +LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

Test Site	: DDT 5# Shield Room	D:\2025 report data\Q25101023-8E\1222 CE.EM6	
Test Date	: 2025-12-22	**Tested By**	: Jiahao Yang
Power Supply	: AC 240V/50Hz	**Test Mode**	: PC in mode
Condition	: Temp:22.1°C,Humi:29.5%,Press:101.9kPa	**LISN**	: 2025 2# 216/LINE
Sample No.	: S25101023-015		

Data: 64

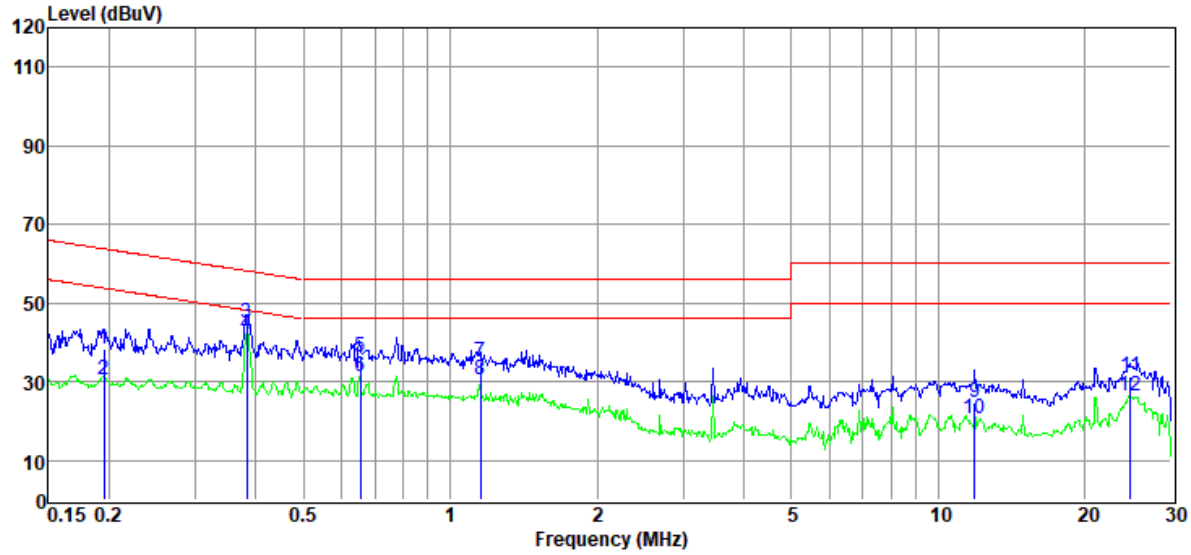


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBµV)	Limit Line (dBµV)	Margin (dB)	Detector	Phase
1	0.20	18.68	9.46	0.05	10.20	38.39	63.80	25.41	QP	LINE
2	0.20	10.80	9.46	0.05	10.20	30.51	53.80	23.29	Average	LINE
3	0.38	24.93	9.48	0.09	10.29	44.79	58.21	13.42	QP	LINE
4	0.38	22.30	9.48	0.09	10.29	42.16	48.21	6.05	Average	LINE
5	0.65	16.19	9.48	0.12	10.35	36.14	56.00	19.86	QP	LINE
6	0.65	11.53	9.48	0.12	10.35	31.48	46.00	14.52	Average	LINE
7	1.15	14.79	9.48	0.19	10.40	34.86	56.00	21.14	QP	LINE
8	1.15	10.63	9.48	0.19	10.40	30.70	46.00	15.30	Average	LINE
9	11.87	4.49	9.65	0.29	10.17	24.60	60.00	35.40	QP	LINE
10	11.87	0.57	9.65	0.29	10.17	20.68	50.00	29.32	Average	LINE
11	24.79	10.98	9.69	0.38	10.31	31.36	60.00	28.64	QP	LINE
12	24.79	5.81	9.69	0.38	10.31	26.19	50.00	23.81	Average	LINE

Note: 1. Result Level = Read Level +LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

Test Site	: DDT 5# Shield Room	D:\2025 report data\Q25101023-8E\1222 CE.EM6	
Test Date	: 2025-12-22	**Tested By**	: Jiahao Yang
Power Supply	: AC 240V/50Hz	**Test Mode**	: OPT in mode
Condition	: Temp:22.1°C,Humi:29.5%,Press:101.9kPa	**LISN**	: 2025 2# 216/LINE
Sample No.	: S25101023-015		

Data: 66

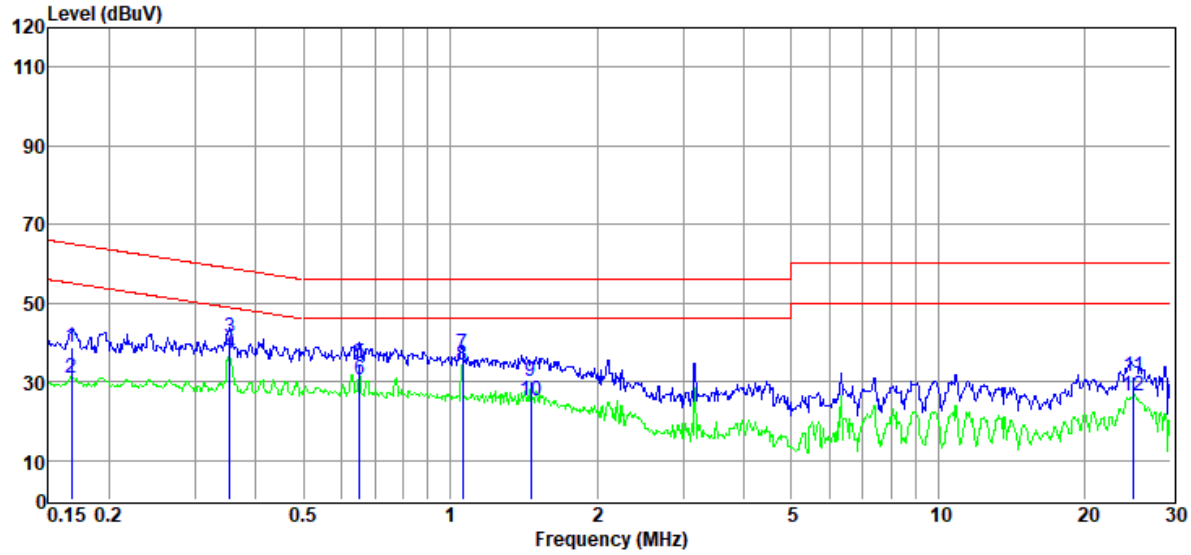


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBµV)	Limit Line (dBµV)	Margin (dB)	Detector	Phase
1	0.17	19.02	9.48	0.05	10.21	38.76	65.08	26.32	QP	LINE
2	0.17	11.01	9.48	0.05	10.21	30.75	55.08	24.33	Average	LINE
3	0.35	21.47	9.48	0.08	10.27	41.30	58.87	17.57	QP	LINE
4	0.35	17.30	9.48	0.08	10.27	37.13	48.87	11.74	Average	LINE
5	0.65	14.88	9.48	0.12	10.35	34.83	56.00	21.17	QP	LINE
6	0.65	10.65	9.48	0.12	10.35	30.60	46.00	15.40	Average	LINE
7	1.06	16.91	9.48	0.18	10.40	36.97	56.00	19.03	QP	LINE
8	1.06	14.20	9.48	0.18	10.40	34.26	46.00	11.74	Average	LINE
9	1.46	9.96	9.50	0.19	10.39	30.04	56.00	25.96	QP	LINE
10	1.46	5.13	9.50	0.19	10.39	25.21	46.00	20.79	Average	LINE
11	25.19	11.17	9.67	0.38	10.31	31.53	60.00	28.47	QP	LINE
12	25.19	5.99	9.67	0.38	10.31	26.35	50.00	23.65	Average	LINE

Note: 1. Result Level = Read Level +LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

Test Site	: DDT 5# Shield Room	D:\2025 report data\Q25101023-8E\1222 CE.EM6	
Test Date	: 2025-12-22	**Tested By**	: Jiahao Yang
Power Supply	: AC 240V/50Hz	**Test Mode**	: OPT in mode
Condition	: Temp:22.1°C,Humi:29.5%,Press:101.9kPa	**LISN**	: 2025 2# 216/NEUTRAL
Sample No.	: S25101023-015		

Data: 68

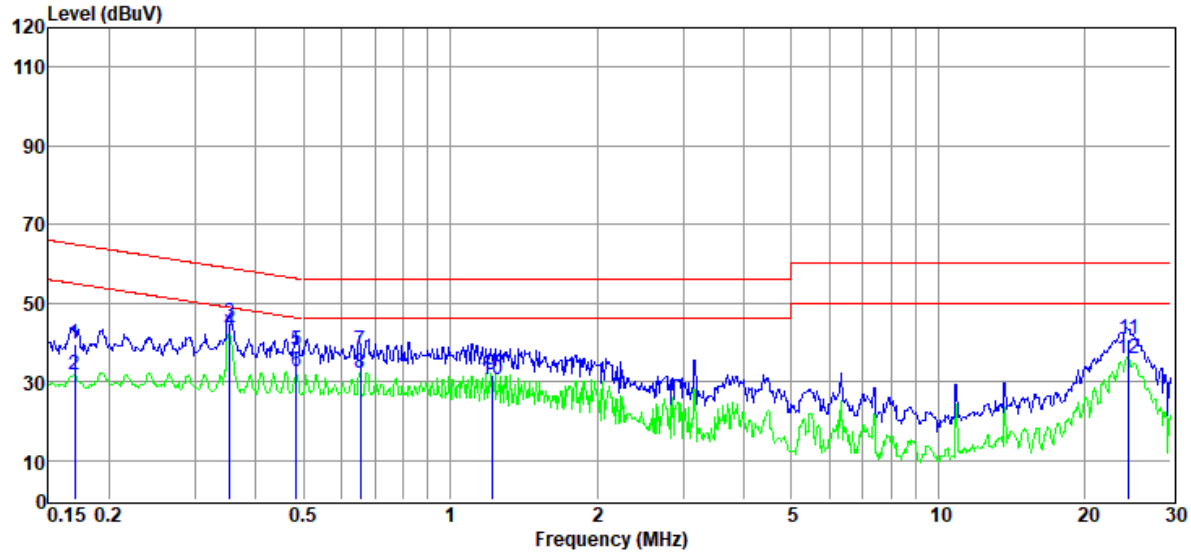


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBµV)	Limit Line (dBµV)	Margin (dB)	Detector	Phase
1	0.17	20.00	9.49	0.05	10.20	39.74	64.94	25.20	QP	NEUTRAL
2	0.17	11.92	9.49	0.05	10.20	31.66	54.94	23.28	Average	NEUTRAL
3	0.35	24.97	9.48	0.08	10.27	44.80	58.87	14.07	QP	NEUTRAL
4	0.35	22.97	9.48	0.08	10.27	42.80	48.87	6.07	Average	NEUTRAL
5	0.48	17.84	9.48	0.10	10.32	37.74	56.27	18.53	QP	NEUTRAL
6	0.48	12.52	9.48	0.10	10.32	32.42	46.27	13.85	Average	NEUTRAL
7	0.65	17.97	9.49	0.12	10.35	37.93	56.00	18.07	QP	NEUTRAL
8	0.65	12.38	9.49	0.12	10.35	32.34	46.00	13.66	Average	NEUTRAL
9	1.22	11.83	9.49	0.19	10.40	31.91	56.00	24.09	QP	NEUTRAL
10	1.22	10.26	9.49	0.19	10.40	30.34	46.00	15.66	Average	NEUTRAL
11	24.53	20.23	9.94	0.38	10.31	40.86	60.00	19.14	QP	NEUTRAL
12	24.53	15.41	9.94	0.38	10.31	36.04	50.00	13.96	Average	NEUTRAL

Note: 1. Result Level = Read Level +LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

Test Site	: DDT 5# Shield Room	D:\2025 report data\Q25101023-8E\1222 CE.EM6	
Test Date	: 2025-12-22	**Tested By**	: Jiahao Yang
Power Supply	: AC 120V/60Hz	**Test Mode**	: OPT in mode
Condition	: Temp:22.1°C,Humi:29.5%,Press:101.9kPa	**LISN**	: 2025 2# 216/NEUTRAL
Sample No.	: S25101023-015		

Data: 70

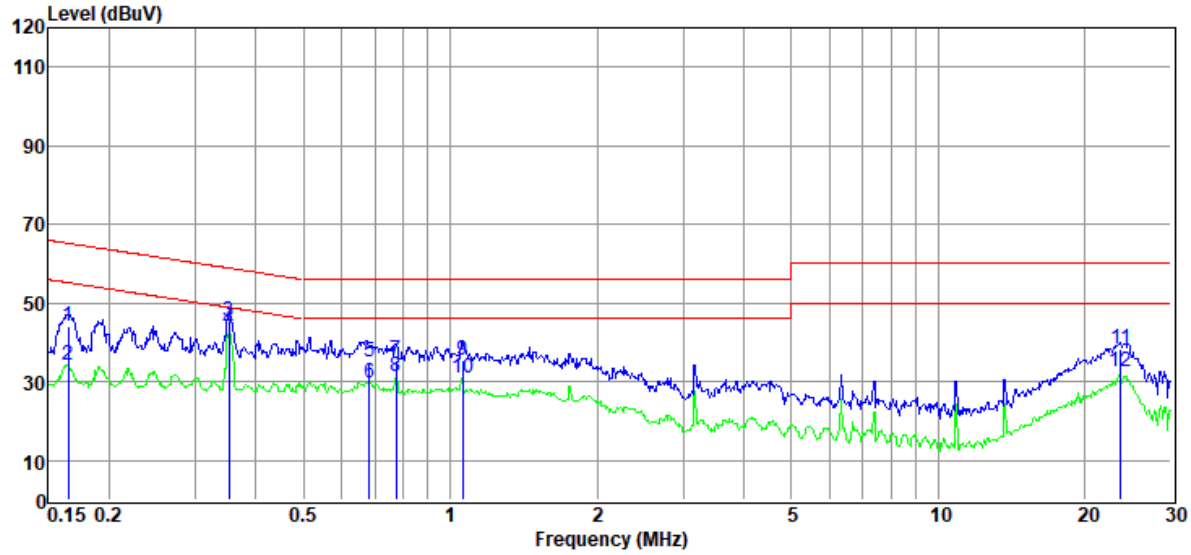


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBµV)	Limit Line (dBµV)	Margin (dB)	Detector	Phase
1	0.17	24.18	9.49	0.05	10.21	43.93	65.21	21.28	QP	NEUTRAL
2	0.17	14.37	9.49	0.05	10.21	34.12	55.21	21.09	Average	NEUTRAL
3	0.35	25.71	9.48	0.08	10.27	45.54	58.91	13.37	QP	NEUTRAL
4	0.35	23.34	9.48	0.08	10.27	43.17	48.91	5.74	Average	NEUTRAL
5	0.68	15.11	9.49	0.12	10.36	35.08	56.00	20.92	QP	NEUTRAL
6	0.68	9.67	9.49	0.12	10.36	29.64	46.00	16.36	Average	NEUTRAL
7	0.78	15.52	9.48	0.14	10.37	35.51	56.00	20.49	QP	NEUTRAL
8	0.78	11.42	9.48	0.14	10.37	31.41	46.00	14.59	Average	NEUTRAL
9	1.06	15.47	9.49	0.18	10.40	35.54	56.00	20.46	QP	NEUTRAL
10	1.06	10.69	9.49	0.18	10.40	30.76	46.00	15.24	Average	NEUTRAL
11	23.64	17.70	9.94	0.37	10.31	38.32	60.00	21.68	QP	NEUTRAL
12	23.64	12.07	9.94	0.37	10.31	32.69	50.00	17.31	Average	NEUTRAL

Note: 1. Result Level = Read Level +LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

Test Site	: DDT 5# Shield Room	D:\2025 report data\Q25101023-8E\1222 CE.EM6	
Test Date	: 2025-12-22	**Tested By**	: Jiahao Yang
Power Supply	: AC 120V/60Hz	**Test Mode**	: OPT in mode
Condition	: Temp:22.1°C,Humi:29.5%,Press:101.9kPa	**LISN**	: 2025 2# 216/LINE
Sample No.	: S25101023-015		

Data: 72

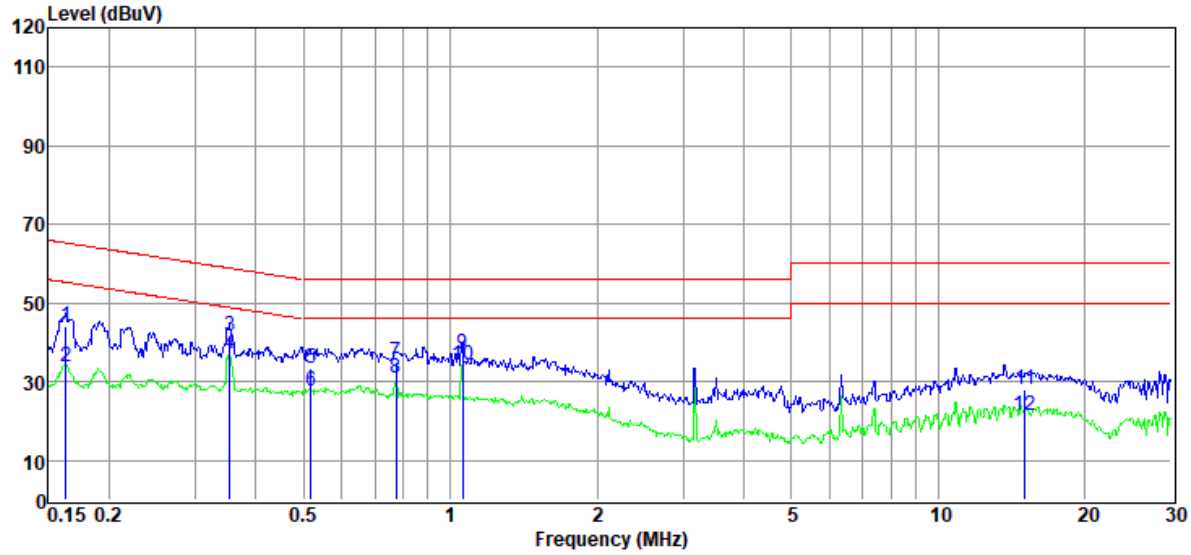


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBµV)	Limit Line (dBµV)	Margin (dB)	Detector	Phase
1	0.16	24.45	9.47	0.05	10.21	44.18	65.30	21.12	QP	LINE
2	0.16	14.02	9.47	0.05	10.21	33.75	55.30	21.55	Average	LINE
3	0.35	21.86	9.48	0.08	10.27	41.69	58.87	17.18	QP	LINE
4	0.35	17.29	9.48	0.08	10.27	37.12	48.87	11.75	Average	LINE
5	0.52	13.53	9.49	0.10	10.32	33.44	56.00	22.56	QP	LINE
6	0.52	7.87	9.49	0.10	10.32	27.78	46.00	18.22	Average	LINE
7	0.78	15.15	9.51	0.14	10.37	35.17	56.00	20.83	QP	LINE
8	0.78	11.11	9.51	0.14	10.37	31.13	46.00	14.87	Average	LINE
9	1.06	16.97	9.48	0.18	10.40	37.03	56.00	18.97	QP	LINE
10	1.06	14.09	9.48	0.18	10.40	34.15	46.00	11.85	Average	LINE
11	15.07	7.64	9.75	0.32	10.21	27.92	60.00	32.08	QP	LINE
12	15.07	1.30	9.75	0.32	10.21	21.58	50.00	28.42	Average	LINE

Note: 1. Result Level = Read Level +LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

Test Site	: DDT 5# Shield Room	D:\2025 report data\Q25101023-8E\1222 CE.EM6	
Test Date	: 2025-12-22	**Tested By**	: Jiahao Yang
Power Supply	: AC 120V/60Hz	**Test Mode**	: COAX in mode
Condition	: Temp:22.1°C,Humi:29.5%,Press:101.9kPa	**LISN**	: 2025 2# 216/LINE
Sample No.	: S25101023-015		

Data: 74

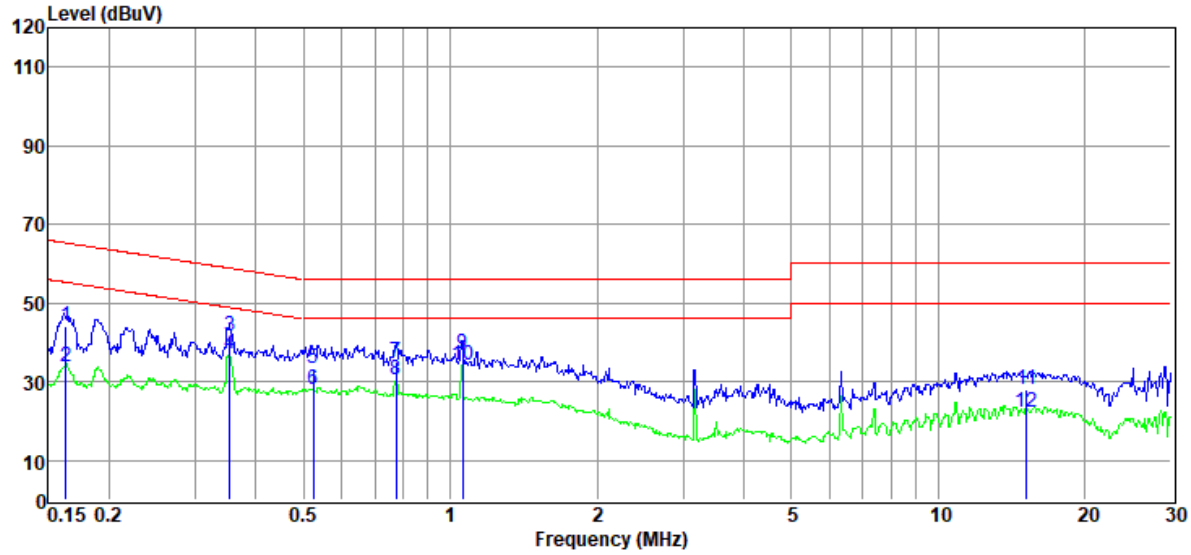


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBµV)	Limit Line (dBµV)	Margin (dB)	Detector	Phase
1	0.16	24.47	9.47	0.05	10.21	44.20	65.30	21.10	QP	LINE
2	0.16	14.00	9.47	0.05	10.21	33.73	55.30	21.57	Average	LINE
3	0.35	21.93	9.48	0.08	10.27	41.76	58.87	17.11	QP	LINE
4	0.35	17.43	9.48	0.08	10.27	37.26	48.87	11.61	Average	LINE
5	0.52	13.52	9.49	0.10	10.33	33.44	56.00	22.56	QP	LINE
6	0.52	7.97	9.49	0.10	10.33	27.89	46.00	18.11	Average	LINE
7	0.78	15.09	9.51	0.14	10.37	35.11	56.00	20.89	QP	LINE
8	0.78	10.43	9.51	0.14	10.37	30.45	46.00	15.55	Average	LINE
9	1.06	17.08	9.48	0.18	10.40	37.14	56.00	18.86	QP	LINE
10	1.06	14.18	9.48	0.18	10.40	34.24	46.00	11.76	Average	LINE
11	15.15	7.97	9.75	0.32	10.21	28.25	60.00	31.75	QP	LINE
12	15.15	2.11	9.75	0.32	10.21	22.39	50.00	27.61	Average	LINE

Note: 1. Result Level = Read Level +LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

Test Site	: DDT 5# Shield Room	D:\2025 report data\Q25101023-8E\1222 CE.EM6	
Test Date	: 2025-12-22	**Tested By**	: Jiahao Yang
Power Supply	: AC 120V/60Hz	**Test Mode**	: COAX in mode
Condition	: Temp:22.1°C,Humi:29.5%,Press:101.9kPa	**LISN**	: 2025 2# 216/NEUTRAL
Sample No.	: S25101023-015		

Data: 76

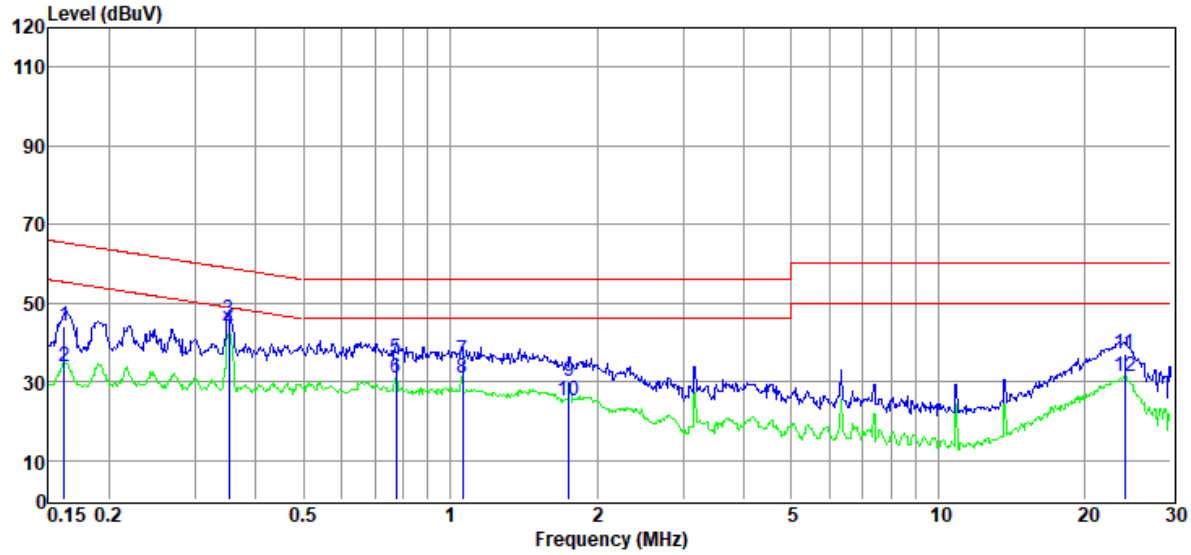


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBµV)	Limit Line (dBµV)	Margin (dB)	Detector	Phase
1	0.16	24.28	9.49	0.05	10.21	44.03	65.38	21.35	QP	NEUTRAL
2	0.16	14.17	9.49	0.05	10.21	33.92	55.38	21.46	Average	NEUTRAL
3	0.35	25.76	9.48	0.08	10.27	45.59	58.91	13.32	QP	NEUTRAL
4	0.35	23.42	9.48	0.08	10.27	43.25	48.91	5.66	Average	NEUTRAL
5	0.78	15.72	9.48	0.14	10.37	35.71	56.00	20.29	QP	NEUTRAL
6	0.78	11.09	9.48	0.14	10.37	31.08	46.00	14.92	Average	NEUTRAL
7	1.06	15.51	9.49	0.18	10.40	35.58	56.00	20.42	QP	NEUTRAL
8	1.06	10.92	9.49	0.18	10.40	30.99	46.00	15.01	Average	NEUTRAL
9	1.75	10.04	9.50	0.20	10.39	30.13	56.00	25.87	QP	NEUTRAL
10	1.75	5.08	9.50	0.20	10.39	25.17	46.00	20.83	Average	NEUTRAL
11	24.14	16.45	9.94	0.37	10.31	37.07	60.00	22.93	QP	NEUTRAL
12	24.14	10.66	9.94	0.37	10.31	31.28	50.00	18.72	Average	NEUTRAL

Note: 1. Result Level = Read Level +LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

Test Site	: DDT 5# Shield Room	D:\2025 report data\Q25101023-8E\1222 CE.EM6	
Test Date	: 2025-12-22	**Tested By**	: Jiahao Yang
Power Supply	: AC 240V/50Hz	**Test Mode**	: COAX in mode
Condition	: Temp:22.1°C,Humi:29.5%,Press:101.9kPa	**LISN**	: 2025 2# 216/NEUTRAL
Sample No.	: S25101023-015		

Data: 78

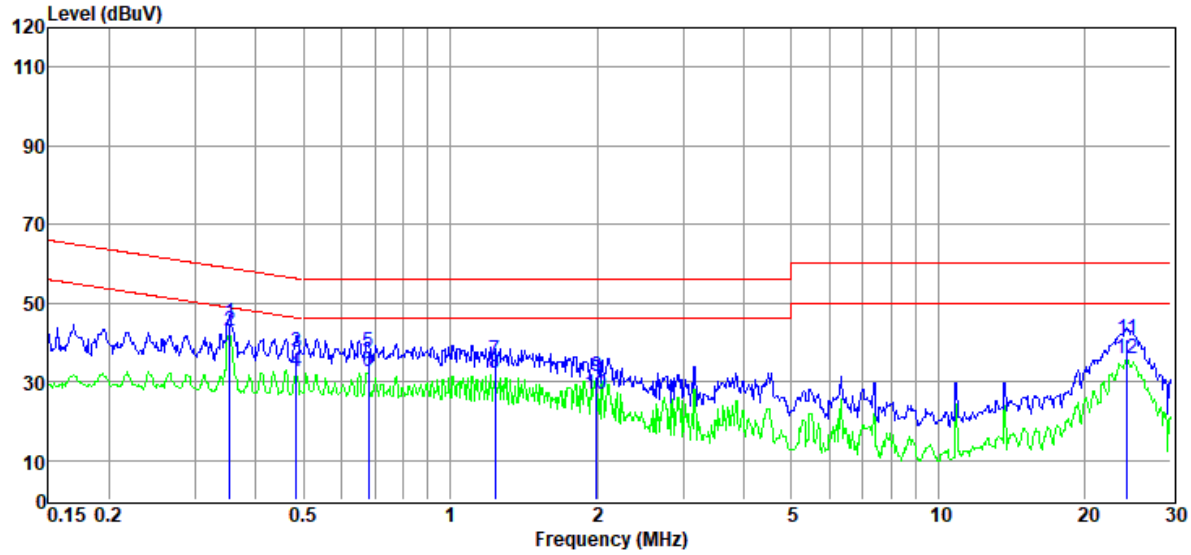


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBµV)	Limit Line (dBµV)	Margin (dB)	Detector	Phase
1	0.35	24.97	9.48	0.08	10.27	44.80	58.87	14.07	QP	NEUTRAL
2	0.35	22.94	9.48	0.08	10.27	42.77	48.87	6.10	Average	NEUTRAL
3	0.48	17.80	9.48	0.10	10.32	37.70	56.27	18.57	QP	NEUTRAL
4	0.48	12.59	9.48	0.10	10.32	32.49	46.27	13.78	Average	NEUTRAL
5	0.68	17.58	9.49	0.12	10.36	37.55	56.00	18.45	QP	NEUTRAL
6	0.68	12.64	9.49	0.12	10.36	32.61	46.00	13.39	Average	NEUTRAL
7	1.24	15.48	9.49	0.19	10.40	35.56	56.00	20.44	QP	NEUTRAL
8	1.24	12.02	9.49	0.19	10.40	32.10	46.00	13.90	Average	NEUTRAL
9	1.99	11.09	9.50	0.21	10.39	31.19	56.00	24.81	QP	NEUTRAL
10	1.99	6.80	9.50	0.21	10.39	26.90	46.00	19.10	Average	NEUTRAL
11	24.40	20.06	9.94	0.38	10.31	40.69	60.00	19.31	QP	NEUTRAL
12	24.40	15.42	9.94	0.38	10.31	36.05	50.00	13.95	Average	NEUTRAL

Note: 1. Result Level = Read Level +LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

Test Site	: DDT 5# Shield Room	D:\2025 report data\Q25101023-8E\1222 CE.EM6	
Test Date	: 2025-12-22	**Tested By**	: Jiahao Yang
Power Supply	: AC 240V/50Hz	**Test Mode**	: COAX in mode
Condition	: Temp:22.1°C,Humi:29.5%,Press:101.9kPa	**LISN**	: 2025 2# 216/LINE
Sample No.	: S25101023-015		

Data: 80

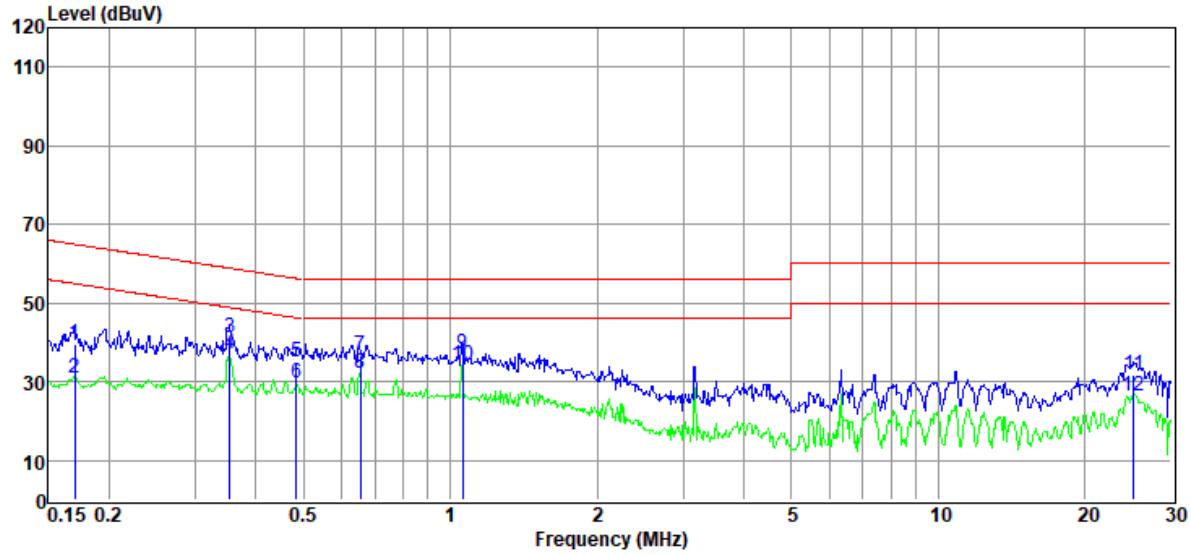


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBµV)	Limit Line (dBµV)	Margin (dB)	Detector	Phase
1	0.17	19.73	9.48	0.05	10.20	39.46	64.94	25.48	QP	LINE
2	0.17	10.99	9.48	0.05	10.20	30.72	54.94	24.22	Average	LINE
3	0.35	21.43	9.48	0.08	10.27	41.26	58.87	17.61	QP	LINE
4	0.35	17.23	9.48	0.08	10.27	37.06	48.87	11.81	Average	LINE
5	0.48	15.19	9.49	0.10	10.32	35.10	56.27	21.17	QP	LINE
6	0.48	9.95	9.49	0.10	10.32	29.86	46.27	16.41	Average	LINE
7	0.65	16.63	9.48	0.12	10.35	36.58	56.00	19.42	QP	LINE
8	0.65	12.17	9.48	0.12	10.35	32.12	46.00	13.88	Average	LINE
9	1.06	16.94	9.48	0.18	10.40	37.00	56.00	19.00	QP	LINE
10	1.06	14.11	9.48	0.18	10.40	34.17	46.00	11.83	Average	LINE
11	25.19	11.31	9.67	0.38	10.31	31.67	60.00	28.33	QP	LINE
12	25.19	6.22	9.67	0.38	10.31	26.58	50.00	23.42	Average	LINE

Note: 1. Result Level = Read Level +LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

Test Site	: DDT 5# Shield Room	D:\2025 report data\Q25101023-8E\1222 CE.EM6	
Test Date	: 2025-12-22	**Tested By**	: Jiahao Yang
Power Supply	: AC 240V/50Hz	**Test Mode**	: Bluetooth mode
Condition	: Temp:22.1°C,Humi:29.5%,Press:101.9kPa	**LISN**	: 2025 2# 216/LINE
Sample No.	: S25101023-015		

Data: 82

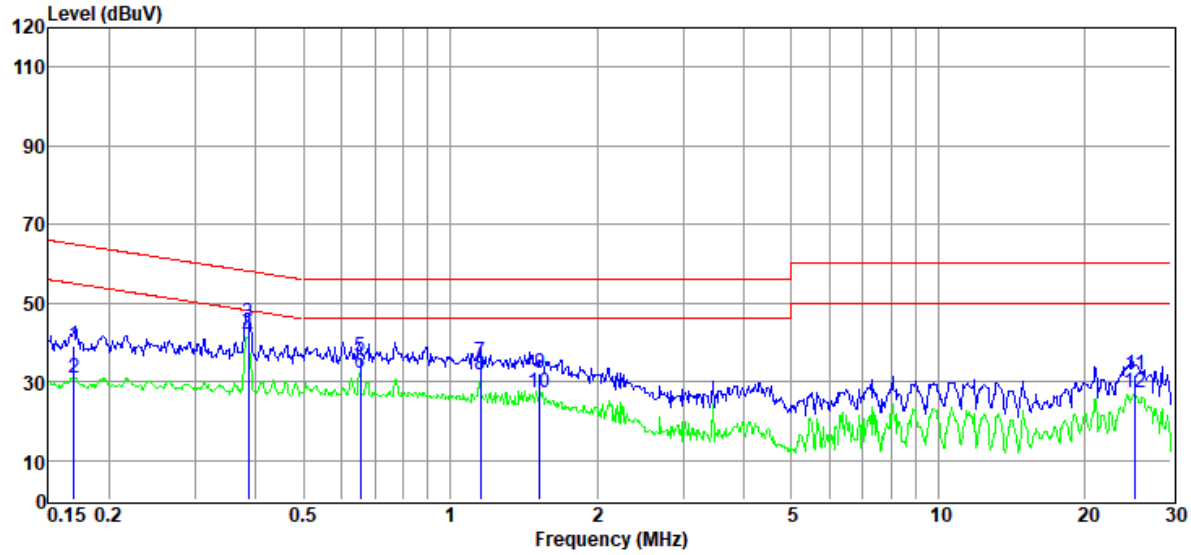


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBµV)	Limit Line (dBµV)	Margin (dB)	Detector	Phase
1	0.17	19.38	9.48	0.05	10.20	39.11	64.99	25.88	QP	LINE
2	0.17	11.06	9.48	0.05	10.20	30.79	54.99	24.20	Average	LINE
3	0.39	25.21	9.48	0.09	10.29	45.07	58.17	13.10	QP	LINE
4	0.39	21.32	9.48	0.09	10.29	41.18	48.17	6.99	Average	LINE
5	0.65	16.51	9.48	0.12	10.35	36.46	56.00	19.54	QP	LINE
6	0.65	12.41	9.48	0.12	10.35	32.36	46.00	13.64	Average	LINE
7	1.15	15.17	9.48	0.19	10.40	35.24	56.00	20.76	QP	LINE
8	1.15	11.73	9.48	0.19	10.40	31.80	46.00	14.20	Average	LINE
9	1.53	11.94	9.51	0.20	10.39	32.04	56.00	23.96	QP	LINE
10	1.53	7.02	9.51	0.20	10.39	27.12	46.00	18.88	Average	LINE
11	25.32	11.39	9.67	0.38	10.31	31.75	60.00	28.25	QP	LINE
12	25.32	6.99	9.67	0.38	10.31	27.35	50.00	22.65	Average	LINE

Note: 1. Result Level = Read Level +LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

Test Site	: DDT 5# Shield Room	D:\2025 report data\Q25101023-8E\1222 CE.EM6	
Test Date	: 2025-12-22	**Tested By**	: Jiahao Yang
Power Supply	: AC 240V/50Hz	**Test Mode**	: Bluetooth mode
Condition	: Temp:22.1°C,Humi:29.5%,Press:101.9kPa	**LISN**	: 2025 2# 216/NEUTRAL
Sample No.	: S25101023-015		

Data: 84

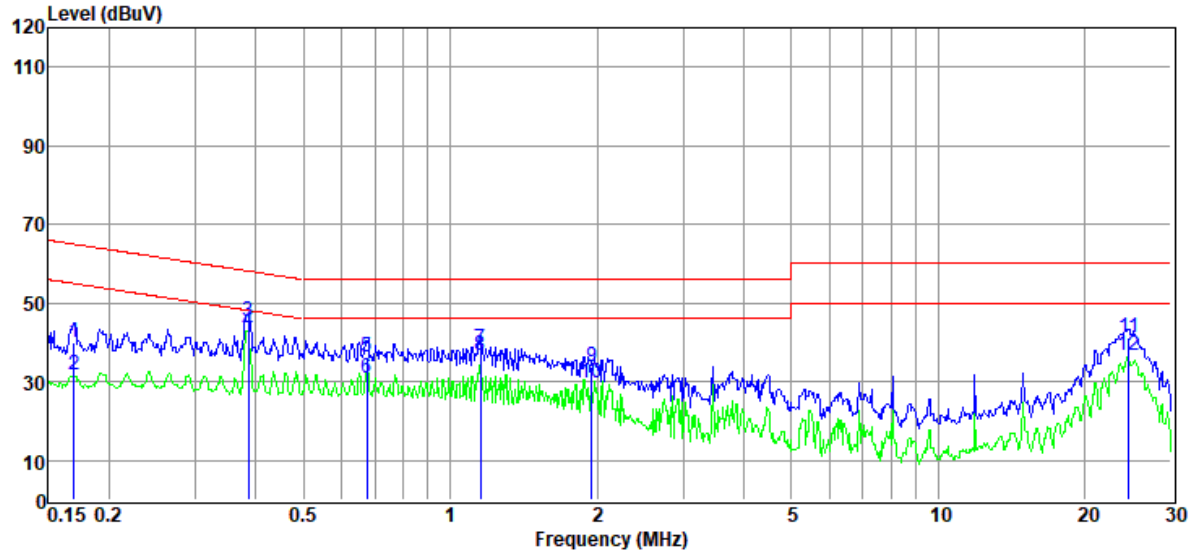


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBµV)	Limit Line (dBµV)	Margin (dB)	Detector	Phase
1	0.17	20.19	9.49	0.05	10.20	39.93	64.99	25.06	QP	NEUTRAL
2	0.17	12.08	9.49	0.05	10.20	31.82	54.99	23.17	Average	NEUTRAL
3	0.39	25.63	9.48	0.09	10.29	45.49	58.17	12.68	QP	NEUTRAL
4	0.39	22.90	9.48	0.09	10.29	42.76	48.17	5.41	Average	NEUTRAL
5	0.68	16.40	9.49	0.12	10.35	36.36	56.00	19.64	QP	NEUTRAL
6	0.68	11.02	9.49	0.12	10.35	30.98	46.00	15.02	Average	NEUTRAL
7	1.15	18.45	9.49	0.19	10.40	38.53	56.00	17.47	QP	NEUTRAL
8	1.15	16.46	9.49	0.19	10.40	36.54	46.00	9.46	Average	NEUTRAL
9	1.95	13.74	9.50	0.21	10.39	33.84	56.00	22.16	QP	NEUTRAL
10	1.95	9.51	9.50	0.21	10.39	29.61	46.00	16.39	Average	NEUTRAL
11	24.53	20.62	9.94	0.38	10.31	41.25	60.00	18.75	QP	NEUTRAL
12	24.53	16.00	9.94	0.38	10.31	36.63	50.00	13.37	Average	NEUTRAL

Note: 1. Result Level = Read Level +LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

Test Site	: DDT 5# Shield Room	D:\2025 report data\Q25101023-8E\1222 CE.EM6	
Test Date	: 2025-12-22	**Tested By**	: Jiahao Yang
Power Supply	: AC 120V/60Hz	**Test Mode**	: Bluetooth mode
Condition	: Temp:22.1°C,Humi:29.5%,Press:101.9kPa	**LISN**	: 2025 2# 216/NEUTRAL
Sample No.	: S25101023-015		

Data: 86

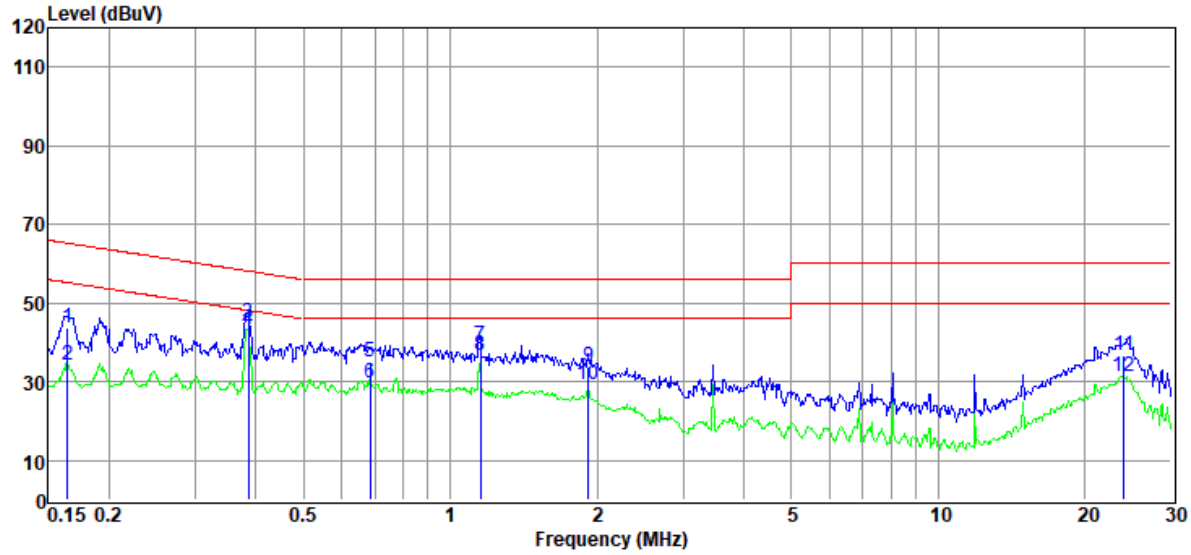


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBµV)	Limit Line (dBµV)	Margin (dB)	Detector	Phase
1	0.16	24.07	9.49	0.05	10.21	43.82	65.25	21.43	QP	NEUTRAL
2	0.16	14.39	9.49	0.05	10.21	34.14	55.25	21.11	Average	NEUTRAL
3	0.39	25.27	9.48	0.09	10.29	45.13	58.17	13.04	QP	NEUTRAL
4	0.39	23.25	9.48	0.09	10.29	43.11	48.17	5.06	Average	NEUTRAL
5	0.69	15.20	9.49	0.12	10.36	35.17	56.00	20.83	QP	NEUTRAL
6	0.69	9.74	9.49	0.12	10.36	29.71	46.00	16.29	Average	NEUTRAL
7	1.15	19.25	9.49	0.19	10.40	39.33	56.00	16.67	QP	NEUTRAL
8	1.15	16.49	9.49	0.19	10.40	36.57	46.00	9.43	Average	NEUTRAL
9	1.92	13.60	9.50	0.21	10.39	33.70	56.00	22.30	QP	NEUTRAL
10	1.92	8.98	9.50	0.21	10.39	29.08	46.00	16.92	Average	NEUTRAL
11	24.02	16.24	9.94	0.37	10.31	36.86	60.00	23.14	QP	NEUTRAL
12	24.02	10.63	9.94	0.37	10.31	31.25	50.00	18.75	Average	NEUTRAL

Note: 1. Result Level = Read Level +LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

Test Site	: DDT 5# Shield Room	D:\2025 report data\Q25101023-8E\1222 CE.EM6	
Test Date	: 2025-12-22	**Tested By**	: Jiahao Yang
Power Supply	: AC 120V/60Hz	**Test Mode**	: Bluetooth mode
Condition	: Temp:22.1°C,Humi:29.5%,Press:101.9kPa	**LISN**	: 2025 2# 216/LINE
Sample No.	: S25101023-015		

Data: 88

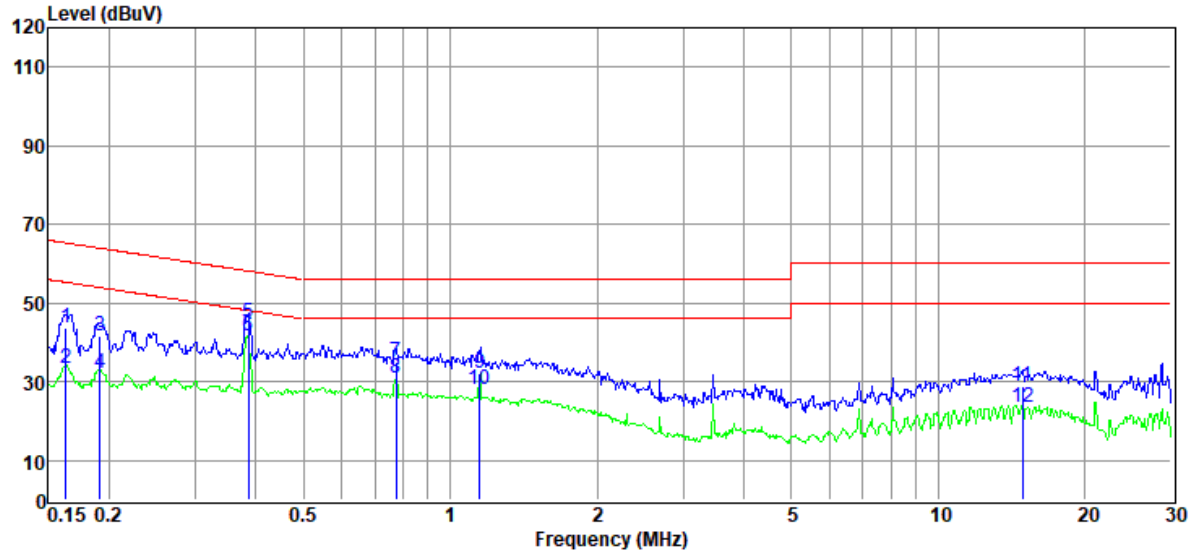


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBµV)	Limit Line (dBµV)	Margin (dB)	Detector	Phase
1	0.16	23.96	9.47	0.05	10.21	43.69	65.30	21.61	QP	LINE
2	0.16	13.60	9.47	0.05	10.21	33.33	55.30	21.97	Average	LINE
3	0.19	21.93	9.47	0.05	10.20	41.65	63.98	22.33	QP	LINE
4	0.19	12.64	9.47	0.05	10.20	32.36	53.98	21.62	Average	LINE
5	0.39	24.96	9.48	0.09	10.29	44.82	58.17	13.35	QP	LINE
6	0.39	21.65	9.48	0.09	10.29	41.51	48.17	6.66	Average	LINE
7	0.78	15.06	9.51	0.14	10.37	35.08	56.00	20.92	QP	LINE
8	0.78	10.81	9.51	0.14	10.37	30.83	46.00	15.17	Average	LINE
9	1.15	11.97	9.48	0.19	10.40	32.04	56.00	23.96	QP	LINE
10	1.15	8.01	9.48	0.19	10.40	28.08	46.00	17.92	Average	LINE
11	14.91	8.59	9.74	0.32	10.21	28.86	60.00	31.14	QP	LINE
12	14.91	3.15	9.74	0.32	10.21	23.42	50.00	26.58	Average	LINE

Note: 1. Result Level = Read Level +LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

3 Appendix B.3 : Radiated Emissions, below 1GHz

Test Site	: DDT 3m Chamber 2#	D:\2025 RE2# Report Data\Q25101023-8E\1223 RE.EM6	
Test Date	: 2025-12-23	**Tested By**	: Jiahao Yang
Power Supply	: AC 240V/50Hz	**Test Mode**	: AUX in mode
Condition	: Temp:23.9°C,Humi:55.4%	**Antenna/Distance**	: 2025 2# ANT 9163/3m/VERTICAL
Sample No.	: S25101023-015		

Data: 1

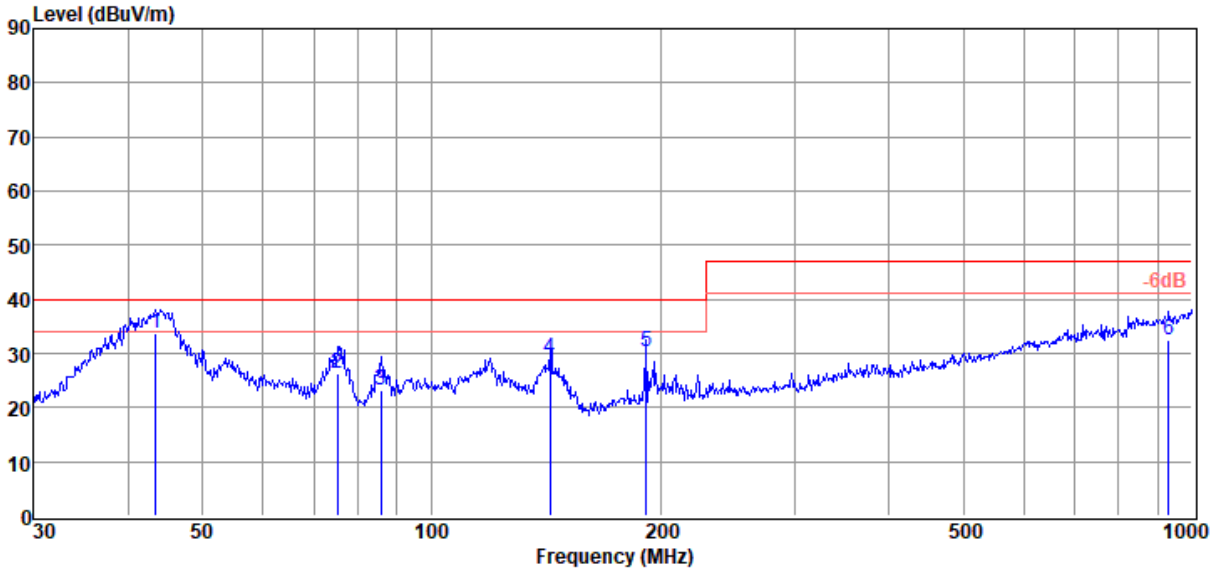


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Margin (dB)	Detector	Polarization
1	43.35	16.30	13.54	3.90	33.74	40.00	6.26	QP	VERTICAL
2	75.18	14.19	7.82	4.27	26.28	40.00	13.72	QP	VERTICAL
3	85.90	10.18	8.77	4.36	23.31	40.00	16.69	QP	VERTICAL
4	143.33	15.54	8.67	4.84	29.05	40.00	10.95	QP	VERTICAL
5	191.75	15.42	9.78	5.16	30.36	40.00	9.64	QP	VERTICAL
6	932.27	1.69	22.15	8.74	32.58	47.00	14.42	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Test Site	: DDT 3m Chamber 2#	D:\2025 RE2# Report Data\Q25101023-8E\1223 RE.EM6	
Test Date	: 2025-12-23	**Tested By**	: Jiahao Yang
Power Supply	: AC 240V/50Hz	**Test Mode**	: AUX in mode
Condition	: Temp:23.9°C,Humi:55.4%	**Antenna/Distance**	: 2025 2# ANT 9163/3m/HORIZONTAL
Sample No.	: S25101023-015		

Data: 2

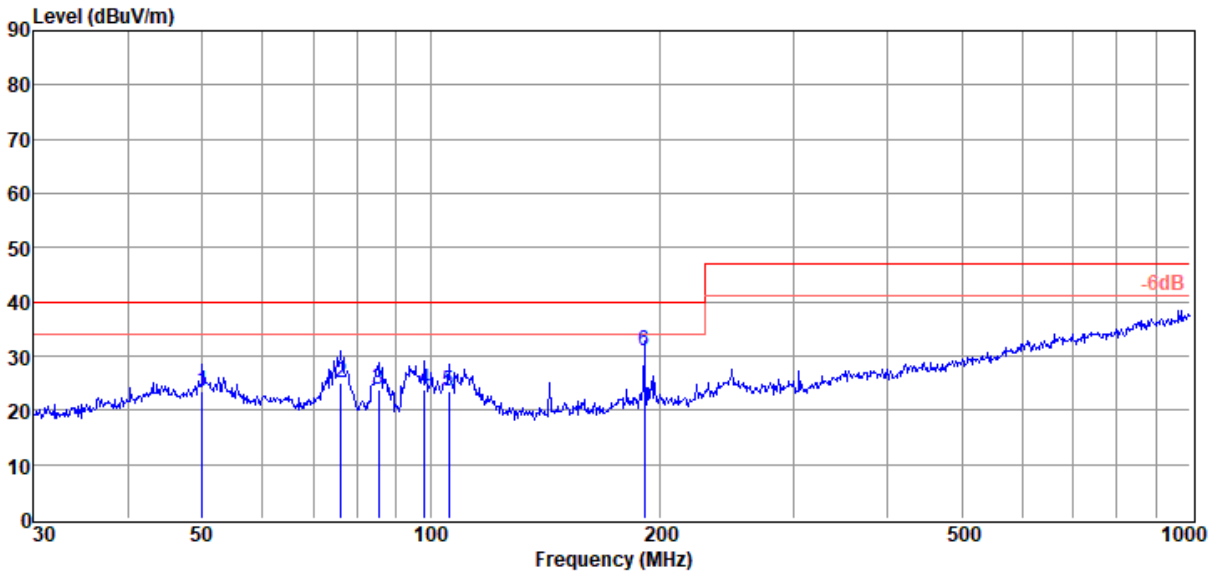


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Margin (dB)	Detector	Polarization
1	50.06	5.69	13.67	4.00	23.36	40.00	16.64	QP	HORIZONTAL
2	76.24	12.65	7.97	4.28	24.90	40.00	15.10	QP	HORIZONTAL
3	85.30	10.13	9.19	4.35	23.67	40.00	16.33	QP	HORIZONTAL
4	98.14	8.15	11.34	4.45	23.94	40.00	16.06	QP	HORIZONTAL
5	105.64	7.53	11.31	4.52	23.36	40.00	16.64	QP	HORIZONTAL
6	191.07	15.66	9.98	5.16	30.80	40.00	9.20	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Test Site	: DDT 3m Chamber 2#	D:\2025 RE2# Report Data\Q25101023-8E\1223 RE.EM6	
Test Date	: 2025-12-23	**Tested By**	: Jiahao Yang
Power Supply	: AC 120V/60Hz	**Test Mode**	: AUX in mode
Condition	: Temp:23.9°C,Humi:55.4%	**Antenna/Distance**	: 2025 2# ANT 9163/3m/HORIZONTAL
Sample No.	: S25101023-015		

Data: 3

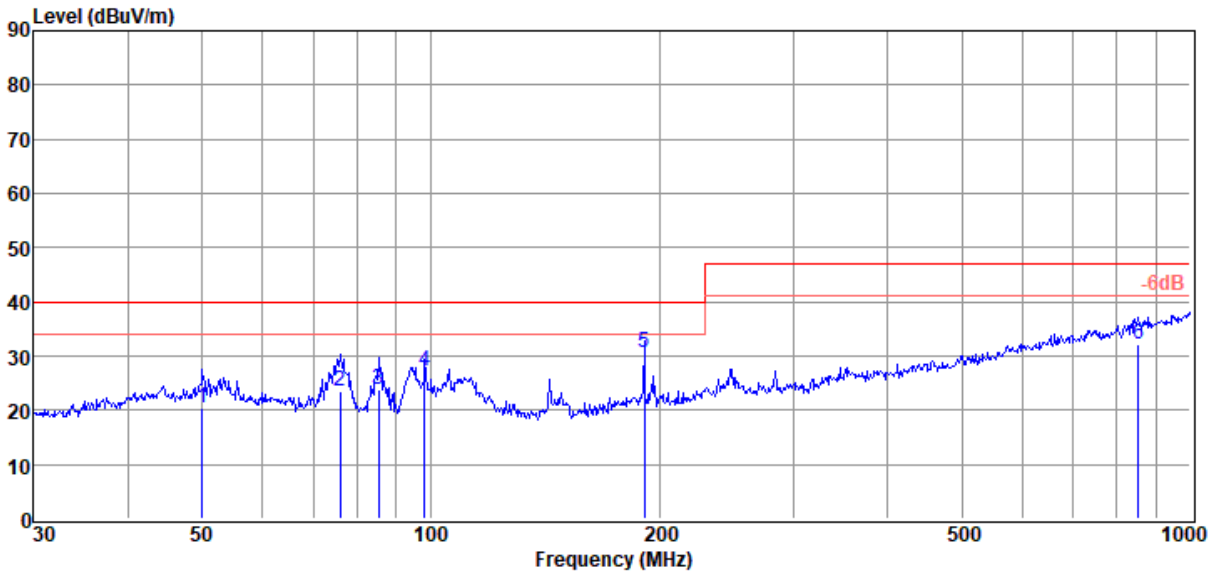


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Margin (dB)	Detector	Polarization
1	50.06	2.77	13.67	4.00	20.44	40.00	19.56	QP	HORIZONTAL
2	75.98	11.17	7.90	4.28	23.35	40.00	16.65	QP	HORIZONTAL
3	85.30	10.26	9.19	4.35	23.80	40.00	16.20	QP	HORIZONTAL
4	98.14	11.53	11.34	4.45	27.32	40.00	12.68	QP	HORIZONTAL
5	191.07	15.58	9.98	5.16	30.72	40.00	9.28	QP	HORIZONTAL
6	854.03	1.88	21.74	8.45	32.07	47.00	14.93	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Test Site	: DDT 3m Chamber 2#	D:\2025 RE2# Report Data\Q25101023-8E\1223 RE.EM6	
Test Date	: 2025-12-23	**Tested By**	: Jiahao Yang
Power Supply	: AC 120V/60Hz	**Test Mode**	: AUX in mode
Condition	: Temp:23.9°C,Humi:55.4%	**Antenna/Distance**	: 2025 2# ANT 9163/3m/VERTICAL
Sample No.	: S25101023-015		

Data: 4

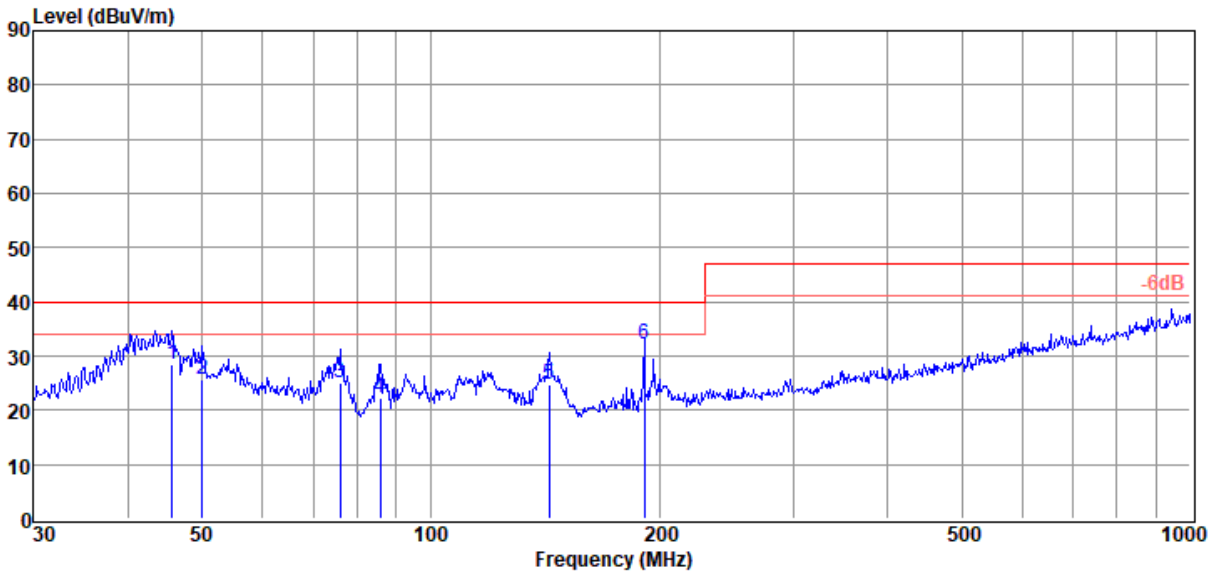


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Margin (dB)	Detector	Polarization
1	45.70	11.40	13.25	3.94	28.59	40.00	11.41	QP	VERTICAL
2	50.06	8.05	13.67	4.00	25.72	40.00	14.28	QP	VERTICAL
3	75.98	12.99	7.90	4.28	25.17	40.00	14.83	QP	VERTICAL
4	85.90	9.18	8.77	4.36	22.31	40.00	17.69	QP	VERTICAL
5	143.33	11.20	8.67	4.84	24.71	40.00	15.29	QP	VERTICAL
6	191.07	16.89	9.98	5.16	32.03	40.00	7.97	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Test Site	: DDT 3m Chamber 2#	D:\2025 RE2# Report Data\Q25101023-8E\1208 RE.EM6	
Test Date	: 2025-12-08	**Tested By**	: Jiahao Yang
Power Supply	: AC 120V/60Hz	**Test Mode**	: PC in mode
Condition	: Temp:23.3°C,Humi:53%	**Antenna/Distance**	: 2025 2# ANT 9163/3m/VERTICAL
Sample No.	: S25101023-015		

Data: 5

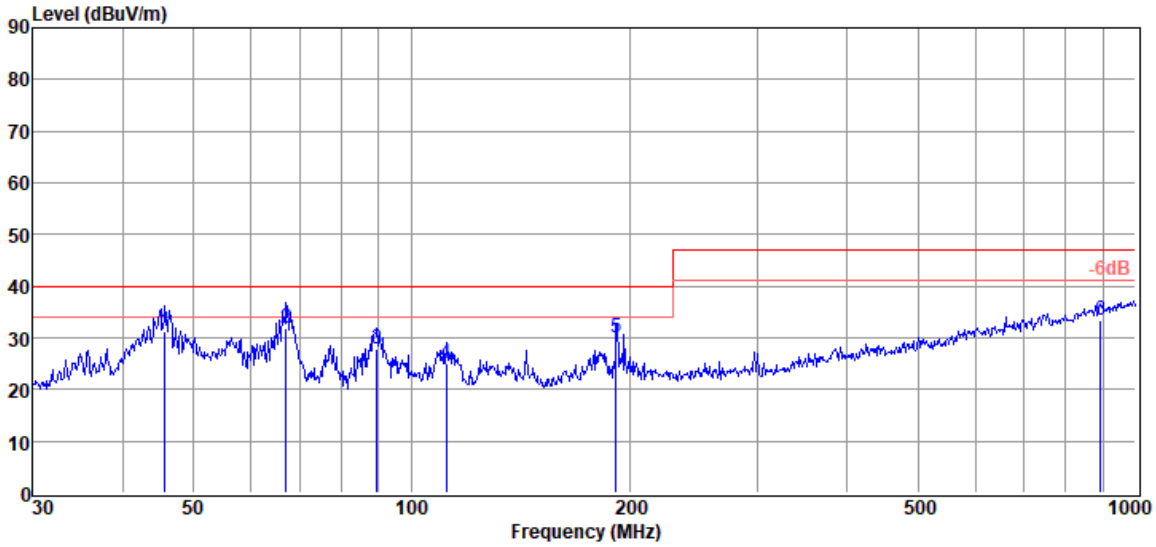


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Margin (dB)	Detector	Polarization
1	45.70	13.91	13.25	3.94	31.10	40.00	8.90	QP	VERTICAL
2	67.20	17.38	10.34	4.19	31.91	40.00	8.09	QP	VERTICAL
3	89.59	14.07	9.45	4.39	27.91	40.00	12.09	QP	VERTICAL
4	111.74	8.96	11.48	4.58	25.02	40.00	14.98	QP	VERTICAL
5	191.75	14.98	9.78	5.16	29.92	40.00	10.08	QP	VERTICAL
6	893.86	3.03	21.80	8.56	33.39	47.00	13.61	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Test Site	: DDT 3m Chamber 2#	D:\2025 RE2# Report Data\Q25101023-8E\1208 RE.EM6	
Test Date	: 2025-12-08	**Tested By**	: Jiahao Yang
Power Supply	: AC 120V/60Hz	**Test Mode**	: PC in mode
Condition	: Temp:23.3°C,Humi:53%	**Antenna/Distance**	: 2025 2# ANT 9163/3m/HORIZONTAL
Sample No.	: S25101023-015		

Data: 6

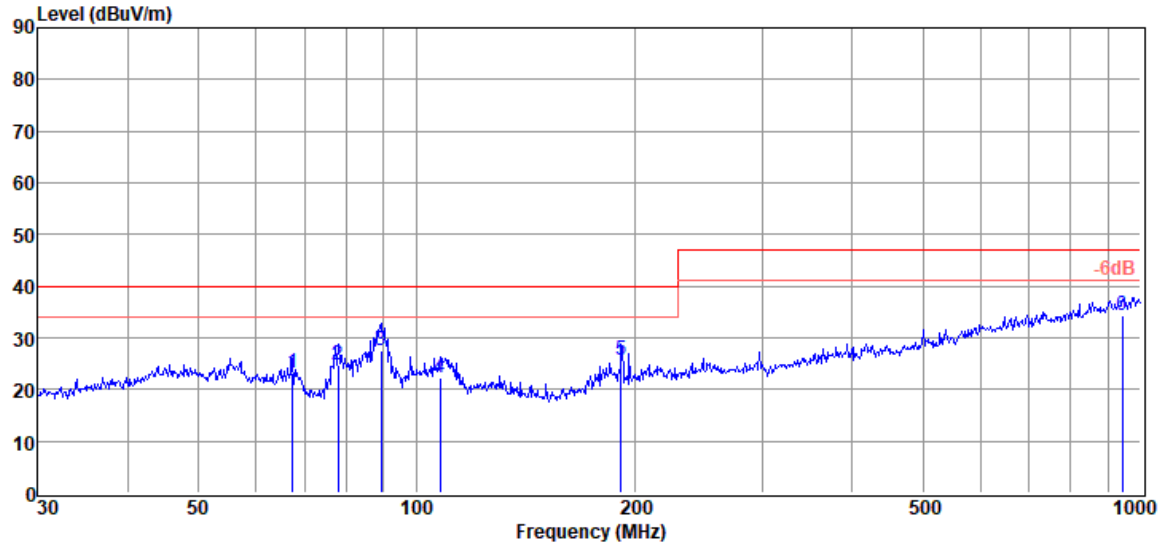


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Margin (dB)	Detector	Polarization
1	67.44	8.53	10.39	4.20	23.12	40.00	16.88	QP	HORIZONTAL
2	77.87	12.49	8.03	4.29	24.81	40.00	15.19	QP	HORIZONTAL
3	89.28	14.02	9.27	4.38	27.67	40.00	12.33	QP	HORIZONTAL
4	107.89	6.40	11.24	4.54	22.18	40.00	17.82	QP	HORIZONTAL
5	191.75	10.83	9.78	5.16	25.77	40.00	14.23	QP	HORIZONTAL
6	942.13	3.63	22.03	8.78	34.44	47.00	12.56	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Test Site	: DDT 3m Chamber 2#	D:\2025 RE2# Report Data\Q25101023-8E\1208 RE.EM6	
Test Date	: 2025-12-08	**Tested By**	: Jiahao Yang
Power Supply	: AC 240V/50Hz	**Test Mode**	: PC in mode
Condition	: Temp:23.3°C,Humi:53%	**Antenna/Distance**	: 2025 2# ANT 9163/3m/HORIZONTAL
Sample No.	: S25101023-015		

Data: 7

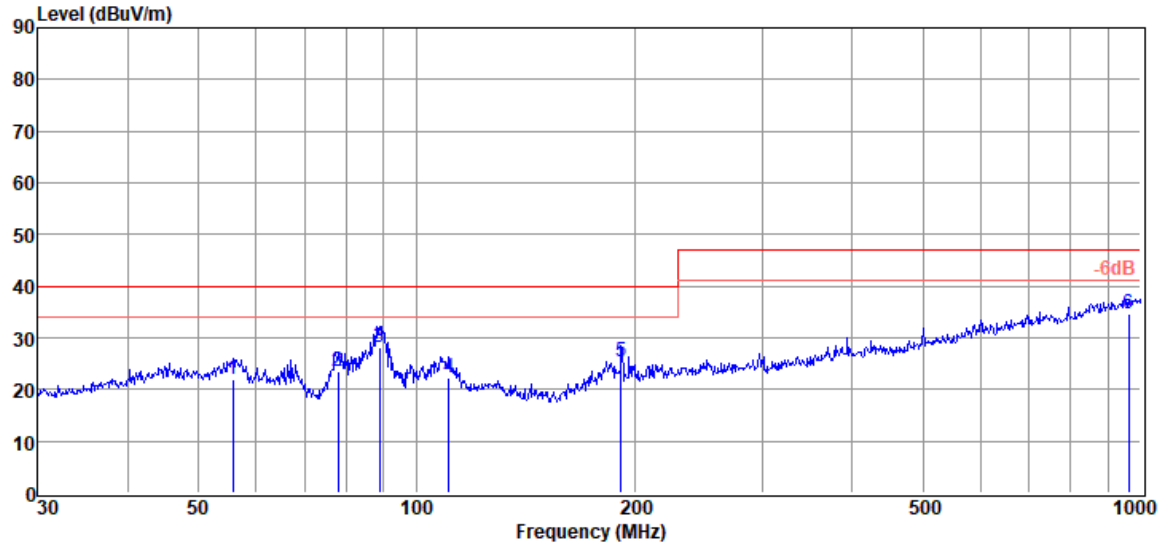


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Margin (dB)	Detector	Polarization
1	55.81	4.83	13.08	4.07	21.98	40.00	18.02	QP	HORIZONTAL
2	77.87	11.05	8.03	4.29	23.37	40.00	16.63	QP	HORIZONTAL
3	88.96	14.79	9.10	4.38	28.27	40.00	11.73	QP	HORIZONTAL
4	110.96	6.15	11.70	4.57	22.42	40.00	17.58	QP	HORIZONTAL
5	191.75	10.42	9.78	5.16	25.36	40.00	14.64	QP	HORIZONTAL
6	962.16	3.37	22.30	8.88	34.55	47.00	12.45	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Test Site	: DDT 3m Chamber 2#	D:\2025 RE2# Report Data\Q25101023-8E\1208 RE.EM6	
Test Date	: 2025-12-08	**Tested By**	: Jiahao Yang
Power Supply	: AC 240V/50Hz	**Test Mode**	: PC in mode
Condition	: Temp:23.3°C,Humi:53%	**Antenna/Distance**	: 2025 2# ANT 9163/3m/VERTICAL
Sample No.	: S25101023-015		

Data: 8

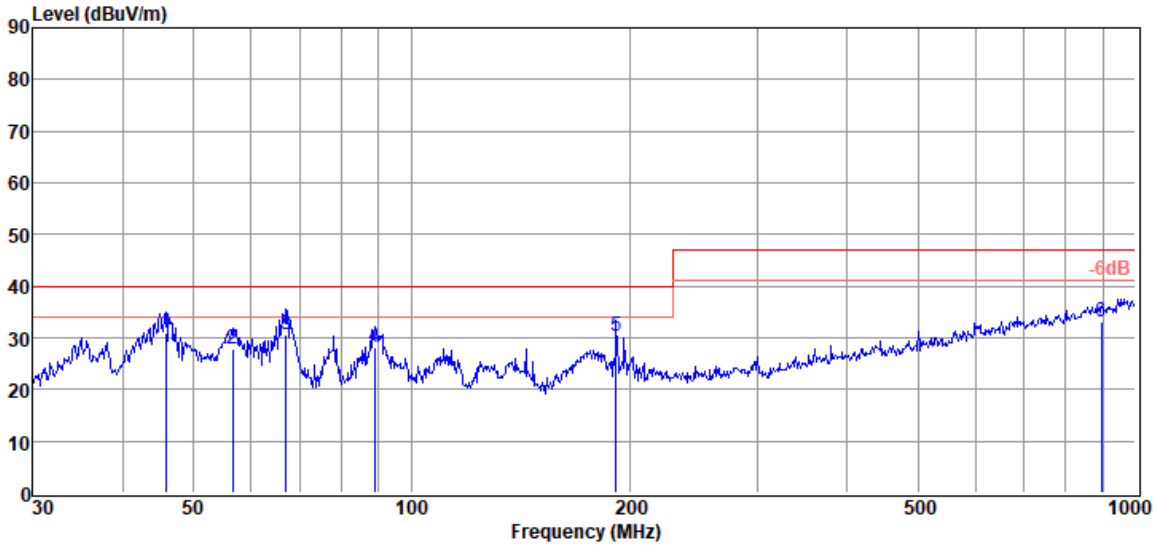


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Margin (dB)	Detector	Polarization
1	45.86	13.70	13.17	3.94	30.81	40.00	9.19	QP	VERTICAL
2	56.59	11.19	12.64	4.08	27.91	40.00	12.09	QP	VERTICAL
3	67.20	16.05	10.34	4.19	30.58	40.00	9.42	QP	VERTICAL
4	88.96	14.62	9.10	4.38	28.10	40.00	11.90	QP	VERTICAL
5	191.75	15.41	9.78	5.16	30.35	40.00	9.65	QP	VERTICAL
6	897.00	2.53	21.96	8.57	33.06	47.00	13.94	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Test Site	: DDT 3m Chamber 2#	D:\2025 RE2# Report Data\Q25101023-8E\1208 RE.EM6	
Test Date	: 2025-12-08	**Tested By**	: Jiahao Yang
Power Supply	: AC 240V/50Hz	**Test Mode**	: OPT in mode
Condition	: Temp:23.3°C,Humi:53%	**Antenna/Distance**	: 2025 2# ANT 9163/3m/VERTICAL
Sample No.	: S25101023-015		

Data: 9

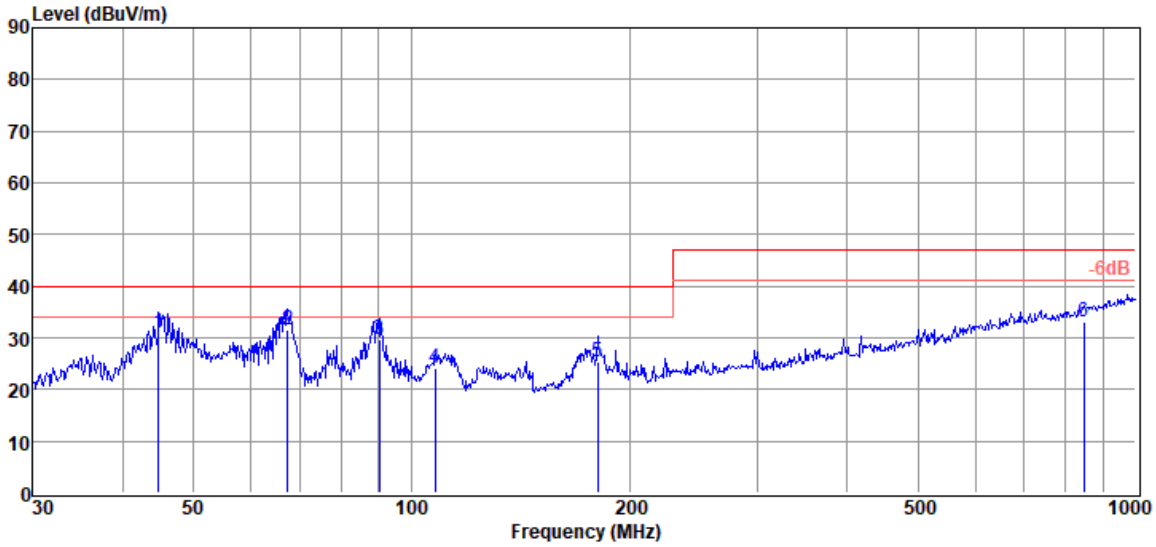


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Margin (dB)	Detector	Polarization
1	44.74	13.30	13.60	3.92	30.82	40.00	9.18	QP	VERTICAL
2	67.44	16.85	10.39	4.20	31.44	40.00	8.56	QP	VERTICAL
3	90.22	15.83	9.59	4.39	29.81	40.00	10.19	QP	VERTICAL
4	107.89	8.20	11.24	4.54	23.98	40.00	16.02	QP	VERTICAL
5	180.65	10.82	9.46	5.10	25.38	40.00	14.62	QP	VERTICAL
6	848.06	3.08	21.67	8.43	33.18	47.00	13.82	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Test Site	: DDT 3m Chamber 2#	D:\2025 RE2# Report Data\Q25101023-8E\1208 RE.EM6	
Test Date	: 2025-12-08	**Tested By**	: Jiahao Yang
Power Supply	: AC 240V/50Hz	**Test Mode**	: OPT in mode
Condition	: Temp:23.3°C,Humi:53%	**Antenna/Distance**	: 2025 2# ANT 9163/3m/HORIZONTAL
Sample No.	: S25101023-015		

Data: 10

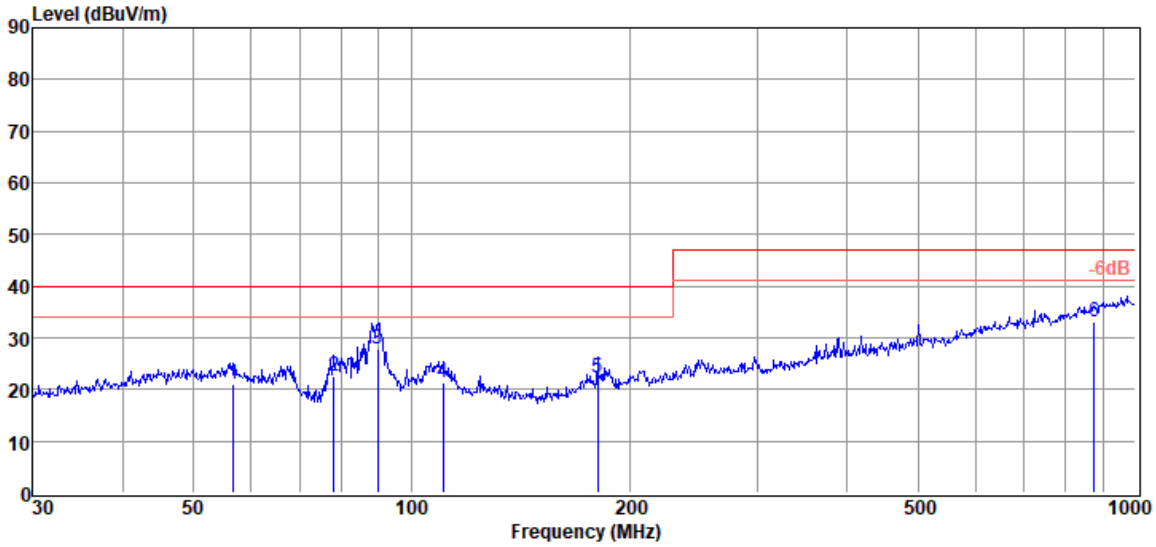


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Margin (dB)	Detector	Polarization
1	56.79	4.49	12.52	4.08	21.09	40.00	18.91	QP	HORIZONTAL
2	78.14	10.14	8.04	4.29	22.47	40.00	17.53	QP	HORIZONTAL
3	89.91	13.74	9.64	4.39	27.77	40.00	12.23	QP	HORIZONTAL
4	110.57	5.16	11.74	4.57	21.47	40.00	18.53	QP	HORIZONTAL
5	180.65	7.84	9.46	5.10	22.40	40.00	17.60	QP	HORIZONTAL
6	875.25	3.02	21.61	8.51	33.14	47.00	13.86	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Test Site	: DDT 3m Chamber 2#	D:\2025 RE2# Report Data\Q25101023-8E\1208 RE.EM6	
Test Date	: 2025-12-08	**Tested By**	: Jiahao Yang
Power Supply	: AC 120V/60Hz	**Test Mode**	: OPT in mode
Condition	: Temp:23.3°C,Humi:53%	**Antenna/Distance**	: 2025 2# ANT 9163/3m/HORIZONTAL
Sample No.	: S25101023-015		

Data: 11

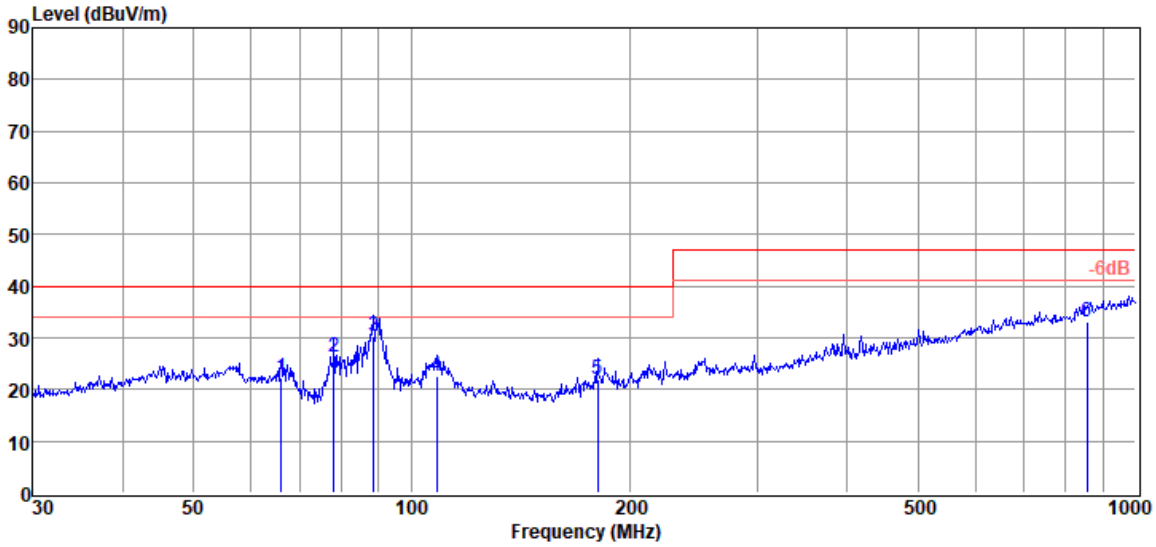


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Margin (dB)	Detector	Polarization
1	66.03	6.79	11.27	4.18	22.24	40.00	17.76	QP	HORIZONTAL
2	78.14	13.81	8.04	4.29	26.14	40.00	13.86	QP	HORIZONTAL
3	88.65	16.79	9.13	4.38	30.30	40.00	9.70	QP	HORIZONTAL
4	108.27	6.55	11.51	4.54	22.60	40.00	17.40	QP	HORIZONTAL
5	180.65	7.28	9.46	5.10	21.84	40.00	18.16	QP	HORIZONTAL
6	857.03	3.04	21.70	8.46	33.20	47.00	13.80	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Test Site	: DDT 3m Chamber 2#	D:\2025 RE2# Report Data\Q25101023-8E\1208 RE.EM6	
Test Date	: 2025-12-08	**Tested By**	: Jiahao Yang
Power Supply	: AC 120V/60Hz	**Test Mode**	: OPT in mode
Condition	: Temp:23.3°C,Humi:53%	**Antenna/Distance**	: 2025 2# ANT 9163/3m/VERTICAL
Sample No.	: S25101023-015		

Data: 12

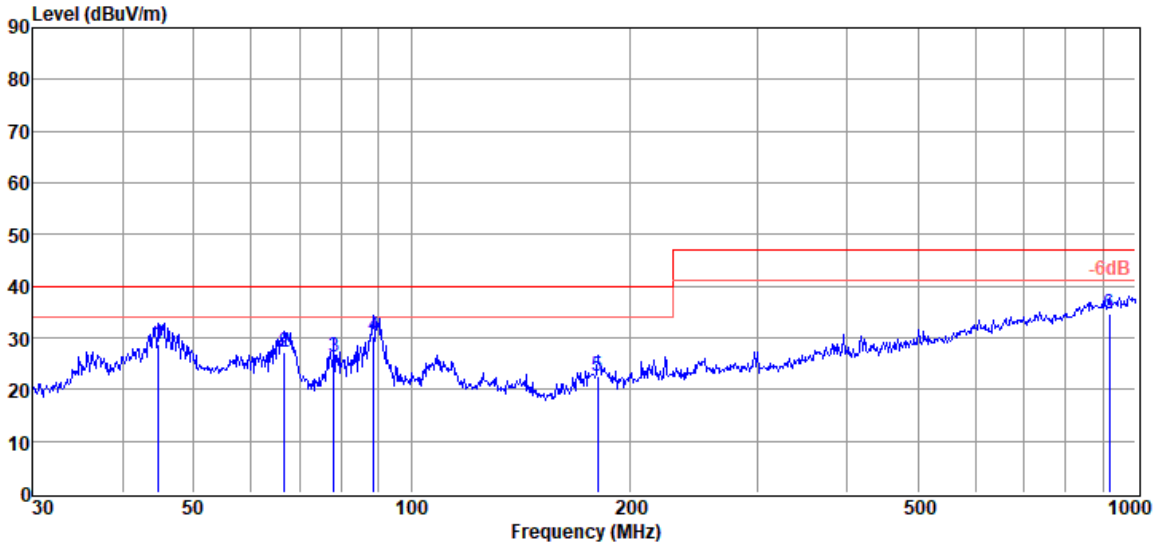

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Margin (dB)	Detector	Polarization
1	44.74	11.24	13.60	3.92	28.76	40.00	11.24	QP	VERTICAL
2	66.73	12.52	10.57	4.19	27.28	40.00	12.72	QP	VERTICAL
3	78.14	13.81	8.04	4.29	26.14	40.00	13.86	QP	VERTICAL
4	88.65	16.79	9.13	4.38	30.30	40.00	9.70	QP	VERTICAL
5	180.65	7.99	9.46	5.10	22.55	40.00	17.45	QP	VERTICAL
6	919.29	3.74	22.26	8.67	34.67	47.00	12.33	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Test Site : DDT 3m Chamber 2# D:\2025 RE2# Report Data\Q25101023-8E\1208 RE.EM6


Test Date : 2025-12-08 **Tested By** : Jiahao Yang

Power Supply : AC 120V/60Hz **Test Mode** : Bluetooth mode

Condition : Temp:23.3°C,Humi:53% **Antenna/Distance** : 2025 2# ANT 9163/3m/VERTICAL

Sample No. : S25101023-015

Data: 13

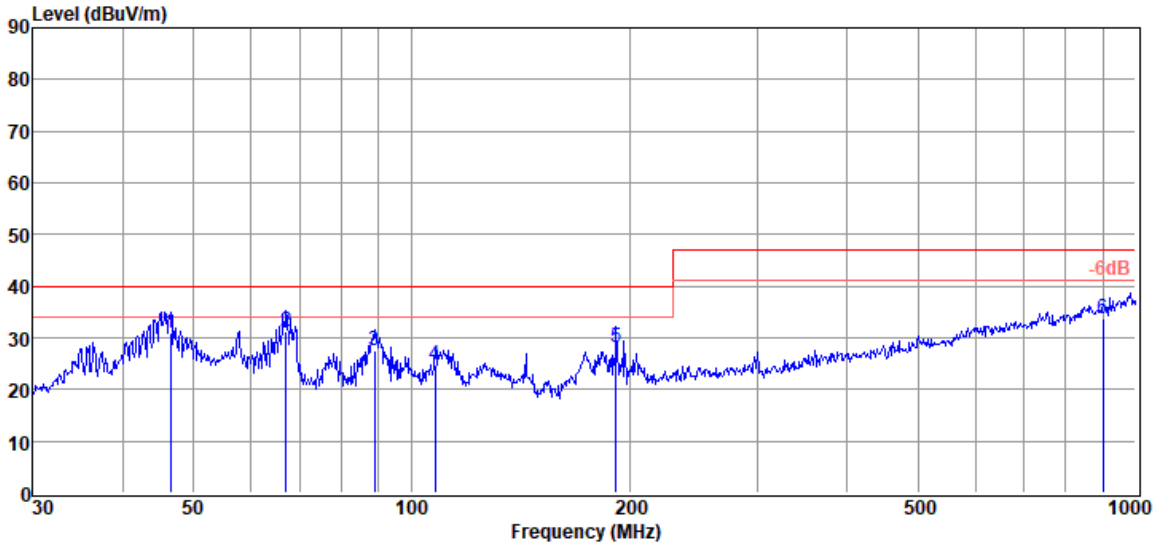


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Margin (dB)	Detector	Polarization
1	46.50	13.86	13.20	3.95	31.01	40.00	8.99	QP	VERTICAL
2	67.20	16.73	10.34	4.19	31.26	40.00	8.74	QP	VERTICAL
3	88.96	14.00	9.10	4.38	27.48	40.00	12.52	QP	VERTICAL
4	107.89	9.06	11.24	4.54	24.84	40.00	15.16	QP	VERTICAL
5	191.75	13.26	9.78	5.16	28.20	40.00	11.80	QP	VERTICAL
6	900.15	2.87	22.20	8.58	33.65	47.00	13.35	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Test Site	: DDT 3m Chamber 2#	D:\2025 RE2# Report Data\Q25101023-8E\1208 RE.EM6	
Test Date	: 2025-12-08	**Tested By**	: Jiahao Yang
Power Supply	: AC 120V/60Hz	**Test Mode**	: Bluetooth mode
Condition	: Temp:23.3°C,Humi:53%	**Antenna/Distance**	: 2025 2# ANT 9163/3m/HORIZONTAL
Sample No.	: S25101023-015		

Data: 14

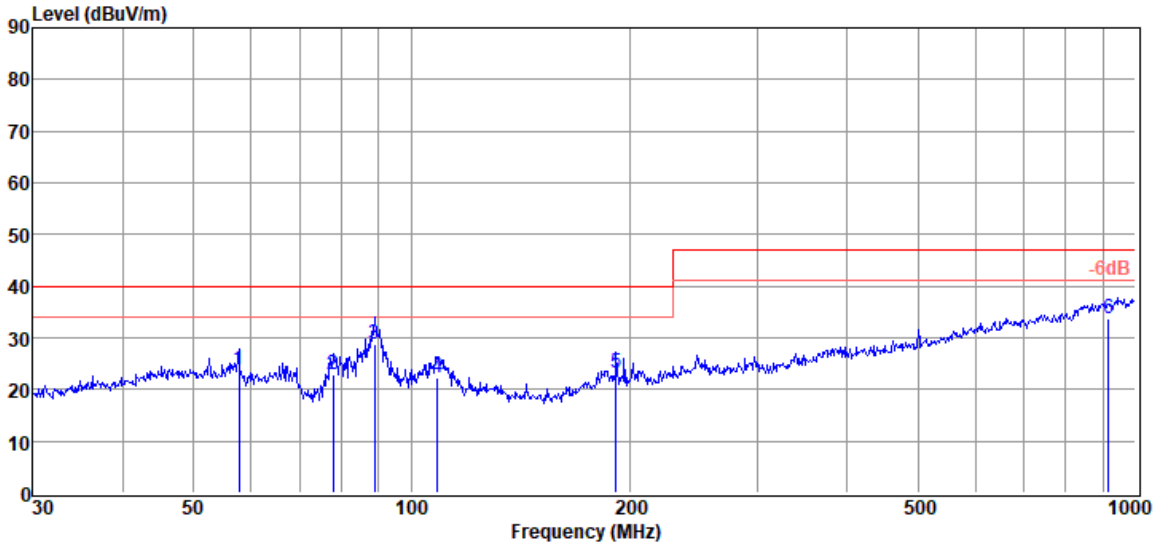


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Margin (dB)	Detector	Polarization
1	57.80	7.12	12.64	4.09	23.85	40.00	16.15	QP	HORIZONTAL
2	77.87	10.66	8.03	4.29	22.98	40.00	17.02	QP	HORIZONTAL
3	88.96	15.40	9.10	4.38	28.88	40.00	11.12	QP	HORIZONTAL
4	108.65	6.19	11.66	4.55	22.40	40.00	17.60	QP	HORIZONTAL
5	191.75	8.32	9.78	5.16	23.26	40.00	16.74	QP	HORIZONTAL
6	916.07	2.92	22.06	8.66	33.64	47.00	13.36	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Test Site	: DDT 3m Chamber 2#	D:\2025 RE2# Report Data\Q25101023-8E\1208 RE.EM6	
Test Date	: 2025-12-08	**Tested By**	: Jiahao Yang
Power Supply	: AC 240V/50Hz	**Test Mode**	: Bluetooth mode
Condition	: Temp:23.3°C,Humi:53%	**Antenna/Distance**	: 2025 2# ANT 9163/3m/HORIZONTAL
Sample No.	: S25101023-015		

Data: 15

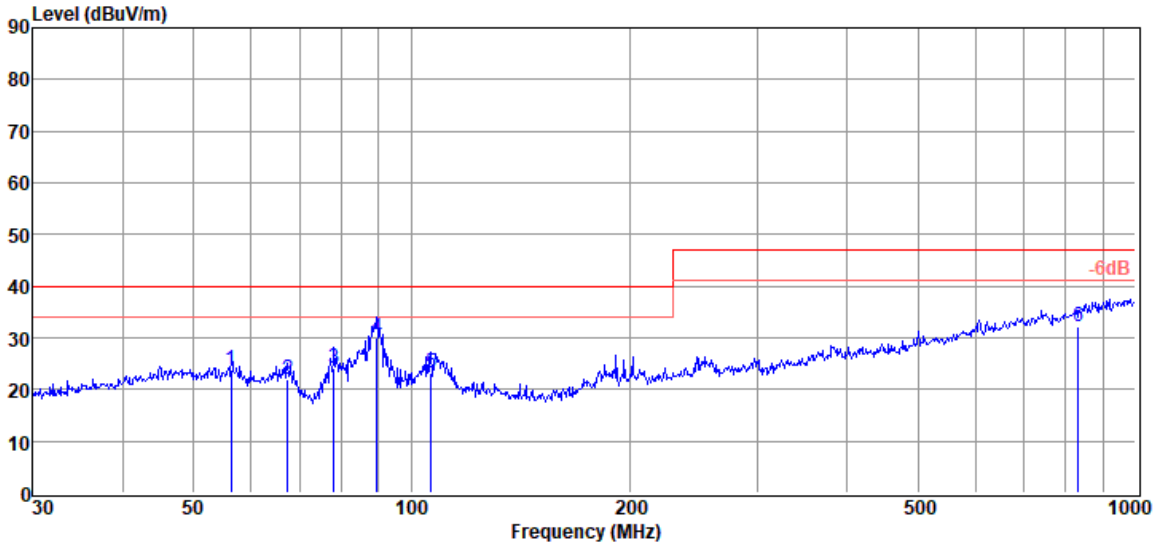


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Margin (dB)	Detector	Polarization
1	56.40	6.86	12.76	4.08	23.70	40.00	16.30	QP	HORIZONTAL
2	67.44	7.35	10.39	4.20	21.94	40.00	18.06	QP	HORIZONTAL
3	78.14	11.90	8.04	4.29	24.23	40.00	15.77	QP	HORIZONTAL
4	89.59	16.17	9.45	4.39	30.01	40.00	9.99	QP	HORIZONTAL
5	106.39	8.05	10.68	4.53	23.26	40.00	16.74	QP	HORIZONTAL
6	833.32	2.78	21.00	8.38	32.16	47.00	14.84	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Test Site	: DDT 3m Chamber 2#	D:\2025 RE2# Report Data\Q25101023-8E\1208 RE.EM6	
Test Date	: 2025-12-08	**Tested By**	: Jiahao Yang
Power Supply	: AC 240V/50Hz	**Test Mode**	: Bluetooth mode
Condition	: Temp:23.3°C,Humi:53%	**Antenna/Distance**	: 2025 2# ANT 9163/3m/VERTICAL
Sample No.	: S25101023-015		

Data: 16

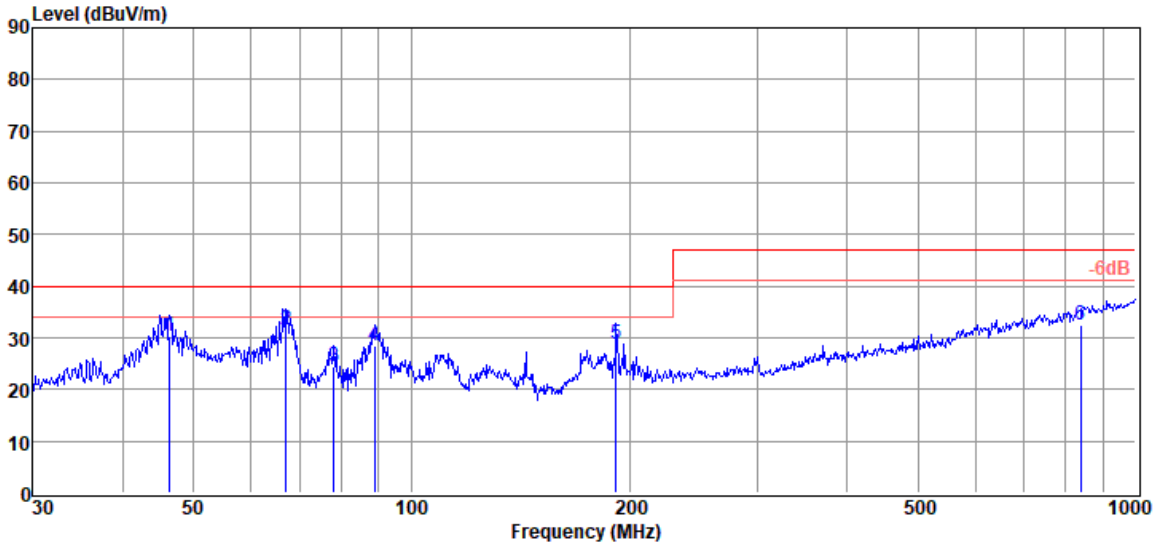


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Margin (dB)	Detector	Polarization
1	46.34	13.24	13.17	3.95	30.36	40.00	9.64	QP	VERTICAL
2	67.20	17.08	10.34	4.19	31.61	40.00	8.39	QP	VERTICAL
3	78.14	12.22	8.04	4.29	24.55	40.00	15.45	QP	VERTICAL
4	88.96	15.07	9.10	4.38	28.55	40.00	11.45	QP	VERTICAL
5	191.75	13.85	9.78	5.16	28.79	40.00	11.21	QP	VERTICAL
6	839.18	3.04	21.03	8.40	32.47	47.00	14.53	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Test Site	: DDT 3m Chamber 2#	D:\2025 RE2# Report Data\Q25101023-8E\1208 RE.EM6	
Test Date	: 2025-12-08	**Tested By**	: Jiahao Yang
Power Supply	: AC 240V/50Hz	**Test Mode**	: COAX in mode
Condition	: Temp:23.3°C,Humi:53%	**Antenna/Distance**	: 2025 2# ANT 9163/3m/VERTICAL
Sample No.	: S25101023-015		

Data: 17

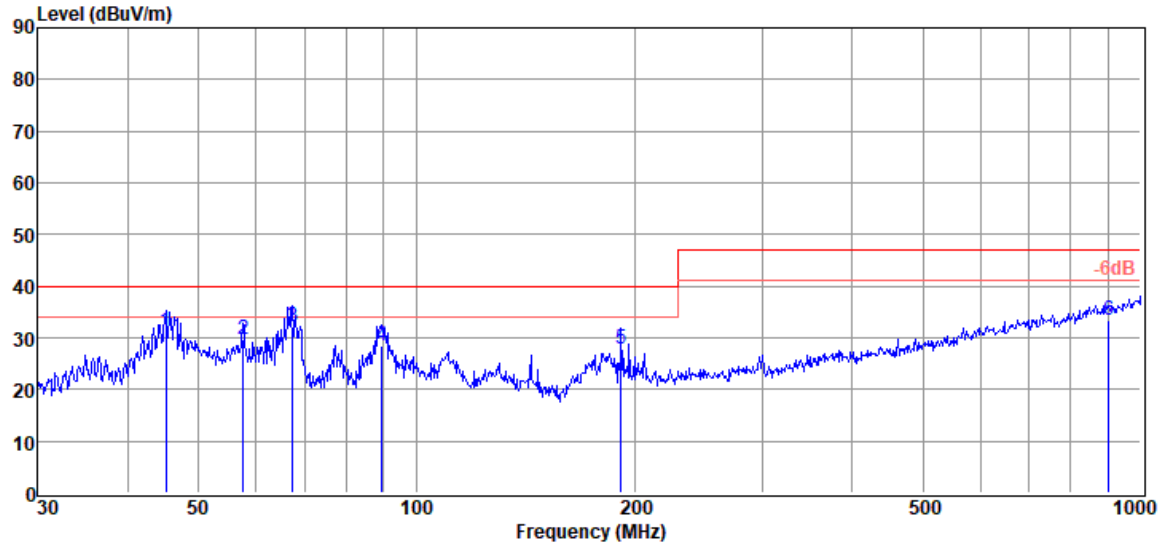


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Margin (dB)	Detector	Polarization
1	45.06	13.78	13.57	3.93	31.28	40.00	8.72	QP	VERTICAL
2	57.59	13.16	12.58	4.09	29.83	40.00	10.17	QP	VERTICAL
3	67.44	17.46	10.39	4.20	32.05	40.00	7.95	QP	VERTICAL
4	89.59	14.63	9.45	4.39	28.47	40.00	11.53	QP	VERTICAL
5	191.75	13.05	9.78	5.16	27.99	40.00	12.01	QP	VERTICAL
6	903.31	2.47	22.20	8.60	33.27	47.00	13.73	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site	: DDT 3m Chamber 2#	D:\2025 RE2# Report Data\Q25101023-8E\1208 RE.EM6	
Test Date	: 2025-12-08	**Tested By**	: Jiahao Yang
Power Supply	: AC 240V/50Hz	**Test Mode**	: COAX in mode
Condition	: Temp:23.3°C,Humi:53%	**Antenna/Distance**	: 2025 2# ANT 9163/3m/HORIZONTAL
Sample No.	: S25101023-015		

Data: 18

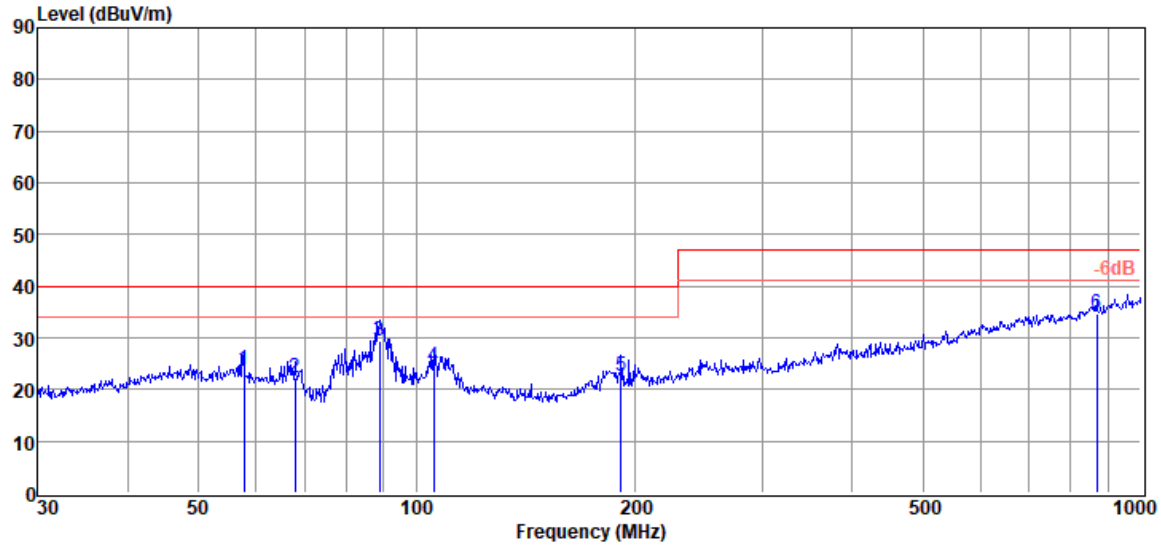


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Margin (dB)	Detector	Polarization
1	57.80	7.22	12.64	4.09	23.95	40.00	16.05	QP	HORIZONTAL
2	67.91	7.57	10.48	4.20	22.25	40.00	17.75	QP	HORIZONTAL
3	88.96	15.98	9.10	4.38	29.46	40.00	10.54	QP	HORIZONTAL
4	105.64	8.61	11.31	4.52	24.44	40.00	15.56	QP	HORIZONTAL
5	191.75	7.58	9.78	5.16	22.52	40.00	17.48	QP	HORIZONTAL
6	869.13	4.23	21.83	8.49	34.55	47.00	12.45	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Test Site	: DDT 3m Chamber 2#	D:\2025 RE2# Report Data\Q25101023-8E\1208 RE.EM6	
Test Date	: 2025-12-08	**Tested By**	: Jiahao Yang
Power Supply	: AC 120V/60Hz	**Test Mode**	: COAX in mode
Condition	: Temp:23.3°C,Humi:53%	**Antenna/Distance**	: 2025 2# ANT 9163/3m/HORIZONTAL
Sample No.	: S25101023-015		

Data: 19

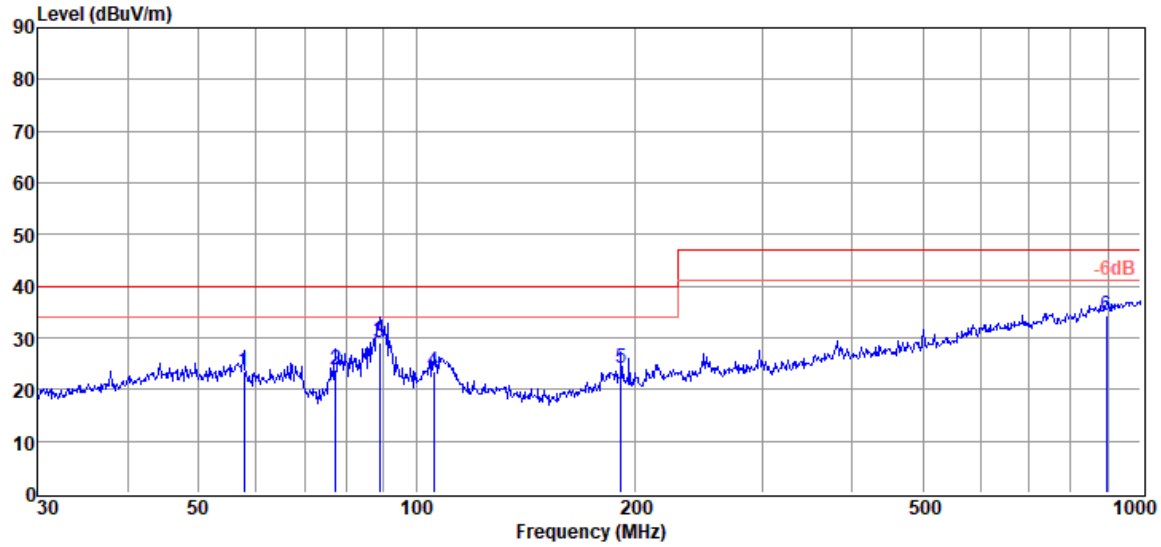


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Margin (dB)	Detector	Polarization
1	57.80	6.87	12.64	4.09	23.60	40.00	16.40	QP	HORIZONTAL
2	77.32	11.42	8.14	4.29	23.85	40.00	16.15	QP	HORIZONTAL
3	88.96	15.53	9.10	4.38	29.01	40.00	10.99	QP	HORIZONTAL
4	105.64	7.67	11.31	4.52	23.50	40.00	16.50	QP	HORIZONTAL
5	191.75	9.32	9.78	5.16	24.26	40.00	15.74	QP	HORIZONTAL
6	897.00	3.66	21.96	8.57	34.19	47.00	12.81	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Test Site	: DDT 3m Chamber 2#	D:\2025 RE2# Report Data\Q25101023-8E\1208 RE.EM6	
Test Date	: 2025-12-08	**Tested By**	: Jiahao Yang
Power Supply	: AC 120V/60Hz	**Test Mode**	: COAX in mode
Condition	: Temp:23.3°C,Humi:53%	**Antenna/Distance**	: 2025 2# ANT 9163/3m/VERTICAL
Sample No.	: S25101023-015		

Data: 20

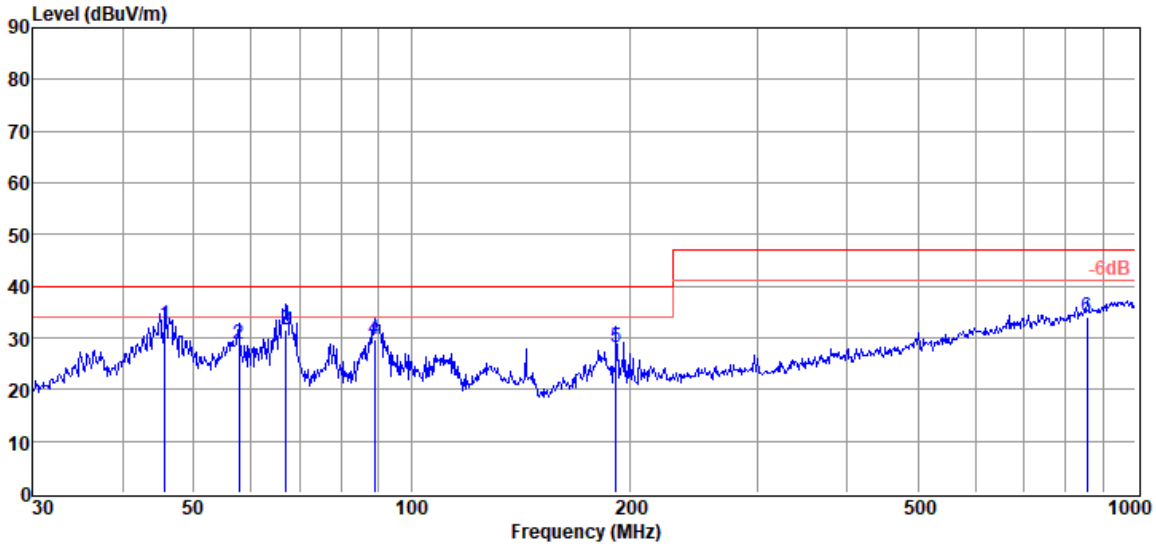


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Margin (dB)	Detector	Polarization
1	45.70	15.36	13.25	3.94	32.55	40.00	7.45	QP	VERTICAL
2	57.80	12.15	12.64	4.09	28.88	40.00	11.12	QP	VERTICAL
3	67.20	16.94	10.34	4.19	31.47	40.00	8.53	QP	VERTICAL
4	88.96	16.30	9.10	4.38	29.78	40.00	10.22	QP	VERTICAL
5	191.75	13.26	9.78	5.16	28.20	40.00	11.80	QP	VERTICAL
6	857.03	3.99	21.70	8.46	34.15	47.00	12.85	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

4 Appendix B.4 : Radiated Emissions, above 1GHz

Test Site	:	DDT 3m Chamber 1#	D:\2025 RE 1# Report data\Q25101023-8E\1210 RE-H-EN.EM6		
Test Date	:	2025-12-10	**Tested By**	:	Li guilin
Power Supply	:	AC 240V/50Hz	**Test Mode**	:	AUX in mode
Condition	:	Temp:23.1°C,Humi:61.7%	**Antenna/Distance**	:	2025 9120D 1#/3m/ VERTICAL
Memo	:	S25101023-015			

Data: 1

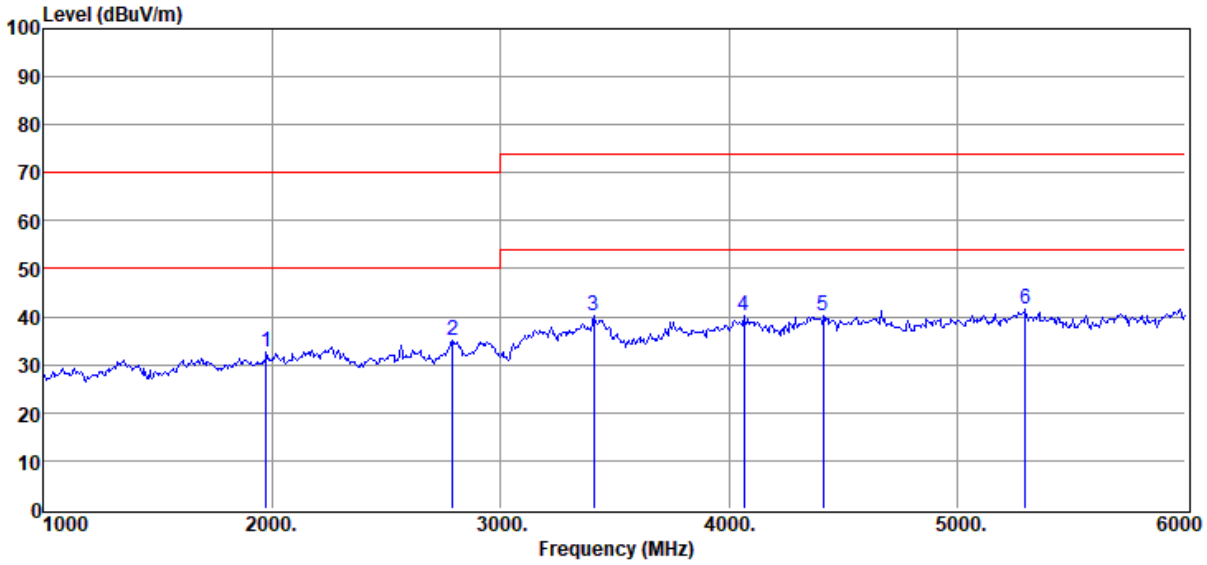


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Margin (dB)	Detector	Polarization
1	1975.00	55.00	25.85	53.09	4.77	32.53	70.00	37.47	Peak	VERTICAL
2	2790.00	54.42	28.28	53.02	5.46	35.14	70.00	34.86	Peak	VERTICAL
3	3410.00	59.08	28.48	53.25	5.99	40.30	74.00	33.70	Peak	VERTICAL
4	4065.00	57.23	30.06	53.57	6.55	40.27	74.00	33.73	Peak	VERTICAL
5	4415.00	56.25	30.83	53.43	6.72	40.37	74.00	33.63	Peak	VERTICAL
6	5300.00	55.22	32.60	53.59	7.21	41.44	74.00	32.56	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

Test Site	:	DDT 3m Chamber 1#	D:\2025 RE 1# Report data\Q25101023-8E\1210 RE-H-EN.EM6		
Test Date	:	2025-12-10	**Tested By**	:	Li guilin
Power Supply	:	AC 240V/50Hz	**Test Mode**	:	AUX in mode
Condition	:	Temp:23.1°C,Humi:61.7%	**Antenna/Distance**	:	2025 9120D 1#/3m/ HORIZONTAL
Memo	:	S25101023-015			

Data: 2

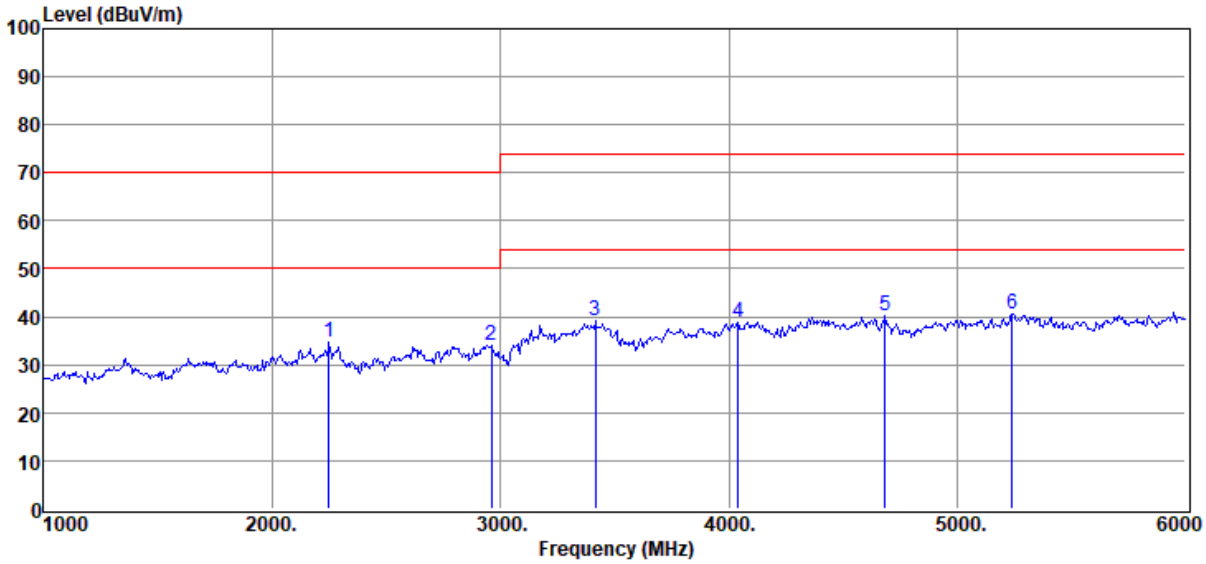


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Margin (dB)	Detector	Polarization
1	2250.00	55.88	26.90	53.07	5.01	34.72	70.00	35.28	Peak	HORIZONTAL
2	2960.00	52.95	28.46	53.00	5.60	34.01	70.00	35.99	Peak	HORIZONTAL
3	3415.00	57.90	28.52	53.25	6.00	39.17	74.00	34.83	Peak	HORIZONTAL
4	4040.00	55.88	29.98	53.58	6.54	38.82	74.00	35.18	Peak	HORIZONTAL
5	4685.00	55.47	31.08	53.33	6.85	40.07	74.00	33.93	Peak	HORIZONTAL
6	5240.00	54.09	32.92	53.51	7.17	40.67	74.00	33.33	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

Test Site	:	DDT 3m Chamber 1#	D:\2025 RE 1# Report data\Q25101023-8E\1210 RE-H-EN.EM6		
Test Date	:	2025-12-10	**Tested By**	:	Li guilin
Power Supply	:	AC 120V/60Hz	**Test Mode**	:	AUX in mode
Condition	:	Temp:23.1°C,Humi:61.7%	**Antenna/Distance**	:	2025 9120D 1#/3m/ HORIZONTAL
Memo	:	S25101023-015			

Data: 3

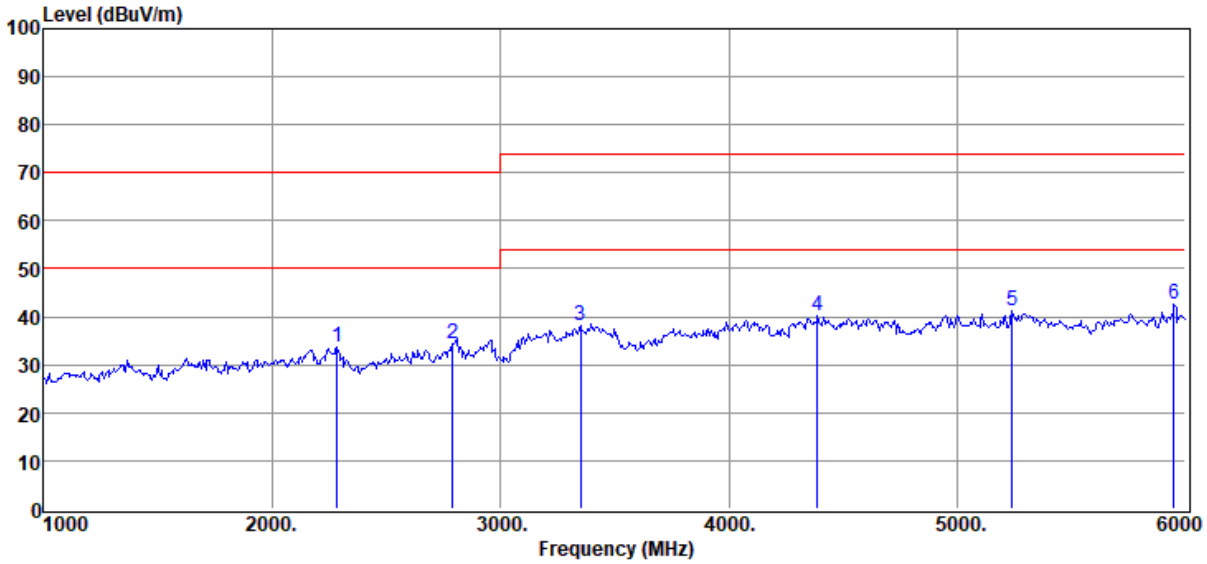


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Margin (dB)	Detector	Polarization
1	2285.00	54.64	26.90	53.07	5.04	33.51	70.00	36.49	Peak	HORIZONTAL
2	2790.00	53.71	28.28	53.02	5.46	34.43	70.00	35.57	Peak	HORIZONTAL
3	3350.00	56.32	29.10	53.21	5.94	38.15	74.00	35.85	Peak	HORIZONTAL
4	4390.00	56.07	30.72	53.44	6.71	40.06	74.00	33.94	Peak	HORIZONTAL
5	5240.00	54.63	32.92	53.51	7.17	41.21	74.00	32.79	Peak	HORIZONTAL
6	5950.00	56.65	32.80	54.44	7.66	42.67	74.00	31.33	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

Test Site	:	DDT 3m Chamber 1#	D:\2025 RE 1# Report data\Q25101023-8E\1210 RE-H-EN.EM6		
Test Date	:	2025-12-10	**Tested By**	:	Li guilin
Power Supply	:	AC 120V/60Hz	**Test Mode**	:	AUX in mode
Condition	:	Temp:23.1°C,Humi:61.7%	**Antenna/Distance**	:	2025 9120D 1#/3m/ VERTICAL
Memo	:	S25101023-015			

Data: 4

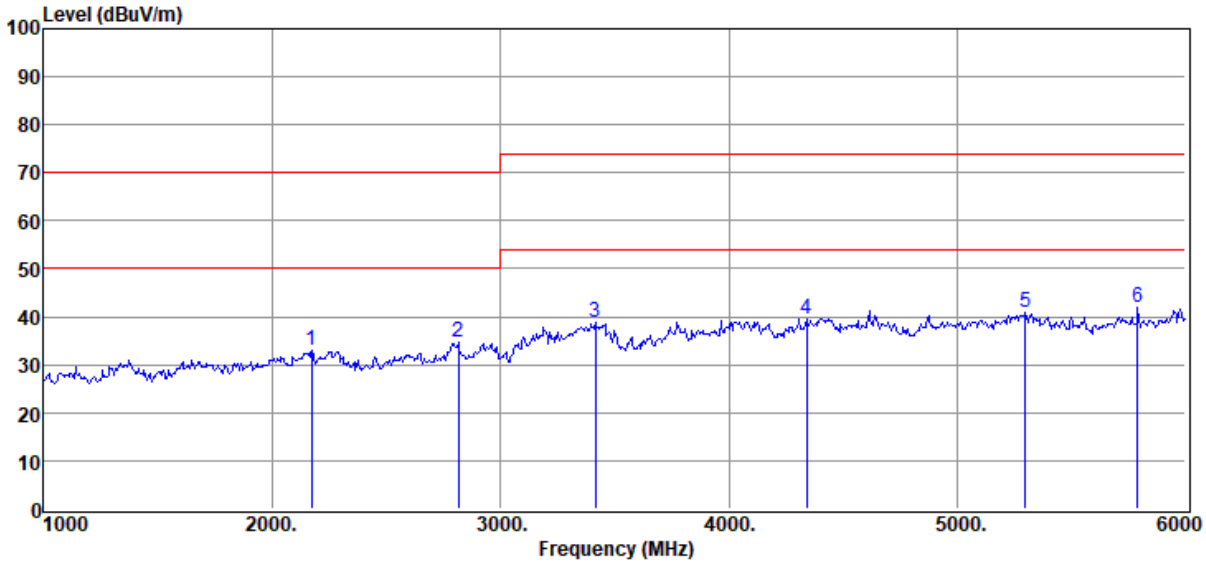


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Margin (dB)	Detector	Polarization
1	2175.00	54.08	27.20	53.08	4.95	33.15	70.00	36.85	Peak	VERTICAL
2	2815.00	54.17	28.24	53.02	5.48	34.87	70.00	35.13	Peak	VERTICAL
3	3415.00	57.73	28.52	53.25	6.00	39.00	74.00	35.00	Peak	VERTICAL
4	4340.00	56.09	30.36	53.46	6.68	39.67	74.00	34.33	Peak	VERTICAL
5	5300.00	54.67	32.60	53.59	7.21	40.89	74.00	33.11	Peak	VERTICAL
6	5790.00	55.55	32.98	54.23	7.55	41.85	74.00	32.15	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

Test Site	:	DDT 3m Chamber 1#	D:\2025 RE 1# Report data\Q25101023-8E\1210 RE-H-EN.EM6		
Test Date	:	2025-12-10	**Tested By**	:	Li guilin
Power Supply	:	AC 120V/60Hz	**Test Mode**	:	PC in mode
Condition	:	Temp:23.1°C,Humi:61.7%	**Antenna/Distance**	:	2025 9120D 1#/3m/ VERTICAL
Memo	:	S25101023-015			

Data: 5

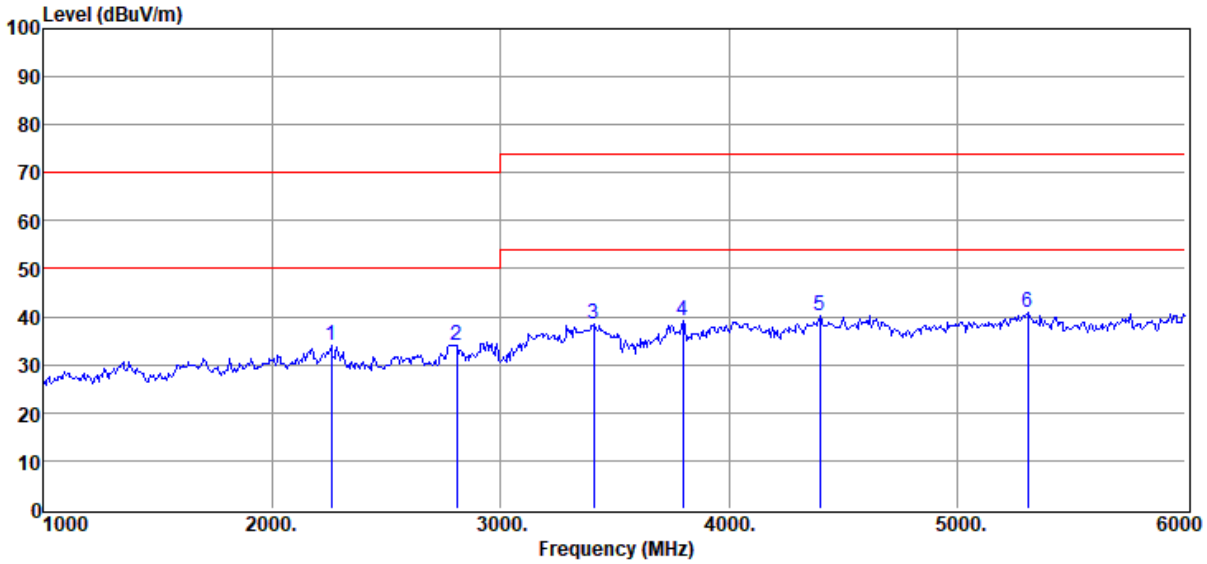


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Margin (dB)	Detector	Polarization
1	2260.00	55.01	26.90	53.07	5.02	33.86	70.00	36.14	Peak	VERTICAL
2	2810.00	53.46	28.26	53.02	5.47	34.17	70.00	35.83	Peak	VERTICAL
3	3410.00	57.10	28.48	53.25	5.99	38.32	74.00	35.68	Peak	VERTICAL
4	3800.00	56.12	30.10	53.48	6.34	39.08	74.00	34.92	Peak	VERTICAL
5	4400.00	56.26	30.80	53.44	6.71	40.33	74.00	33.67	Peak	VERTICAL
6	5310.00	54.85	32.52	53.60	7.22	40.99	74.00	33.01	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

Test Site	:	DDT 3m Chamber 1#	D:\2025 RE 1# Report data\Q25101023-8E\1210 RE-H-EN.EM6		
Test Date	:	2025-12-10	**Tested By**	:	Li guilin
Power Supply	:	AC 120V/60Hz	**Test Mode**	:	PC in mode
Condition	:	Temp:23.1°C,Humi:61.7%	**Antenna/Distance**	:	2025 9120D 1#/3m/ HORIZONTAL
Memo	:	S25101023-015			

Data: 6

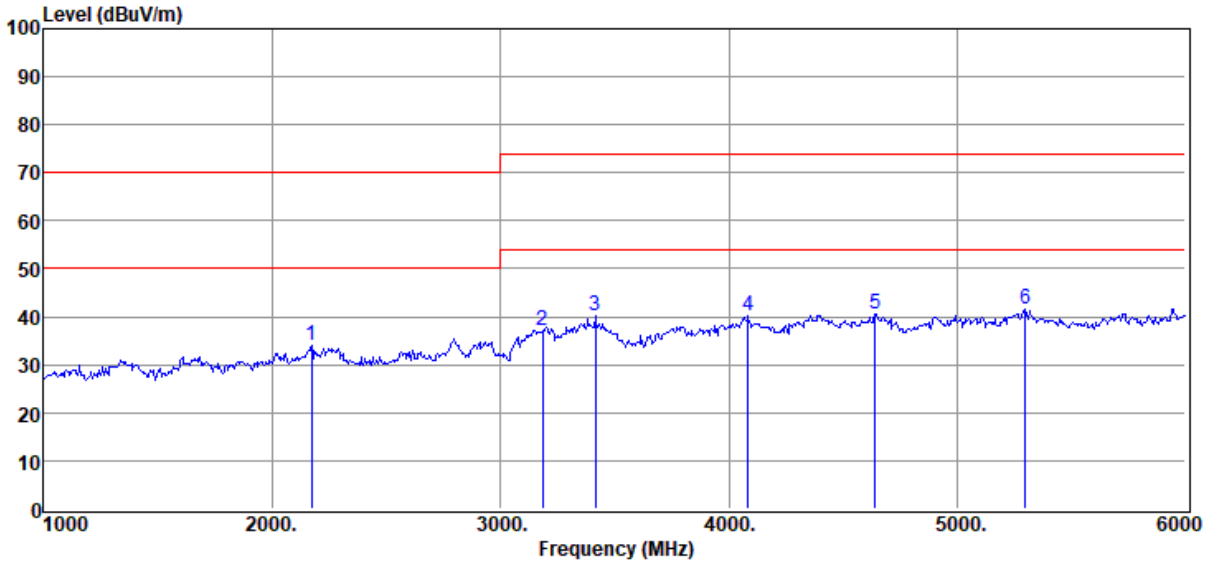


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Margin (dB)	Detector	Polarization
1	2175.00	54.94	27.20	53.08	4.95	34.01	70.00	35.99	Peak	HORIZONTAL
2	3185.00	55.84	28.64	53.11	5.79	37.16	74.00	36.84	Peak	HORIZONTAL
3	3415.00	58.91	28.52	53.25	6.00	40.18	74.00	33.82	Peak	HORIZONTAL
4	4085.00	57.14	30.14	53.57	6.56	40.27	74.00	33.73	Peak	HORIZONTAL
5	4640.00	55.82	31.40	53.34	6.83	40.71	74.00	33.29	Peak	HORIZONTAL
6	5300.00	55.34	32.60	53.59	7.21	41.56	74.00	32.44	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

Test Site	:	DDT 3m Chamber 1#	D:\2025 RE 1# Report data\Q25101023-8E\1210 RE-H-EN.EM6		
Test Date	:	2025-12-10	**Tested By**	:	Li guilin
Power Supply	:	AC 240V/50Hz	**Test Mode**	:	PC in mode
Condition	:	Temp:23.1°C,Humi:61.7%	**Antenna/Distance**	:	2025 9120D 1#/3m/ HORIZONTAL
Memo	:	S25101023-015			

Data: 7

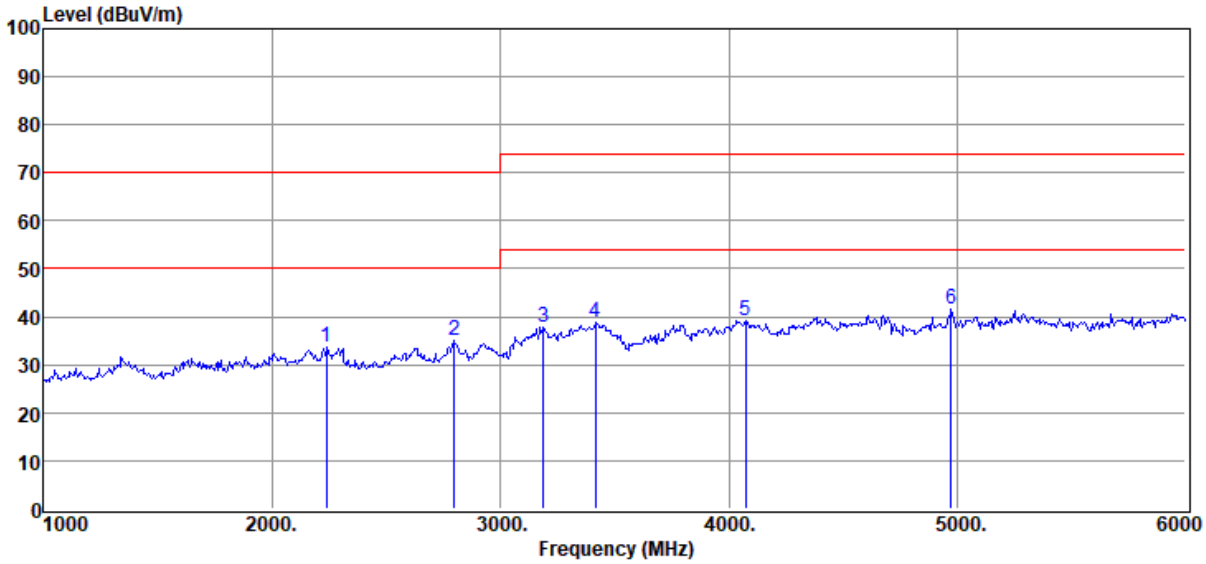


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Margin (dB)	Detector	Polarization
1	2240.00	54.71	26.96	53.08	5.01	33.60	70.00	36.40	Peak	HORIZONTAL
2	2800.00	54.14	28.30	53.02	5.47	34.89	70.00	35.11	Peak	HORIZONTAL
3	3190.00	56.59	28.66	53.11	5.80	37.94	74.00	36.06	Peak	HORIZONTAL
4	3415.00	57.59	28.52	53.25	6.00	38.86	74.00	35.14	Peak	HORIZONTAL
5	4075.00	56.02	30.10	53.57	6.56	39.11	74.00	34.89	Peak	HORIZONTAL
6	4975.00	56.27	31.45	53.21	6.99	41.50	74.00	32.50	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

Test Site	:	DDT 3m Chamber 1#	D:\2025 RE 1# Report data\Q25101023-8E\1210 RE-H-EN.EM6		
Test Date	:	2025-12-10	**Tested By**	:	Li guilin
Power Supply	:	AC 240V/50Hz	**Test Mode**	:	PC in mode
Condition	:	Temp:23.1°C,Humi:61.7%	**Antenna/Distance**	:	2025 9120D 1#/3m/ VERTICAL
Memo	:	S25101023-015			

Data: 8

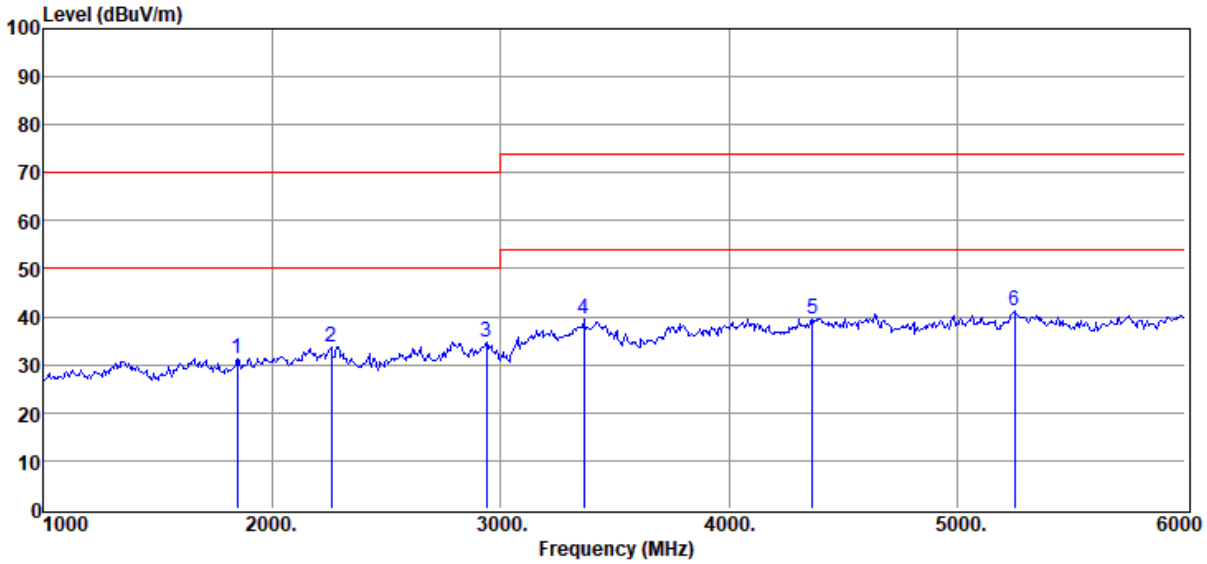


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Margin (dB)	Detector	Polarization
1	1850.00	54.57	25.30	53.04	4.58	31.41	70.00	38.59	Peak	VERTICAL
2	2260.00	54.94	26.90	53.07	5.02	33.79	70.00	36.21	Peak	VERTICAL
3	2940.00	53.69	28.44	53.01	5.58	34.70	70.00	35.30	Peak	VERTICAL
4	3365.00	57.76	28.89	53.22	5.95	39.38	74.00	34.62	Peak	VERTICAL
5	4365.00	55.88	30.52	53.45	6.70	39.65	74.00	34.35	Peak	VERTICAL
6	5250.00	54.52	33.00	53.53	7.18	41.17	74.00	32.83	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

Test Site	:	DDT 3m Chamber 1#	D:\2025 RE 1# Report data\Q25101023-8E\1210 RE-H-EN.EM6		
Test Date	:	2025-12-10	**Tested By**	:	Li guilin
Power Supply	:	AC 240V/50Hz	**Test Mode**	:	OPT in mode
Condition	:	Temp:23.1°C,Humi:61.7%	**Antenna/Distance**	:	2025 9120D 1#/3m/ VERTICAL
Memo	:	S25101023-015			

Data: 9

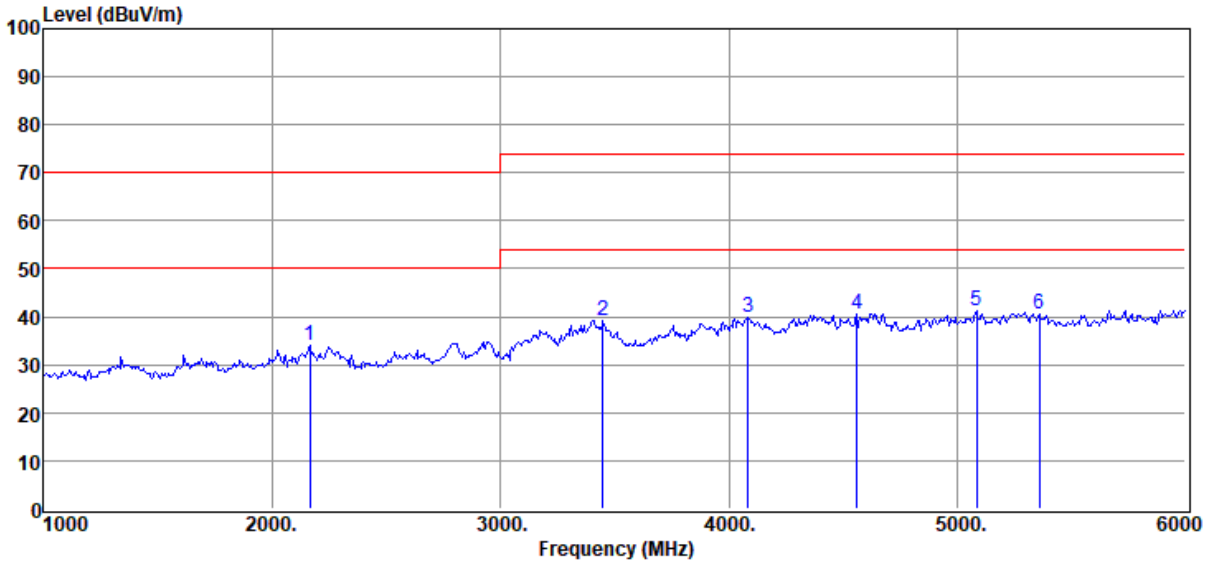


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Margin (dB)	Detector	Polarization
1	2165.00	55.08	27.20	53.08	4.95	34.15	70.00	35.85	Peak	VERTICAL
2	3450.00	57.76	28.80	53.27	6.03	39.32	74.00	34.68	Peak	VERTICAL
3	4085.00	56.85	30.14	53.57	6.56	39.98	74.00	34.02	Peak	VERTICAL
4	4560.00	55.92	31.08	53.38	6.79	40.41	74.00	33.59	Peak	VERTICAL
5	5085.00	55.22	32.14	53.31	7.06	41.11	74.00	32.89	Peak	VERTICAL
6	5360.00	54.52	32.36	53.67	7.25	40.46	74.00	33.54	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

Test Site	:	DDT 3m Chamber 1#	D:\2025 RE 1# Report data\Q25101023-8E\1210 RE-H-EN.EM6		
Test Date	:	2025-12-10	**Tested By**	:	Li guilin
Power Supply	:	AC 240V/50Hz	**Test Mode**	:	OPT in mode
Condition	:	Temp:23.1°C,Humi:61.7%	**Antenna/Distance**	:	2025 9120D 1#/3m/ HORIZONTAL
Memo	:	S25101023-015			

Data: 10

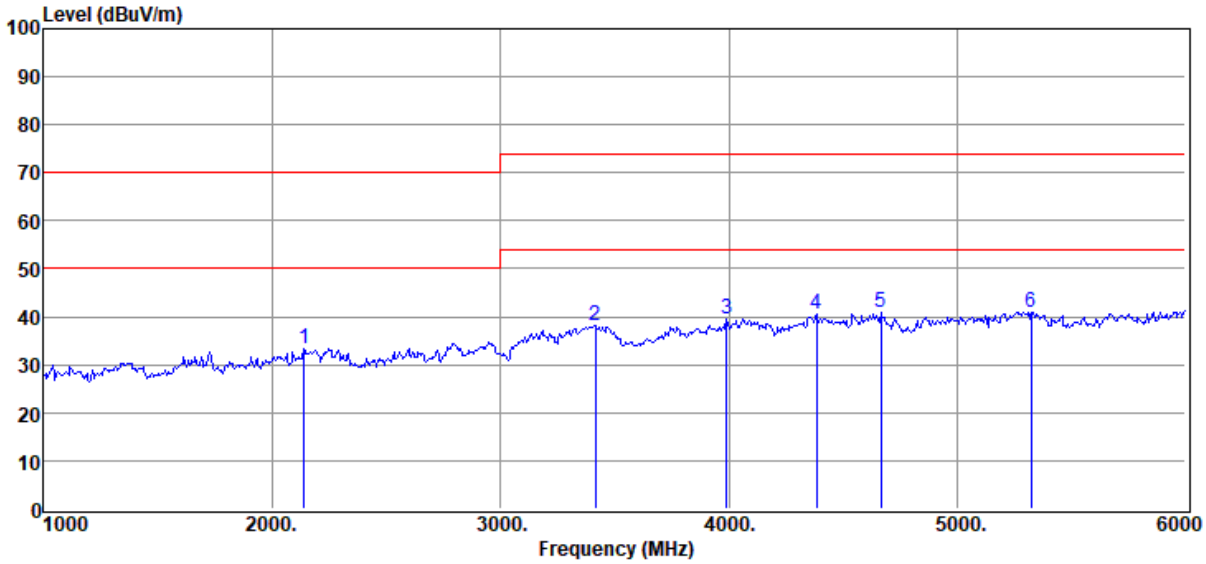


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Margin (dB)	Detector	Polarization
1	2140.00	54.40	27.20	53.09	4.92	33.43	70.00	36.57	Peak	HORIZONTAL
2	3415.00	56.85	28.52	53.25	6.00	38.12	74.00	35.88	Peak	HORIZONTAL
3	3990.00	56.58	29.86	53.59	6.51	39.36	74.00	34.64	Peak	HORIZONTAL
4	4385.00	56.79	30.68	53.45	6.70	40.72	74.00	33.28	Peak	HORIZONTAL
5	4665.00	56.16	31.32	53.33	6.84	40.99	74.00	33.01	Peak	HORIZONTAL
6	5325.00	55.01	32.40	53.62	7.23	41.02	74.00	32.98	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

Test Site	:	DDT 3m Chamber 1#	D:\2025 RE 1# Report data\Q25101023-8E\1210 RE-H-EN.EM6		
Test Date	:	2025-12-10	**Tested By**	:	Li guilin
Power Supply	:	AC 120V/60Hz	**Test Mode**	:	OPT in mode
Condition	:	Temp:23.1°C,Humi:61.7%	**Antenna/Distance**	:	2025 9120D 1#/3m/ HORIZONTAL
Memo	:	S25101023-015			

Data: 11

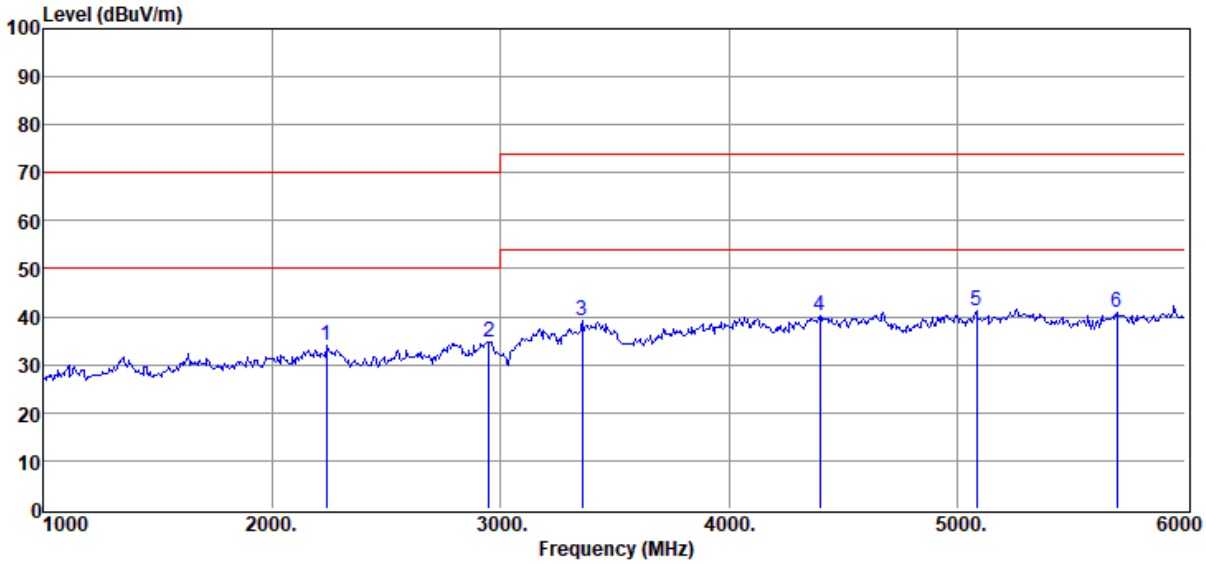


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Margin (dB)	Detector	Polarization
1	2240.00	55.09	26.96	53.08	5.01	33.98	70.00	36.02	Peak	HORIZONTAL
2	2950.00	53.80	28.50	53.01	5.59	34.88	70.00	35.12	Peak	HORIZONTAL
3	3360.00	57.33	28.96	53.22	5.95	39.02	74.00	34.98	Peak	HORIZONTAL
4	4400.00	56.29	30.80	53.44	6.71	40.36	74.00	33.64	Peak	HORIZONTAL
5	5085.00	55.33	32.14	53.31	7.06	41.22	74.00	32.78	Peak	HORIZONTAL
6	5700.00	55.03	32.50	54.11	7.49	40.91	74.00	33.09	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

Test Site	:	DDT 3m Chamber 1#	D:\2025 RE 1# Report data\Q25101023-8E\1210 RE-H-EN.EM6		
Test Date	:	2025-12-10	**Tested By**	:	Li guilin
Power Supply	:	AC 120V/60Hz	**Test Mode**	:	OPT in mode
Condition	:	Temp:23.1°C,Humi:61.7%	**Antenna/Distance**	:	2025 9120D 1#/3m/ VERTICAL
Memo	:	S25101023-015			

Data: 12

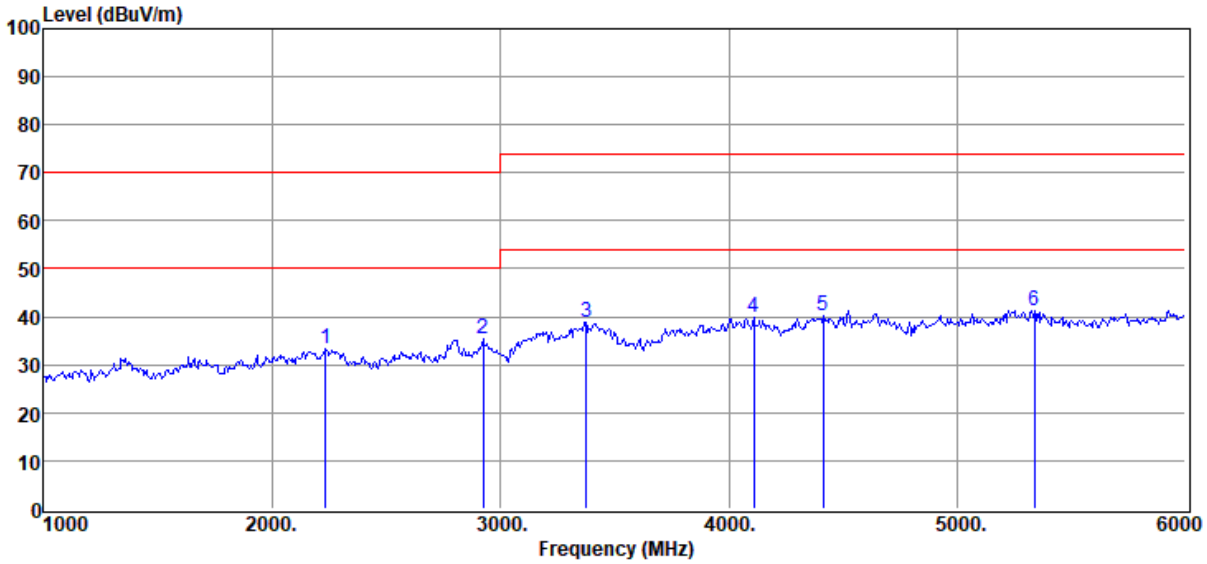


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Margin (dB)	Detector	Polarization
1	2235.00	54.46	26.99	53.08	5.00	33.37	70.00	36.63	Peak	VERTICAL
2	2925.00	54.42	28.35	53.01	5.57	35.33	70.00	34.67	Peak	VERTICAL
3	3375.00	57.32	28.75	53.22	5.96	38.81	74.00	35.19	Peak	VERTICAL
4	4110.00	56.56	30.22	53.56	6.57	39.79	74.00	34.21	Peak	VERTICAL
5	4415.00	56.01	30.83	53.43	6.72	40.13	74.00	33.87	Peak	VERTICAL
6	5340.00	55.33	32.28	53.64	7.24	41.21	74.00	32.79	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

Test Site	:	DDT 3m Chamber 1#	D:\2025 RE 1# Report data\Q25101023-8E\1210 RE-H-EN.EM6		
Test Date	:	2025-12-10	**Tested By**	:	Li guilin
Power Supply	:	AC 120V/60Hz	**Test Mode**	:	COAX in mode
Condition	:	Temp:23.1°C,Humi:61.7%	**Antenna/Distance**	:	2025 9120D 1#/3m/ VERTICAL
Memo	:	S25101023-015			

Data: 13

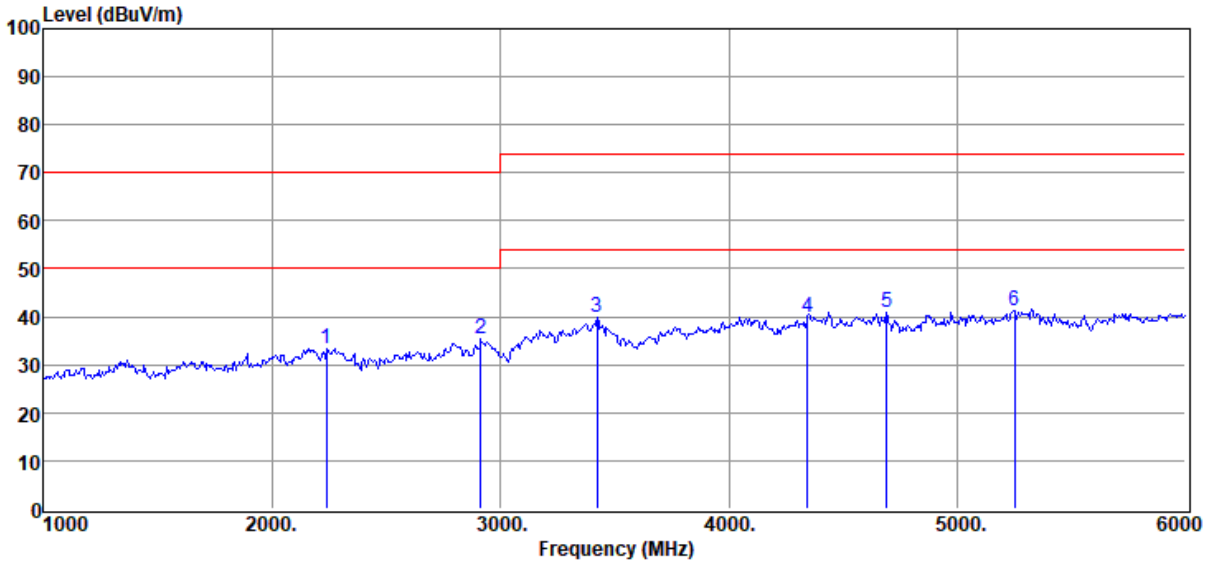


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Margin (dB)	Detector	Polarization
1	2240.00	54.43	26.96	53.08	5.01	33.32	70.00	36.68	Peak	VERTICAL
2	2915.00	54.39	28.29	53.01	5.56	35.23	70.00	34.77	Peak	VERTICAL
3	3425.00	58.57	28.60	53.26	6.01	39.92	74.00	34.08	Peak	VERTICAL
4	4345.00	56.24	30.38	53.46	6.69	39.85	74.00	34.15	Peak	VERTICAL
5	4690.00	56.35	31.02	53.32	6.85	40.90	74.00	33.10	Peak	VERTICAL
6	5250.00	54.51	33.00	53.53	7.18	41.16	74.00	32.84	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

Test Site	:	DDT 3m Chamber 1#	D:\2025 RE 1# Report data\Q25101023-8E\1210 RE-H-EN.EM6		
Test Date	:	2025-12-10	**Tested By**	:	Li guilin
Power Supply	:	AC 120V/60Hz	**Test Mode**	:	COAX in mode
Condition	:	Temp:23.1°C,Humi:61.7%	**Antenna/Distance**	:	2025 9120D 1#/3m/ HORIZONTAL
Memo	:	S25101023-015			

Data: 14

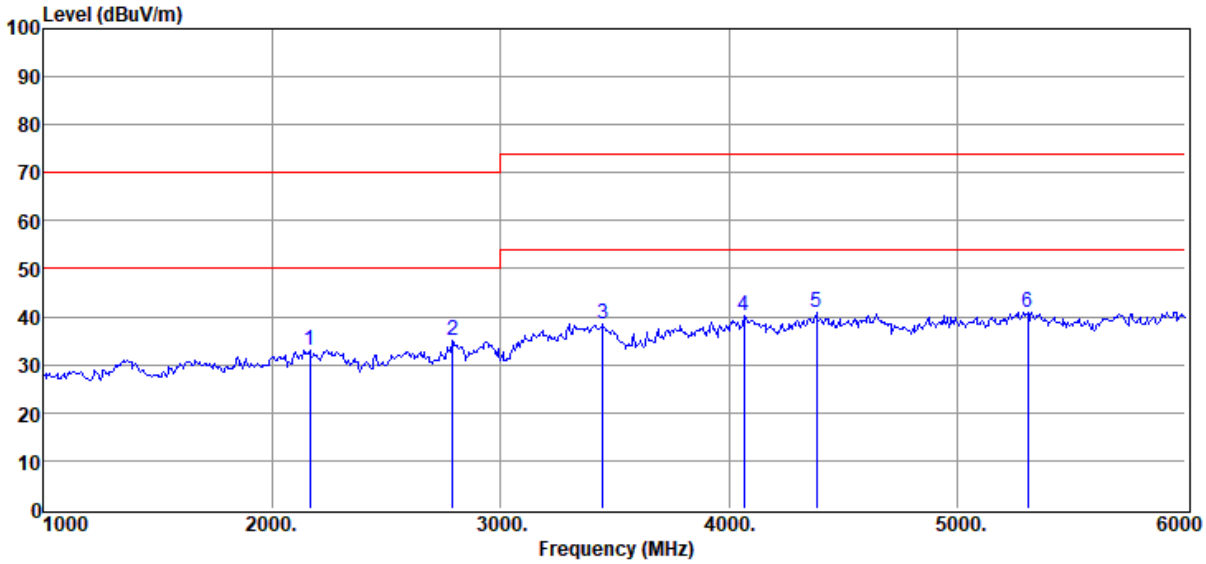


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Margin (dB)	Detector	Polarization
1	2165.00	53.96	27.20	53.08	4.95	33.03	70.00	36.97	Peak	HORIZONTAL
2	2790.00	54.48	28.28	53.02	5.46	35.20	70.00	34.80	Peak	HORIZONTAL
3	3450.00	56.91	28.80	53.27	6.03	38.47	74.00	35.53	Peak	HORIZONTAL
4	4065.00	57.04	30.06	53.57	6.55	40.08	74.00	33.92	Peak	HORIZONTAL
5	4385.00	56.98	30.68	53.45	6.70	40.91	74.00	33.09	Peak	HORIZONTAL
6	5310.00	54.87	32.52	53.60	7.22	41.01	74.00	32.99	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

Test Site	:	DDT 3m Chamber 1#	D:\2025 RE 1# Report data\Q25101023-8E\1210 RE-H-EN.EM6		
Test Date	:	2025-12-10	**Tested By**	:	Li guilin
Power Supply	:	AC 240V/50Hz	**Test Mode**	:	COAX in mode
Condition	:	Temp:23.1°C,Humi:61.7%	**Antenna/Distance**	:	2025 9120D 1#/3m/ HORIZONTAL
Memo	:	S25101023-015			

Data: 15

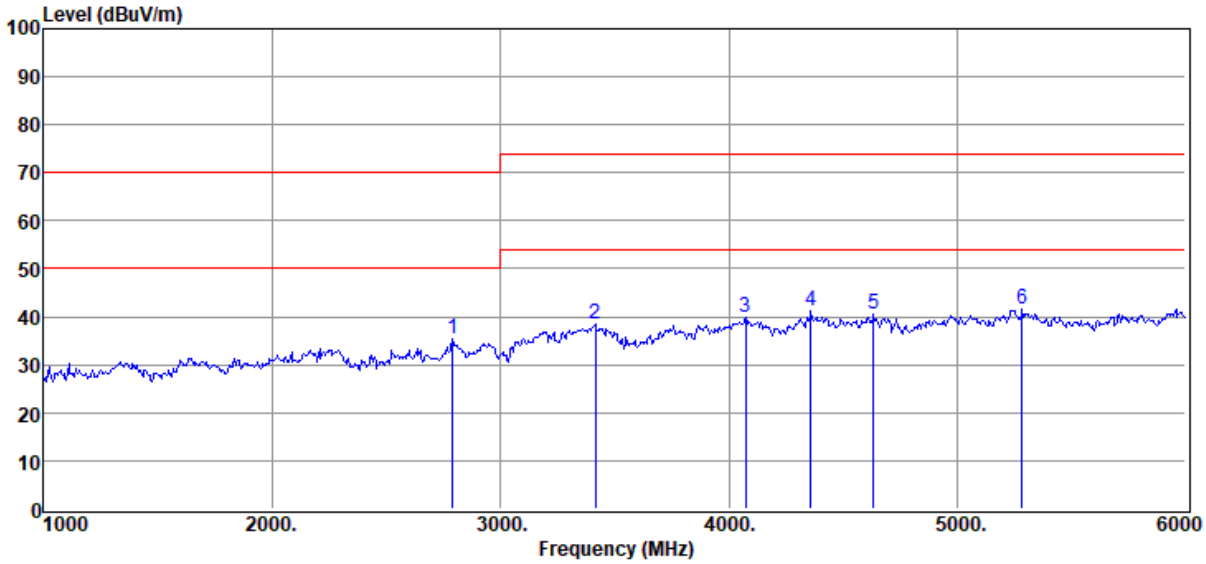


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Margin (dB)	Detector	Polarization
1	2790.00	54.80	28.28	53.02	5.46	35.52	70.00	34.48	Peak	HORIZONTAL
2	3415.00	57.08	28.52	53.25	6.00	38.35	74.00	35.65	Peak	HORIZONTAL
3	4075.00	56.70	30.10	53.57	6.56	39.79	74.00	34.21	Peak	HORIZONTAL
4	4360.00	57.56	30.48	53.46	6.69	41.27	74.00	32.73	Peak	HORIZONTAL
5	4635.00	55.65	31.35	53.35	6.82	40.47	74.00	33.53	Peak	HORIZONTAL
6	5285.00	55.24	32.72	53.57	7.20	41.59	74.00	32.41	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

Test Site	:	DDT 3m Chamber 1#	D:\2025 RE 1# Report data\Q25101023-8E\1210 RE-H-EN.EM6		
Test Date	:	2025-12-10	**Tested By**	:	Li guilin
Power Supply	:	AC 240V/50Hz	**Test Mode**	:	COAX in mode
Condition	:	Temp:23.1°C,Humi:61.7%	**Antenna/Distance**	:	2025 9120D 1#/3m/ VERTICAL
Memo	:	S25101023-015			

Data: 16

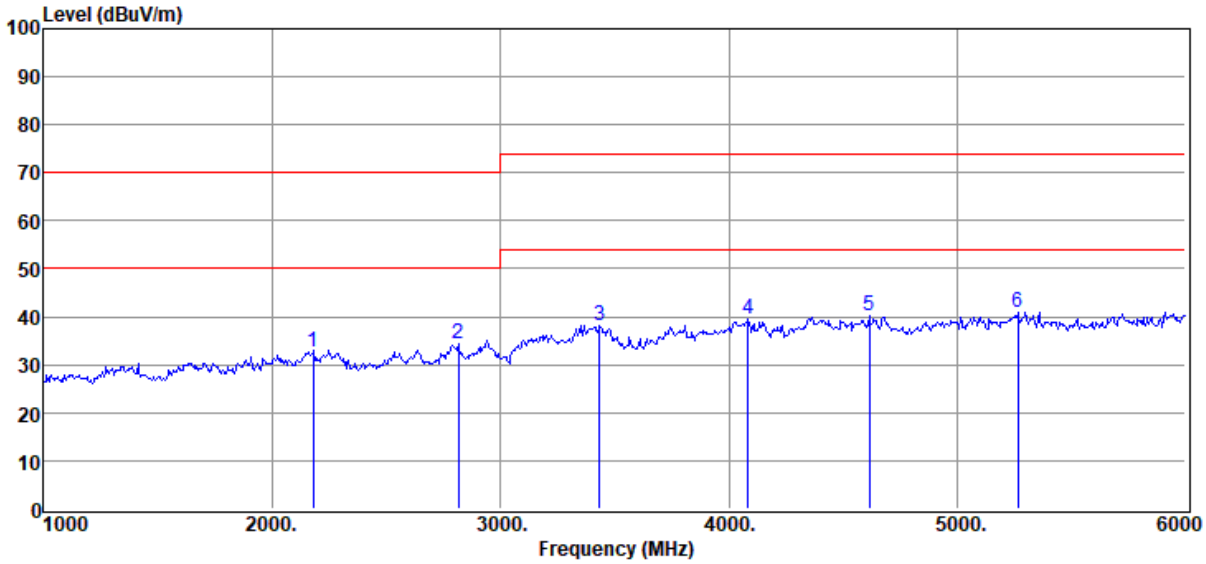


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Margin (dB)	Detector	Polarization
1	2180.00	53.64	27.20	53.08	4.96	32.72	70.00	37.28	Peak	VERTICAL
2	2815.00	53.82	28.24	53.02	5.48	34.52	70.00	35.48	Peak	VERTICAL
3	3435.00	56.76	28.68	53.26	6.02	38.20	74.00	35.80	Peak	VERTICAL
4	4085.00	56.53	30.14	53.57	6.56	39.66	74.00	34.34	Peak	VERTICAL
5	4615.00	55.48	31.15	53.35	6.82	40.10	74.00	33.90	Peak	VERTICAL
6	5265.00	54.49	32.88	53.54	7.19	41.02	74.00	32.98	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

Test Site	:	DDT 3m Chamber 1#	D:\2025 RE 1# Report data\Q25101023-8E\1210 RE-H-EN.EM6		
Test Date	:	2025-12-10	**Tested By**	:	Li guilin
Power Supply	:	AC 240V/50Hz	**Test Mode**	:	Bluetooth mode
Condition	:	Temp:23.1°C,Humi:61.7%	**Antenna/Distance**	:	2025 9120D 1#/3m/ VERTICAL
Memo	:	S25101023-015			

Data: 17

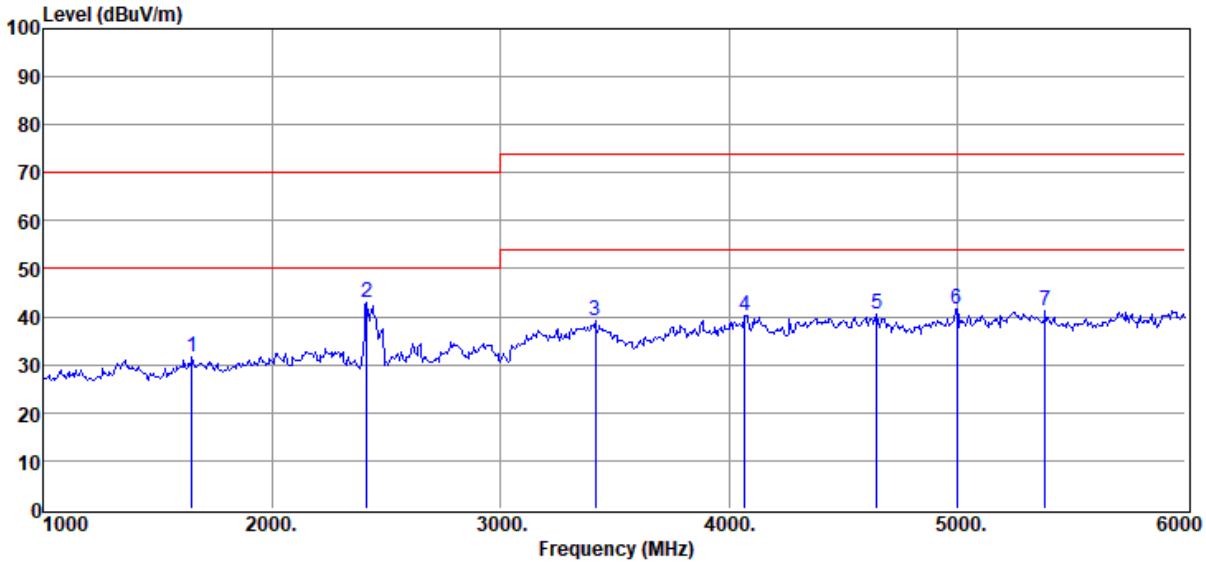


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Margin (dB)	Detector	Polarization
1	1650.00	55.23	25.00	52.96	4.27	31.54	70.00	38.46	Peak	VERTICAL
2	2415.00	63.05	27.66	53.06	5.15	42.80	Carrier Frequency			VERTICAL
3	3415.00	57.74	28.52	53.25	6.00	39.01	74.00	34.99	Peak	VERTICAL
4	4070.00	57.04	30.08	53.57	6.55	40.10	74.00	33.90	Peak	VERTICAL
5	4650.00	55.59	31.50	53.34	6.83	40.58	74.00	33.42	Peak	VERTICAL
6	5000.00	56.05	31.80	53.20	7.00	41.65	74.00	32.35	Peak	VERTICAL
7	5385.00	54.97	32.76	53.70	7.27	41.30	74.00	32.70	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

Test Site	:	DDT 3m Chamber 1#	D:\2025 RE 1# Report data\Q25101023-8E\1210 RE-H-EN.EM6		
Test Date	:	2025-12-10	**Tested By**	:	Li guilin
Power Supply	:	AC 240V/50Hz	**Test Mode**	:	Bluetooth mode
Condition	:	Temp:23.1°C,Humi:61.7%	**Antenna/Distance**	:	2025 9120D 1#/3m/ HORIZONTAL
Memo	:	S25101023-015			

Data: 18

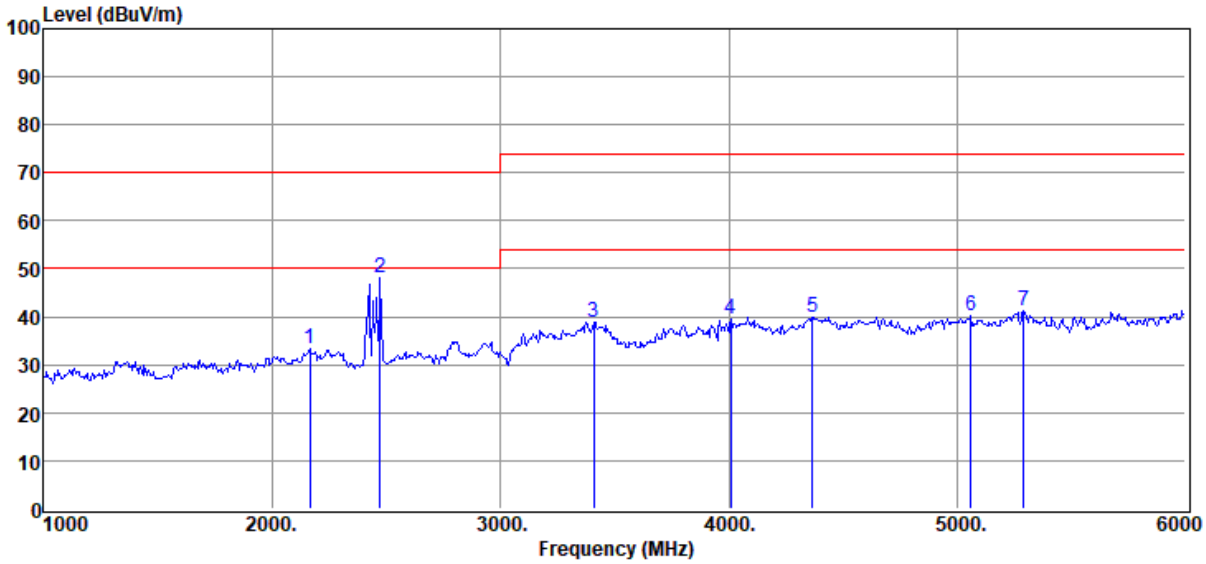


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Margin (dB)	Detector	Polarization
1	2165.00	54.23	27.20	53.08	4.95	33.30	70.00	36.70	Peak	HORIZONTAL
2	2475.00	68.38	27.50	53.05	5.20	48.03	Carrier Frequency			HORIZONTAL
3	3410.00	57.63	28.48	53.25	5.99	38.85	74.00	35.15	Peak	HORIZONTAL
4	4010.00	56.54	29.92	53.60	6.52	39.38	74.00	34.62	Peak	HORIZONTAL
5	4365.00	56.20	30.52	53.45	6.70	39.97	74.00	34.03	Peak	HORIZONTAL
6	5060.00	54.35	32.04	53.28	7.04	40.15	74.00	33.85	Peak	HORIZONTAL
7	5290.00	54.82	32.68	53.58	7.20	41.12	74.00	32.88	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

Test Site	:	DDT 3m Chamber 1#	D:\2025 RE 1# Report data\Q25101023-8E\1210 RE-H-EN.EM6		
Test Date	:	2025-12-10	**Tested By**	:	Li guilin
Power Supply	:	AC 120V/60Hz	**Test Mode**	:	Bluetooth mode
Condition	:	Temp:23.1°C,Humi:61.7%	**Antenna/Distance**	:	2025 9120D 1#/3m/ HORIZONTAL
Memo	:	S25101023-015			

Data: 19

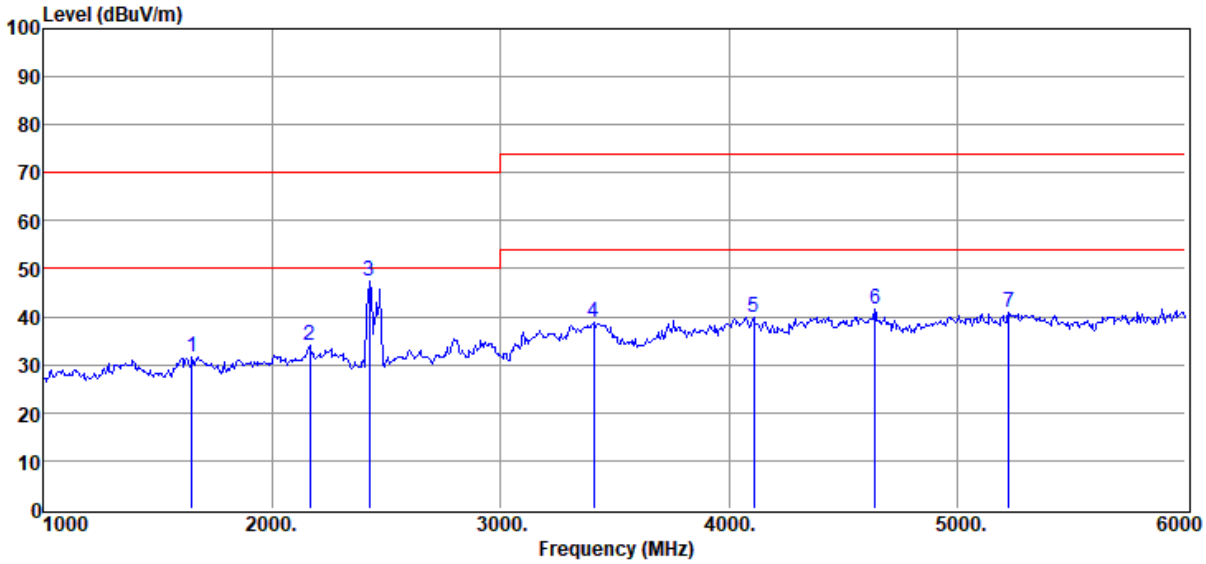


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Margin (dB)	Detector	Polarization
1	1650.00	55.20	25.00	52.96	4.27	31.51	70.00	38.49	Peak	HORIZONTAL
2	2165.00	55.03	27.20	53.08	4.95	34.10	70.00	35.90	Peak	HORIZONTAL
3	2425.00	67.73	27.70	53.06	5.16	47.53	Carrier Frequency			HORIZONTAL
4	3410.00	57.69	28.48	53.25	5.99	38.91	74.00	35.09	Peak	HORIZONTAL
5	4110.00	56.52	30.22	53.56	6.57	39.75	74.00	34.25	Peak	HORIZONTAL
6	4640.00	56.70	31.40	53.34	6.83	41.59	74.00	32.41	Peak	HORIZONTAL
7	5225.00	54.55	32.80	53.49	7.16	41.02	74.00	32.98	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.

Test Site	:	DDT 3m Chamber 1#	D:\2025 RE 1# Report data\Q25101023-8E\1210 RE-H-EN.EM6		
Test Date	:	2025-12-10	**Tested By**	:	Li guilin
Power Supply	:	AC 120V/60Hz	**Test Mode**	:	Bluetooth mode
Condition	:	Temp:23.1°C,Humi:61.7%	**Antenna/Distance**	:	2025 9120D 1#/3m/ VERTICAL
Memo	:	S25101023-015			

Data: 20

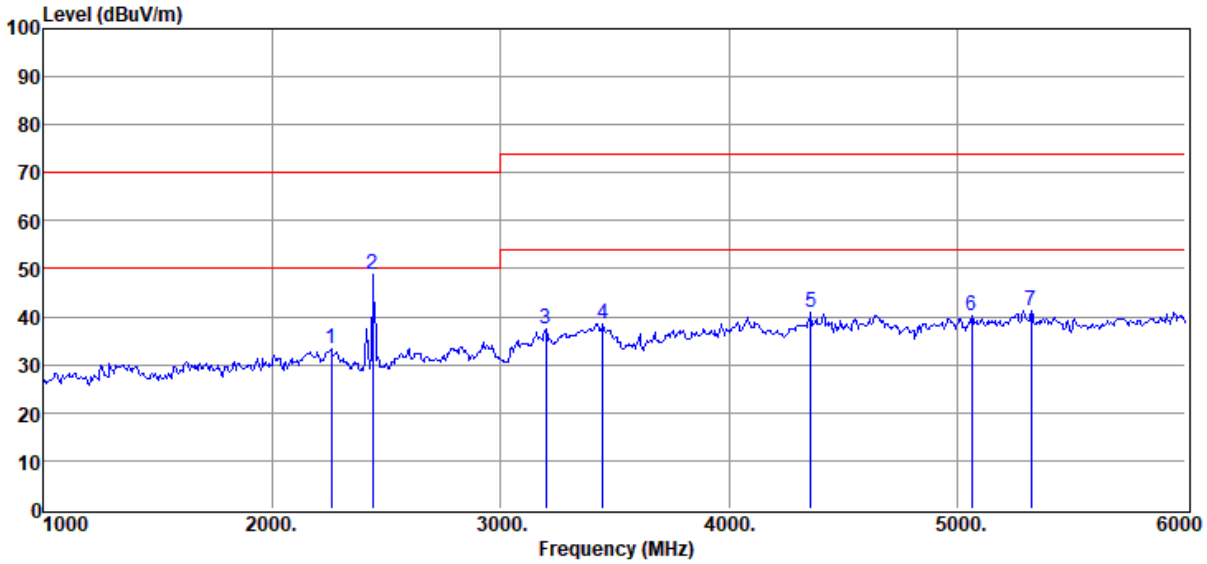

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Margin (dB)	Detector	Polarization
1	2260.00	54.61	26.90	53.07	5.02	33.46	70.00	36.54	Peak	VERTICAL
2	2440.00	68.76	27.76	53.06	5.17	48.63	Carrier Frequency			VERTICAL
3	3200.00	55.91	28.70	53.12	5.81	37.30	74.00	36.70	Peak	VERTICAL
4	3450.00	57.00	28.80	53.27	6.03	38.56	74.00	35.44	Peak	VERTICAL
5	4360.00	57.10	30.48	53.46	6.69	40.81	74.00	33.19	Peak	VERTICAL
6	5065.00	54.45	32.06	53.28	7.05	40.28	74.00	33.72	Peak	VERTICAL
7	5325.00	55.14	32.40	53.62	7.23	41.15	74.00	32.85	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. According to standard requirements, the radio carrier and harmonic frequencies of the samples are not included in the test results.