TEST REPORT

Product	:	XGS-PON ONT
Trade mark	:	ZTE
Model/Type reference	:	ZXHN F8708
Serial Number	:	N/A
Report Number	:	EED32S821444
Date of Issue	:	October 27, 2026
Test Standards	:	ETSI EN 301 893 V2.2.1 (2024-11)
Test result	:	PASS

Prepared for:

ZTE Corporation

ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, NanshanDistrict, Shenzhen, Guangdong , P. R. China

Prepared by:

Centre Testing International Group Co., Ltd.
Hongwei Industrial Park, Zone 70, Bao'an District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Compiled by: Frazer Li — Frazer Li

Reviewed by: Tom Chen — Tom Chen

Approved by: Aaron Ma — Aaron Ma

Date: October 27, 2026

Check No.:8234020926

1 Test Summary

ETSI EN 301 893 V2.2.1 (2024-11)				
Test Item	**Test Requirement**	**Test Method**	**Limit**	**Result**
Nominal centre frequency	Clause 4.2.1.4	Clause 5.4.3.2.1	Clause 4.2.1.3	PASS
Nominal channel bandwidth and occupied bandwidth	Clause 4.2.2.3	Clause 5.4.3.2.1	Clause 4.2.2.2	PASS
RF output power	Clause 4.2.3.3	Clause 5.4.4.2.1	Clause 4.2.3.2	PASS
Transmit Power Control (TPC)	Clause 4.2.3.3	Clause 5.4.4.2.1	Clause 4.2.3.2	PASS
Power Spectral Density (PSD)	Clause 4.2.3.3	Clause 5.4.4.2.1	Clause 4.2.3.2	PASS
Transmitter unwanted emissions outside the transmitter's operating bands	Clause 4.2.4.1.3	Clause 5.4.5.2.1	Clause 4.2.4.1.2	PASS
Transmitter unwanted emissions within the transmitter's operating bands	Clause 4.2.4.2.3	Clause 5.4.6.2.2	Clause 4.2.4.2.2	PASS
Receiver spurious emissions	Clause 4.2.5.3	Clause 5.4.7.2.2	Clause 4.2.5.2	PASS
Dynamic Frequency Selection (DFS)	Clause 4.2.6.2	Clause 5.4.8.2.1	Clause 4.2.6.2.1	PASS
Adaptivity (channel access mechanism)	Clause 4.2.7.4	Clause 5.4.9.3.2	Clause 4.2.7.3	PASS
Receiver blocking	Clause 4.2.8.5	Clause 5.4.10.2.1	Clause 4.2.8.4	PASS
Adjacent channel selectivity	Clause 4.2.9.5	Clause 5.4.11.2.1	Clause 4.2.9.4	PASS
User Access Restrictions (UAR)	Clause 4.2.10.2	Clause 5.4.12.3	Clause 4.2.10.3	PASS
Country determination capability	Clause B.2.2.11.3	Clause B.2.2.11.2	Clause B.2.2.11.4	N/A

Remark:
N/A:The product does not support 5G Wi-Fi sub-band 4. In this whole report not application.

2 Content

Page

1 TEST SUMMARY 2

2 CONTENT 3

3 TEST REQUIREMENT 4

3.1 TEST SETUP 4
3.1.1 *For Conducted test setup* *4*
3.1.2 *For Radiated Emissions test setup* *4*
3.2 TEST ENVIRONMENT 5
3.3 TEST CONDITION 6

4 GENERAL INFORMATION 8

4.1 CLIENT INFORMATION 8
4.2 GENERAL DESCRIPTION OF EUT 8
4.3 OTHER INFORMATION 9
4.4 DESCRIPTION OF SUPPORT UNITS 9
4.5 TEST LOCATION 10
4.6 DEVIATION FROM STANDARDS 10
4.7 ABNORMALITIES FROM STANDARD CONDITIONS 10
4.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER 10
4.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2) 10

5 EQUIPMENT LIST 11

6 RADIO TECHNICAL REQUIREMENTS SPECIFICATION 13

APPENDIX A: USER ACCESS RESTRICTIONS(UAR) 14


APPENDIX B: SPURIOUS EMISSIONS 15

7 PHOTOGRAPHS 59

3 Test Requirement

3.1 Test setup

3.1.1 For Conducted test setup

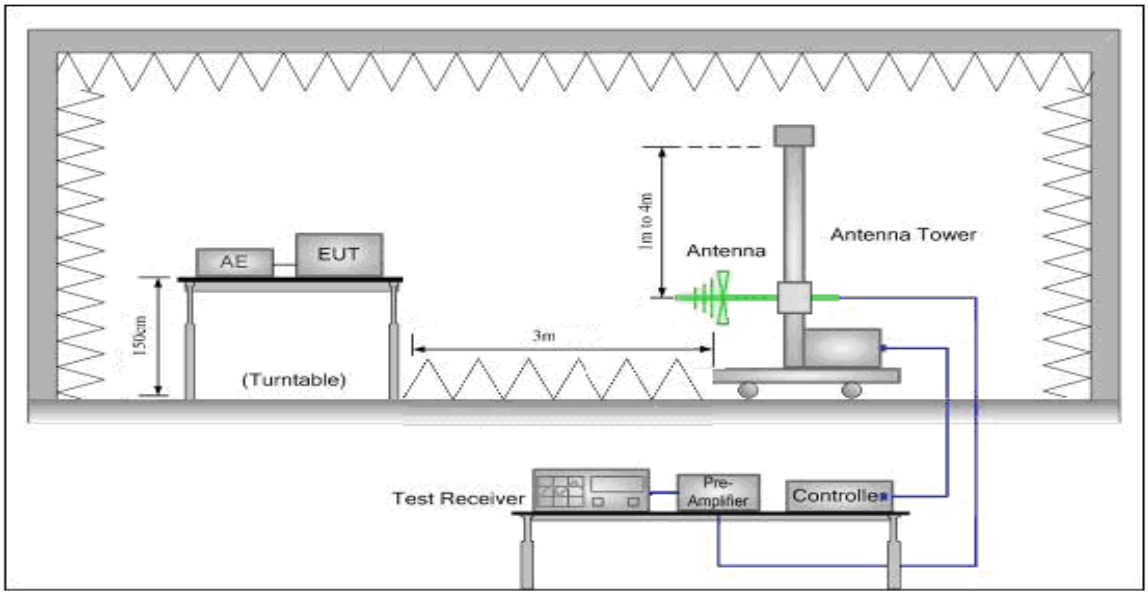

3.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

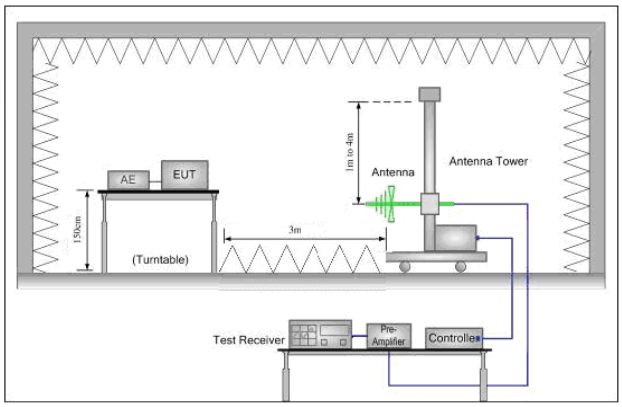


Figure 1. 30MHz to 1GHz

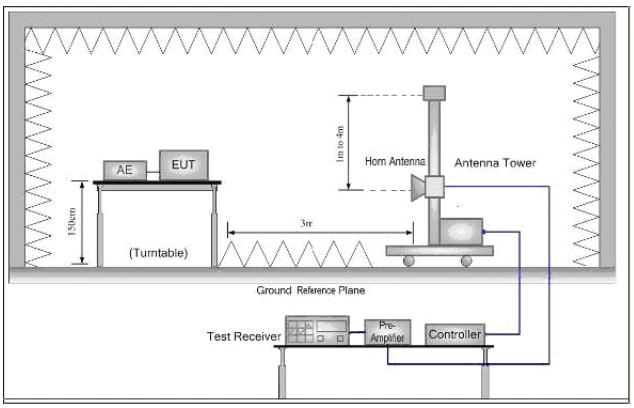


Figure 2. Above 1GHz

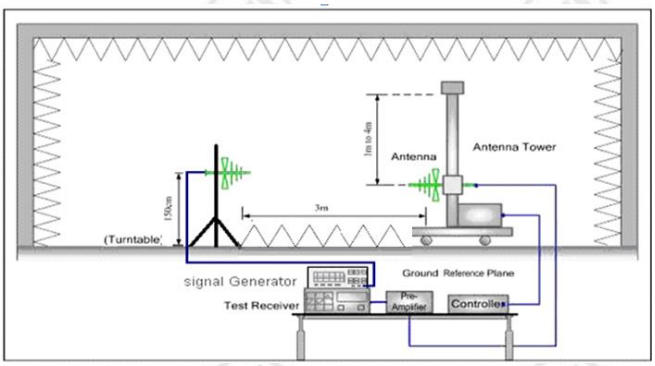


Figure 1. 30MHz to 1GHz

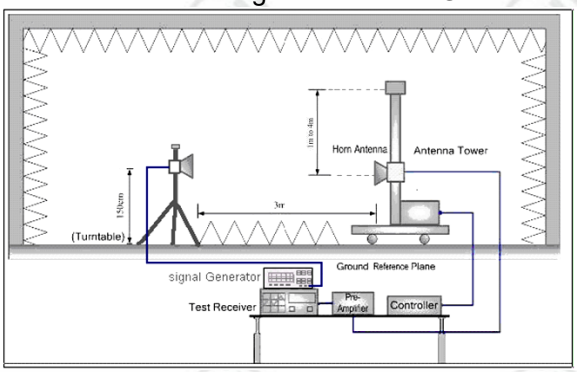


Figure 2. Above 1GHz

3.2 Test Environment

Environment Parameter	Selected Values During Tests		
Test condition	Ambient		
	Temperature(℃)	DC Voltage(V)	Humidity(%)
NT/NV	23	12	52
LT/NV	0	12	52
HT/NV	40	12	52

Note:

1) The EUT just work in such extreme temperature of 0℃~+40℃and the voltage of 12V, so here the EUT is tested in the temperature of 0℃~+40℃and the voltage of 12V.
2) NV: Normal Voltage NT: Normal Temperature
LT: Low Extreme Test Temperature HT: High Extreme Test Temperature

5.1.2 Normal test conditions

5.1.2.1 Normal temperature and humidity

Unless otherwise declared by the manufacturer, the normal temperature and humidity conditions for tests shall be any convenient combination of temperature and humidity within the following ranges:

- temperature: +15 °C to +35 °C;
- relative humidity: 20 % to 75 %.

The actual values during the tests shall be recorded.

5.1.2.2 Normal power source

The normal test voltage for the equipment shall be the nominal voltage for which the equipment was designed.

5.1.3 Extreme test conditions

Some tests in the present document need to be repeated at extreme temperatures. Where that is the case, measurements shall be made over the extremes of the operating temperature range as declared by the manufacturer.

3.3 Test Condition

Test	Clause	Test channels		
		Lower sub-band (5 150 MHz to 5 350 MHz)		Higher sub-band 5 470 MHz to 5 725 MHz
		5 150 MHz to 5 250 MHz	5 250 MHz to 5 350 MHz	
Centre frequencies	5.4.2	C7 (see note 1)		C8 (see note 1)
Occupied Channel Bandwidth	5.4.3	C7		C8
Power, Power Density	5.4.4	C1	C2	C3, C4
Transmitter unwanted emissions outside the 5 GHz RLAN bands	5.4.5	C7 (see note 1)		C8 (see note 1)
Transmitter unwanted emissions within the 5 GHz RLAN bands	5.4.6	C1	C2	C3, C4
Receiver spurious emissions	5.4.7	C7 (see note 1)		C8 (see note 1)

Test	Clause	Test channels		
		Lower sub-band (5 150 MHz to 5 350 MHz)		Higher sub-band 5 470 MHz to 5 725 MHz
		5 150 MHz to 5 250 MHz	5 250 MHz to 5 350 MHz	
Transmit Power Control (TPC)	5.4.4	n.a. (see note 2)	C2 (see note 1)	C3, C4 (see note 1)
Dynamic Frequency Selection (DFS)	5.4.8	n.a. (see note 2)	C5	C6 (see note 3)
Adaptivity	5.4.9	C9		
Receiver Blocking	5.4.10	C7		C8

C1, C3: The lowest declared channel for every declared *Nominal Channel Bandwidth* within this band. For the Power Density testing, it is sufficient to only perform this test using the lowest *Nominal Channel Bandwidth*.

C2, C4: The highest declared channel for every declared *Nominal Channel Bandwidth* within this band. For the Power Density testing, it is sufficient to only perform this test using the lowest *Nominal Channel Bandwidth*.

C5, C6: One channel out of the declared channels for this frequency range. If more than one *Nominal Channel Bandwidth* has been declared for this sub-band, testing shall be performed using the lowest and highest *Nominal Channel Bandwidth*.

C7, C8: One channel out of the declared channels for this sub-band. For *Occupied Channel Bandwidth*, testing shall be repeated for every declared *Nominal Channel Bandwidth* within this sub-band.

C9: One channel (in case of single-channel testing) or a group of channels (in case of multi-channel testing) out of the declared channels.

NOTE 1: In case of more than one channel plan has been declared, testing of these specific requirements need only be performed using one of the declared channel plans.

NOTE 2: Testing is not required for *Nominal Channel Bandwidths* that fall completely within the frequency range 5 150 MHz to 5 250 MHz.

NOTE 3: Where the declared channel plan includes channels whose *Nominal Channel Bandwidth* falls completely or partly within the 5 600 MHz to 5 650 MHz band, the tests for the *Channel Availability Check* (and where implemented, for the *Off-Channel CAC)* shall be performed on one of these channels in addition to a channel within the band 5 470 MHz to 5 600 MHz or within the band 5 650 MHz to 5 725 MHz.

The worst case configurations, The worst case data was recorded in the report.
SISO:

Operating Frequency	802.11 Mode	Data rate
Sub-band 1: 5150-5250MHz; Sub-band 2: 5250-5350MHz; Sub-band 3: 5470-5725MHz;	a	6Mb/s
	n(HT20)	MCS0
	n(HT40)	MCS0
	ac(VHT20)	MCS0
	ac(VHT40)	MCS0
	ac(VHT80)	MCS0
	ac(VHT160)	MCS0
	ax(HE20)	MCS0
	ax(HE40)	MCS0
	ax(HE80)	MCS0
	ax(HE160)	MCS0
	be(EHT20)	MCS0
	be(EHT40)	MCS0
	be(EHT80)	MCS0
	be(EHT160)	MCS0

MIMO:

Operating Frequency	802.11 Mode	Data rate
Sub-band 1: 5150-5250MHz; Sub-band 2: 5250-5350MHz; Sub-band 3: 5470-5725MHz;	n(HT20)	MCS0
	n(HT40)	MCS0
	ac(VHT20)	MCS0
	ac(VHT40)	MCS0
	ac(VHT80)	MCS0
	ac(VHT160)	MCS0
	ax(HE20)	MCS0
	ax(HE40)	MCS0
	ax(HE80)	MCS0
	ax(HE160)	MCS0
	be(EHT20)	MCS0
	be(EHT40)	MCS0
	be(EHT80)	MCS0
	be(EHT160)	MCS0

4 General Information

4.1 Client Information

Applicant:	ZTE Corporation
Address of Applicant:	ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, NanshanDistrict, Shenzhen, Guangdong , P. R. China
Manufacturer:	ZTE Corporation
Address of Manufacturer:	ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, NanshanDistrict, Shenzhen, Guangdong , P. R. China

4.2 General Description of EUT

Product Name:	XGS-PON ONT
Model No.:	ZXHN F8708
Test model No.:	ZXHN F8708
Model difference:	N/A
Trade mark:	ZTE
Type of Modulation:	IEEE 802.11a: OFDM (BPSK, QPSK, 16QAM, 64QAM) IEEE 802.11n(HT20/HT40): OFDM (BPSK, QPSK, 16QAM, 64QAM) IEEE 802.11ac(HT20/HT40/HT80): OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM) IEEE for 802.11ax(HE20/HE40/HE80/HE160): OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11be(EHT20/EHT40//EHT80//EHT160): OFDMA (4096QAM, 1024QAM, 64QAM, 16QAM, QPSK, BPSK)
Frequency band(s) of operation:	Sub-band 1: 5150-5250MHz; Sub-band 2: 5250-5350MHz; Sub-band 3: 5470-5725MHz;
Weather Band	☒ With 5600-5650MHz ☐ Without 5600-5650MHz
Sample Type:	Fix Location
Test Power Grade:	Default
Test Software of EUT:	QATool_Dbg.exe
DFS (Dynamic Frequency Selection) Operational mode:	☒ Master ☐ Slaver without radar detection ☐ Slaver with radar detection
TPC Function	☒ With TPC Function ☐ Without TPC Function
Antenna Configuration:	☒Single Transmitting; ☒MIMO（☐2T2R,☒3T3R,☐4T4R, ☐Other);
Beamforming Function	☒ With beamfomming ☐ Without beamforming
Antenna Type:	Dipole antenna
Antenna Gain:	3dBi; Max Beamforming gain:3dBi
Power Supply:	DC 12V
Test voltage:	DC 12V

4.3 Other Information

RED Directive:	2014/53/EU
Sample Received Date:	Sep. 08, 2026
Sample tested Date:	Sep. 08, 2026 to Sep. 26, 2026

Operation Frequency each of channel

802.11a/802.11n/802.11ac/802.11ax/802.11be(20MHz) Frequency/Channel Operations:

Sub-band 1		Sub-band 2		Sub-band 3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	52	5260	100	5500
40	5200	56	5280	104	5520
44	5220	60	5300	108	5540
48	5240	64	5320	112	5560
-	-	-	-	116	5580
-	-	-	-	132	5660
-	-	-	-	136	5680
-	-	-	-	140	5700

802.11n/802.11ac/802.11ax/802.11be(40MHz) Frequency/Channel Operations:

Sub-band 1		Sub-band 2		Sub-band 3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	54	5270	102	5510
46	5230	62	5310	110	5550
-	-	-	-	118	5590
-	-	-	-	134	5670

802.11ac/802.11ax(80MHz)/802.11be(80MHz) Frequency/Channel Operations:

Sub-band 1		Sub-band 2		Sub-band 3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	58	5290	106	5530

802.11ac/802.11ax(160MHz)/802.11be(160MHz) Frequency/Channel Operations:

4.4 Description of Support Units

Description	Manufacturer	Model No.	Certification	Supplied by
Netbook	Dell	P77F	FCC&CE	CTI
Router	Asus	GT-AXE11000	FCC&CE	CTI

4.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd.

Hongwei Industrial Park, Zone 70, Bao'an District, Shenzhen, Guangdong, China

Telephone: +86 (0) 755 3368 3668 Fax:+86 (0) 755 3368 3385

No tests were sub-contracted.

4.6 Deviation from Standards

None.

4.7 Abnormalities from Standard Conditions

None.

4.8 Other Information Requested by the Customer

None.

4.9 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio frequency	7.8×10^{-8}
2	RF Power conducted	0.46dB(30MHz-1GHz)
		0.55dB(1GHz-18GHz)
3	Unwanted Emission, conducted	0.46dB(30MHz-1GHz)
		0.55dB(1GHz-18GHz)
4	Spurious Emission, radiated	4.3dB (30MHz-1GHz)
		4.5dB (1GHz-18GHz)
		3.4dB (18GHz-26GHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC and low frequency voltages test	0.026%

5 Equipment List

RF test system					
Equipment	**Manufacturer**	**Model No.**	**Serial Number**	**Cal. Date (mm-dd-yyyy)**	**Cal. Due date (mm-dd-yyyy)**
Spectrum Analyzer	Keysight	N9010A	MY54510339	11-25-2025	11-24-2026
Spectrum Analyzer	R&S	FSVS3044	101509	05-14-2026	05-13-2027
Spectrum Analyzer	R&S	FSW43	102978	08-07-2026	07-06-2027
Signal Generator	Keysight	N5182B	MY53051549	11-13-2025	11-12-2026
Signal Generator	Agilent	N5181A	MY46240094	11-25-2025	11-24-2026
DC Power	Keysight	E3642A	MY56376072	11-13-2025	11-12-2026
Communication test set	R&S	CMW500	169004	02-06-2026	02-05-2027
RF control unit(power unit)	JS Tonscend	JS0806-2	24I80620925	07-15-2026	07-14-2027
Wi-Fi 7GHz Band Extendder	JS Tonscend	TS-WF7U2	2206200002	05-09-2026	05-08-2027
high-low temperature test chamber	Dong Guang Qin Zhuo	LK-80GA	QZ20150611879	11-13-2025	11-12-2026
Temperature/ Humidity Indicator	biaozhi	HM10	1804186	05-22-2026	05-21-2027
BT&WI-FI Automatic test software	JS Tonscend	JS1120-3	V3.6.21	---	---
Digital multimeter	FLUKE	17B MAX	59545050WS	10-15-2025	10-14-2026

3M full-anechoic Chamber					
Equipment	**Manufacturer**	**Model No.**	**Serial Number**	**Cal. Date (mm-dd-yyyy)**	**Cal. Due date (mm-dd-yyyy)**
Fully Anechoic Chamber	TDK	FAC-3	---	01-29-2024	01-28-2027
Receiver	Keysight	N9038A	MY57290136	12-22-2025	12-21-2026
Spectrum Analyzer	Keysight	N9020B	MY57111112	12-21-2025	12-20-2026
Spectrum Analyzer	Keysight	N9030B	MY57140871	12-21-2025	12-20-2026
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	03-29-2026	03-28-2027
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-03-2026	04-02-2027
Horn Antenna	ETS-LINDGREN	3117	57407	05-10-2026	05-09-2027
Preamplifier	EMCI	EMC001330	980563	02-06-2026	02-05-2027
Preamplifier	EMCI	EMC051845SE	980380	11-25-2025	11-24-2026
Preamplifier	Tonscend	TAP-011858	AP21B806112	06-22-2026	06-21-2027
Communication test set	R&S	CMW500	104466	11-25-2025	11-24-2026
Temperature/ Humidity Indicator	biaozhi	GM1360	EE1186631	03-24-2026	03-23-2027
RSE Automatic test software	JS Tonscend	JS36-RSE	V5.0.0.1	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	---	---
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	---	---
Cable line	Times	EMC104-NMNM-1000	SN160710	---	---
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	---	---
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	---	---
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	---	---
Cable line	Times	HF160-KMKM-3.00M	393493-0001	---	---

6 Radio Technical Requirements Specification

Reference documents for testing:

No.	Identity	Document Title
1	ETSI EN 301 893 V2.2.1 (2024-11)	5 GHz WAS/RLAN; Harmonised Standard for access to radio spectrum

Test Results List:

ETSI EN 301 893 V2.2.1 (2024-11)		Test Descriptions & Test Conditions	Verdict	Note
Test Requirement	Test Method			
Clause 4.2.1.4	Clause 5.4.3.2.1	Nominal centre frequency		Note 1
		NT/NV	PASS	
		LT/NV	PASS	
		HT/NV	PASS	
Clause 4.2.2.3	Clause 5.4.3.2.1	Nominal channel bandwidth and occupied bandwidth		Note 1
		NT/NV	PASS	
Clause 4.2.3.3	Clause 5.4.4.2.1	RF output power		Note 1
		NT/NV	PASS	
		LT/NV	PASS	
		HT/NV	PASS	
Clause 4.2.3.3	Clause 5.4.4.2.1	Transmit Power Control (TPC)		Note 1
		NT/NV	PASS	
		LT/NV	PASS	
		HT/NV	PASS	
Clause 4.2.3.3	Clause 5.4.4.2.1	Power Spectral Density (PSD)		Note 1
		NT/NV	PASS	
Clause 4.2.6.2	Clause 5.4.8.2.1	Dynamic Frequency Selection (DFS)		Note 2
		NT/NV	PASS	
Clause 4.2.7.4	Clause 5.4.9.3.2	Adaptivity (channel access mechanism)		Note 1
		NT/NV	PASS	
Clause 4.2.8.5	Clause 5.4.10.2.1	Receiver blocking		Note 1
		NT/NV	PASS	
Clause 4.2.4.2.3	Clause 5.4.6.2.2	Transmitter unwanted emissions within the transmitter's operating bands		Note 1
		NT/NV	PASS	
Clause 4.2.9.5	Clause 5.4.11.2.1	Adjacent channel selectivity		Note 1
		NT/NV	PASS	
Clause 4.2.4.1.3	Clause 5.4.5.2.1	Transmitter unwanted emissions outside the transmitter's operating bands		Appendix B
		NT/NV	PASS	
Clause 4.2.5.3	Clause 5.4.7.2.2	Receiver spurious emissions		Appendix B
		NT/NV	PASS	
Clause 4.2.10.2	Clause 5.4.12.3	User Access Restrictions (UAR)		Appendix A
		NT/NV	PASS	

Note 1: The test data please refer to Appendix: 5G Wi-Fi Band 1,2,3 of EED32S821444
Note 2: The test data please refer to Appendix: 5G Wi-Fi DFS of EED32S821444

Appendix A: User Access Restrictions(UAR)

Requirement:
User Access Restrictions are restraints

The equipment shall be so constructed that settings (hardware and/or software) are not accessible to the user if changing those settings result in the equipment no longer being conformant to the following:
• The DFS requirements as specified in clause 4.2.6.
• The adaptivity requirements as specified in clause 4.2.7, in particular the thresholds as defined or referred to in clause 4.2.7.3.1.4 and in clause 4.2.7.3.2.5.
The equipment does not allow the user to change the country of operation and/or the operating frequency band if that results in the equipment no longer being conformant to the DFS and/or the adaptivity requirements.

Conclusion:
The EUT does not allow the user to change the country of operation and/or the operating frequency band.
The EUT does not accept software and/or firmware which results in the equipment no
longer being compliant with the DFS requirements, e.g.:
• software and/or firmware provided by the manufacturer but intended for other regulatory regimes;
• modified software and/or firmware where the software and/or firmware is available as open source code;
• previous versions of the software and/or firmware (downgrade).

Appendix B: Spurious emissions

Test Procedure:

1. Scan from 30MHz to 26GHz; find the maximum radiation frequency to measure.
2. The technique used to find the Spurious Emissions of the transmitter was the antenna substitution method. Substitution method was performed to determine the actual ERP/EIRP emission levels of the EUT.

Test procedure as below:

1) The EUT was powered ON and placed on a 1.5m high table at a 3 meter fully Anechoic Chamber. The antenna of the transmitter was extended to its maximum length. Modulation mode and the measuring receiver shall be tuned to the frequency of the transmitter under test.
2) The EUT was set 3 meters (above 18GHz the distance is 1 meter) away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3) The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
4) Steps 1) to 3) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
5) The transmitter was then removed and replaced with another antenna. The center of the antenna was approximately at the same location as the center of the transmitter.
6) A signal at the disturbance was fed to the substitution antenna by means of a non-radiating cable. With both the substitution and the receive antennas horizontally polarized, the receive antenna was raised and lowered to obtain a maximum reading at the test receiver. The level of the signal generator was adjusted until the measured field strength level in step 3) is obtained for this set of conditions.
7) The output power into the substitution antenna was then measured.
8) Steps 6) and 7) were repeated with both antennas polarized.
9) Calculate power in dBm by the following formula:

ERP(dBm) = Pg(dBm) – cable loss (dB) + antenna gain (dBd)
EIRP(dBm) = Pg(dBm) – cable loss (dB) + antenna gain (dBi)
EIRP=ERP+2.15dB

where:

Pg is the generator output power into the substitution antenna.

10) Test the EUT in the lowest channel , the Highest channel

Repeat above procedures until all frequencies measured was complete.

Limit:

Frequency range	Maximum power (dBm)	Bandwidth
30MHz to 87.5MHz	-36	100kHz
87.5MHz to 118MHz	-54	100kHz
118MHz to 174MHz	-36	100kHz
174MHz to 230MHz	-54	100kHz
230MHz to 470MHz	-36	100kHz
470MHz to 694MHz	-54	100kHz
694MHz to 1GHz	-36	100kHz
1GHz to 26GHz	-30	1MHz

Transmitter limits for spurious emissions

Frequency range	Maximum power (dBm)	Bandwidth
30MHz to 1GHz	-57	100kHz
1GHz to 26GHz	-47	1MHz

Spurious emission limits for receivers

Radiated Spurious Emissions test Data:

1) Transmitter unwanted emissions outside the 5 GHz RLAN bands

SISO:
Sub-band 1:

Mode	802.11 a Transmitting	Remark	\
Band	\	Channel	5180MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	108.7719	150	90	-58.78	-54.00	4.78	PASS	Horizontal
2	208.8859	150	3	-66.29	-54.00	12.29	PASS	Horizontal
3	625.0575	150	3	-71.44	-54.00	17.44	PASS	Horizontal
4	6484.3242	150	3	-34.38	-30.00	4.38	PASS	Horizontal
5	17595.1595	150	29	-33.58	-30.00	3.58	PASS	Horizontal
6	26081.7582	150	58	-54.88	-30.00	24.88	PASS	Horizontal

Mode	802.11 a Transmitting	Remark	\
Band	\	Channel	5180MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	103.8244	150	3	-66.29	-54.00	12.29	PASS	Vertical
2	208.8859	150	56	-65.43	-54.00	11.43	PASS	Vertical
3	576.4556	150	90	-71.49	-54.00	17.49	PASS	Vertical
4	6484.8742	150	3	-34.26	-30.00	4.26	PASS	Vertical
5	16533.6034	150	45	-34.19	-30.00	4.19	PASS	Vertical
6	25161.9662	150	3	-55.05	-30.00	25.05	PASS	Vertical

Mode	802.11 n(HT40) Transmitting	Remark	\
Band	\	Channel	5190MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	106.5407	150	3	-58.59	-54.00	4.59	PASS	Horizontal
2	213.8334	150	161	-65.91	-54.00	11.91	PASS	Horizontal
3	597.5068	150	32	-69.20	-54.00	15.20	PASS	Horizontal
4	6496.9748	150	229	-34.60	-30.00	4.60	PASS	Horizontal
5	16531.3031	150	72	-33.41	-30.00	3.41	PASS	Horizontal
6	24543.1043	150	229	-55.95	-30.00	25.95	PASS	Horizontal

Mode	802.11 n(HT40) Transmitting	Remark	\
Band	\	Channel	5190MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	100.9141	150	356	-65.87	-54.00	11.87	PASS	Vertical
2	206.7517	150	232	-63.69	-54.00	9.69	PASS	Vertical
3	597.6038	150	182	-67.56	-54.00	13.56	PASS	Vertical
4	6476.8988	150	3	-34.62	-30.00	4.62	PASS	Vertical
5	17058.0558	150	16	-33.97	-30.00	3.97	PASS	Vertical
6	24601.7602	150	54	-55.28	-30.00	25.28	PASS	Vertical

Mode	802.11 ax(HE160)Transmitting	Remark	\
Band	\	Channel	5250MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	108.2868	150	3	-59.75	-54.00	5.75	PASS	Horizontal
2	208.8859	150	83	-66.46	-54.00	12.46	PASS	Horizontal
3	677.8308	150	83	-67.55	-54.00	13.55	PASS	Horizontal
4	6344.6172	150	13	-35.89	-30.00	5.89	PASS	Horizontal
5	17573.3073	150	30	-33.53	-30.00	3.53	PASS	Horizontal
6	25065.9066	150	74	-55.39	-30.00	25.39	PASS	Horizontal

Mode	802.11 ax(HE160)Transmitting	Remark	\
Band	\	Channel	5250MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	99.944	150	67	-65.25	-54.00	11.25	PASS	Vertical
2	208.8859	150	22	-64.77	-54.00	10.77	PASS	Vertical
3	600.029	150	40	-68.51	-54.00	14.51	PASS	Vertical
4	6125.9813	150	76	-36.13	-30.00	6.13	PASS	Vertical
5	16539.3539	150	45	-34.43	-30.00	4.43	PASS	Vertical
6	24919.692	150	3	-55.71	-30.00	25.71	PASS	Vertical

Mode	802.11 ac(VHT160)Transmitting	Remark	\
Band	\	Channel	5250MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	111.7792	150	90	-57.69	-54.00	3.69	PASS	Horizontal
2	208.8859	150	3	-66.62	-54.00	12.62	PASS	Horizontal
3	625.0575	150	65	-70.62	-54.00	16.62	PASS	Horizontal
4	6445.8223	150	65	-35.55	-30.00	5.55	PASS	Horizontal
5	16373.7374	150	79	-35.51	-30.00	5.51	PASS	Horizontal
6	26460.8961	150	36	-55.52	-30.00	25.52	PASS	Horizontal

Mode	802.11 ac(VHT160)Transmitting	Remark	\
Band	\	Channel	5250MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	102.5633	150	90	-66.23	-54.00	12.23	PASS	Vertical
2	196.8567	150	3	-65.95	-54.00	11.95	PASS	Vertical
3	652.2202	150	90	-69.93	-54.00	15.93	PASS	Vertical
4	6454.8977	150	54	-34.84	-30.00	4.84	PASS	Vertical
5	17071.8572	150	9	-34.00	-30.00	4.00	PASS	Vertical
6	24606.0106	150	3	-55.77	-30.00	25.77	PASS	Vertical

Sub-band 2:

Mode	802.11 a Transmitting	Remark	\
Band	\	Channel	5260MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	111.0031	150	90	-59.60	-54.00	5.60	PASS	Horizontal
2	208.8859	150	3	-66.32	-54.00	12.32	PASS	Horizontal
3	599.544	150	21	-69.84	-54.00	15.84	PASS	Horizontal
4	6451.5976	150	90	-35.16	-30.00	5.16	PASS	Horizontal
5	17560.6561	150	62	-33.85	-30.00	3.85	PASS	Horizontal
6	24976.6477	150	56	-55.64	-30.00	25.64	PASS	Horizontal

Mode	802.11 a Transmitting	Remark	\
Band	\	Channel	5260MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	100.332	150	3	-65.80	-54.00	11.80	PASS	Vertical
2	208.8859	150	72	-65.17	-54.00	11.17	PASS	Vertical
3	676.7637	150	72	-70.04	-54.00	16.04	PASS	Vertical
4	6463.4232	150	48	-33.98	-30.00	3.98	PASS	Vertical
5	17033.9034	150	3	-33.95	-30.00	3.95	PASS	Vertical
6	25603.1603	150	84	-55.00	-30.00	25.00	PASS	Vertical

Mode	802.11 n(HT40) Transmitting	Remark	\
Band	\	Channel	5310MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	108.4808	150	3	-58.88	-54.00	4.88	PASS	Horizontal
2	208.8859	150	3	-66.63	-54.00	12.63	PASS	Horizontal
3	625.0575	150	86	-71.28	-54.00	17.28	PASS	Horizontal
4	6452.6976	150	90	-34.94	-30.00	4.94	PASS	Horizontal
5	16522.1022	150	87	-33.85	-30.00	3.85	PASS	Horizontal
6	25067.6068	150	3	-54.73	-30.00	24.73	PASS	Horizontal

Mode	802.11 n(HT40) Transmitting	Remark	\
Band	\	Channel	5310MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	100.041	150	3	-66.62	-54.00	12.62	PASS	Vertical
2	201.7072	150	3	-63.49	-54.00	9.49	PASS	Vertical
3	648.2428	150	3	-70.87	-54.00	16.87	PASS	Vertical
4	6405.1203	150	66	-35.22	-30.00	5.22	PASS	Vertical
5	17015.5016	150	54	-34.02	-30.00	4.02	PASS	Vertical
6	25093.1093	150	3	-54.68	-30.00	24.68	PASS	Vertical

Mode	802.11 ax(HE160)Transmitting	Remark	\
Band	\	Channel	5250MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	109.742	150	3	-60.26	-54.00	6.26	PASS	Horizontal
2	208.8859	150	3	-66.37	-54.00	12.37	PASS	Horizontal
3	651.6382	150	83	-70.87	-54.00	16.87	PASS	Horizontal
4	6426.8463	150	73	-35.28	-30.00	5.28	PASS	Horizontal
5	16531.3031	150	30	-33.07	-30.00	3.07	PASS	Horizontal
6	25105.0105	150	90	-54.78	-30.00	24.78	PASS	Horizontal

Mode	802.11 ax(HE160)Transmitting	Remark	\
Band	\	Channel	5250MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	103.6304	150	3	-66.66	-54.00	12.66	PASS	Vertical
2	202.7743	150	3	-64.47	-54.00	10.47	PASS	Vertical
3	585.7686	150	89	-72.08	-54.00	18.08	PASS	Vertical
4	6414.7457	150	70	-34.96	-30.00	4.96	PASS	Vertical
5	17023.5524	150	79	-34.08	-30.00	4.08	PASS	Vertical
6	25303.0803	150	81	-56.18	-30.00	26.18	PASS	Vertical

Mode	802.11 ac(VHT160)Transmitting	Remark	\
Band	\	Channel	5250MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	62.3042	150	37	-63.05	-36.00	27.05	PASS	Horizontal
2	91.7952	150	3	-63.22	-54.00	9.22	PASS	Horizontal
3	208.8859	150	3	-66.14	-54.00	12.14	PASS	Horizontal
4	2706.7353	150	20	-40.47	-30.00	10.47	PASS	Horizontal
5	12503.6004	150	0	-38.15	-30.00	8.15	PASS	Horizontal
6	26417.5418	150	28	-54.90	-30.00	24.90	PASS	Horizontal

Mode	802.11 ac(VHT160)Transmitting	Remark	\
Band	\	Channel	5250MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	60.5581	150	33	-52.50	-36.00	16.50	PASS	Vertical
2	208.8859	150	43	-65.39	-54.00	11.39	PASS	Vertical
3	679.577	150	43	-64.14	-54.00	10.14	PASS	Vertical
4	2697.1099	150	87	-41.94	-30.00	11.94	PASS	Vertical
5	12541.5542	150	3	-38.66	-30.00	8.66	PASS	Vertical
6	25372.7873	150	14	-55.76	-30.00	25.76	PASS	Vertical

Sub-band 3:

Mode	802.11 a Transmitting	Remark	\
Band	\	Channel	5500MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	108.7194	150	351	-57.76	-54.00	3.76	PASS	Horizontal
2	208.8769	150	162	-66.18	-54.00	12.18	PASS	Horizontal
3	599.273	150	125	-60.44	-54.00	6.44	PASS	Horizontal
4	6149.615	150	322	-34.29	-30.00	4.29	PASS	Horizontal
5	17615.8808	150	329	-33.05	-30.00	3.05	PASS	Horizontal
6	25089.509	150	58	-54.66	-30.00	24.66	PASS	Horizontal

Mode	802.11 a Transmitting	Remark	\
Band	\	Channel	5500MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	102.4141	150	359	-64.60	-54.00	10.60	PASS	Vertical
2	205.2878	150	175	-63.64	-54.00	9.64	PASS	Vertical
3	597.9634	150	175	-62.91	-54.00	8.91	PASS	Vertical
4	5973.5974	150	294	-34.68	-30.00	4.68	PASS	Vertical
5	16530.8015	150	118	-33.95	-30.00	3.95	PASS	Vertical
6	25015.1015	150	323	-54.94	-30.00	24.94	PASS	Vertical

Mode	802.11 n(HT40) Transmitting	Remark	\
Band	\	Channel	5670MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	111.0476	150	90	-59.26	-54.00	5.26	PASS	Horizontal
2	208.8769	150	3	-66.91	-54.00	12.91	PASS	Horizontal
3	598.8364	150	3	-71.80	-54.00	17.80	PASS	Horizontal
4	6110.5611	150	38	-34.18	-30.00	4.18	PASS	Horizontal
5	17575.0538	150	49	-33.23	-30.00	3.23	PASS	Horizontal
6	25105.5106	150	64	-54.27	-30.00	24.27	PASS	Horizontal

Mode	802.11 n(HT40) Transmitting	Remark	\
Band	\	Channel	5670MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	102.7051	150	3	-65.40	-54.00	11.40	PASS	Vertical
2	208.9254	150	74	-66.32	-54.00	12.32	PASS	Vertical
3	677.5559	150	85	-70.88	-54.00	16.88	PASS	Vertical
4	5492.2992	150	32	-34.63	-30.00	4.63	PASS	Vertical
5	16933.3217	150	41	-34.44	-30.00	4.44	PASS	Vertical
6	25544.7545	150	50	-55.23	-30.00	25.23	PASS	Vertical

Mode	802.11 ax(HE160)Transmitting	Remark	\
Band	\	Channel	5570MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	109.1075	150	90	-59.32	-54.00	5.32	PASS	Horizontal
2	208.8769	150	17	-66.88	-54.00	12.88	PASS	Horizontal
3	625.0763	150	6	-71.94	-54.00	17.94	PASS	Horizontal
4	6021.4521	150	90	-35.44	-30.00	5.44	PASS	Horizontal
5	17752.7376	150	13	-33.32	-30.00	3.32	PASS	Horizontal
6	25089.509	150	84	-54.67	-30.00	24.67	PASS	Horizontal

Mode	802.11 ax(HE160)Transmitting	Remark	\
Band	\	Channel	5570MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	102.4141	150	3	-65.35	-54.00	11.35	PASS	Vertical
2	204.9968	150	3	-63.55	-54.00	9.55	PASS	Vertical
3	681.6301	150	76	-69.28	-54.00	15.28	PASS	Vertical
4	6295.9296	150	76	-34.54	-30.00	4.54	PASS	Vertical
5	16537.1269	150	12	-34.57	-30.00	4.57	PASS	Vertical
6	25309.531	150	86	-55.07	-30.00	25.07	PASS	Vertical

Mode	802.11 ac(VHT160)Transmitting	Remark	\
Band	\	Channel	5570MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	108.8164	150	3	-59.74	-54.00	5.74	PASS	Horizontal
2	208.8769	150	3	-66.80	-54.00	12.80	PASS	Horizontal
3	625.0278	150	25	-73.05	-54.00	19.05	PASS	Horizontal
4	6141.9142	150	3	-34.20	-30.00	4.20	PASS	Horizontal
5	17798.7399	150	52	-33.13	-30.00	3.13	PASS	Horizontal
6	25324.7325	150	80	-54.59	-30.00	24.59	PASS	Horizontal

Mode	802.11 ac(VHT160)Transmitting	Remark	\
Band	\	Channel	5570MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	99.7465	150	3	-64.55	-54.00	10.55	PASS	Vertical
2	203.5417	150	3	-64.72	-54.00	10.72	PASS	Vertical
3	600.0005	150	90	-67.92	-54.00	13.92	PASS	Vertical
4	6100.6601	150	35	-34.50	-30.00	4.50	PASS	Vertical
5	16505.5003	150	13	-35.15	-30.00	5.15	PASS	Vertical
6	25114.3114	150	35	-55.05	-30.00	25.05	PASS	Vertical

MIMO:
Sub-band 1:

Mode	802.11 n(HT40) Transmitting	Remark	\
Band	\	Channel	5190MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	109.742	150	360	-57.46	-54.00	3.46	PASS	Horizontal
2	210.147	150	162	-66.60	-54.00	12.60	PASS	Horizontal
3	660.369	150	117	-64.17	-54.00	10.17	PASS	Horizontal
4	6480.749	150	107	-34.19	-30.00	4.19	PASS	Horizontal
5	16433.5434	150	29	-35.04	-30.00	5.04	PASS	Horizontal
6	25280.128	150	218	-55.36	-30.00	25.36	PASS	Horizontal

Mode	802.11 n(HT40) Transmitting	Remark	\
Band	\	Channel	5190MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	105.3765	150	232	-65.64	-54.00	11.64	PASS	Vertical
2	208.4008	150	202	-62.09	-54.00	8.09	PASS	Vertical
3	598.4768	150	125	-64.34	-54.00	10.34	PASS	Vertical
4	6121.3061	150	354	-35.80	-30.00	5.80	PASS	Vertical
5	17058.0558	150	78	-33.91	-30.00	3.91	PASS	Vertical
6	25085.4585	150	168	-55.23	-30.00	25.23	PASS	Vertical

Mode	802.11 ax(HE160)Transmitting	Remark	\
Band	\	Channel	5250MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	107.6078	150	110	-57.83	-54.00	3.83	PASS	Horizontal
2	208.8859	150	158	-66.18	-54.00	12.18	PASS	Horizontal
3	599.0589	150	120	-65.73	-54.00	11.73	PASS	Horizontal
4	6437.8469	150	195	-35.57	-30.00	5.57	PASS	Horizontal
5	16461.1461	150	357	-33.52	-30.00	3.52	PASS	Horizontal
6	26069.0069	150	360	-54.61	-30.00	24.61	PASS	Horizontal

Mode	802.11 ax(HE160)Transmitting	Remark	\
Band	\	Channel	5250MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	105.0855	150	3	-65.05	-54.00	11.05	PASS	Vertical
2	205.1025	150	3	-62.47	-54.00	8.47	PASS	Vertical
3	597.8948	150	134	-65.41	-54.00	11.41	PASS	Vertical
4	6102.8801	150	295	-35.59	-30.00	5.59	PASS	Vertical
5	17228.2728	150	175	-33.97	-30.00	3.97	PASS	Vertical
6	24837.2337	150	287	-55.50	-30.00	25.50	PASS	Vertical

Mode	802.11 ac(VHT160)Transmitting	Remark	\
Band	\	Channel	5250MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	109.548	150	3	-59.55	-54.00	5.55	PASS	Horizontal
2	208.5949	150	3	-66.24	-54.00	12.24	PASS	Horizontal
3	625.0575	150	67	-70.79	-54.00	16.79	PASS	Horizontal
4	6479.099	150	85	-33.58	-30.00	3.58	PASS	Horizontal
5	16541.6542	150	41	-33.41	-30.00	3.41	PASS	Horizontal
6	26499.1499	150	90	-54.58	-30.00	24.58	PASS	Horizontal

Mode	802.11 ac(VHT160)Transmitting	Remark	\
Band	\	Channel	5250MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	101.5932	150	36	-64.55	-54.00	10.55	PASS	Vertical
2	201.9982	150	3	-65.59	-54.00	11.59	PASS	Vertical
3	661.3391	150	84	-63.12	-54.00	9.12	PASS	Vertical
4	6144.9572	150	90	-37.01	-30.00	7.01	PASS	Vertical
5	17028.1528	150	79	-34.39	-30.00	4.39	PASS	Vertical
6	25750.225	150	76	-55.46	-30.00	25.46	PASS	Vertical

Sub-band 2:

Mode	802.11 n(HT40) Transmitting	Remark	\
Band	\	Channel	5310MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	107.8018	150	13	-60.62	-54.00	6.62	PASS	Horizontal
2	208.8859	150	3	-65.97	-54.00	11.97	PASS	Horizontal
3	655.3245	150	81	-71.42	-54.00	17.42	PASS	Horizontal
4	6425.1963	150	90	-35.05	-30.00	5.05	PASS	Horizontal
5	16542.8043	150	0	-34.07	-30.00	4.07	PASS	Horizontal
6	25018.3018	150	62	-55.37	-30.00	25.37	PASS	Horizontal

Mode	802.11 n(HT40) Transmitting	Remark	\
Band	\	Channel	5310MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	103.9214	150	3	-65.34	-54.00	11.34	PASS	Vertical
2	201.9012	150	3	-66.75	-54.00	12.75	PASS	Vertical
3	672.9803	150	90	-70.07	-54.00	16.07	PASS	Vertical
4	6462.5981	150	3	-33.58	-30.00	3.58	PASS	Vertical
5	17038.5038	150	3	-34.01	-30.00	4.01	PASS	Vertical
6	24883.1383	150	90	-55.93	-30.00	25.93	PASS	Vertical

Mode	802.11 ax(HE160)Transmitting	Remark	\
Band	\	Channel	5250MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	110.033	150	3	-58.98	-54.00	4.98	PASS	Horizontal
2	209.662	150	24	-66.76	-54.00	12.76	PASS	Horizontal
3	643.5864	150	87	-70.89	-54.00	16.89	PASS	Horizontal
4	6486.5243	150	42	-33.55	-30.00	3.55	PASS	Horizontal
5	17567.5568	150	29	-34.03	-30.00	4.03	PASS	Horizontal
6	24980.048	150	33	-55.55	-30.00	25.55	PASS	Horizontal

Mode	802.11 ax(HE160)Transmitting	Remark	\
Band	\	Channel	5250MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	100.138	150	58	-66.93	-54.00	12.93	PASS	Vertical
2	202.0952	150	3	-64.98	-54.00	10.98	PASS	Vertical
3	676.5697	150	67	-71.21	-54.00	17.21	PASS	Vertical
4	6485.1493	150	3	-34.93	-30.00	4.93	PASS	Vertical
5	17522.7023	150	87	-33.37	-30.00	3.37	PASS	Vertical
6	25670.317	150	20	-55.32	-30.00	25.32	PASS	Vertical

Mode	802.11 ac(VHT160)Transmitting	Remark	\
Band	\	Channel	5250MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	106.9287	150	3	-61.69	-54.00	7.69	PASS	Horizontal
2	208.8859	150	3	-66.43	-54.00	12.43	PASS	Horizontal
3	625.0575	150	3	-71.91	-54.00	17.91	PASS	Horizontal
4	6274.2137	150	90	-36.54	-30.00	6.54	PASS	Horizontal
5	16538.2038	150	45	-33.75	-30.00	3.75	PASS	Horizontal
6	25268.2268	150	23	-54.18	-30.00	24.18	PASS	Horizontal

Mode	802.11 ac(VHT160)Transmitting	Remark	\
Band	\	Channel	5250MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	103.0483	150	3	-65.75	-54.00	11.75	PASS	Vertical
2	208.8859	150	39	-65.54	-54.00	11.54	PASS	Vertical
3	577.7168	150	90	-70.70	-54.00	16.70	PASS	Vertical
4	6472.7736	150	90	-34.87	-30.00	4.87	PASS	Vertical
5	17010.9011	150	12	-34.60	-30.00	4.60	PASS	Vertical
6	25030.203	150	90	-55.25	-30.00	25.25	PASS	Vertical

Sub-band 3:

Mode	802.11 n(HT40) Transmitting	Remark	\
Band	\	Channel	5670MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	110.708	150	87	-60.20	-54.00	6.20	PASS	Horizontal
2	208.8769	150	3	-66.60	-54.00	12.60	PASS	Horizontal
3	598.7879	150	3	-68.49	-54.00	14.49	PASS	Horizontal
4	6156.7657	150	43	-34.60	-30.00	4.60	PASS	Horizontal
5	17319.741	150	77	-33.93	-30.00	3.93	PASS	Horizontal
6	25092.7093	150	87	-54.94	-30.00	24.94	PASS	Horizontal

Mode	802.11 n(HT40) Transmitting	Remark	\
Band	\	Channel	5670MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	102.8991	150	3	-66.31	-54.00	12.31	PASS	Vertical
2	202.6686	150	3	-63.53	-54.00	9.53	PASS	Vertical
3	597.7694	150	88	-70.94	-54.00	16.94	PASS	Vertical
4	6127.6128	150	12	-33.66	-30.00	3.66	PASS	Vertical
5	16554.9527	150	60	-35.15	-30.00	5.15	PASS	Vertical
6	24707.8708	150	79	-55.50	-30.00	25.50	PASS	Vertical

Mode	802.11 ax(HE160)Transmitting	Remark	\
Band	\	Channel	5570MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	109.156	150	3	-59.57	-54.00	5.57	PASS	Horizontal
2	208.8284	150	31	-66.50	-54.00	12.50	PASS	Horizontal
3	665.6728	150	90	-68.45	-54.00	14.45	PASS	Horizontal
4	6190.319	150	23	-34.53	-30.00	4.53	PASS	Horizontal
5	17587.7044	150	0	-33.45	-30.00	3.45	PASS	Horizontal
6	24951.0951	150	58	-54.71	-30.00	24.71	PASS	Horizontal

Mode	802.11 ax(HE160)Transmitting	Remark	\
Band	\	Channel	5570MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	104.0147	150	12	-67.89	-54.00	13.89	PASS	Vertical
2	202.6201	150	3	-65.45	-54.00	11.45	PASS	Vertical
3	598.1089	150	49	-68.97	-54.00	14.97	PASS	Vertical
4	6068.2068	150	3	-34.61	-30.00	4.61	PASS	Vertical
5	16454.3227	150	5	-35.42	-30.00	5.42	PASS	Vertical
6	25083.9084	150	12	-55.62	-30.00	25.62	PASS	Vertical

Mode	802.11 ac(VHT160)Transmitting	Remark	\
Band	\	Channel	5570MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	108.6224	150	3	-60.98	-54.00	6.98	PASS	Horizontal
2	208.8769	150	3	-66.61	-54.00	12.61	PASS	Horizontal
3	625.0278	150	3	-72.86	-54.00	18.86	PASS	Horizontal
4	5849.2849	150	30	-35.42	-30.00	5.42	PASS	Horizontal
5	17583.6792	150	4	-33.30	-30.00	3.30	PASS	Horizontal
6	24999.9	150	46	-53.39	-30.00	23.39	PASS	Horizontal

Mode	802.11 ac(VHT160)Transmitting	Remark	\
Band	\	Channel	5570MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	99.989	150	90	-63.45	-54.00	9.45	PASS	Vertical
2	201.7471	150	3	-66.06	-54.00	12.06	PASS	Vertical
3	632.2061	150	3	-59.29	-54.00	5.29	PASS	Vertical
4	6376.7877	150	3	-33.44	-30.00	3.44	PASS	Vertical
5	17020.151	150	60	-34.10	-30.00	4.10	PASS	Vertical
6	25060.7061	150	90	-54.21	-30.00	24.21	PASS	Vertical

2.4G Wi-Fi + 5G Wi-Fi：

Mode	2.4G+5GWIFI	Remark	\
Band	\	Channel	\

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	111.9732	150	116	-57.55	-54.00	3.55	PASS	Horizontal
2	208.8859	150	316	-66.37	-54.00	12.37	PASS	Horizontal
3	609.4389	150	135	-67.85	-54.00	13.85	PASS	Horizontal
4	6472.4986	150	172	-34.93	-30.00	4.93	PASS	Horizontal
5	16537.0537	150	15	-33.81	-30.00	3.81	PASS	Horizontal
6	25020.8521	150	12	-53.81	-30.00	23.81	PASS	Horizontal

Mode	2.4G+5GWIFI	Remark	\
Band	\	Channel	\

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	102.6603	150	3	-65.74	-54.00	11.74	PASS	Vertical
2	212.3782	150	162	-64.16	-54.00	10.16	PASS	Vertical
3	663.8614	150	330	-62.36	-54.00	8.36	PASS	Vertical
4	6429.3215	150	30	-34.05	-30.00	4.05	PASS	Vertical
5	17033.9034	150	3	-33.87	-30.00	3.87	PASS	Vertical
6	25084.6085	150	253	-54.79	-30.00	24.79	PASS	Vertical

Receiver spurious emissions test data

SISO:

Sub-band 1:

Mode	802.11 a Receiving	Remark	\
Band	\	Channel	5180MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	57.5009	150	83	-71.85	-57.00	14.85	PASS	Horizontal
2	259.1255	150	90	-62.61	-57.00	5.61	PASS	Horizontal
3	750.067	150	3	-73.79	-57.00	16.79	PASS	Horizontal
4	2279.8112	150	3	-57.37	-47.00	10.37	PASS	Horizontal
5	10833.8734	150	3	-51.85	-47.00	4.85	PASS	Horizontal
6	25099.555	150	62	-64.51	-47.00	17.51	PASS	Horizontal

Mode	802.11 a Receiving	Remark	\
Band	\	Channel	5180MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	65.0188	150	77	-67.22	-57.00	10.22	PASS	Vertical
2	208.9254	150	87	-68.85	-57.00	11.85	PASS	Vertical
3	830.29	150	21	-67.25	-57.00	10.25	PASS	Vertical
4	2279.8112	150	87	-56.14	-47.00	9.14	PASS	Vertical
5	10253.1301	150	87	-51.42	-47.00	4.42	PASS	Vertical
6	25075.7538	150	0	-64.74	-47.00	17.74	PASS	Vertical

Mode	802.11 n(HT40) Receiving	Remark	\
Band	\	Channel	5190MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	45.4723	150	4	-65.46	-57.00	8.46	PASS	Horizontal
2	133.1162	150	135	-63.10	-57.00	6.10	PASS	Horizontal
3	832.4726	150	259	-67.46	-57.00	10.46	PASS	Horizontal
4	2279.8112	150	4	-57.47	-47.00	10.47	PASS	Horizontal
5	11835.5534	150	336	-50.18	-47.00	3.18	PASS	Horizontal
6	25025.1763	150	169	-64.24	-47.00	17.24	PASS	Horizontal

Mode	802.11 n(HT40) Receiving	Remark	\
Band	\	Channel	5190MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	67.0559	150	348	-65.48	-57.00	8.48	PASS	Vertical
2	208.8769	150	202	-67.47	-57.00	10.47	PASS	Vertical
3	833.0547	150	158	-66.55	-57.00	9.55	PASS	Vertical
4	2279.8112	150	228	-56.34	-47.00	9.34	PASS	Vertical
5	10258.5703	150	192	-51.44	-47.00	4.44	PASS	Vertical
6	25076.6038	150	192	-64.52	-47.00	17.52	PASS	Vertical

Mode	802.11 ax(HE160) Receiving	Remark	\
Band	\	Channel	5250MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	62.3026	150	13	-68.58	-57.00	11.58	PASS	Horizontal
2	208.8769	150	154	-67.55	-57.00	10.55	PASS	Horizontal
3	828.6894	150	3	-71.32	-57.00	14.32	PASS	Horizontal
4	2279.8112	150	247	-56.44	-47.00	9.44	PASS	Horizontal
5	10725.749	150	355	-51.54	-47.00	4.54	PASS	Horizontal
6	25059.603	150	310	-64.51	-47.00	17.51	PASS	Horizontal

Mode	802.11 ax(HE160) Receiving	Remark	\
Band	\	Channel	5250MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	64.2912	150	291	-62.78	-57.00	5.78	PASS	Vertical
2	208.8769	150	57	-67.51	-57.00	10.51	PASS	Vertical
3	829.126	150	57	-68.28	-57.00	11.28	PASS	Vertical
4	2279.8112	150	312	-55.44	-47.00	8.44	PASS	Vertical
5	10422.4569	150	171	-51.71	-47.00	4.71	PASS	Vertical
6	24579.754	150	160	-64.79	-47.00	17.79	PASS	Vertical

Mode	802.11 ac(VHT160) Receiving	Remark	\
Band	\	Channel	5250MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	60.5565	150	334	-66.18	-57.00	9.18	PASS	Horizontal
2	280.0785	150	90	-61.43	-57.00	4.43	PASS	Horizontal
3	828.8349	150	334	-69.76	-57.00	12.76	PASS	Horizontal
4	2279.8112	150	202	-56.59	-47.00	9.59	PASS	Horizontal
5	11248.6899	150	358	-51.58	-47.00	4.58	PASS	Horizontal
6	25040.477	150	168	-64.46	-47.00	17.46	PASS	Horizontal

Mode	802.11 ac(VHT160) Receiving	Remark	\
Band	\	Channel	5250MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	69.8205	150	255	-65.22	-57.00	8.22	PASS	Vertical
2	208.8769	150	136	-67.71	-57.00	10.71	PASS	Vertical
3	829.029	150	34	-68.31	-57.00	11.31	PASS	Vertical
4	2279.8112	150	220	-55.88	-47.00	8.88	PASS	Vertical
5	10633.9454	150	220	-51.74	-47.00	4.74	PASS	Vertical
6	24997.5499	150	2	-64.73	-47.00	17.73	PASS	Vertical

Sub-band 2:

Mode	802.11 a Receiving	Remark	\
Band	\	Channel	5260MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	62.2541	150	348	-68.60	-57.00	11.60	PASS	Horizontal
2	208.8769	150	158	-67.43	-57.00	10.43	PASS	Horizontal
3	750.067	150	66	-72.96	-57.00	15.96	PASS	Horizontal
4	2279.8112	150	168	-57.74	-47.00	10.74	PASS	Horizontal
5	11273.1709	150	99	-51.85	-47.00	4.85	PASS	Horizontal
6	25041.3271	150	144	-64.03	-47.00	17.03	PASS	Horizontal

Mode	802.11 a Receiving	Remark	\
Band	\	Channel	5260MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	67.0074	150	347	-66.16	-57.00	9.16	PASS	Vertical
2	208.8769	150	216	-67.12	-57.00	10.12	PASS	Vertical
3	750.067	150	294	-69.66	-57.00	12.66	PASS	Vertical
4	2279.8112	150	133	-56.66	-47.00	9.66	PASS	Vertical
5	11054.2022	150	284	-51.86	-47.00	4.86	PASS	Vertical
6	24996.2748	150	261	-65.03	-47.00	18.03	PASS	Vertical

Mode	802.11 n(HT40) Receiving	Remark	\
Band	\	Channel	5310MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	60.508	150	346	-66.82	-57.00	9.82	PASS	Horizontal
2	208.8769	150	326	-67.20	-57.00	10.20	PASS	Horizontal
3	750.067	150	266	-74.57	-57.00	17.57	PASS	Horizontal
4	2279.8112	150	58	-57.00	-47.00	10.00	PASS	Horizontal
5	11241.8897	150	137	-51.60	-47.00	4.60	PASS	Horizontal
6	25024.3262	150	128	-64.01	-47.00	17.01	PASS	Horizontal

Mode	802.11 n(HT40) Receiving	Remark	\
Band	\	Channel	5310MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	69.8205	150	234	-65.94	-57.00	8.94	PASS	Vertical
2	208.8769	150	208	-66.46	-57.00	9.46	PASS	Vertical
3	750.067	150	357	-68.69	-57.00	11.69	PASS	Vertical
4	2279.8112	150	38	-56.54	-47.00	9.54	PASS	Vertical
5	10715.5486	150	357	-51.13	-47.00	4.13	PASS	Vertical
6	24636.7068	150	336	-65.03	-47.00	18.03	PASS	Vertical

Mode	802.11 ax(HE160) Receiving	Remark	\
Band	\	Channel	5250MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	60.4595	150	307	-66.45	-57.00	9.45	PASS	Horizontal
2	208.8769	150	192	-67.77	-57.00	10.77	PASS	Horizontal
3	750.067	150	350	-73.09	-57.00	16.09	PASS	Horizontal
4	2279.8112	150	126	-57.45	-47.00	10.45	PASS	Horizontal
5	11236.4495	150	22	-51.36	-47.00	4.36	PASS	Horizontal
6	25027.7264	150	100	-64.37	-47.00	17.37	PASS	Horizontal

Mode	802.11 ax(HE160) Receiving	Remark	\
Band	\	Channel	5250MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	69.8205	150	348	-65.67	-57.00	8.67	PASS	Vertical
2	208.8769	150	224	-67.06	-57.00	10.06	PASS	Vertical
3	750.067	150	357	-69.33	-57.00	12.33	PASS	Vertical
4	2279.8112	150	357	-56.79	-47.00	9.79	PASS	Vertical
5	10735.9494	150	316	-51.84	-47.00	4.84	PASS	Vertical
6	25033.2517	150	293	-64.56	-47.00	17.56	PASS	Vertical

Mode	802.11 ac(VHT160) Receiving	Remark	\
Band	\	Channel	5250MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	60.508	150	290	-67.04	-57.00	10.04	PASS	Horizontal
2	208.8769	150	160	-67.56	-57.00	10.56	PASS	Horizontal
3	750.0185	150	312	-74.03	-57.00	17.03	PASS	Horizontal
4	2279.8112	150	239	-57.40	-47.00	10.40	PASS	Horizontal
5	11267.7307	150	12	-51.67	-47.00	4.67	PASS	Horizontal
6	25074.0537	150	360	-64.34	-47.00	17.34	PASS	Horizontal

Mode	802.11 ac(VHT160) Receiving	Remark	\
Band	\	Channel	5250MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	67.0074	150	0	-65.83	-57.00	8.83	PASS	Vertical
2	208.8769	150	226	-66.79	-57.00	9.79	PASS	Vertical
3	750.067	150	44	-69.40	-57.00	12.40	PASS	Vertical
4	2279.8112	150	12	-56.33	-47.00	9.33	PASS	Vertical
5	11239.1696	150	304	-50.52	-47.00	3.52	PASS	Vertical
6	24601.8551	150	271	-64.83	-47.00	17.83	PASS	Vertical

Sub-band 3:

Mode	802.11 a Receiving	Remark	\
Band	\	Channel	5500MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	62.3511	150	61	-68.94	-57.00	11.94	PASS	Horizontal
2	208.8769	150	3	-67.54	-57.00	10.54	PASS	Horizontal
3	598.9819	150	132	-69.94	-57.00	12.94	PASS	Horizontal
4	2279.8112	150	288	-57.73	-47.00	10.73	PASS	Horizontal
5	11257.5303	150	61	-51.63	-47.00	4.63	PASS	Horizontal
6	24871.8872	150	144	-66.01	-47.00	19.01	PASS	Horizontal

Mode	802.11 a Receiving	Remark	\
Band	\	Channel	5500MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	68.8504	150	236	-66.05	-57.00	9.05	PASS	Vertical
2	208.8769	150	152	-68.09	-57.00	11.09	PASS	Vertical
3	750.067	150	357	-69.87	-57.00	12.87	PASS	Vertical
4	2279.8112	150	357	-57.01	-47.00	10.01	PASS	Vertical
5	11378.5751	150	348	-50.42	-47.00	3.42	PASS	Vertical
6	25034.3034	150	40	-65.20	-47.00	18.20	PASS	Vertical

Mode	802.11 n(HT40) Receiving	Remark	\
Band	\	Channel	5500MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	60.5565	150	292	-66.53	-57.00	9.53	PASS	Horizontal
2	208.9254	150	136	-67.13	-57.00	10.13	PASS	Horizontal
3	907.9909	150	157	-68.14	-57.00	11.14	PASS	Horizontal
4	2279.8112	150	85	-57.80	-47.00	10.80	PASS	Horizontal
5	11473.779	150	210	-51.63	-47.00	4.63	PASS	Horizontal
6	25089.509	150	118	-64.76	-47.00	17.76	PASS	Horizontal

Mode	802.11 n(HT40) Receiving	Remark	\
Band	\	Channel	5500MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	64.2912	150	349	-62.28	-57.00	5.28	PASS	Vertical
2	208.8769	150	357	-67.53	-57.00	10.53	PASS	Vertical
3	750.067	150	357	-69.27	-57.00	12.27	PASS	Vertical
4	2279.8112	150	8	-56.60	-47.00	9.60	PASS	Vertical
5	11272.4909	150	235	-50.59	-47.00	3.59	PASS	Vertical
6	24567.0567	150	88	-65.69	-47.00	18.69	PASS	Vertical

Mode	802.11 ax(HE160) Receiving	Remark	\
Band	\	Channel	5570MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	60.411	150	296	-69.15	-57.00	12.15	PASS	Horizontal
2	208.8769	150	114	-67.18	-57.00	10.18	PASS	Horizontal
3	750.0185	150	192	-74.74	-57.00	17.74	PASS	Horizontal
4	2279.8112	150	205	-57.69	-47.00	10.69	PASS	Horizontal
5	11290.1716	150	353	-51.52	-47.00	4.52	PASS	Horizontal
6	25101.5102	150	11	-64.95	-47.00	17.95	PASS	Horizontal

Mode	802.11 ax(HE160) Receiving	Remark	\
Band	\	Channel	5570MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	66.6678	150	187	-68.46	-57.00	11.46	PASS	Vertical
2	208.8769	150	187	-66.18	-57.00	9.18	PASS	Vertical
3	757.4394	150	107	-66.03	-57.00	9.03	PASS	Vertical
4	2279.8112	150	179	-56.69	-47.00	9.69	PASS	Vertical
5	11435.6974	150	340	-50.17	-47.00	3.17	PASS	Vertical
6	25033.5034	150	138	-65.28	-47.00	18.28	PASS	Vertical

Mode	802.11 ac(VHT160) Receiving	Remark	\
Band	\	Channel	5570MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	57.7434	150	253	-67.75	-57.00	10.75	PASS	Horizontal
2	208.8769	150	302	-67.89	-57.00	10.89	PASS	Horizontal
3	699.576	150	110	-71.59	-57.00	14.59	PASS	Horizontal
4	2279.8112	150	11	-57.33	-47.00	10.33	PASS	Horizontal
5	11244.6098	150	241	-51.69	-47.00	4.69	PASS	Horizontal
6	25034.3034	150	335	-64.91	-47.00	17.91	PASS	Horizontal

Mode	802.11 ac(VHT160) Receiving	Remark	\
Band	\	Channel	5570MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	63.3697	150	94	-62.67	-57.00	5.67	PASS	Vertical
2	208.8769	150	357	-67.39	-57.00	10.39	PASS	Vertical
3	731.9756	150	124	-66.59	-57.00	9.59	PASS	Vertical
4	2279.8112	150	237	-56.56	-47.00	9.56	PASS	Vertical
5	10618.3047	150	338	-51.98	-47.00	4.98	PASS	Vertical
6	25024.7025	150	94	-65.47	-47.00	18.47	PASS	Vertical

MIMO:
Sub-band 1:

Mode	802.11 n(HT40) Receiving	Remark	\
Band	\	Channel	5190MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	60.508	150	270	-67.23	-57.00	10.23	PASS	Horizontal
2	245.0113	150	3	-65.68	-57.00	8.68	PASS	Horizontal
3	825.3428	150	294	-70.61	-57.00	13.61	PASS	Horizontal
4	2279.8112	150	280	-57.64	-47.00	10.64	PASS	Horizontal
5	11279.2912	150	201	-51.82	-47.00	4.82	PASS	Horizontal
6	25094.0297	150	327	-64.44	-47.00	17.44	PASS	Horizontal

Mode	802.11 n(HT40) Receiving	Remark	\
Band	\	Channel	5190MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	69.8205	150	191	-65.00	-57.00	8.00	PASS	Vertical
2	208.8769	150	191	-67.09	-57.00	10.09	PASS	Vertical
3	750.067	150	201	-68.74	-57.00	11.74	PASS	Vertical
4	2279.8112	150	210	-56.40	-47.00	9.40	PASS	Vertical
5	10671.3469	150	277	-52.02	-47.00	5.02	PASS	Vertical
6	25992.5246	150	76	-64.63	-47.00	17.63	PASS	Vertical

Mode	802.11 ax(HE160) Receiving	Remark	\
Band	\	Channel	5250MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	60.4595	150	270	-66.28	-57.00	9.28	PASS	Horizontal
2	263.5877	150	75	-63.31	-57.00	6.31	PASS	Horizontal
3	826.2158	150	192	-72.34	-57.00	15.34	PASS	Horizontal
4	2279.8112	150	178	-57.62	-47.00	10.62	PASS	Horizontal
5	11271.8109	150	3	-51.49	-47.00	4.49	PASS	Horizontal
6	25029.4265	150	147	-64.36	-47.00	17.36	PASS	Horizontal

Mode	802.11 ax(HE160) Receiving	Remark	\
Band	\	Channel	5250MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	63.2242	150	201	-62.98	-57.00	5.98	PASS	Vertical
2	208.8769	150	33	-66.86	-57.00	9.86	PASS	Vertical
3	826.6038	150	268	-64.09	-57.00	7.09	PASS	Vertical
4	2279.8112	150	178	-56.70	-47.00	9.70	PASS	Vertical
5	11388.7756	150	313	-50.33	-47.00	3.33	PASS	Vertical
6	25064.2782	150	201	-64.67	-47.00	17.67	PASS	Vertical

Mode	802.11 ac(VHT160) Receiving	Remark	\
Band	\	Channel	5250MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	62.2541	150	24	-67.29	-57.00	10.29	PASS	Horizontal
2	208.8769	150	3	-68.29	-57.00	11.29	PASS	Horizontal
3	825.3428	150	3	-65.42	-57.00	8.42	PASS	Horizontal
4	2279.8112	150	82	-57.82	-47.00	10.82	PASS	Horizontal
5	10699.228	150	82	-51.98	-47.00	4.98	PASS	Horizontal
6	25053.6527	150	14	-64.42	-47.00	17.42	PASS	Horizontal

Mode	802.11 ac(VHT160) Receiving	Remark	\
Band	\	Channel	5250MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	60.023	150	78	-65.49	-57.00	8.49	PASS	Vertical
2	208.9254	150	32	-67.88	-57.00	10.88	PASS	Vertical
3	732.6061	150	87	-64.48	-57.00	7.48	PASS	Vertical
4	2279.8112	150	87	-56.64	-47.00	9.64	PASS	Vertical
5	10406.1362	150	0	-51.49	-47.00	4.49	PASS	Vertical
6	24952.9226	150	87	-64.91	-47.00	17.91	PASS	Vertical

Sub-band 2:

Mode	802.11 n(HT40) Receiving	Remark	\
Band	\	Channel	5310MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	60.4595	150	248	-67.54	-57.00	10.54	PASS	Horizontal
2	208.8769	150	341	-67.37	-57.00	10.37	PASS	Horizontal
3	750.0185	150	297	-74.20	-57.00	17.20	PASS	Horizontal
4	2279.8112	150	272	-57.66	-47.00	10.66	PASS	Horizontal
5	11269.7708	150	28	-51.31	-47.00	4.31	PASS	Horizontal
6	25042.1771	150	70	-64.29	-47.00	17.29	PASS	Horizontal

Mode	802.11 n(HT40) Receiving	Remark	\
Band	\	Channel	5310MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	69.869	150	266	-65.68	-57.00	8.68	PASS	Vertical
2	250.007	150	119	-61.62	-57.00	4.62	PASS	Vertical
3	750.067	150	154	-69.29	-57.00	12.29	PASS	Vertical
4	2279.8112	150	71	-56.71	-47.00	9.71	PASS	Vertical
5	10410.2164	150	302	-51.61	-47.00	4.61	PASS	Vertical
6	23611.1306	150	302	-65.76	-47.00	18.76	PASS	Vertical

Mode	802.11 ax(HE160) Receiving	Remark	\
Band	\	Channel	5250MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	60.508	150	280	-66.21	-57.00	9.21	PASS	Horizontal
2	208.8769	150	125	-66.87	-57.00	9.87	PASS	Horizontal
3	750.067	150	41	-73.99	-57.00	16.99	PASS	Horizontal
4	2279.8112	150	177	-57.57	-47.00	10.57	PASS	Horizontal
5	10640.7456	150	314	-51.72	-47.00	4.72	PASS	Horizontal
6	25013.2757	150	304	-64.48	-47.00	17.48	PASS	Horizontal

Mode	802.11 ax(HE160) Receiving	Remark	\
Band	\	Channel	5250MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	69.8205	150	347	-65.99	-57.00	8.99	PASS	Vertical
2	208.8769	150	59	-66.48	-57.00	9.48	PASS	Vertical
3	755.1113	150	115	-66.55	-57.00	9.55	PASS	Vertical
4	2279.8112	150	92	-56.77	-47.00	9.77	PASS	Vertical
5	10419.0568	150	47	-51.54	-47.00	4.54	PASS	Vertical
6	25035.3768	150	306	-64.70	-47.00	17.70	PASS	Vertical

Mode	802.11 ac(VHT160) Receiving	Remark	\
Band	\	Channel	5250MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	60.4595	150	329	-66.15	-57.00	9.15	PASS	Horizontal
2	208.8769	150	136	-67.54	-57.00	10.54	PASS	Horizontal
3	692.3491	150	125	-69.51	-57.00	12.51	PASS	Horizontal
4	2279.8112	150	25	-57.64	-47.00	10.64	PASS	Horizontal
5	10620.3448	150	69	-51.57	-47.00	4.57	PASS	Horizontal
6	25052.8026	150	206	-64.34	-47.00	17.34	PASS	Horizontal

Mode	802.11 ac(VHT160) Receiving	Remark	\
Band	\	Channel	5250MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	69.8205	150	159	-65.31	-57.00	8.31	PASS	Vertical
2	202.4746	150	357	-68.94	-57.00	11.94	PASS	Vertical
3	750.067	150	280	-68.77	-57.00	11.77	PASS	Vertical
4	2279.8112	150	212	-56.54	-47.00	9.54	PASS	Vertical
5	10676.107	150	10	-51.82	-47.00	4.82	PASS	Vertical
6	24592.9296	150	79	-65.15	-47.00	18.15	PASS	Vertical

Sub-band 3:

Mode	802.11 n(HT40) Receiving	Remark	\
Band	\	Channel	5670MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	60.4595	150	181	-67.93	-57.00	10.93	PASS	Horizontal
2	208.8769	150	281	-67.92	-57.00	10.92	PASS	Horizontal
3	750.067	150	3	-72.64	-57.00	15.64	PASS	Horizontal
4	2160.1264	150	24	-59.40	-47.00	12.40	PASS	Horizontal
5	11388.0955	150	150	-51.69	-47.00	4.69	PASS	Horizontal
6	25047.9048	150	231	-64.82	-47.00	17.82	PASS	Horizontal

Mode	802.11 n(HT40) Receiving	Remark	\
Band	\	Channel	5670MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	69.8205	150	21	-66.29	-57.00	9.29	PASS	Vertical
2	208.8769	150	230	-67.05	-57.00	10.05	PASS	Vertical
3	686.1408	150	109	-66.26	-57.00	9.26	PASS	Vertical
4	2279.8112	150	299	-56.20	-47.00	9.20	PASS	Vertical
5	11206.5283	150	7	-51.21	-47.00	4.21	PASS	Vertical
6	25094.3094	150	38	-65.36	-47.00	18.36	PASS	Vertical

Mode	802.11 ax(HE160) Receiving	Remark	\
Band	\	Channel	5570MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	62.3511	150	323	-68.88	-57.00	11.88	PASS	Horizontal
2	208.8769	150	3	-67.70	-57.00	10.70	PASS	Horizontal
3	750.067	150	360	-73.06	-57.00	16.06	PASS	Horizontal
4	2279.8112	150	148	-57.03	-47.00	10.03	PASS	Horizontal
5	10580.9032	150	125	-51.57	-47.00	4.57	PASS	Horizontal
6	25039.1039	150	85	-64.85	-47.00	17.85	PASS	Horizontal

Mode	802.11 ax(HE160) Receiving	Remark	\
Band	\	Channel	5570MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	69.8205	150	298	-65.12	-57.00	8.12	PASS	Vertical
2	208.8769	150	357	-67.07	-57.00	10.07	PASS	Vertical
3	750.067	150	111	-70.16	-57.00	13.16	PASS	Vertical
4	2279.8112	150	298	-56.45	-47.00	9.45	PASS	Vertical
5	11211.9685	150	120	-51.01	-47.00	4.01	PASS	Vertical
6	24560.6561	150	28	-65.63	-47.00	18.63	PASS	Vertical

Mode	802.11 ac(VHT160) Receiving	Remark	\
Band	\	Channel	5570MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	60.4595	150	230	-67.37	-57.00	10.37	PASS	Horizontal
2	208.8769	150	296	-68.00	-57.00	11.00	PASS	Horizontal
3	731.8786	150	239	-70.88	-57.00	13.88	PASS	Horizontal
4	2279.8112	150	273	-57.15	-47.00	10.15	PASS	Horizontal
5	11231.6893	150	190	-51.78	-47.00	4.78	PASS	Horizontal
6	25060.7061	150	263	-64.89	-47.00	17.89	PASS	Horizontal

Mode	802.11 ac(VHT160) Receiving	Remark	\
Band	\	Channel	5570MHz

Suspected List								
NO.	Freq. [MHz]	Height [cm]	Azimuth [deg]	Level [dBm]	Limit [dBm]	Margin [dB]	Result	Polarity
1	67.0074	150	331	-65.87	-57.00	8.87	PASS	Vertical
2	208.8769	150	46	-67.18	-57.00	10.18	PASS	Vertical
3	750.067	150	249	-70.26	-57.00	13.26	PASS	Vertical
4	2279.8112	150	36	-56.19	-47.00	9.19	PASS	Vertical
5	10718.9488	150	129	-51.80	-47.00	4.80	PASS	Vertical
6	23581.3581	150	230	-66.34	-47.00	19.34	PASS	Vertical

7 PHOTOGRAPHS

Refer to Appendix Photographs of Report No. EED32S821444.

Statement

1. This report is considered invalid without approved signature, special seal and the seal on the perforation;

2. The Company Name shown on Report and Address, the sample(s) and sample information was/were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified;

3. The result(s) shown in this report refer(s) only to the sample(s) tested;

4. Unless otherwise stated,the decision rule for conformity reporting is based on Binary Statement for Simple Acceptance Rule stated in ILAC-G8:09/2019/CNAS-GL015:2022;

5. Without written approval of CTI, this report can't be reproduced except in full;

*** End of Report ***