

RADIO TEST REPORT

for

Dongguan Meiloon Acoustic Equipments Co., Ltd.

Integrated Music System

Model Number: R410

Prepared for : Dongguan Meiloon Acoustic Equipments Co., Ltd.
Address : 80, Yuanlin Road Fenghuanggang Ind, Estate, Tangxia
Town, 523727 Dongguan City, Guangdong Province,
PEOPLE'S REPUBLIC OF CHINA.

Prepared by : Keyway Testing Technology (Guangdong) Co., Ltd.
Address : No.7 of Zhangmutou District, Guanzhang Road,
Zhangmutou town, Dongguan Guangdong China.

Tel: 86-769-87182258
Fax: 86-769-87181058

Report No. : TR23040454-E-005
Date of Test : Aug.10 ~ Sep. 28, 2023
Date of Report : Oct. 10, 2023

Keyway Testing Technology (Guangdong) Co., Ltd.



Applicant:	Dongguan Meiloon Acoustic Equipments Co., Ltd.		
Address:	80, Yuanlin Road Fenghuanggang Ind, Estate, Tangxia Town, 523727 Dongguan City, Guangdong Province, PEOPLE'S REPUBLIC OF CHINA.		
Manufacturer:	Ruark Audio Limited		
Address:	59 Tailors Court, Temple Farm Industrial Estate, Southend on Sea, Essex, SS2 5TH, United Kingdom		
E.U.T:	Integrated Music System		
Model Number:	R410		
Trade Name:	ruark audio	Sample Number:	230811003
Date of Receipt:	Aug. 10, 2023	Date of Test:	Aug.10 ~ Sep. 28, 2023
Test Specification:	ETSI EN 301 893 V2.1.1 (2017-05)		
Test Result:	The equipment under test was found to be compliance with the requirements of the standards applied.		
		Issue Date: Oct. 10, 2023	
Tested by:	Reviewed by:	Approved by:	
 _____ Jacob Ouyang / Engineer	 _____ Billy Zeng / Supervisor	 _____ Andy Cao / Manager	
Other Aspects:			
None.			
Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested			
This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Keyway Testing Technology (Guangdong) Co., Ltd.			

Table of Contents

Page

1. SUMMARY OF TEST RESULTS	5
1.1 TEST PROCEDURES ACCORDING TO THE TECHNICAL STANDARDS:	5
1.2 TEST FACILITY	5
1.3 MEASUREMENT UNCERTAINTY	5
2. GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST CONDITIONS	7
2.3 TEST CONDITIONS AND CHANNEL	7
2.4 DESCRIPTION OF SUPPORT UNITS	9
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	10
3. CENTRE FREQUENCIES	11
3.1 APPLIED PROCEDURES / LIMIT	11
3.2 TEST PROCEDURES	11
3.3 TEST METHOD	11
3.4 TEST SETUP LAYOUT	11
3.5 TEST RESULT	12
4. NOMINAL CHANNEL BANDWIDTH AND OCCUPIED CHANNEL BANDWIDTH	17
4.1 APPLIED PROCEDURES / LIMIT	17
4.2 TEST PROCEDURES	17
4.3 TEST METHOD	17
4.4 TEST SETUP LAYOUT	18
4.5 TEST RESULTS	19
5. RF OUTPUT POWER, TPC AND POWER DENSITY	29
5.1 APPLIED PROCEDURES / LIMIT	29
5.2 TEST PROCEDURES	29
5.3 TEST SETUP LAYOUT	29
5.4 TEST RESULTS	30
6. TRANSMITTER UNWANTED EMISSIONS OUTSIDE THE 5 GHZ RLAN BANDS	55
6.1 APPLIED PROCEDURES / LIMIT	55
6.2 CONFORMANCE	55
6.3 TEST METHOD	55
6.4 TEST SETUP LAYOUT	55
6.5 TEST RESULTS	56
7. TRANSMITTER UNWANTED EMISSIONS WITHIN THE 5 GHZ RLAN BANDS	58
7.1 APPLIED PROCEDURES / LIMIT	58
7.2 TEST PROCEDURES	58
7.3 TEST SETUP LAYOUT	58
8. RECEIVER SPURIOUS EMISSIONS	83
8.1 APPLIED PROCEDURES / LIMIT	83
8.2 TEST PROCEDURES	83
8.3 TEST SETUP LAYOUT	83
8.4 TEST RESULTS	84
9. ADAPTIVITY (CHANNEL ACCESS MECHANISM)	86
9.1 APPLICABILITY OF ADAPTIVE REQUIREMENTS AND LILIT	86
9.2 TEST PROCEDURE	86
9.3 TEST SETUP CONFIGURATION	87

Table of Contents	Page
9.4 LIST OF MEASUREMENTS	87
9.5 TEST RESULTS	88
10. MEDIUM ACCESS PROTOCOL	90
10.1 APPLIED PROCEDURES / LIMIT	90
10.2 TEST RESULTS	90
11. RECEIVER BLOCKING	91
11.1 LIMITS	91
11.2 TEST PROCEDURE	91
11.3 DEVIATION FROM TEST STANDARD	91
11.4 TEST SETUP	91
12. DYNAMIC FREQUENCY SELECTION (DFS)	93
12.1 DFS PARAMETERS	93
12.2 APPLICABILITY	95
12.3 CHANNEL AVAILABILITY CHECK	95
12.4 OFF-CHANNEL CAC (OFF-CHANNEL CHANNEL AVAILABILITY CHECK)	95
12.5 IN-SERVICE MONITORING	95
12.6 CHANNEL SHUTDOWN	96
12.7 NON-OCCUPANCY	96
12.8 UNIFORM SPREADING	96
12.9 TEST PROCEDURE	96
12.10 TEST SETUP	96
12.11 TEST RESULTS	97
13. TEST PHOTOGRAPH	98
14. EUT CONSTRUCTIONAL DETAILS	98

1. SUMMARY OF TEST RESULTS

1.1 Test procedures according to the technical standards:

The following essential requirements and test specifications refer to ETSI EN 301 893 V2.1.1 (2017-05)			
Clause	Test Item	Applicable	NOTE
4.2.1	Centre Frequencies	Compliance	
4.2.2	Nominal Channel Bandwidth and Occupied Channel Bandwidth	Compliance	
4.2.3	RF output power	Compliance	
4.2.3	Transmit Power Control (TPC)	Not Applicable	
4.2.3	Power Density	Compliance	
4.2.4.1	Transmitter unwanted emissions outside the 5 GHz RLAN bands	Compliance	
4.2.4.2	Transmitter unwanted emissions within the 5 GHz RLAN bands	Compliance	
4.2.5	Receiver spurious emissions	Compliance	
4.2.6	Dynamic Frequency Selection (DFS)	Not Applicable	
4.2.7	Adaptivity (Channel Access Mechanism)	Compliance	
4.2.8	Receiver Blocking	Compliance	
4.2.9	User Access Protocol	Compliance*	

Note: Compliance*: Please refer to the product information declared by the manufacturer.

1.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

●**Certificated by CNAS China**

Registration No.: CNAS L5783

Date of registration: August 8, 2012

●**Certificated by VCCI**

Registration No.: R-4045

Date of registration: September 10, 2013

1.3 Measurement Uncertainty

Measurement Uncertainty for a Level of Confidence of 95 %, $U=2xUc(y)$

RF frequency	1×10^{-7}
RF power, conducted	± 1.0 dB
Conducted emission of receivers	± 1 dB
Radiated emission of transmitter	± 6 dB
Radiated emission of receiver	± 6 dB
Temperature	± 1 degree
Humidity	± 5 %

2. GENERAL INFORMATION

2.1 General Description Of EUT

Product Name:	Integrated Music System
Test Model No.:	R410
Series Model:	N/A
Operation Frequency:	802.11n(20MHz): 5180~5700MHz 802.11n(40MHz):5190~5670MHz 802.11ac/ax(80MHz):5210~5610MHz
Modulation type:	802.11a(OFDM): BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM): BPSK,QPSK,16-QAM,64-QAM 802.11ac(OFDM): BPSK,QPSK,16-QAM,64-QAM,256-QAM
Antenna Type:	Internal Antenna
Antenna gain:	ANT 0:3.7dBi, ANT 1:3.7dBi
Power Input:	AC100V-240V 50/60Hz

Note:


1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

802.11n(20MHz) Carrier Frequency Channel					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	40	5200	44	5220
48	5240	52	5220	56	5280
60	5300	64	5320	100	5500
116	5580	140	5700		
802.11n(40MHz) Carrier Frequency Channel					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	46	5230	54	5270
62	5310	102	5510	110	5550
134	5670				
802.11ac/ax(80MHz) Carrier Frequency Channel					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	58	5290	106	5530
122	5610				

2.2 Description Of Test Conditions

(1) EUT was tested in normal configuration (Please See following Block diagram)

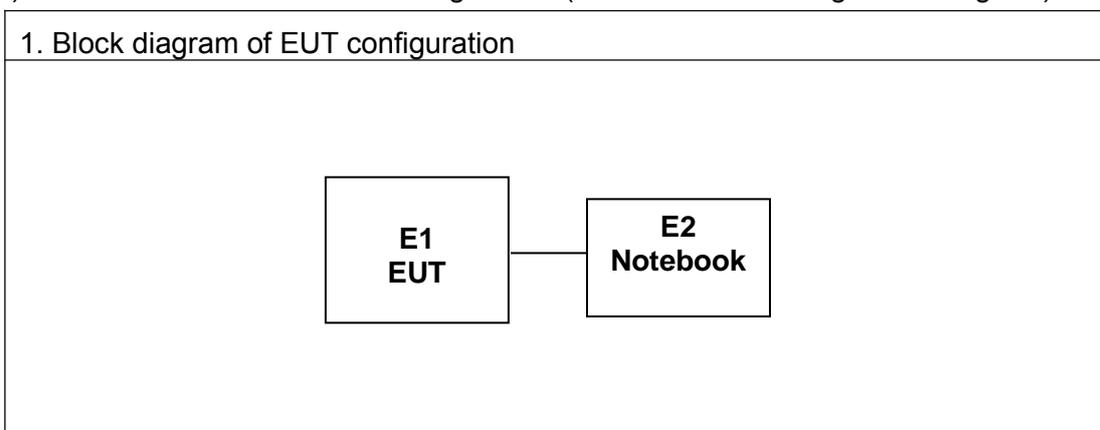

2.3 Test Conditions and Channel

	Normal Test Conditions	Extreme Test Conditions
Temperature	15°C - 35°C	0°C ~ 45°C Note: (1)
Relative Humidity	20% - 75%	N/A
Supply Voltage	AC 230V/50Hz	N/A

802.11n(20MHz)

EUT Channel	Test Frequency (MHz)
CH36	5180
CH40	5200
CH48	5240
CH52	5260
CH64	5320
CH100	5500
CH116	5580
CH140	5700

802.11n(40MHz)

EUT Channel	Test Frequency (MHz)
CH38	5190
CH46	5230
CH54	5270
CH62	5310
CH102	5510
CH110	5550
CH134	5670

802.11ac/ax(80MHz)

CH42	5210
CH58	5290
CH106	5530
CH122	5610

Note:

- (1) The HT 45°C and LT 0°C was declared by manufacturer, The EUT couldn't be operate normally with higher or lower temperature.
- (2) The measurements are performed at the highest, middle, lowest available channels.

2.4 Description Of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Integrated Music System	ruark audio	R410	N/A	EUT
E-2	Notebook	Lenovo	300-15SK	GB14477457	AE

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in m in 『Length』 column.

2.5 Equipments List for All Test Items

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
MXG Signal Analyzer	Keysight	N9020A	MY56070279	Apr 10,23	Apr 09,24
MIMO4TX-1	Keysight	MIMO4TX	TW5451101,TW5451102,TW5451103,TW5451104	Apr 11,22	Apr 10,24
MXG Vector Signal Generator	Agilent	N5182A	MY50143410	Apr 10,23	Apr 09,24
MXG Analog Signal Generator	Agilent	N5181B	MY53050432	Apr 10,23	Apr 09,24
Comprehensive tester	R&S	CMW500	106288	Apr 11,22	Apr 10,24
EMI Test Receiver	Rohde&Schwarz	ESCI	101156	Apr 12,22	Apr 11,24
TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00829	Apr 12,22	Apr 11,24
3m Semi-anechoic Chamber	ETS-LINDGREN	966	170326	Apr 11,22	Apr 10,24
RF Cable	Junkosha	MWX322-2m	1305G007	Apr 11,22	Apr 10,24
RF Cable	Junkosha	MWX322-8m	1305G008	Apr 11,22	Apr 10,24
MULTI-DEVICE Controller	ETS-LINDGREN	2090	126913	N/A	N/A
Antenna Holder	ETS-LINDGREN	2070B	00109601	N/A	N/A
EMI Test Receiver	Rohde&Schwarz	ESCI	101156	Apr 11,22	Apr 10,23
Horn Antenna	DAZE	ZN30701	11003	Apr 11,22	Apr 10,24
Spectrum Analyzer	Keysight	N9020A	MY56070279	Apr 11,22	Apr 10,24
3m anechoic Chamber	ETS-LINDGREN	966	170326	Apr 12,22	Apr 11,24
Signal Amplifier	ZHINAN	ZN3380C	11001	Apr 10,23	Apr 09,24
RF Cable	Junkosha	MWX322-1m	1305G006	Apr 11,22	Apr 10,24
RF Cable	Junkosha	MWX322-2m	1305G007	Apr 11,22	Apr 10,24
RF Cable	Junkosha	MWX322-8m	1305G008	Apr 11,22	Apr 10,24
MULTI-DEVICE Controller	ETS-LINDGREN	2090	126913	N/A	N/A
Antenna Holder	ETS-LINDGREN	2070B	00109601	N/A	N/A

3. CENTRE FREQUENCIES

3.1 APPLIED PROCEDURES / LIMIT LIMIT

The actual centre frequency for any given channel declared by the manufacturer shall be maintained within the range $f_c \pm 20$ ppm

3.2 TEST PROCEDURES

Test conditions

These measurements shall be performed under both normal and extreme test conditions (see clause 5.1.3).

The channels on which the conformance requirements in clause 4.2.1 shall be verified are defined in clause 5.3.2.

The UUT shall be configured to operate at a normal RF Output Power level. In addition, the UUT shall be configured to operate on a single channel.

For a UUT with antenna connector(s) and using dedicated external antenna(s), or for a UUT with integral antenna(s) but with a temporary antenna connector(s) provided, conducted measurements shall be used.

In case of conducted measurements on smart antenna systems (devices with multiple transmit chains) the measurements shall be performed on only one of the active transmit chains.

For a UUT with integral antenna(s) and without a temporary antenna connector(s), radiated measurements shall be used

3.3 TEST METHOD

Conducted measurement:

1. Equipment operating without modulation

This test method requires that the UUT can be operated in an unmodulated test mode.

The UUT shall be connected to a suitable frequency measuring device (e.g. a frequency counter or a spectrum analyser) and operated in an unmodulated mode.

The result shall be recorded.

2. Equipment operating with modulation

This method is an alternative to the above method in case the UUT cannot be operated in an un-modulated mode. The UUT shall be connected to spectrum analyser.

Max Hold shall be selected and the centre frequency adjusted to that of the UUT.

The peak value of the power envelope shall be measured and noted. The span shall be reduced and the marker moved in a positive frequency increment until the upper, (relative to the centre frequency), -10 dBc point is reached. This value shall be noted as f1.

The marker shall then be moved in a negative frequency increment until the lower, (relative to the centre frequency), -10 dBc point is reached. This value shall be noted as f2.


The centre frequency is calculated as $(f1 + f2) / 2$.

Radiated measurement:

The test set up as described in annex B shall be used with a spectrum analyser attached to the test antenna.

The test procedure is as described under clause 5.4.2.2.1.

3.4 TEST SETUP LAYOUT

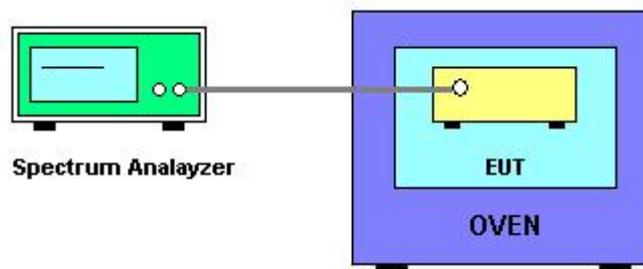


3.5 TEST RESULT


Temperature:	25°C	Relative Humidity:	60 %
Pressure:	1012 hPa	Test Voltage:	AC 230V/50Hz

Channel	Freq. (MHz)	RU & Index	Freq. Deviation(ppm)	Limit (ppm)	Result
			NT		
IEEE 802.11n_20(CW Mode)					
36	5180	N/A	-10.62	±20	PASS
40	5200	N/A	-6.16	±20	PASS
48	5240	N/A	-3.04	±20	PASS
52	5260	N/A	0.58	±20	PASS
56	5280	N/A	2.83	±20	PASS
64	5320	N/A	3.5	±20	PASS
100	5500	N/A	4.39	±20	PASS
116	5580	N/A	5.72	±20	PASS
140	5700	N/A	6.45	±20	PASS
IEEE 802.11n_40(CW Mode)					
38	5190	N/A	7.98	±20	PASS
46	5230	N/A	7.95	±20	PASS
54	5270	N/A	8.13	±20	PASS
62	5310	N/A	8.1	±20	PASS
102	5510	N/A	8.3	±20	PASS
110	5550	N/A	9.25	±20	PASS
118	5590	N/A	9.1	±20	PASS
134	5670	N/A	8.76	±20	PASS
IEEE 802.11ac_80(CW Mode)					
42	5210	N/A	9.61	±20	PASS
58	5290	N/A	9.35	±20	PASS
106	5530	N/A	10.03	±20	PASS
122	5610	N/A	9.5	±20	PASS
IEEE 802.11ax_80(CW Mode)					
42	5210	SU	9.69	±20	PASS
58	5290	SU	9.7	±20	PASS
106	5530	SU	10.21	±20	PASS
122	5610	SU	10.23	±20	PASS


Test Graphs

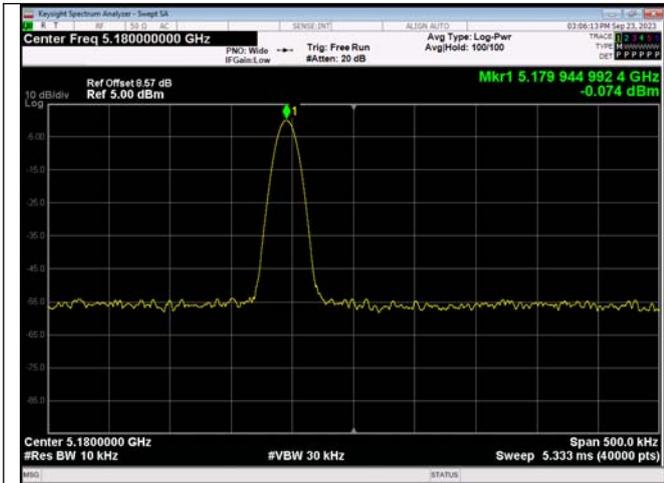


NT/NV
 IEEE 802.11n_20(CW Mode)_Channel 36

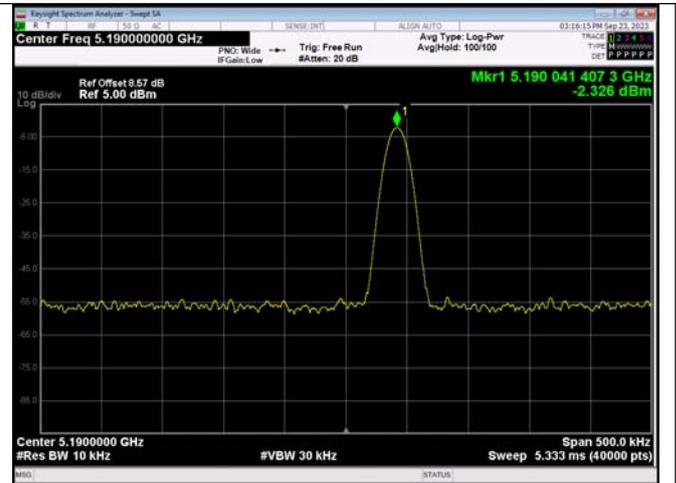


NT/NV
 IEEE 802.11n_40(CW Mode)_Channel 38

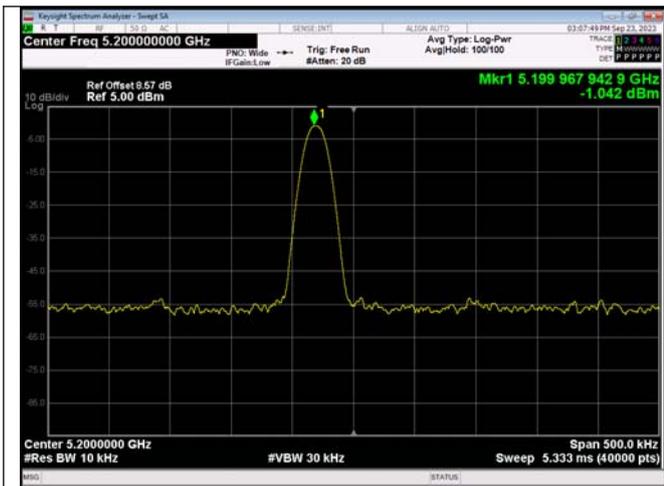


NT/NV
 IEEE 802.11n_20(CW Mode)_Channel 40

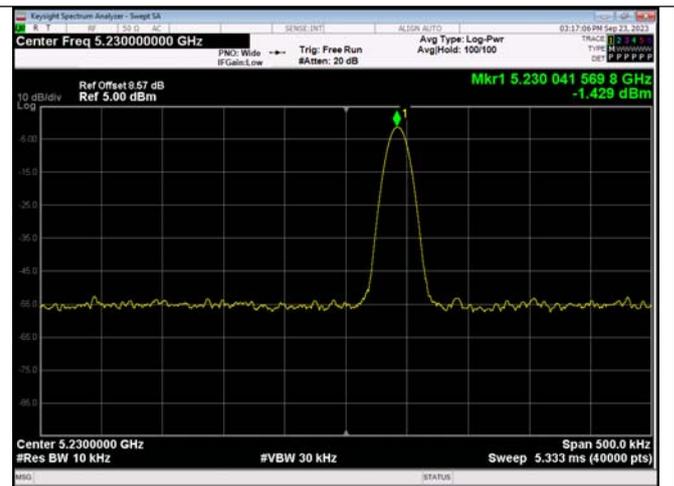


NT/NV
 IEEE 802.11n_40(CW Mode)_Channel 46

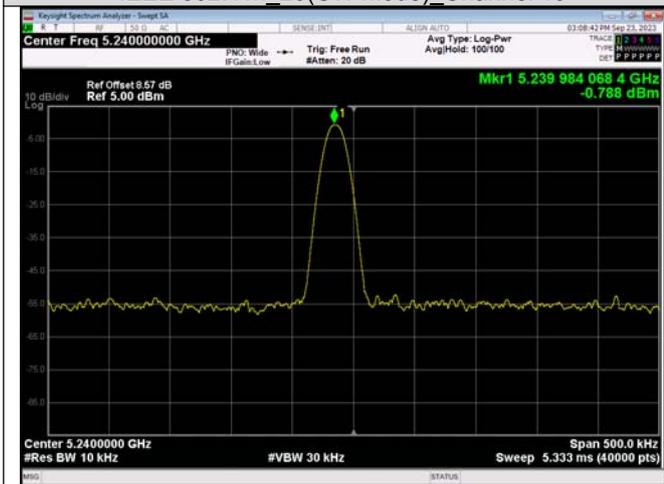


NT/NV
 IEEE 802.11n_20(CW Mode)_Channel 48

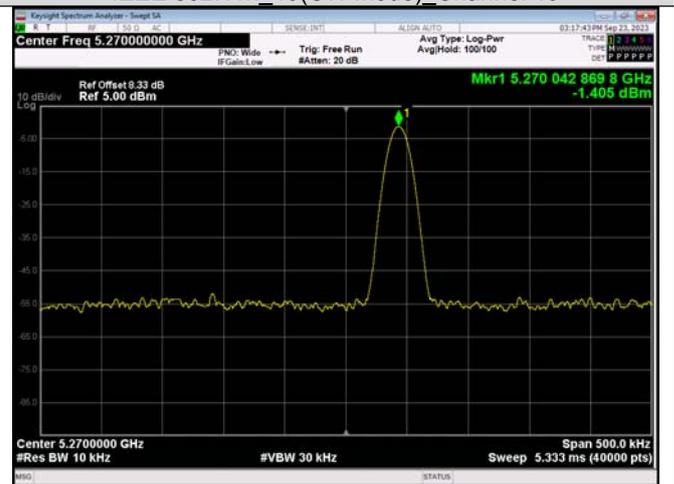


NT/NV
 IEEE 802.11n_40(CW Mode)_Channel 54

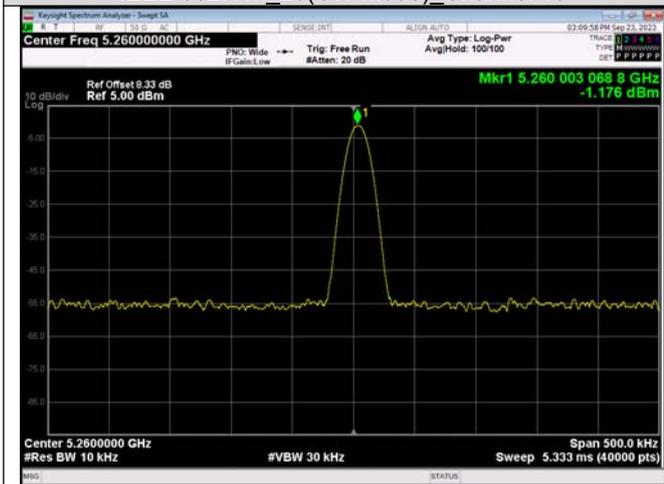


NT/NV
 IEEE 802.11n_20(CW Mode)_Channel 52

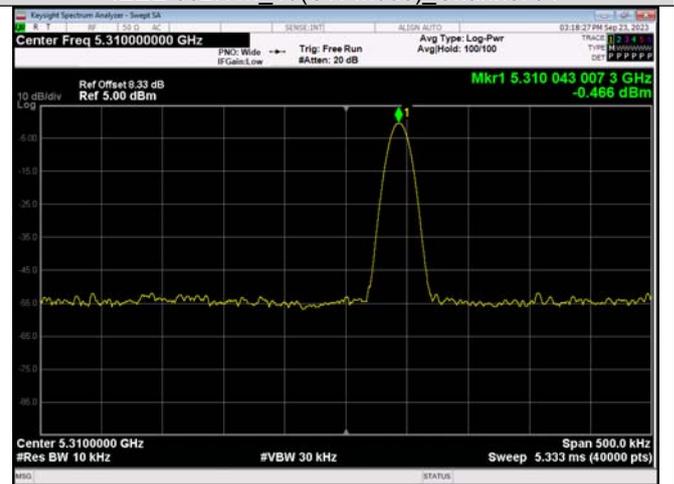


NT/NV
 IEEE 802.11n_40(CW Mode)_Channel 62

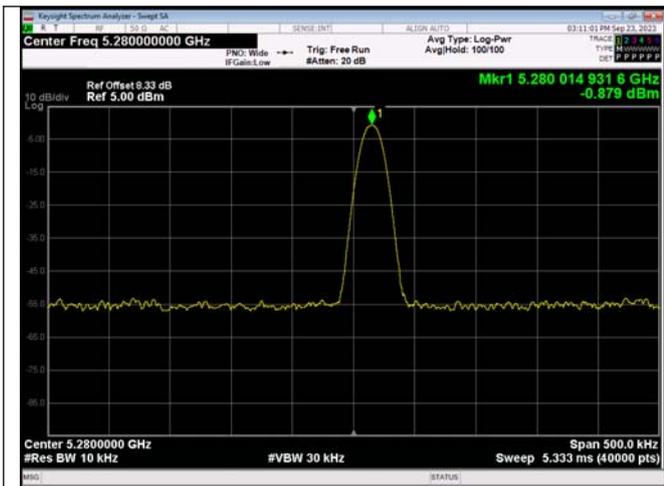


NT/NV
 IEEE 802.11n_20(CW Mode)_Channel 56

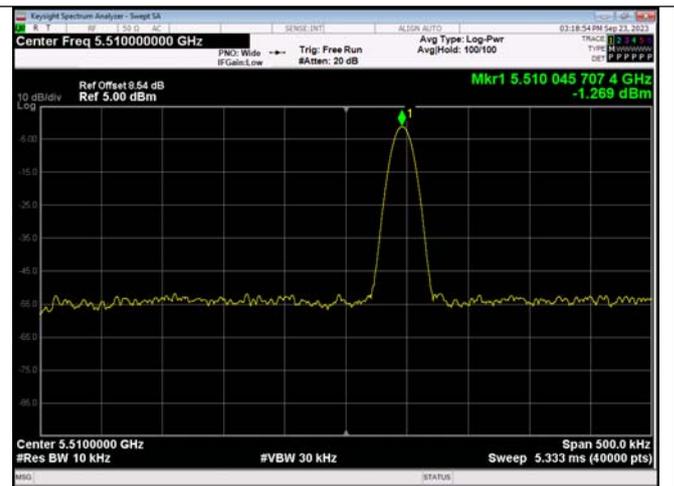


NT/NV
 IEEE 802.11n_40(CW Mode)_Channel 102

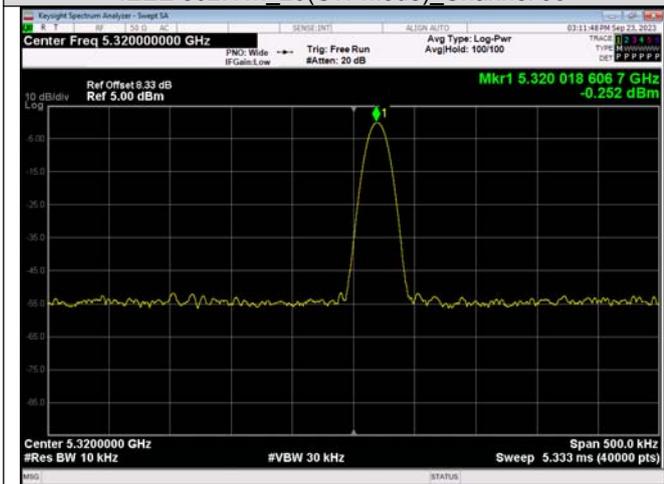


NT/NV
 IEEE 802.11n_20(CW Mode)_Channel 64

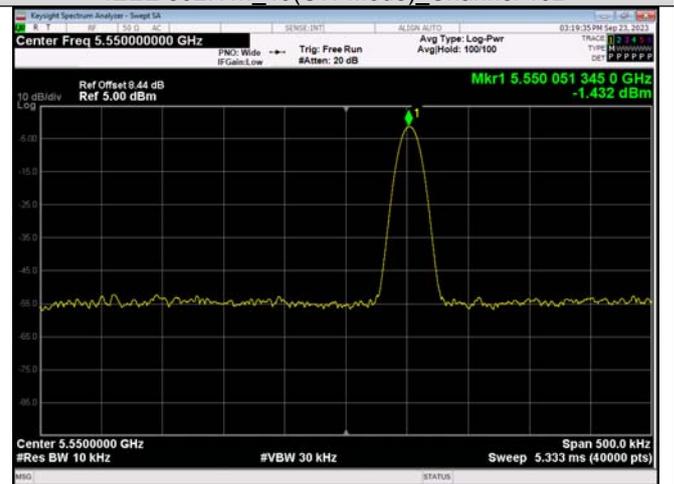


NT/NV
 IEEE 802.11n_40(CW Mode)_Channel 110

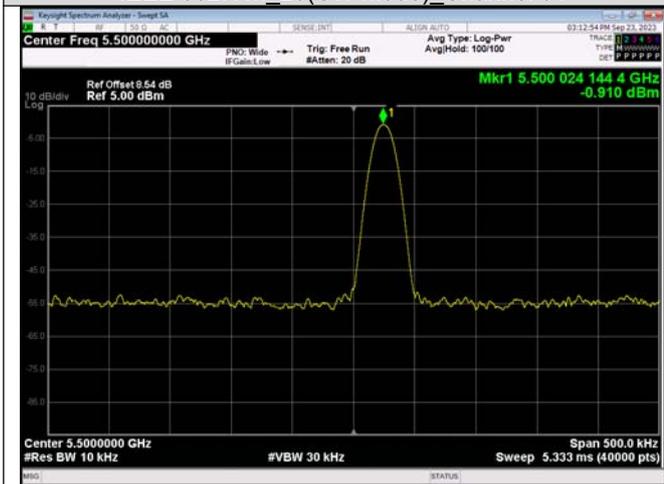


NT/NV
 IEEE 802.11n_20(CW Mode)_Channel 100

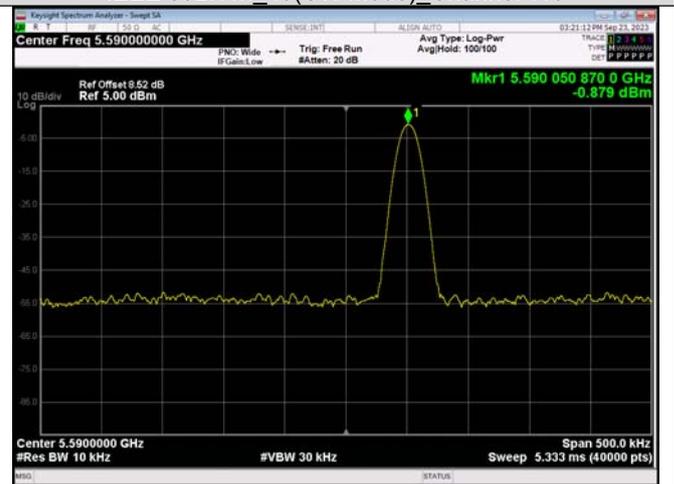


NT/NV
 IEEE 802.11n_40(CW Mode)_Channel 118

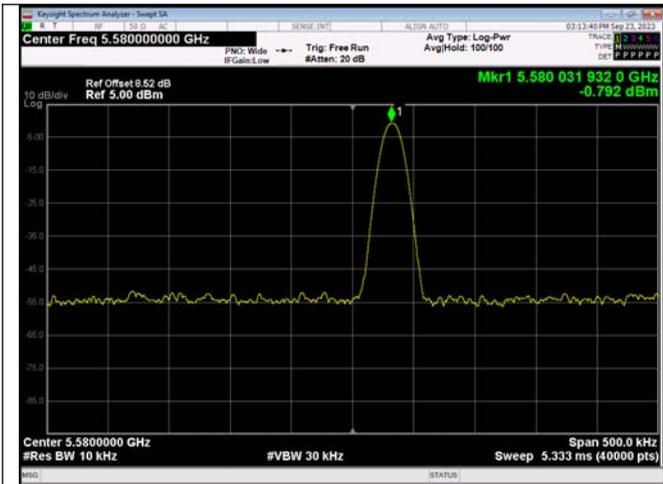

NT/NV
 IEEE 802.11n_20(CW Mode)_Channel 116

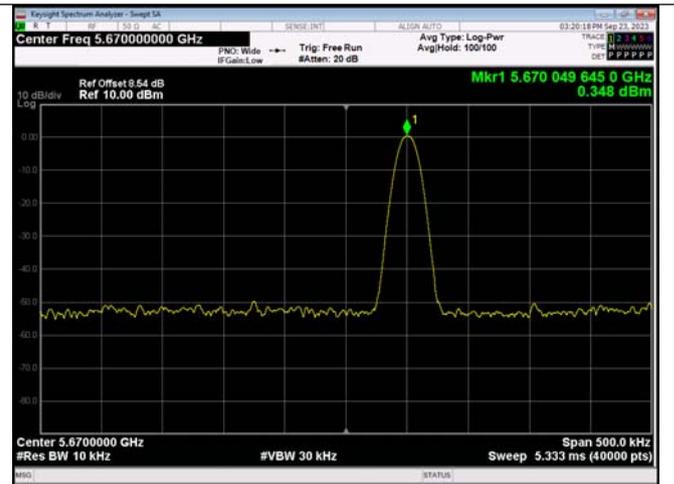


NT/NV
 IEEE 802.11n_40(CW Mode)_Channel 134

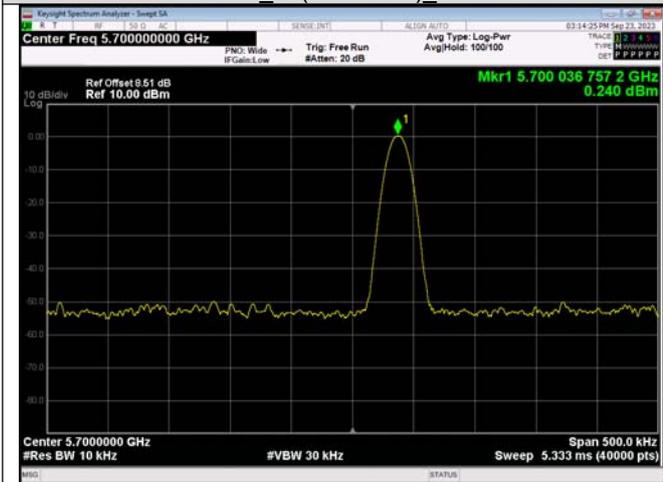


NT/NV
 IEEE 802.11n_20(CW Mode)_Channel 140


Void

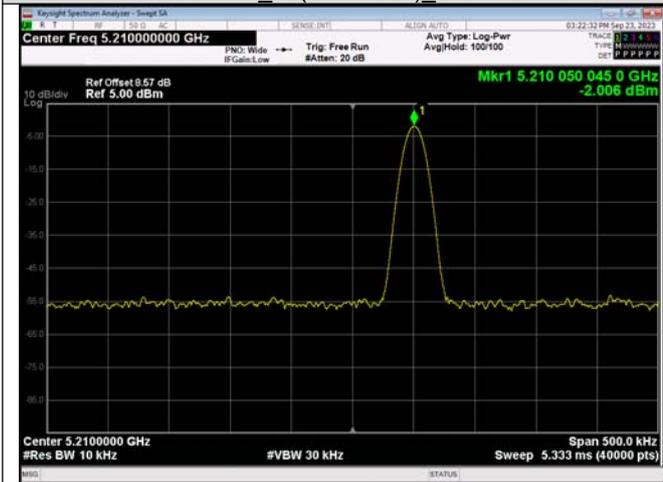


NT/NV
 IEEE 802.11ac_80(CW Mode)_Channel 42

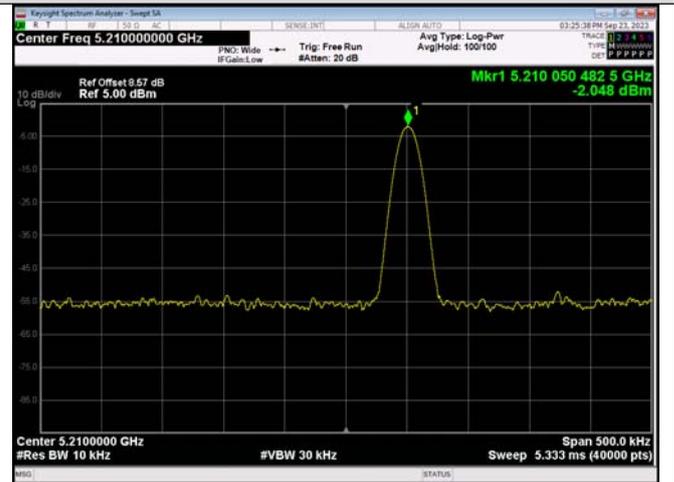


NT/NV
 IEEE 802.11ax_80(CW Mode)_Channel 42_SU

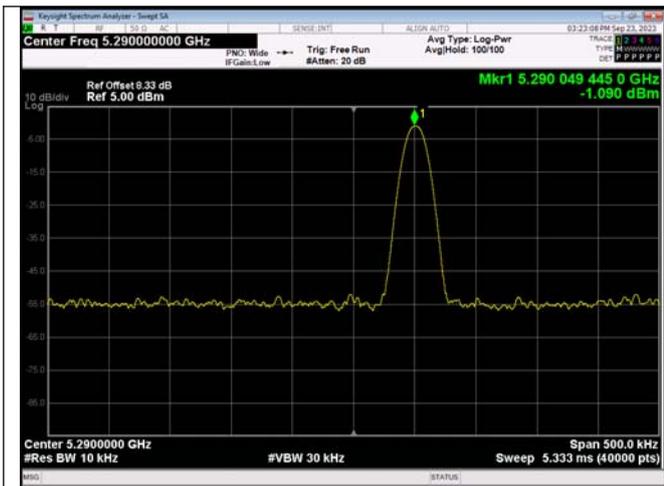


NT/NV
 IEEE 802.11ac_80(CW Mode)_Channel 58

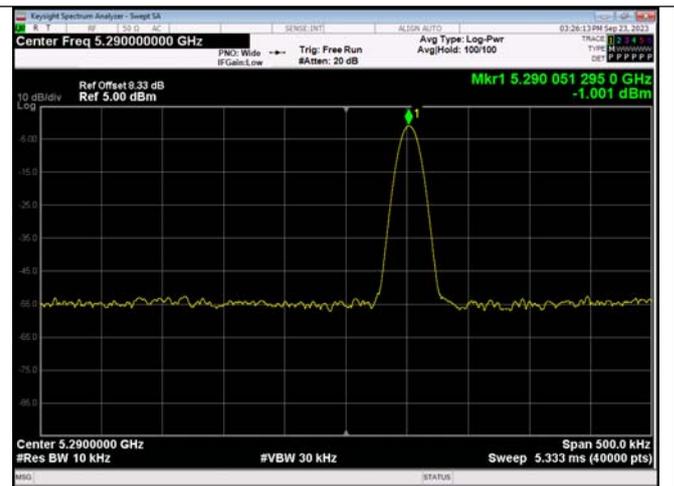


NT/NV
 IEEE 802.11ax_80(CW Mode)_Channel 58_SU

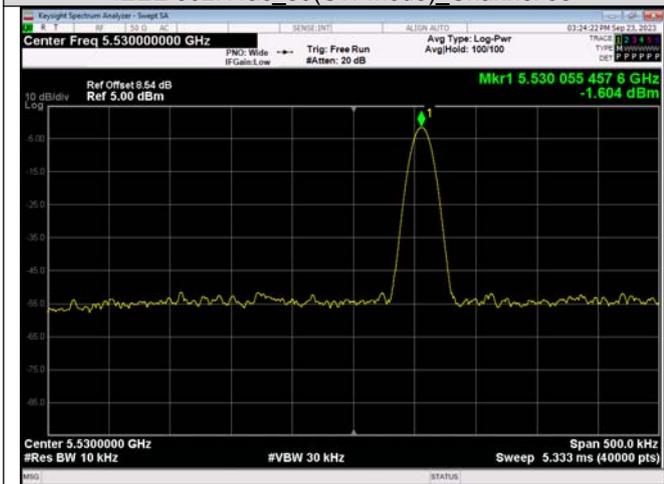


NT/NV
 IEEE 802.11ac_80(CW Mode)_Channel 106

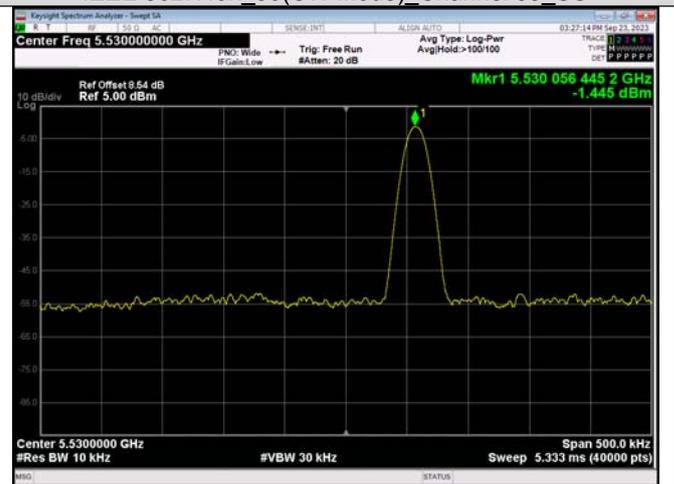

NT/NV
 IEEE 802.11ax_80(CW Mode)_Channel 106_SU

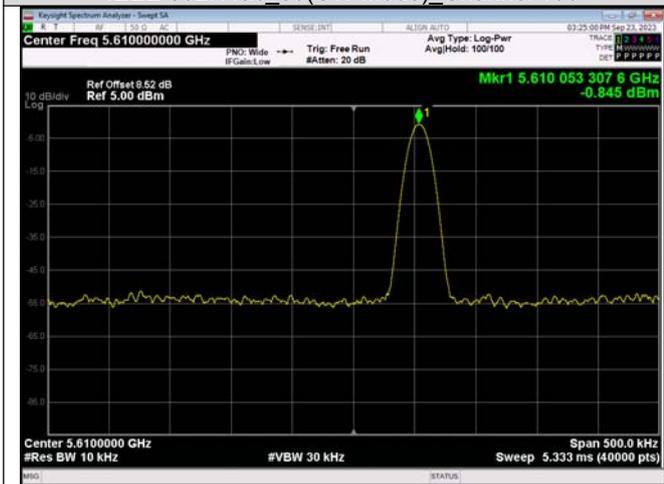

NT/NV
 IEEE 802.11ac_80(CW Mode)_Channel 122

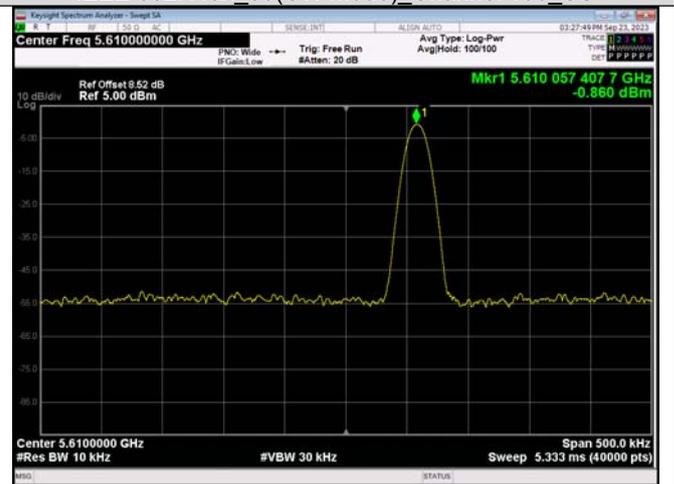

NT/NV
 IEEE 802.11ax_80(CW Mode)_Channel 122_SU

4. NOMINAL CHANNEL BANDWIDTH AND OCCUPIED CHANNEL BANDWIDTH

4.1 APPLIED PROCEDURES / LIMIT

LIMIT

The Nominal Channel Bandwidth shall be at least 5 MHz at all times.

The Occupied Channel Bandwidth shall be between 80 % and 100 % of the declared Nominal Channel Bandwidth. In case of smart antenna systems (devices with multiple transmit chains) each of the transmit chains shall meet this requirement.

NOTE: During an established communication, a device is allowed to operate temporarily in a mode where its Occupied Channel Bandwidth may be reduced to as low as 40 % of its Nominal Channel Bandwidth with a minimum of 4 MHz.

4.2 TEST PROCEDURES

Test conditions

The conformance requirements shall be verified only under normal operating conditions, and on those channels and channel bandwidths defined in clause 5.1.3(ETSI EN 301 893 V2.1.1).

The measurements shall be performed using normal operation of the equipment with the test signal applied.

The UUT shall be configured to operate at a typical RF power output level.

When equipment has simultaneous transmissions in adjacent channels, these transmissions may be considered as one signal with an actual Nominal Channel Bandwidth of 'n' times the individual Nominal Channel Bandwidth where 'n' is the number of adjacent channels. When equipment has simultaneous transmissions in non-adjacent channels, each power envelope shall be considered separately.

For a UUT with antenna connector(s) and using dedicated external antenna(s), or for a UUT with integral antenna(s) but with a temporary antenna connector(s) provided, conducted measurements shall be used.

In case of conducted measurements on smart antenna systems (devices with multiple transmit chains) measurements need only to be performed on one of the active transmit chains (antenna outputs).

For a UUT with integral antenna(s) and without a temporary antenna connector(s), radiated measurements shall be used.

4.3 TEST METHOD

Conducted measurement

The measurement procedure shall be as follows:

Step 1:

Connect the UUT to the spectrum analyser and use the following settings:

- Centre Frequency: The centre frequency of the channel under test
- Resolution BW: 100 kHz
- Video BW: 300 kHz
- Frequency Span: 2 x Nominal Bandwidth (e.g. 40 MHz for a 20 MHz channel)
- Detector Mode: Peak
- Trace Mode: Max Hold

Step 2:

Wait for the trace to stabilize.

Step 3:


Make sure that the power envelope is sufficiently above the noise floor of the analyser to avoid the noise signals left and right from the power envelope being taken into account by this measurement.

Use the 99 % bandwidth function of the spectrum analyser to measure the Occupied Channel Bandwidth of the UUT. This value shall be recorded.

Radiated measurement

The test set up as described in annex B and the applicable measurement procedures described in annex C shall be used. The test procedure is as described under clause 5.4.3.2.1


4.4 TEST SETUP LAYOUT

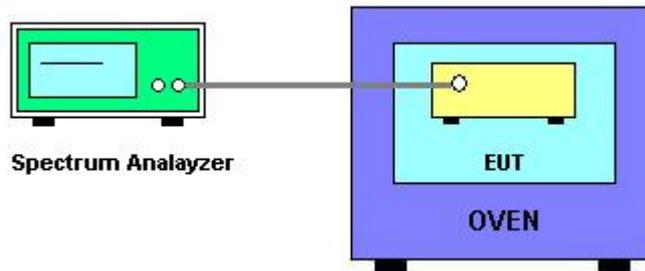


4.5 TEST RESULTS

Mode	Ch.	RU & Index	Ant.	Frequency (MHz)	OBW (MHz)	Lower Edge (MHz)	Upper Edge (MHz)	Limit OBW (MHz)	Result		
IEEE 802.11n_20	36	N/A	0	5180	17.636	5171.148	5188.78	16-20	PASS		
	40			5200	17.636	5191.144	5208.78		PASS		
	48			5240	17.634	5231.148	5248.78		PASS		
	52			5260	17.636	5251.152	5268.784		PASS		
	56			5280	17.634	5271.156	5288.788		PASS		
	64			5320	17.631	5311.148	5328.776		PASS		
	100			5500	17.641	5491.136	5508.776		PASS		
	116			5580	17.635	5571.152	5588.784		PASS		
	140			5700	17.632	5691.144	5708.772		PASS		
IEEE 802.11n_40	38			N/A	0	5190	36.249	5171.84	5208.088	32-40	PASS
	46					5230	36.226	5211.848	5248.072		PASS
	54					5270	36.246	5251.848	5288.088		PASS
	62					5310	36.225	5291.848	5328.064		PASS
	102					5510	36.264	5491.808	5528.072		PASS
	110	5550	36.266			5531.84	5568.104	PASS			
	118	5590	36.247			5571.848	5608.088	PASS			
IEEE 802.11ac_80	134	N/A	0	5670	36.241	5651.864	5688.096	64-80	PASS		
	42			5210	75.680	5172.176	5247.84		PASS		
	58			5290	75.654	5252.176	5327.824		PASS		
	106			5530	75.755	5492.096	5567.84		PASS		
IEEE 802.11ax_80	122	SU	0	5610	75.709	5572.16	5647.856	64-80	PASS		
	42			5210	77.015	5171.52	5248.528		PASS		
	58			5290	76.944	5251.536	5328.48		PASS		
	106			5530	77.098	5491.424	5568.512		PASS		
	122			5610	77.015	5571.536	5648.544		PASS		

Test Graphs

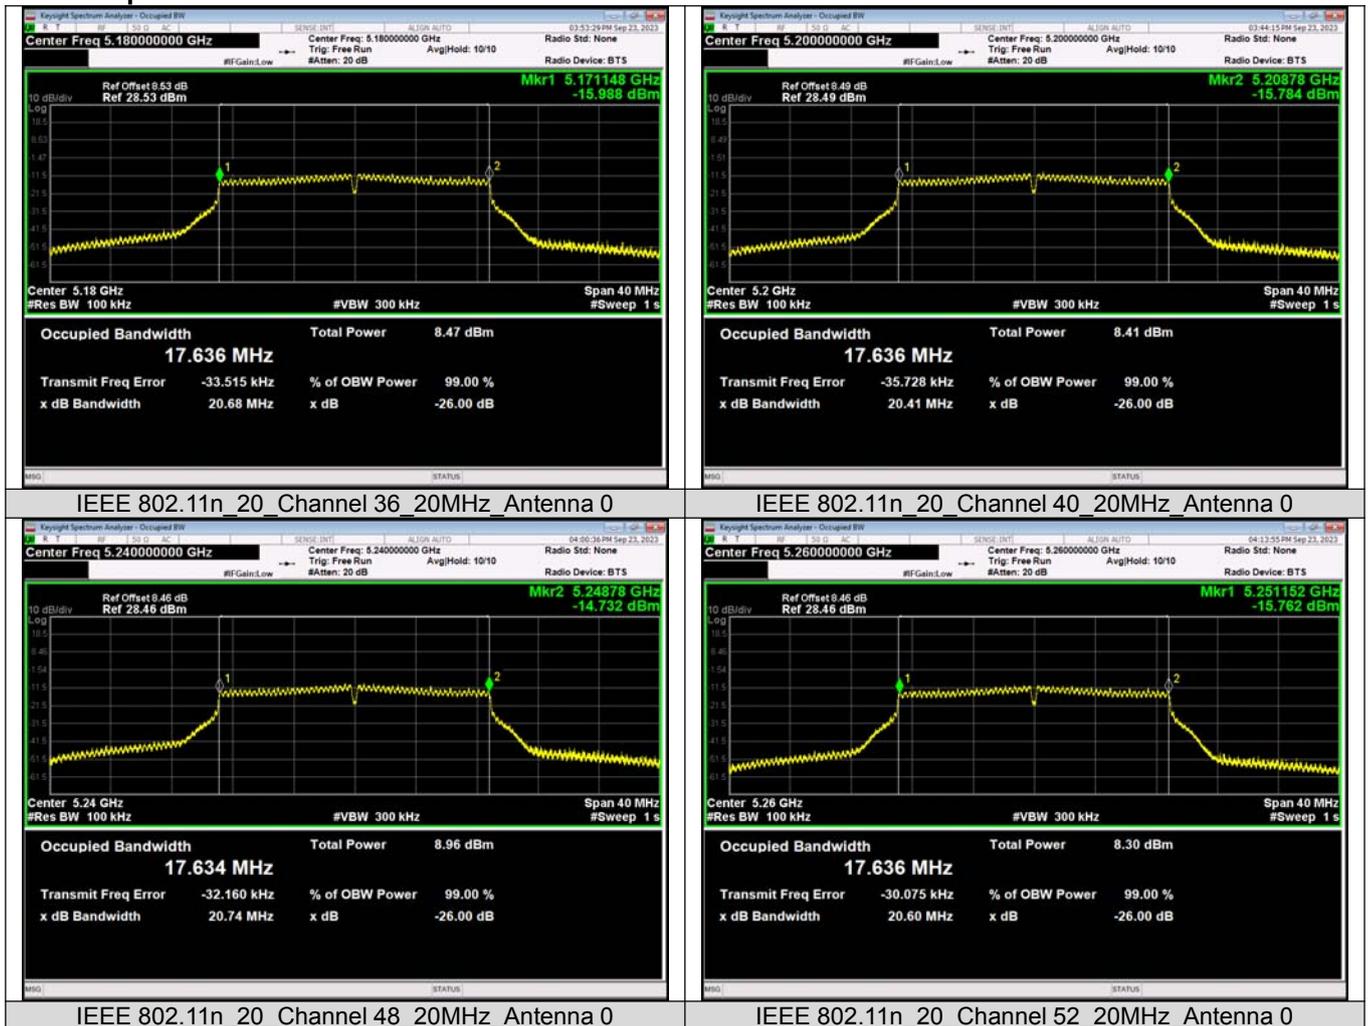


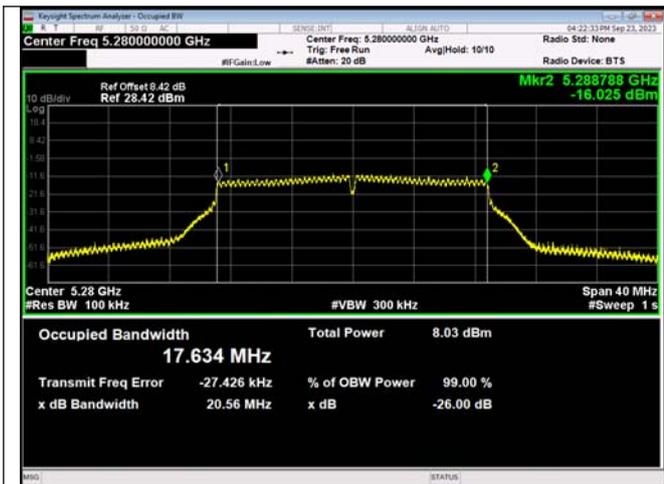


IEEE 802.11n_20 Channel 56_20MHz_Antenna 0




IEEE 802.11n_20 Channel 64_20MHz_Antenna 0

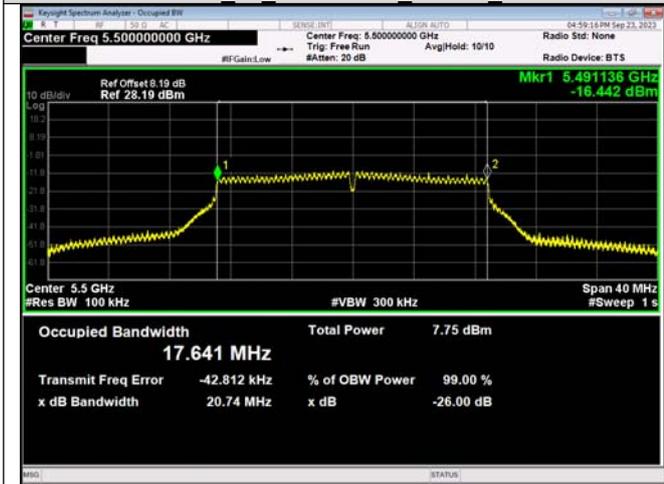


IEEE 802.11n_20 Channel 100_20MHz_Antenna 0

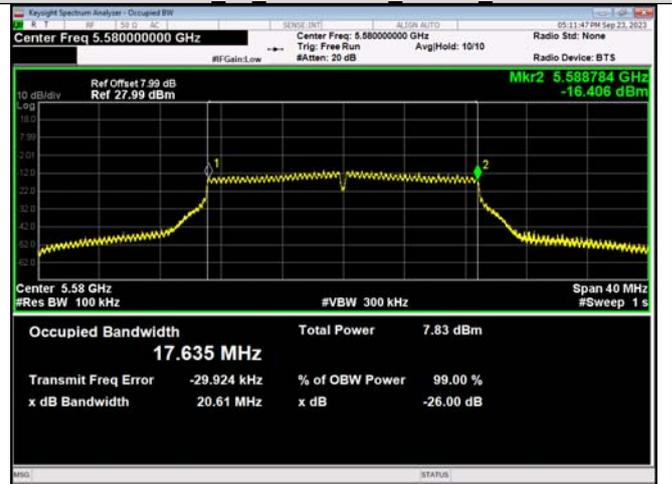

IEEE 802.11n_20 Channel 116_20MHz_Antenna 0

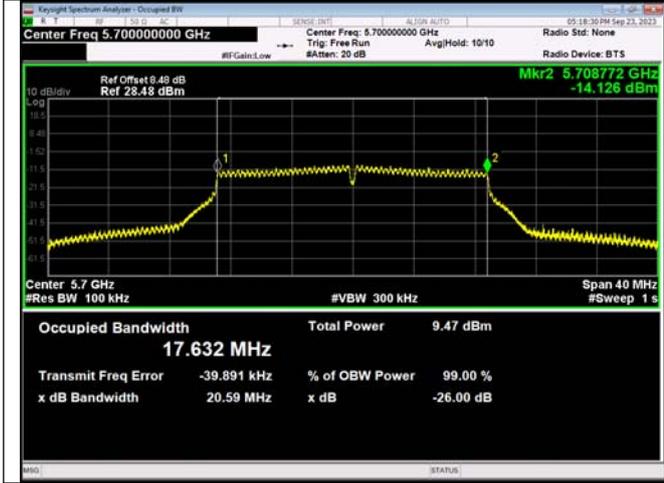


IEEE 802.11n_20 Channel 140_20MHz_Antenna 0

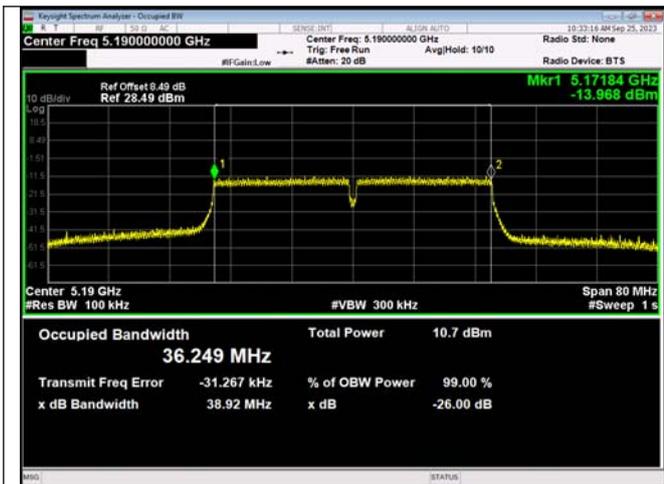

IEEE 802.11n 40 Channel 38 40MHz Antenna 0




IEEE 802.11n 40 Channel 46 40MHz Antenna 0

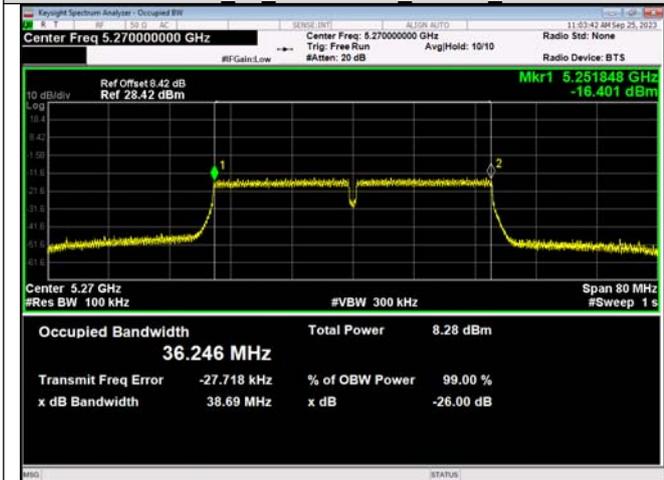

IEEE 802.11n 40 Channel 54 40MHz Antenna 0




IEEE 802.11n 40 Channel 62 40MHz Antenna 0

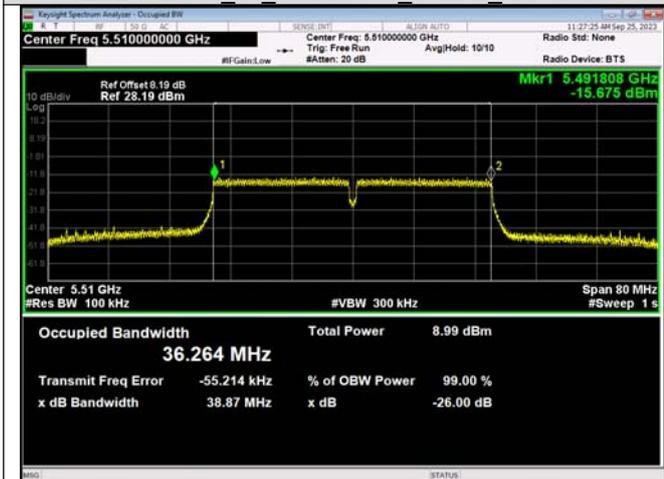

IEEE 802.11n 40 Channel 102 40MHz Antenna 0




IEEE 802.11n 40 Channel 110 40MHz Antenna 0

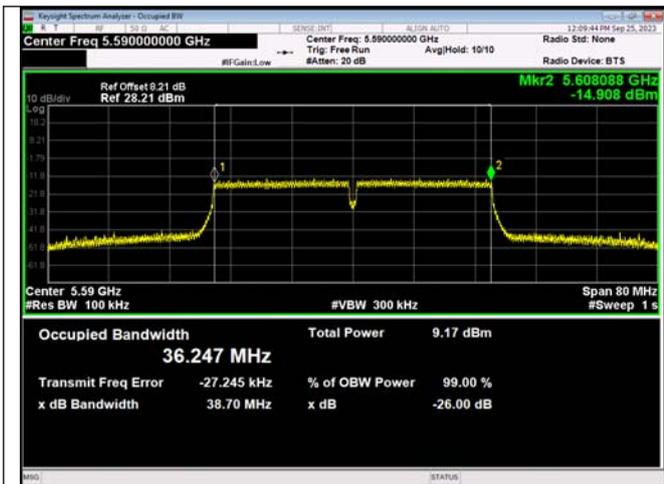


IEEE 802.11n_40_Channel 118_40MHz_Antenna 0




IEEE 802.11n_40_Channel 134_40MHz_Antenna 0

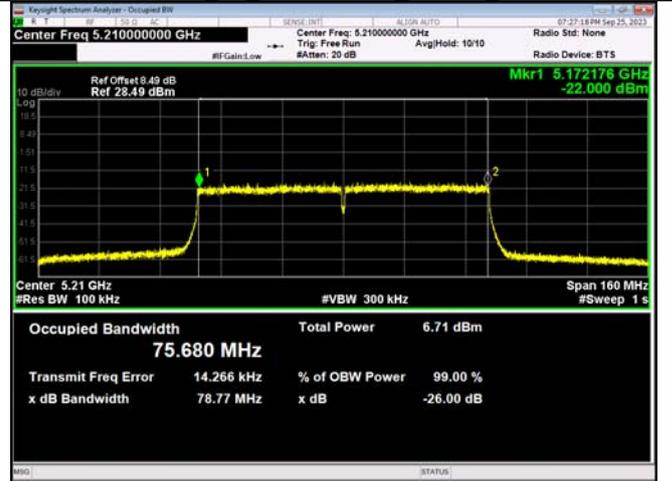


IEEE 802.11ac_80_Channel 42_80MHz_Antenna 0

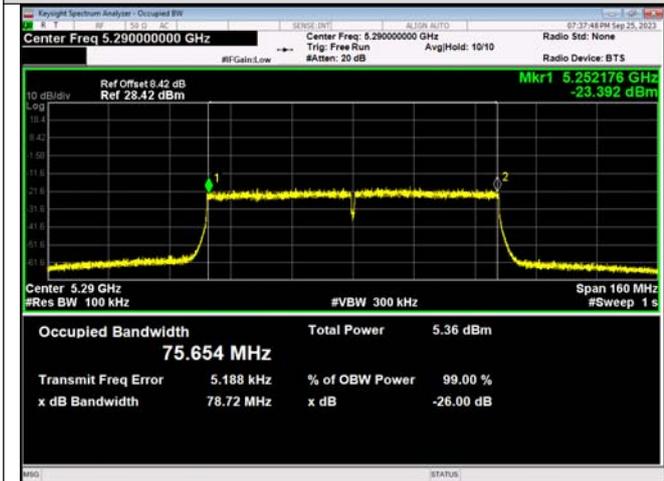


IEEE 802.11ac_80_Channel 58_80MHz_Antenna 0

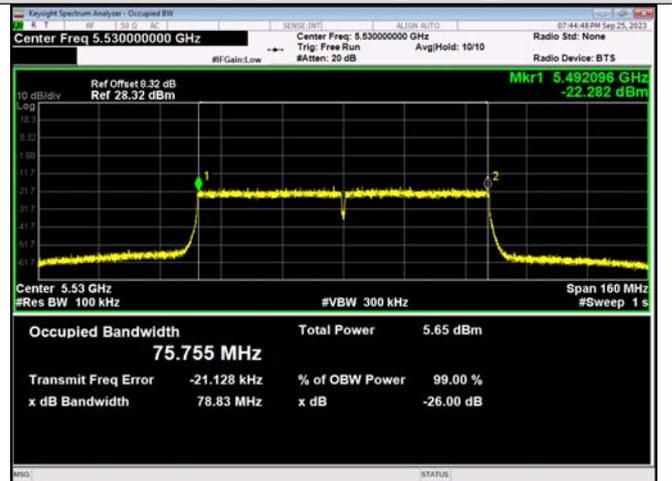


IEEE 802.11ac_80_Channel 106_80MHz_Antenna 0

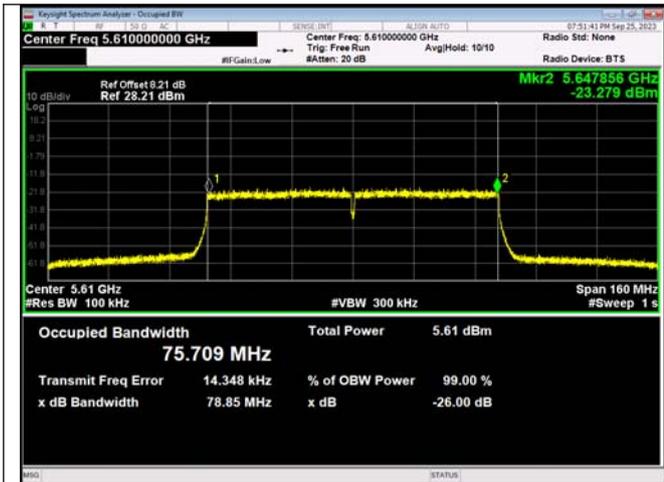


IEEE 802.11ac_80_Channel 122_80MHz_Antenna 0

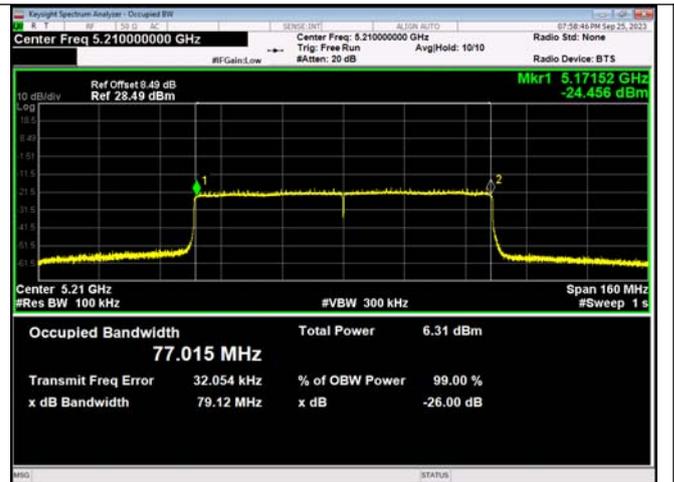


IEEE 802.11ax_80_Channel 42_80MHz_Antenna 0_RU&Index SU

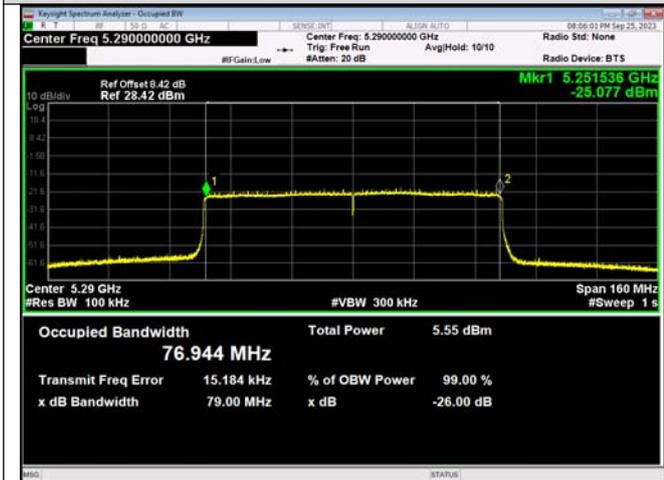

IEEE 802.11ax_80_Channel 58_80MHz_Antenna 0_RU&Index SU

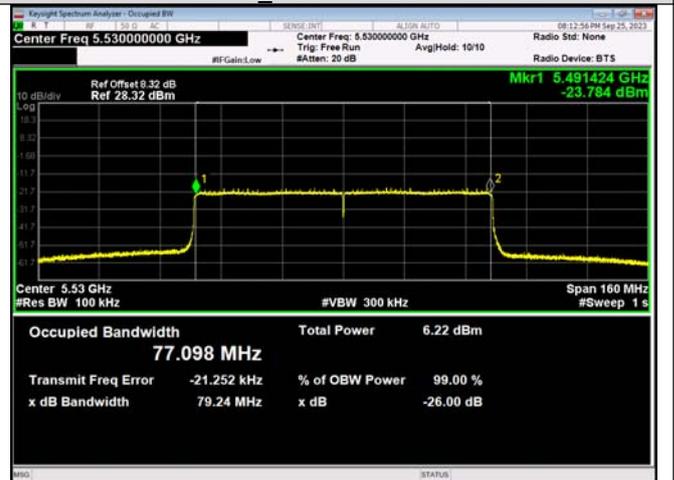


IEEE 802.11ax_80_Channel 106_80MHz_Antenna 0_RU&Index SU

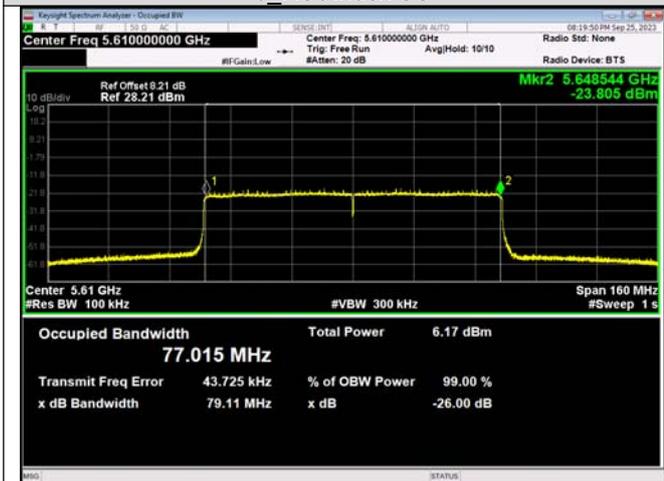


IEEE 802.11ax_80_Channel 122_80MHz_Antenna 0_RU&Index SU

Mode	Ch.	RU & Index	Ant.	Frequency (MHz)	OBW (MHz)	Lower Edge (MHz)	Upper Edge (MHz)	Limit OBW (MHz)	Result
IEEE 802.11n_20	36	N/A	1	5180	17.638	5171.136	5188.772	16-20	PASS
	40			5200	17.637	5191.156	5208.788		PASS
	48			5240	17.634	5231.152	5248.78		PASS
	52			5260	17.644	5251.136	5268.78		PASS
	56			5280	17.653	5271.152	5288.8		PASS
	64			5320	17.642	5311.148	5328.788		PASS
	100			5500	17.635	5491.144	5508.776		PASS
	116			5580	17.629	5571.156	5588.78		PASS
	140			5700	17.630	5691.16	5708.788		PASS
IEEE 802.11n_40	38			5190	36.250	5171.856	5208.104	PASS	
	46			5230	36.250	5211.84	5248.088	PASS	
	54			5270	36.254	5251.84	5288.088	PASS	
	62			5310	36.240	5291.848	5328.088	PASS	
	102			5510	36.257	5491.832	5528.088	PASS	
	110			5550	36.242	5531.872	5568.104	PASS	
	118			5590	36.236	5571.856	5608.088	PASS	
IEEE 802.11ac_80	134			5670	36.241	5651.888	5688.12	PASS	
	42			5210	75.684	5172.192	5247.856	PASS	
	58			5290	75.702	5252.192	5327.888	PASS	
	106			5530	75.772	5492.128	5567.888	PASS	
IEEE 802.11ax_80	122			5610	75.706	5572.16	5647.856	PASS	
	42			5210	76.997	5171.552	5248.528	PASS	
	58			5290	77.010	5251.552	5328.56	PASS	
	106	5530	77.096	5491.456	5568.544	PASS			
	122	5610	77.044	5571.488	5648.528	PASS			
		SU							

Test Graphs

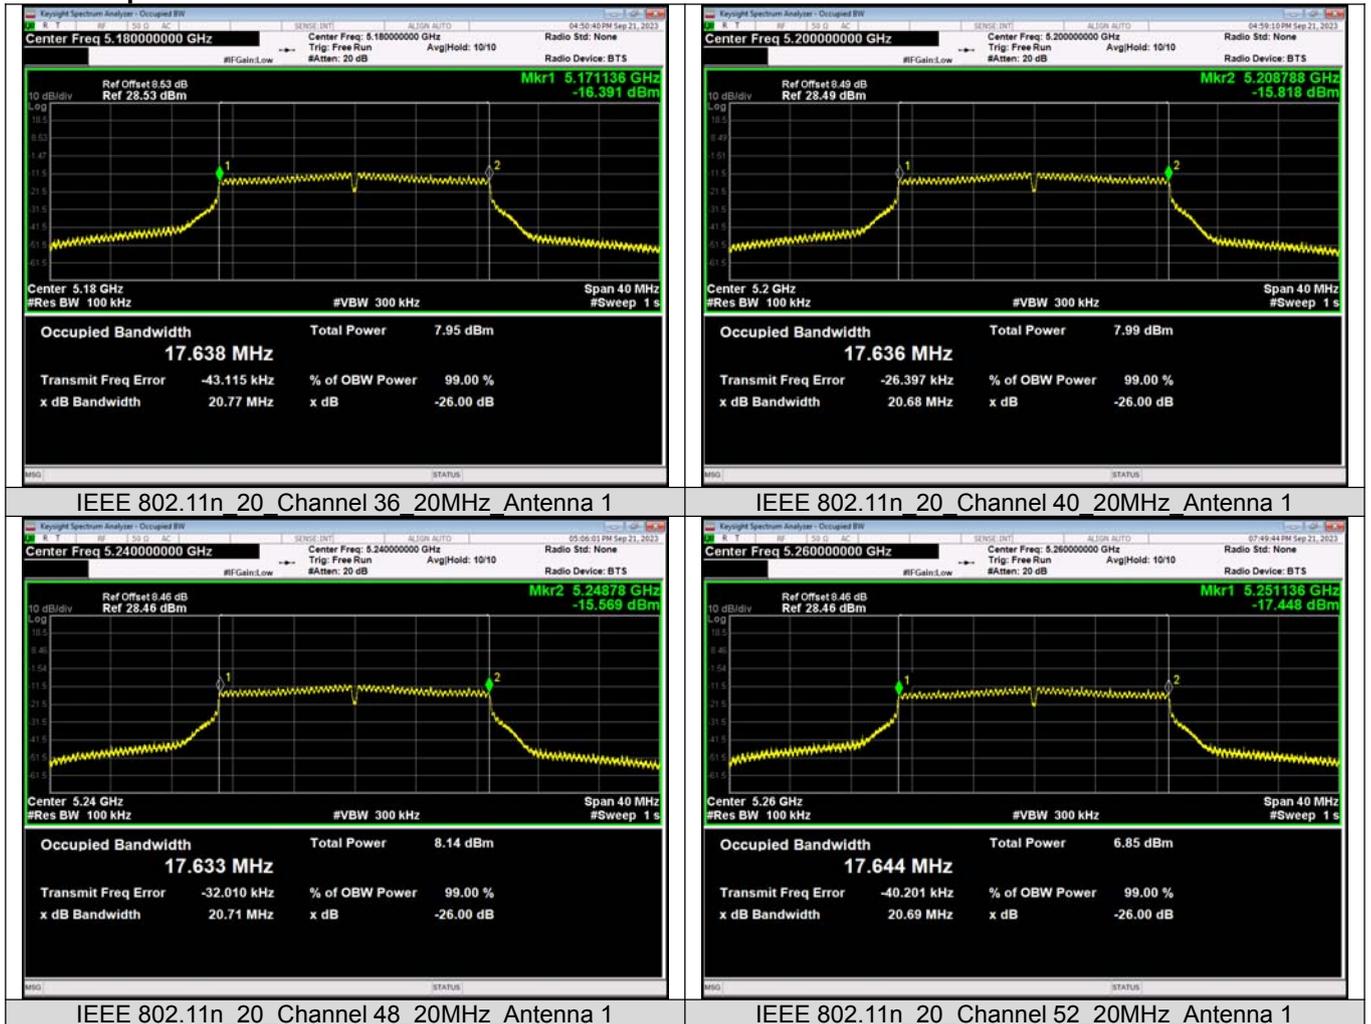


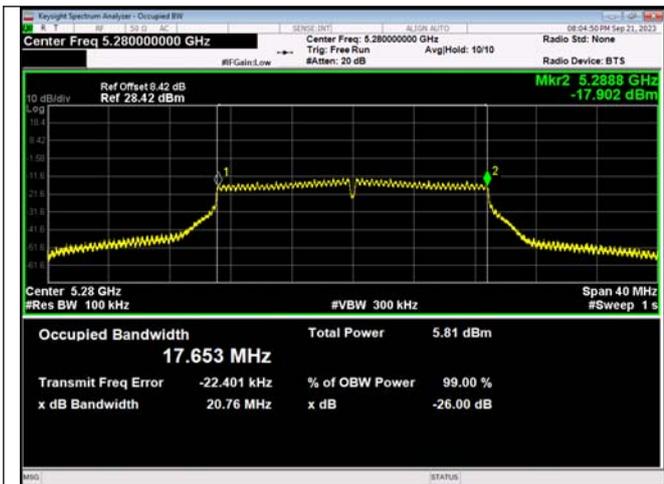


IEEE 802.11n 20 Channel 56 20MHz Antenna 1




IEEE 802.11n 20 Channel 64 20MHz Antenna 1

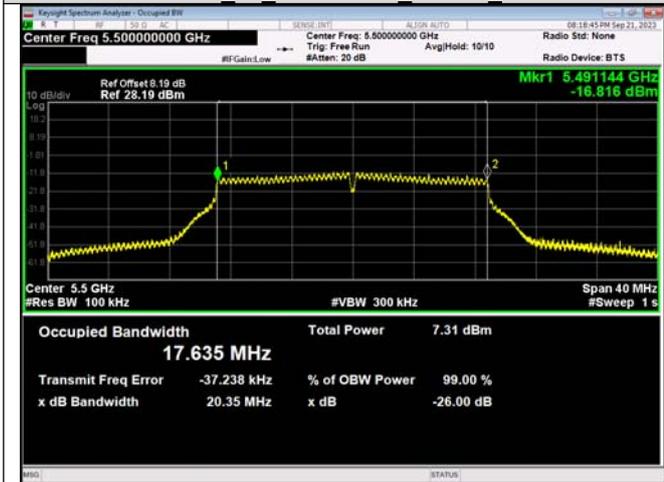


IEEE 802.11n 20 Channel 100 20MHz Antenna 1

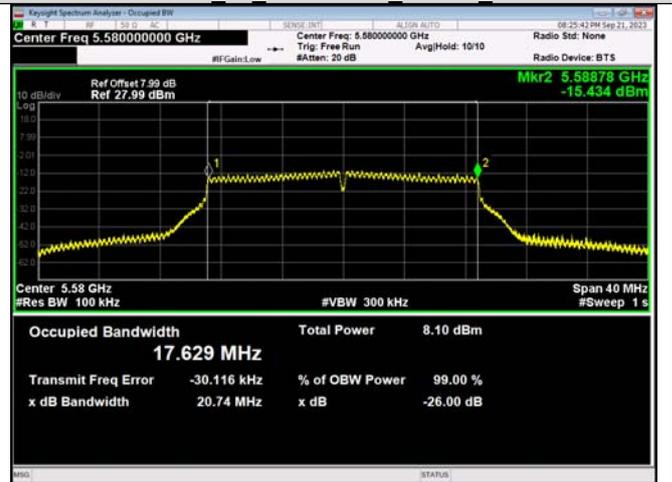

IEEE 802.11n 20 Channel 116 20MHz Antenna 1

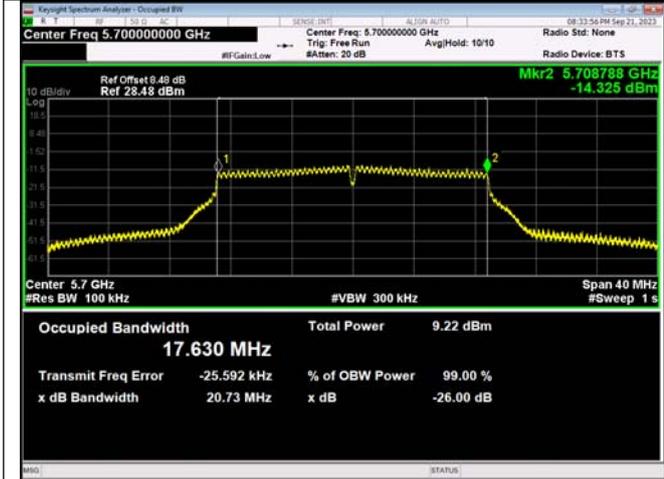


IEEE 802.11n 20 Channel 140 20MHz Antenna 1

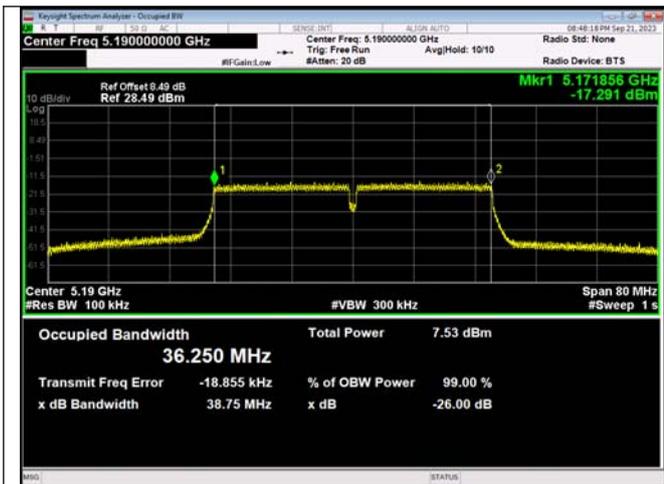

IEEE 802.11n 40 Channel 38 40MHz Antenna 1



IEEE 802.11n 40 Channel 46 40MHz Antenna 1

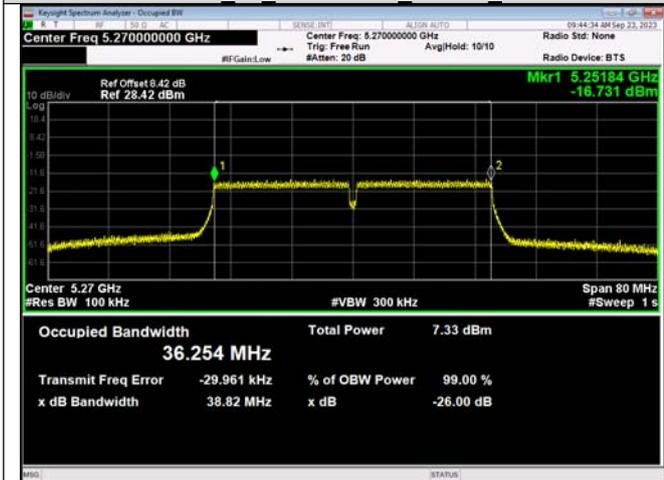

IEEE 802.11n 40 Channel 54 40MHz Antenna 1




IEEE 802.11n 40 Channel 62 40MHz Antenna 1



IEEE 802.11n_40_Channel 102_40MHz_Antenna 1



IEEE 802.11n_40_Channel 110_40MHz_Antenna 1

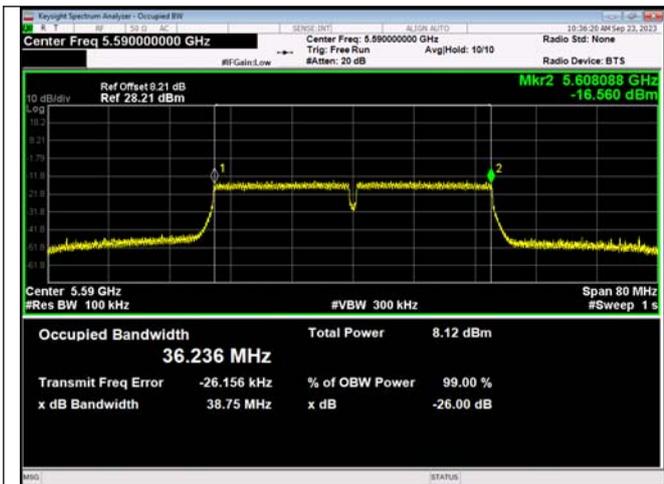


IEEE 802.11n_40 Channel 118_40MHz_Antenna 1




IEEE 802.11n_40 Channel 134_40MHz_Antenna 1




IEEE 802.11ac_80 Channel 42_80MHz_Antenna 1

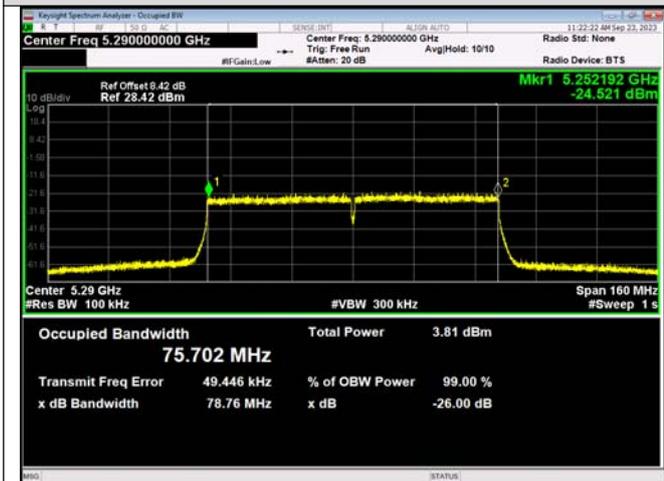


IEEE 802.11ac_80 Channel 58_80MHz_Antenna 1

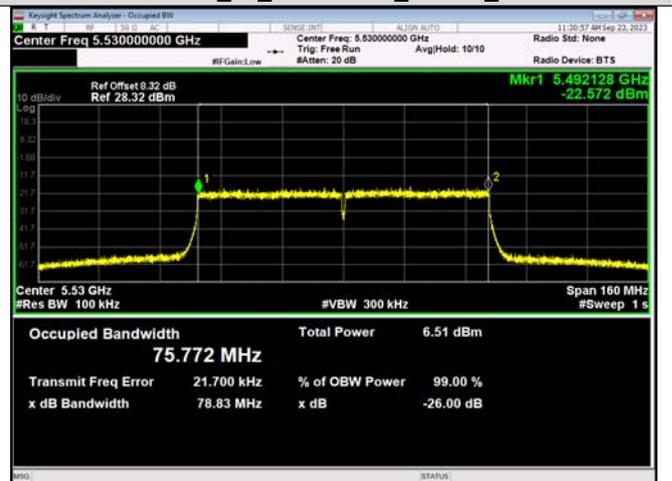


IEEE 802.11ac_80 Channel 106_80MHz_Antenna 1

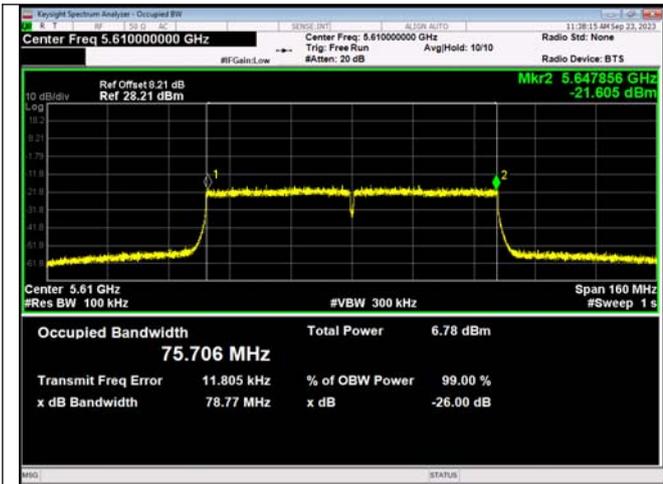


IEEE 802.11ac_80_Channel 122_80MHz_Antenna 1

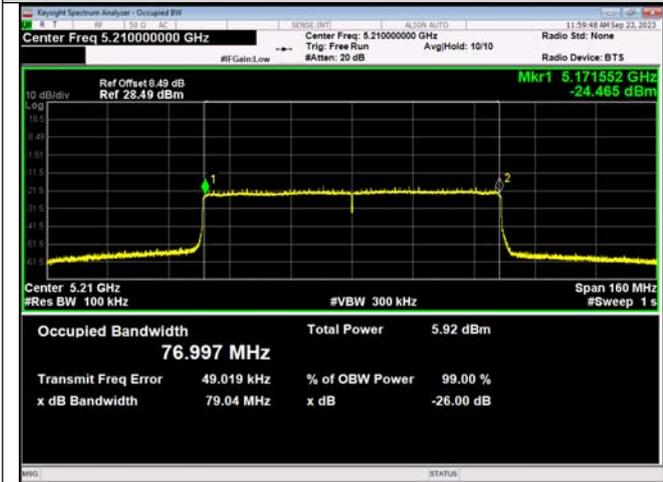


IEEE 802.11ax_80_Channel 42_80MHz_Antenna 1_RU&Index SU

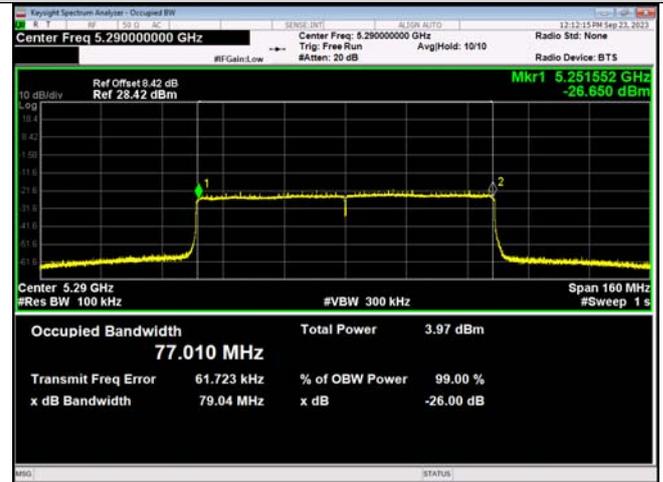

IEEE 802.11ax_80_Channel 58_80MHz_Antenna 1_RU&Index SU

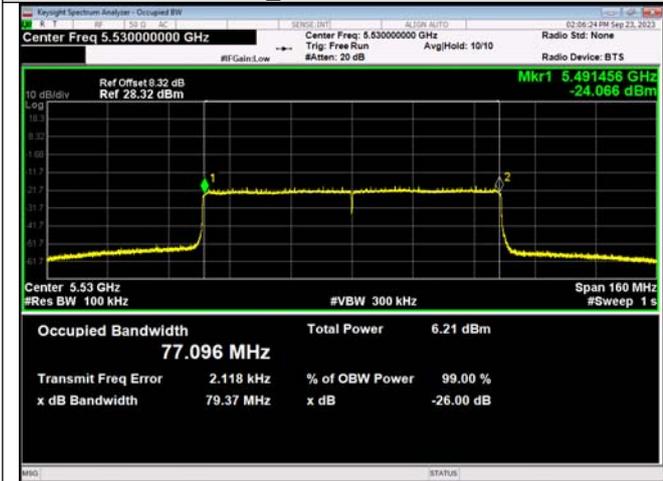

IEEE 802.11ax_80_Channel 106_80MHz_Antenna 1_RU&Index SU

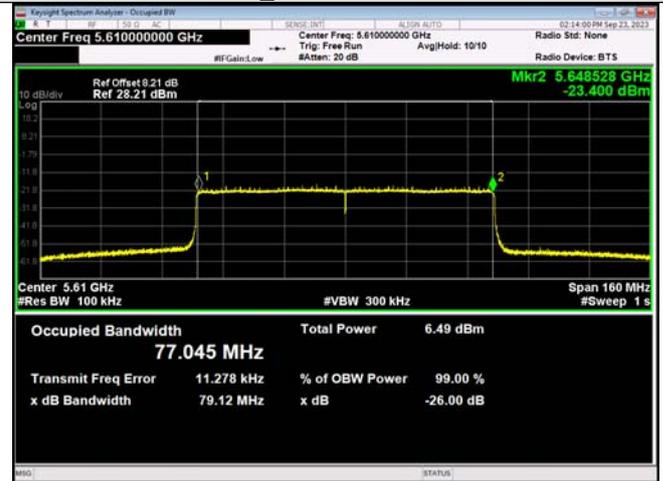

IEEE 802.11ax_80_Channel 122_80MHz_Antenna 1_RU&Index SU

5. RF OUTPUT POWER, TPC AND POWER DENSITY

5.1 APPLIED PROCEDURES / LIMIT

LIMIT

TPC is not required for channels whose nominal bandwidth falls completely within the band 5 150MHz to 5 250 MHz. For devices with TPC, the RF output power and the Power Density when configured to operate at the highest stated power level (PH) of the TPC range shall not exceed the levels given in table 2. Devices are allowed to operate without TPC. See table 2 for the applicable limits that shall apply in this case.

Table 2: Mean e.i.r.p. limits for RF output power and Power Density at the highest power level (P_H)

Frequency range (MHz)	Mean e.i.r.p. limit for P _H (dBm)		Mean e.i.r.p. density limit (dBm/MHz)	
	with TPC	without TPC	with TPC	without TPC
5 150 to 5 350	23	20/23 (see note 1)	10	7/10 (see note 2)
5 470 to 5 725	30 (see note 3)	27 (see note 3)	17 (see note 3)	14 (see note 3)

NOTE 1: The applicable limit is 20 dBm, except for transmissions whose nominal bandwidth falls completely within the band 5 150 MHz to 5 250 MHz, in which case the applicable limit is 23 dBm.

NOTE 2: The applicable limit is 7 dBm/MHz, except for transmissions whose nominal bandwidth falls completely within the band 5 150 MHz to 5 250 MHz, in which case the applicable limit is 10 dBm/MHz.

NOTE 3: Slave devices without a *Radar Interference Detection* function shall comply with the limits for the frequency range 5 250 MHz to 5 350 MHz.

For devices using TPC, the RF Output Power during a transmission burst when configured to operate at the lowest stated power level (PL) of the TPC range shall not exceed the levels given in table 3. For devices without TPC, the limits in table 3 do not apply.

Table 3: Mean e.i.r.p. limits for RF Output Power at the lowest power level of the TPC range


Frequency range	Mean e.i.r.p. (dBm) limit for P _L
5 250 MHz to 5 350 MHz	17
5 470 MHz to 5 725 MHz	24 (see note)

NOTE: Slave devices without a *Radar Interference Detection* function shall comply with the limits for the band 5 250 MHz to 5 350 MHz.

5.2 TEST PROCEDURES

According to ETSI EN 301 893 V2.1.1 (2017-05) §5.4.4

5.3 TEST SETUP LAYOUT

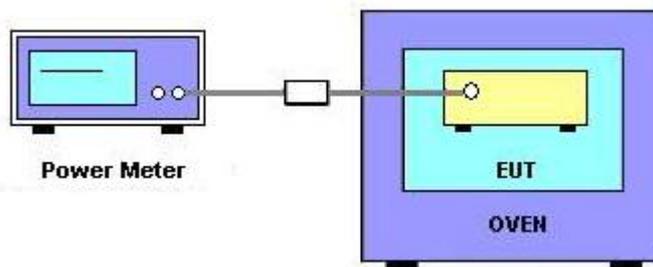

5.4 TEST RESULTS

RF Output Power			
Temperature:	25°C	Relative Humidity:	60 %
Pressure:	1012 hPa	Test Voltage:	AC 230V/50Hz

ANT 0

Test Mode: 802.11n(20MHz)					
TEST CONDITIONS			Total e.i.r.p (dBm)		
			CH36	CH40	CH48
Normal voltage	T nom (°C)	25.00	8.26	8.14	8.52
	T min (°C)	0.00	8.03	7.96	8.34
	T max (°C)	45.00	7.89	7.63	8.11
Max RF Power			8.52		
Limits			23dBm		
Result			Complies		

Test Mode: 802.11n(20MHz)					
TEST CONDITIONS			Total e.i.r.p (dBm)		
			CH52	CH56	CH64
Normal voltage	T nom (°C)	25.00	5.16	5.56	4.94
	T min (°C)	0.00	4.89	5.28	4.72
	T max (°C)	45.00	4.63	5.03	4.58
Max RF Power			5.56		
Limits			23dBm		
Result			Complies		

Test Mode: 802.11n(20MHz)					
TEST CONDITIONS			Total e.i.r.p (dBm)		
			CH100	CH116	CH140
Normal voltage	T nom (°C)	25.00	4.02	5.11	5.93
	T min (°C)	0.00	3.88	4.96	5.74
	T max (°C)	45.00	3.63	4.72	5.43
Max RF Power			5.93		
Limits			23dBm		
Result			Complies		

Test Mode: 802.11n(40MHz)					
TEST CONDITIONS			Total e.i.r.p (dBm)		
			CH38	CH46	CH54
Normal voltage	T nom (°C)	25.00	5.62	5.67	5.40
	T min (°C)	0.00	5.41	5.43	5.26
	T max (°C)	45.00	5.18	5.21	5.01
Max RF Power			5.67		
Limits			23dBm		
Result			Complies		

Test Mode: 802.11n(40MHz)					
TEST CONDITIONS			Total e.i.r.p (dBm)		
			CH62	CH102	CH110
Normal voltage	T nom (°C)	25.00	5.04	5.45	4.12
	T min (°C)	0.00	4.88	5.32	3.89
	T max (°C)	45.00	4.54	5.10	3.63
Max RF Power			5.45		
Limits			23dBm		
Result			Complies		

Test Mode: 802.11n(40MHz)					
TEST CONDITIONS			Total e.i.r.p (dBm)		
			CH118	CH134	
Normal voltage	T nom (°C)	25.00	5.61	5.25	
	T min (°C)	0.00	5.36	5.07	
	T max (°C)	45.00	5.11	4.96	
Max RF Power			5.61		
Limits			23dBm		
Result			Complies		

Test Mode: 802.11ac(80MHz)					
TEST CONDITIONS			Total e.i.r.p (dBm)		
			CH42	CH58	
Normal voltage	T nom (°C)	25.00	4.55	3.74	
	T min (°C)	0.00	4.29	3.41	
	T max (°C)	45.00	4.06	3.14	
Max RF Power			4.55		
Limits			23dBm		
Result			Complies		

Test Mode: 802.11ac(80MHz)					
TEST CONDITIONS			Total e.i.r.p (dBm)		
			CH106	CH122	
Normal voltage	T nom (°C)	25.00	4.26	4.64	
	T min (°C)	0.00	4.06	4.33	
	T max (°C)	45.00	3.85	4.16	
Max RF Power			4.64		
Limits			23dBm		
Result			Complies		

Test Mode: 802.11ax(80MHz)					
TEST CONDITIONS			Total e.i.r.p (dBm)		
			CH42	CH58	
Normal voltage	T nom (°C)	25.00	4.26	3.83	
	T min (°C)	0.00	4.13	3.69	
	T max (°C)	45.00	3.96	3.28	
Max RF Power			4.26		
Limits			23dBm		
Result			Complies		

Test Mode: 802.11ax(80MHz)				
TEST CONDITIONS			Total e.i.r.p (dBm)	
			CH106	CH122
Normal voltage	T nom (°C)	25.00	4.32	4.51
	T min (°C)	0.00	4.16	4.41
	T max (°C)	45.00	3.97	4.25
Max RF Power			4.51	
Limits			23dBm	
Result			Complies	

ANT 1

Test Mode: 802.11n(20MHz)					
TEST CONDITIONS			Total e.i.r.p (dBm)		
			CH36	CH40	CH48
Normal voltage	T nom (°C)	25.00	7.83	7.76	8.16
	T min (°C)	0.00	7.64	7.59	7.82
	T max (°C)	45.00	7.43	7.34	7.69
Max RF Power			8.16		
Limits			23dBm		
Result			Complies		

Test Mode: 802.11n(20MHz)					
TEST CONDITIONS			Total e.i.r.p (dBm)		
			CH52	CH56	CH64
Normal voltage	T nom (°C)	25.00	5.26	5.43	4.96
	T min (°C)	0.00	4.91	5.13	4.73
	T max (°C)	45.00	4.68	4.97	4.63
Max RF Power			5.43		
Limits			23dBm		
Result			Complies		

Test Mode: 802.11n(20MHz)					
TEST CONDITIONS			Total e.i.r.p (dBm)		
			CH100	CH116	CH140
Normal voltage	T nom (°C)	25.00	4.16	5.03	5.71
	T min (°C)	0.00	3.76	4.83	5.46
	T max (°C)	45.00	3.58	4.63	5.11
Max RF Power			5.71		
Limits			23dBm		
Result			Complies		

Test Mode: 802.11n(40MHz)					
TEST CONDITIONS			Total e.i.r.p (dBm)		
			CH38	CH46	CH54
Normal voltage	T nom (°C)	25.00	5.26	5.39	5.59
	T min (°C)	0.00	5.01	5.17	5.34
	T max (°C)	45.00	4.88	4.97	5.16
Max RF Power			5.59		
Limits			23dBm		
Result			Complies		

Test Mode: 802.11n(40MHz)					
TEST CONDITIONS			Total e.i.r.p (dBm)		
			CH62	CH102	CH110
Normal voltage	T nom (°C)	25.00	5.11	5.37	4.52
	T min (°C)	0.00	4.91	5.13	4.32
	T max (°C)	45.00	4.76	4.92	4.11
Max RF Power			5.37		
Limits			23dBm		
Result			Complies		

Test Mode: 802.11n(40MHz)					
TEST CONDITIONS			Total e.i.r.p (dBm)		
			CH118	CH134	
Normal voltage	T nom (°C)	25.00	5.52	5.36	
	T min (°C)	0.00	5.43	5.19	
	T max (°C)	45.00	5.23	4.89	
Max RF Power			5.52		
Limits			23dBm		
Result			Complies		

Test Mode: 802.11ac(80MHz)					
TEST CONDITIONS			Total e.i.r.p (dBm)		
			CH42	CH58	
Normal voltage	T nom (°C)	25.00	4.46	4.16	
	T min (°C)	0.00	4.31	4.02	
	T max (°C)	45.00	4.16	3.89	
Max RF Power			4.46		
Limits			23dBm		
Result			Complies		

Test Mode: 802.11ac(80MHz)					
TEST CONDITIONS			Total e.i.r.p (dBm)		
			CH106	CH122	
Normal voltage	T nom (°C)	25.00	4.26	4.52	
	T min (°C)	0.00	4.02	4.29	
	T max (°C)	45.00	3.94	4.10	
Max RF Power			4.52		
Limits			23dBm		
Result			Complies		

Test Mode: 802.11ax(80MHz)					
TEST CONDITIONS			Total e.i.r.p (dBm)		
			CH42	CH58	
Normal voltage	T nom (°C)	25.00	4.32	4.01	
	T min (°C)	0.00	4.10	3.84	
	T max (°C)	45.00	3.85	3.66	
Max RF Power			4.32		
Limits			23dBm		
Result			Complies		

Test Mode: 802.11ax(80MHz)				
TEST CONDITIONS			Total e.i.r.p (dBm)	
			CH106	CH122
Normal voltage	T nom (°C)	25.00	4.41	4.39
	T min (°C)	0.00	4.27	4.16
	T max (°C)	45.00	3.98	3.89
Max RF Power			4.41	
Limits			23dBm	
Result			Complies	

ANT 0+ANT 1

Test Mode: 802.11n(20MHz)					
TEST CONDITIONS			Total e.i.r.p (dBm)		
			CH36	CH40	CH48
Normal voltage	T nom (°C)	25.00	11.06	11.00	10.96
	T min (°C)	0.00	10.85	10.81	10.79
	T max (°C)	45.00	10.68	10.54	10.50
Max RF Power			11.06		
Limits			23dBm		
Result			Complies		

Test Mode: 802.11n(20MHz)					
TEST CONDITIONS			Total e.i.r.p (dBm)		
			CH52	CH56	CH64
Normal voltage	T nom (°C)	25.00	8.22	8.42	8.51
	T min (°C)	0.00	7.91	8.11	8.22
	T max (°C)	45.00	7.67	7.87	8.01
Max RF Power			8.51		
Limits			23dBm		
Result			Complies		

Test Mode: 802.11n(20MHz)					
TEST CONDITIONS			Total e.i.r.p (dBm)		
			CH100	CH116	CH140
Normal voltage	T nom (°C)	25.00	7.10	7.67	8.08
	T min (°C)	0.00	6.83	7.41	7.91
	T max (°C)	45.00	6.62	7.20	7.69
Max RF Power			8.08		
Limits			23dBm		
Result			Complies		

Test Mode: 802.11n(40MHz)					
TEST CONDITIONS			Total e.i.r.p (dBm)		
			CH38	CH46	CH54
Normal voltage	T nom (°C)	25.00	8.45	8.48	8.54
	T min (°C)	0.00	8.22	8.24	8.31
	T max (°C)	45.00	8.04	8.06	8.10
Max RF Power			8.54		
Limits			23dBm		
Result			Complies		

Test Mode: 802.11n(40MHz)					
TEST CONDITIONS			Total e.i.r.p (dBm)		
			CH62	CH102	CH110
Normal voltage	T nom (°C)	25.00	8.09	8.29	8.42
	T min (°C)	0.00	7.91	8.13	8.24
	T max (°C)	45.00	7.66	7.94	8.02
Max RF Power			8.42		
Limits			23dBm		
Result			Complies		

Test Mode: 802.11n(40MHz)					
TEST CONDITIONS			Total e.i.r.p (dBm)		
			CH118	CH134	
Normal voltage	T nom (°C)	25.00	8.58	8.40	
	T min (°C)	0.00	8.41	8.26	
	T max (°C)	45.00	8.18	8.11	
Max RF Power			8.58		
Limits			23dBm		
Result			Complies		

Test Mode: 802.11ac(80MHz)					
TEST CONDITIONS			Total e.i.r.p (dBm)		
			CH42	CH58	
Normal voltage	T nom (°C)	25.00	7.52	7.13	
	T min (°C)	0.00	7.31	6.89	
	T max (°C)	45.00	7.12	6.69	
Max RF Power			7.52		
Limits			23dBm		
Result			Complies		

Test Mode: 802.11ac(80MHz)					
TEST CONDITIONS			Total e.i.r.p (dBm)		
			CH106	CH122	
Normal voltage	T nom (°C)	25.00	7.27	7.46	
	T min (°C)	0.00	7.05	7.19	
	T max (°C)	45.00	6.91	7.06	
Max RF Power			7.46		
Limits			23dBm		
Result			Complies		


Test Mode: 802.11ax(80MHz)					
TEST CONDITIONS			Total e.i.r.p (dBm)		
			CH42	CH58	
Normal voltage	T nom (°C)	25.00	7.30	7.09	
	T min (°C)	0.00	7.13	6.91	
	T max (°C)	45.00	6.92	6.58	
Max RF Power			7.30		
Limits			23dBm		
Result			Complies		

Test Mode: 802.11ax(80MHz)				
TEST CONDITIONS			Total e.i.r.p (dBm)	
			CH106	CH122
Normal voltage	T nom (°C)	25.00	7.38	7.37
	T min (°C)	0.00	7.23	7.17
	T max (°C)	45.00	6.99	6.94
Max RF Power			7.38	
Limits			23dBm	
Result			Complies	


Power Density			
Temperature:	25°C	Relative Humidity:	60 %
Pressure:	1012 hPa	Test Voltage:	AC 230V/50Hz

Mode	Ch.	RU & Index	PSD (dBm/MHz)	Limit (dBm/MHz)	Result
IEEE 802.11n_20	36	N/A	-0.2270	10	PASS
	40		-0.1950		PASS
	48		0.1910		PASS
	52		-4.3810	7	PASS
	56		-4.8020		PASS
	64		-4.6730		PASS
	100		-3.2870		PASS
	116		-3.6050		PASS
	140		-3.4980		PASS
IEEE 802.11n_40	38	N/A	-1.3560	10	PASS
	46		-2.8670		PASS
	54		-7.0260	7	PASS
	62		-7.3040		PASS
	102		-6.9230		PASS
	110		-6.5260		PASS
	118		-6.4830		PASS
134	-6.8930	PASS			
IEEE 802.11ac_80	42	N/A	-8.1200	10	PASS
	58		-12.6890	7	PASS
	106		-12.1330		PASS
	122		-11.9170		PASS
IEEE 802.11ax_80	42	SU	-8.4880	10	PASS
	58		-12.6880	7	PASS
	106		-12.4670		PASS
	122		-11.8790		PASS


Test Graphs

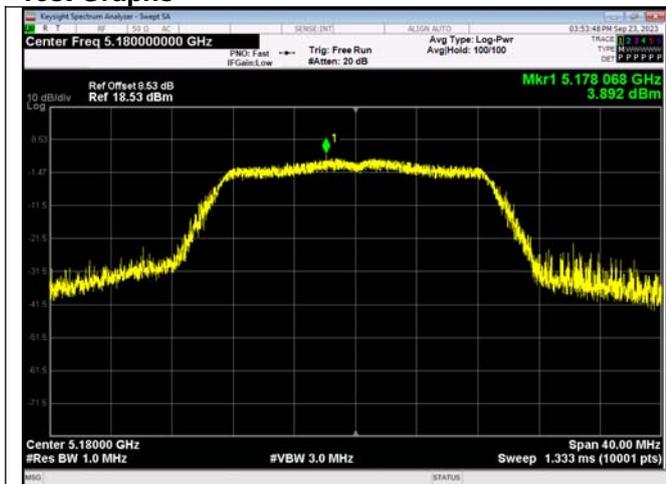


Find the peak value of the power envelope
 Antenna 0_IEEE 802.11n_20MHz_Channel 36

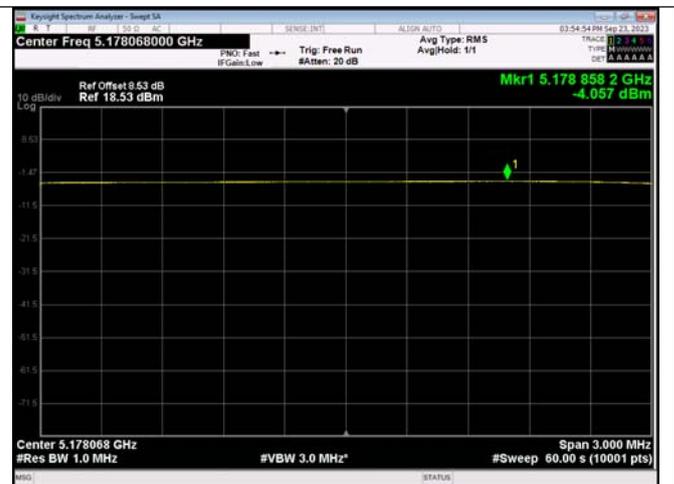


The highest mean power
 Antenna 0_IEEE 802.11n_20MHz_Channel 36

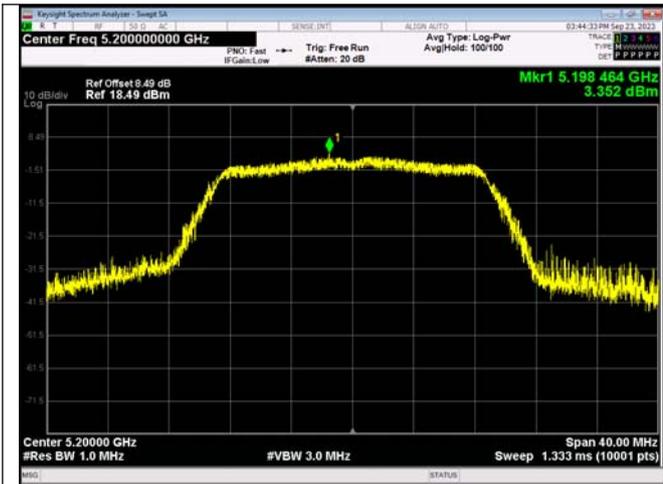


Find the peak value of the power envelope
 Antenna 0_IEEE 802.11n_20MHz_Channel 40

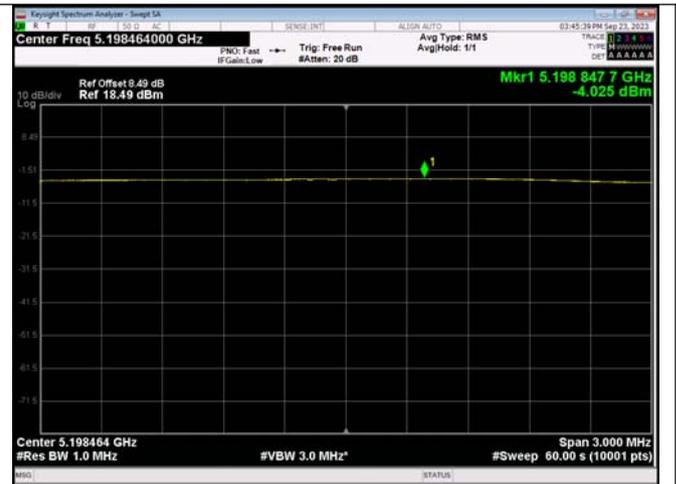


The highest mean power
 Antenna 0_IEEE 802.11n_20MHz_Channel 40

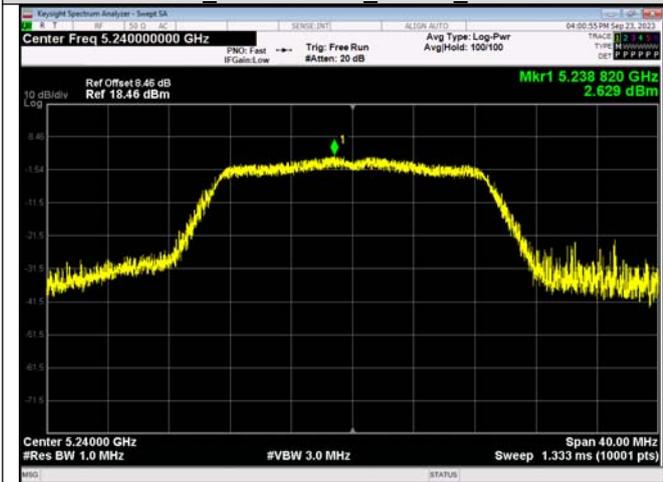

Find the peak value of the power envelope
 Antenna 0_IEEE 802.11n_20MHz_Channel 48

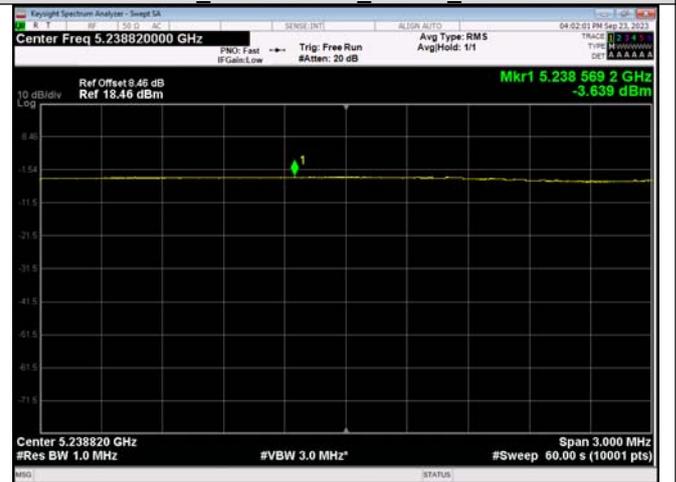


The highest mean power
 Antenna 0_IEEE 802.11n_20MHz_Channel 48

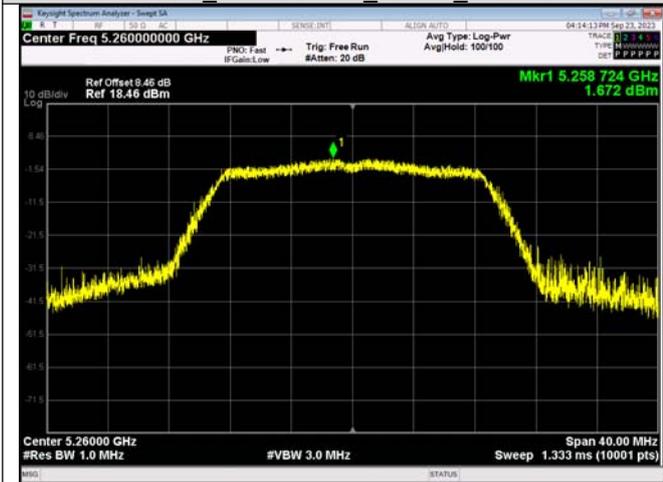


Find the peak value of the power envelope
 Antenna 0_IEEE 802.11n_20MHz_Channel 52




The highest mean power
 Antenna 0_IEEE 802.11n_20MHz_Channel 52

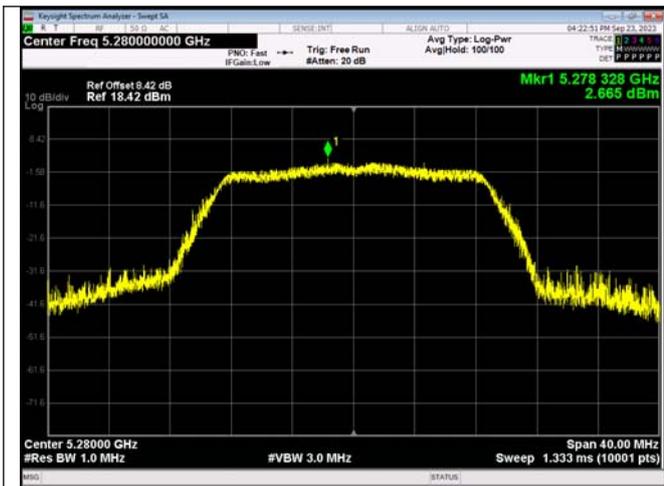


Find the peak value of the power envelope
 Antenna 0 IEEE 802.11n_20MHz_Channel 56

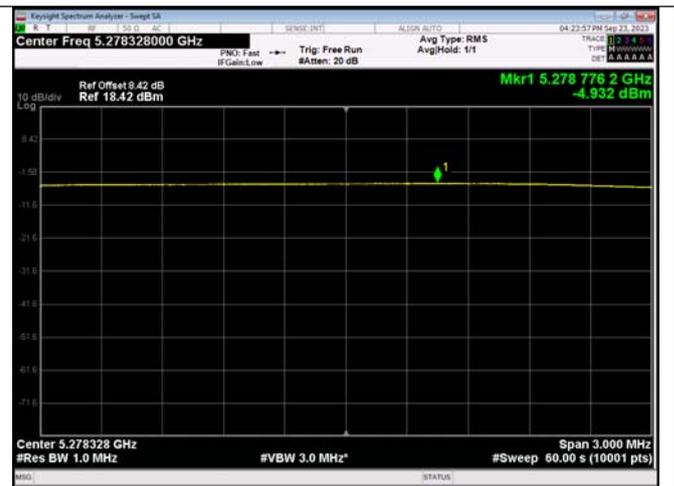


The highest mean power
 Antenna 0 IEEE 802.11n_20MHz_Channel 56

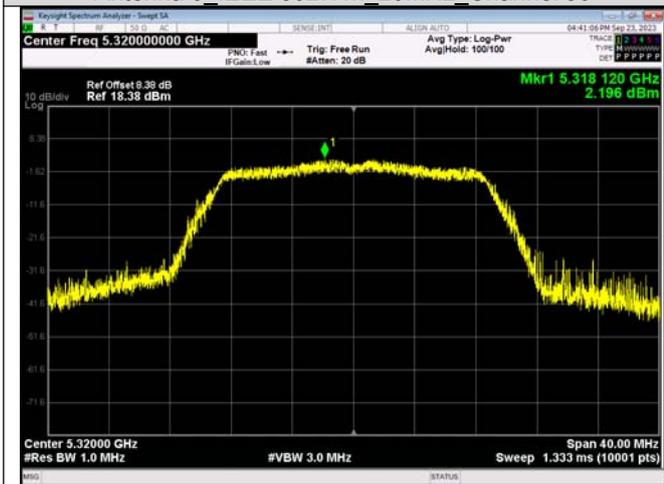


Find the peak value of the power envelope
 Antenna 0 IEEE 802.11n_20MHz_Channel 64

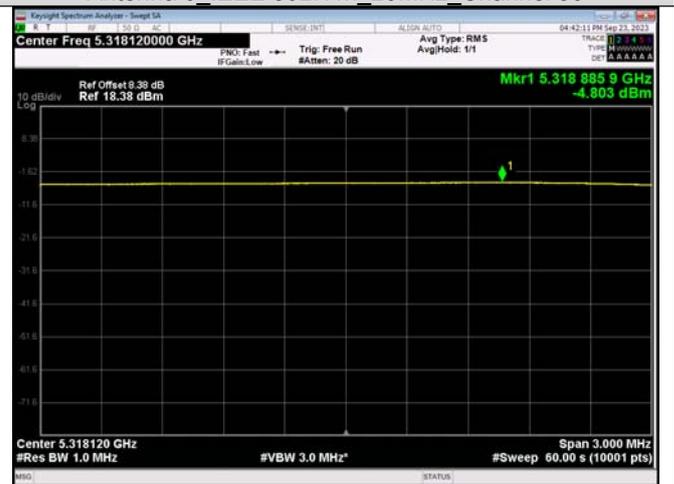


The highest mean power
 Antenna 0 IEEE 802.11n_20MHz_Channel 64

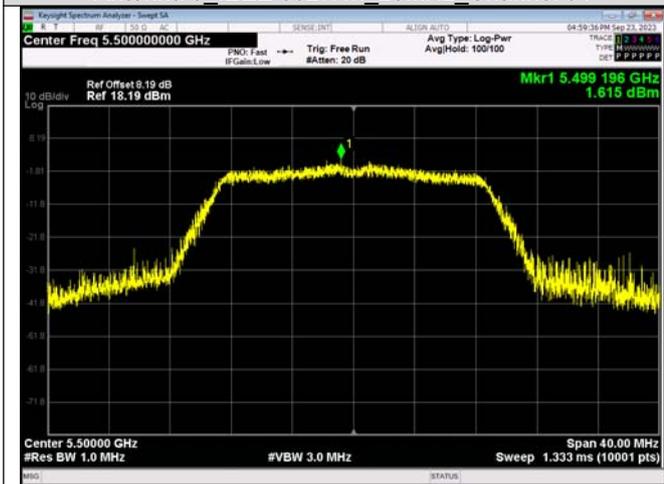


Find the peak value of the power envelope
 Antenna 0 IEEE 802.11n_20MHz_Channel 100

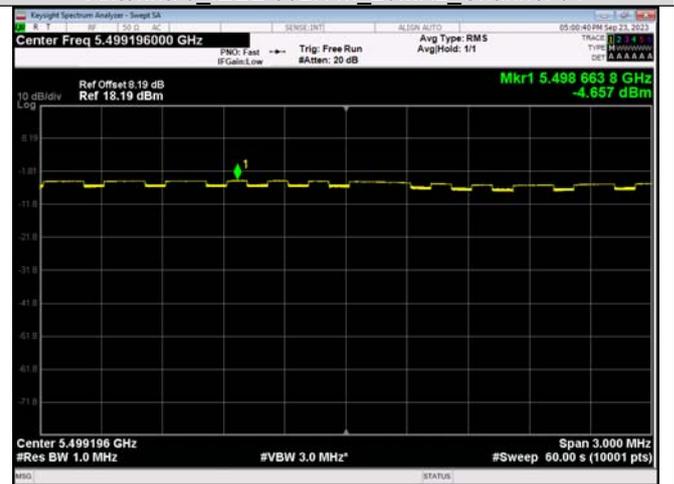


The highest mean power
 Antenna 0 IEEE 802.11n_20MHz_Channel 100

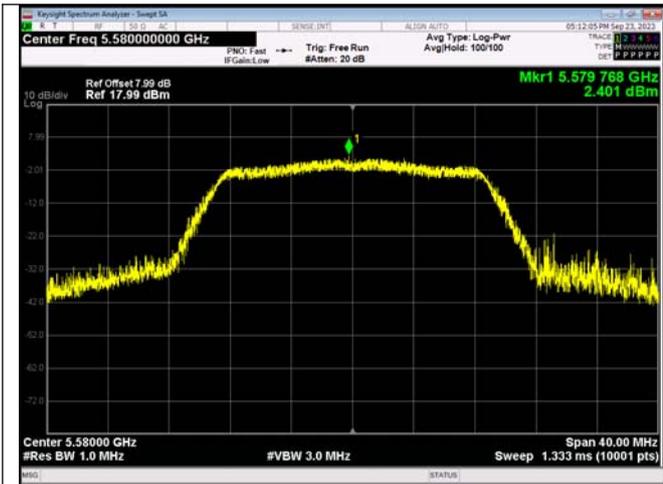


Find the peak value of the power envelope
 Antenna 0_ IEEE 802.11n_ 20MHz_ Channel 116

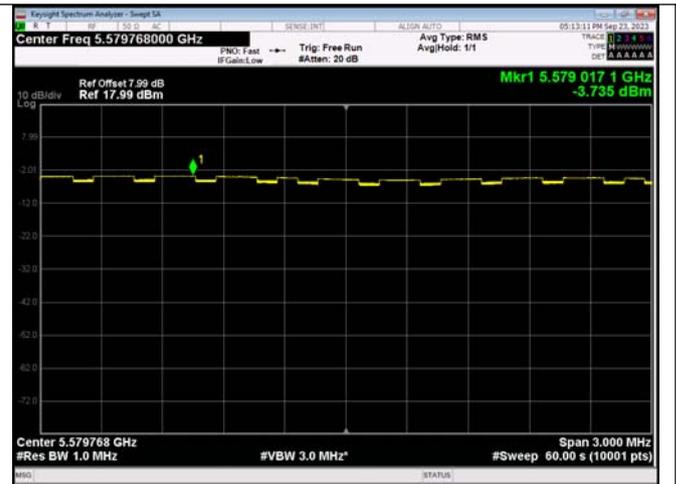


The highest mean power
 Antenna 0_ IEEE 802.11n_ 20MHz_ Channel 116

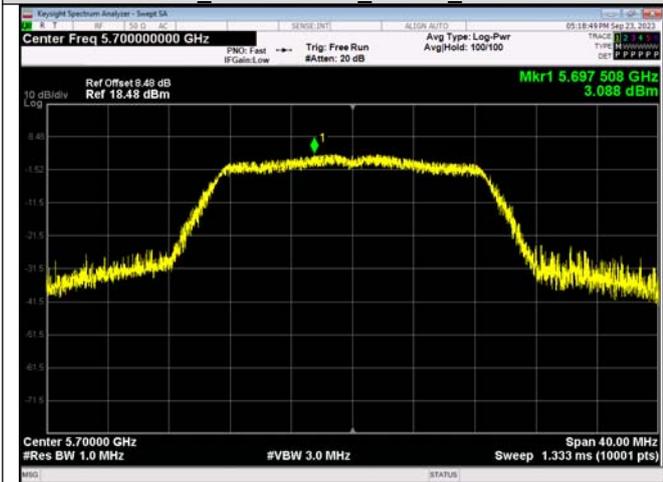


Find the peak value of the power envelope
 Antenna 0_ IEEE 802.11n_ 20MHz_ Channel 140

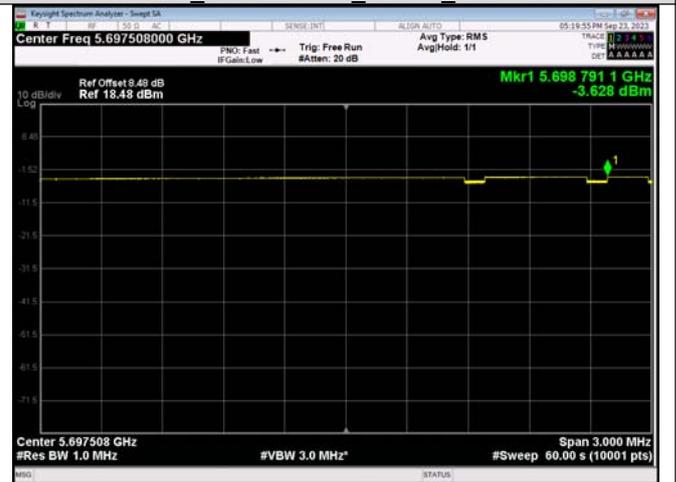


The highest mean power
 Antenna 0_ IEEE 802.11n_ 20MHz_ Channel 140

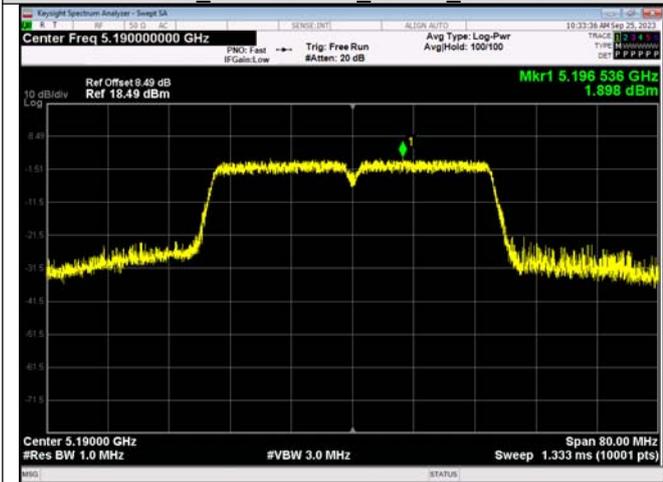


Find the peak value of the power envelope
 Antenna 0_ IEEE 802.11n_ 40MHz_ Channel 38

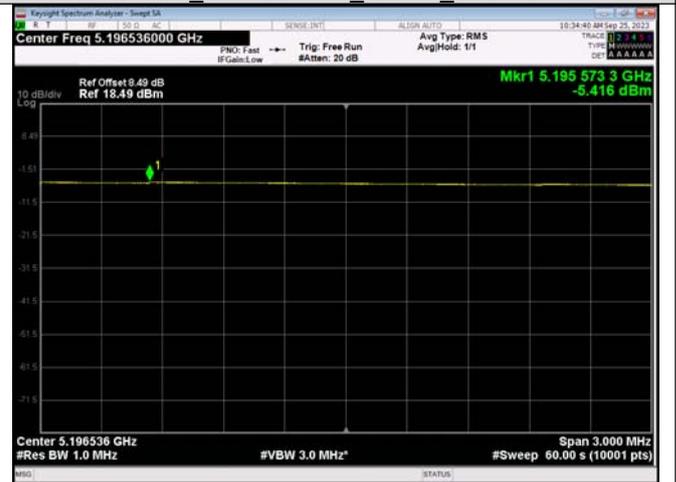


The highest mean power
 Antenna 0_ IEEE 802.11n_ 40MHz_ Channel 38

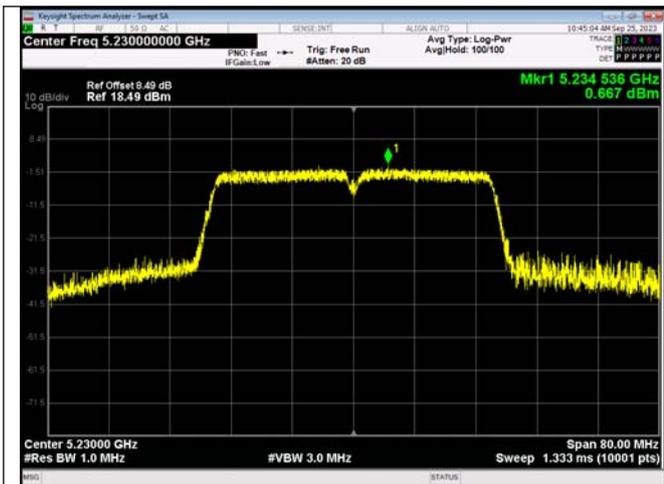

Find the peak value of the power envelope
 Antenna 0_IEEE 802.11n_40MHz_Channel 46

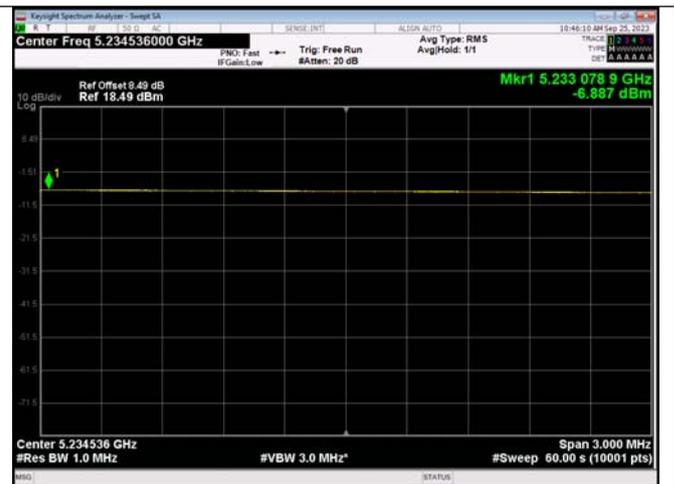


The highest mean power
 Antenna 0_IEEE 802.11n_40MHz_Channel 46

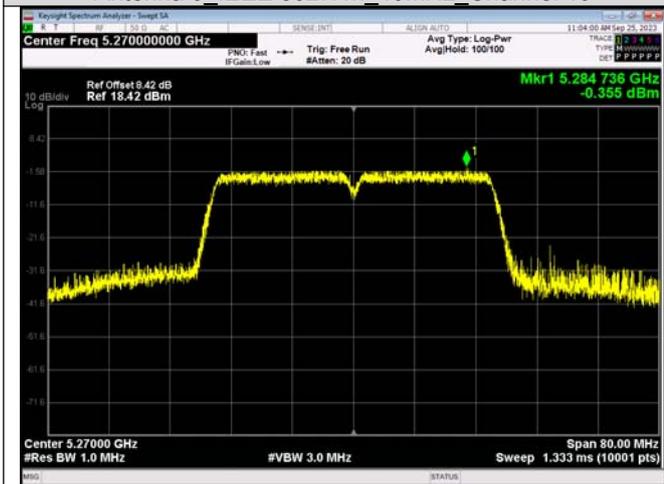

Find the peak value of the power envelope
 Antenna 0_IEEE 802.11n_40MHz_Channel 54




The highest mean power
 Antenna 0_IEEE 802.11n_40MHz_Channel 54

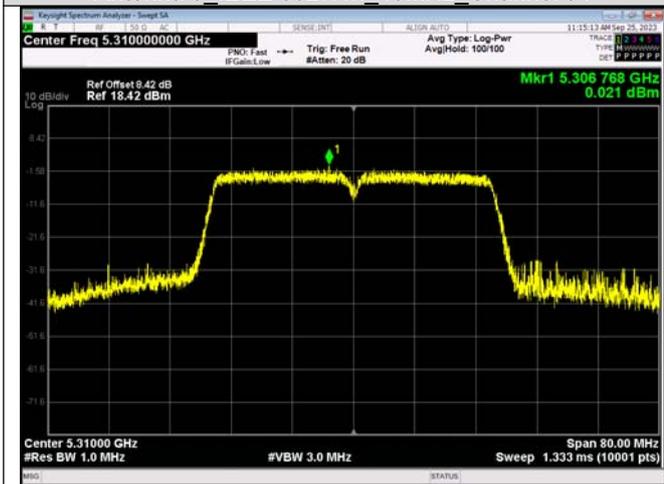

Find the peak value of the power envelope
 Antenna 0_IEEE 802.11n_40MHz_Channel 62




The highest mean power
 Antenna 0_IEEE 802.11n_40MHz_Channel 62

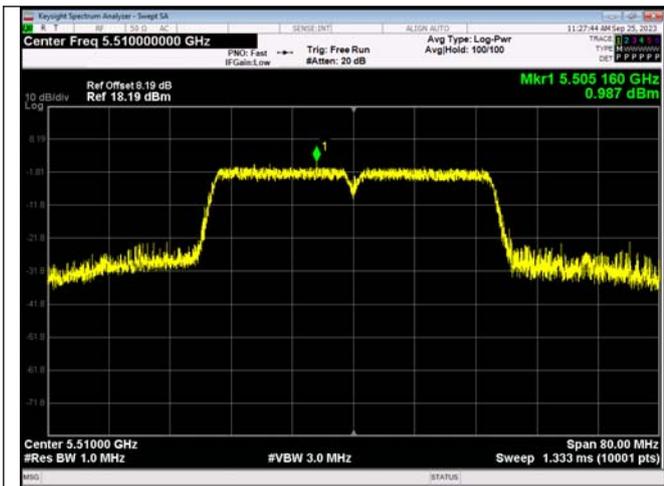


Find the peak value of the power envelope
 Antenna 0_ IEEE 802.11n_ 40MHz_ Channel 102




The highest mean power
 Antenna 0_ IEEE 802.11n_ 40MHz_ Channel 102

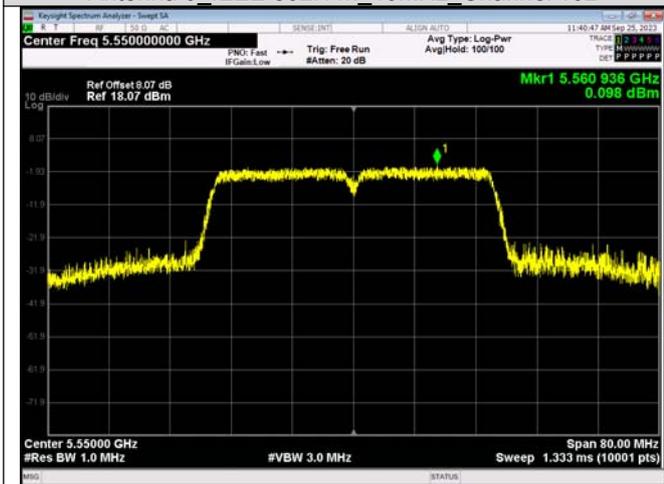

Find the peak value of the power envelope
 Antenna 0_ IEEE 802.11n_ 40MHz_ Channel 110

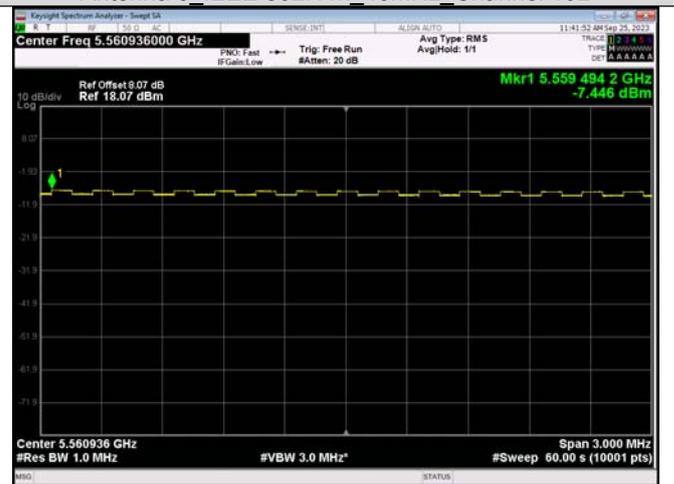


The highest mean power
 Antenna 0_ IEEE 802.11n_ 40MHz_ Channel 110

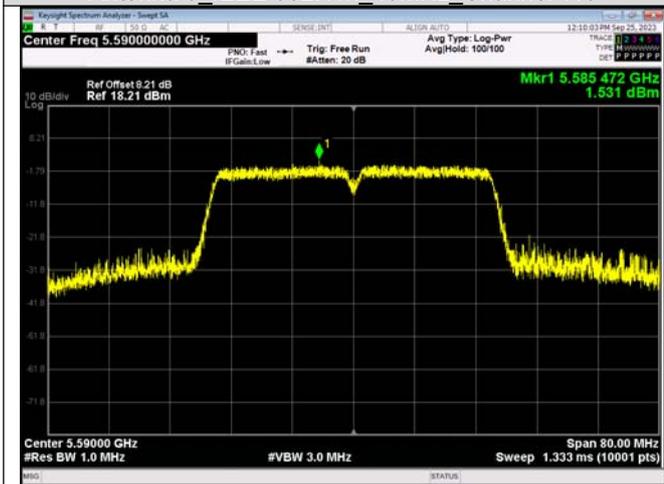

Find the peak value of the power envelope
 Antenna 0_ IEEE 802.11n_ 40MHz_ Channel 118




The highest mean power
 Antenna 0_ IEEE 802.11n_ 40MHz_ Channel 118

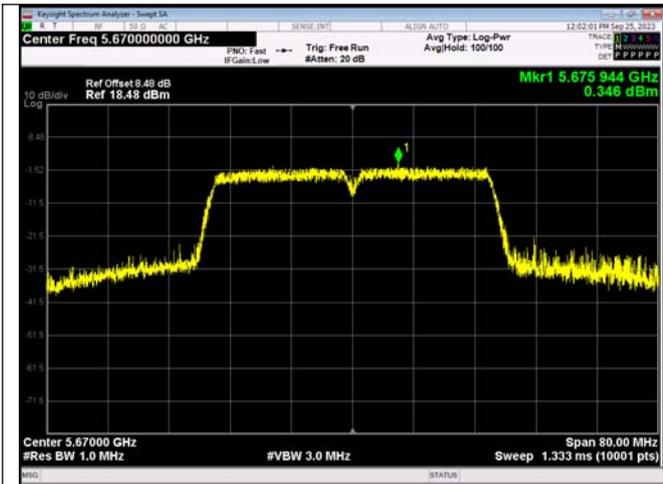


Find the peak value of the power envelope
 Antenna 0_ IEEE 802.11n_ 40MHz_ Channel 134




The highest mean power
 Antenna 0_ IEEE 802.11n_ 40MHz_ Channel 134

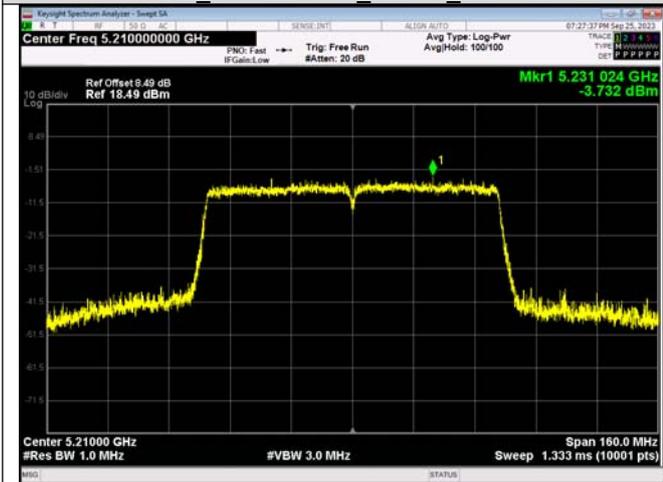


Find the peak value of the power envelope
 Antenna 0_ IEEE 802.11ac_ 80MHz_ Channel 42

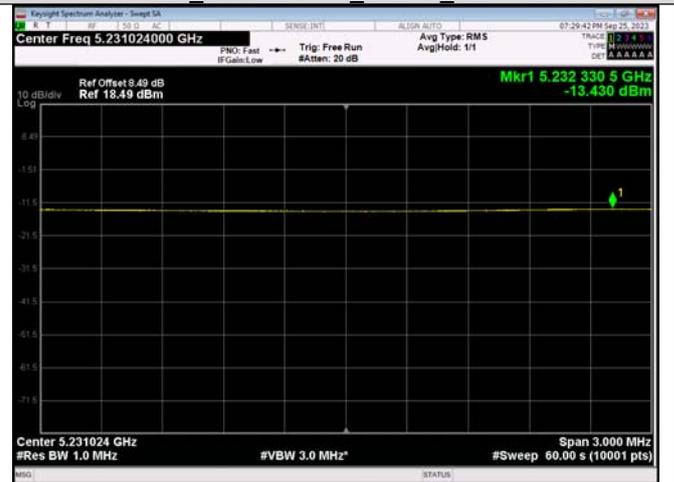


The highest mean power
 Antenna 0_ IEEE 802.11ac_ 80MHz_ Channel 42

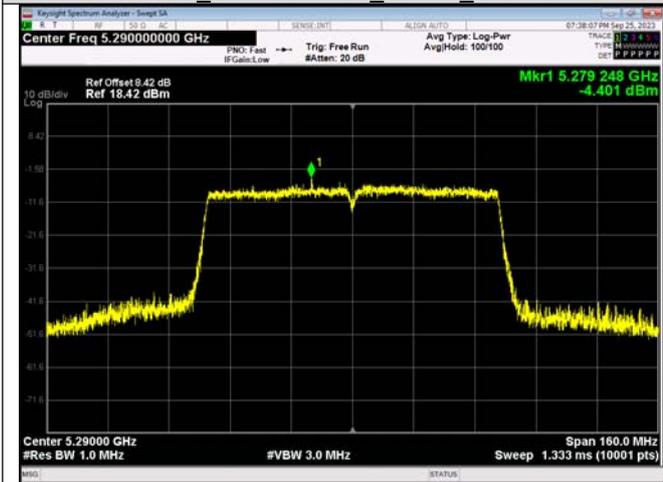


Find the peak value of the power envelope
 Antenna 0_ IEEE 802.11ac_ 80MHz_ Channel 58

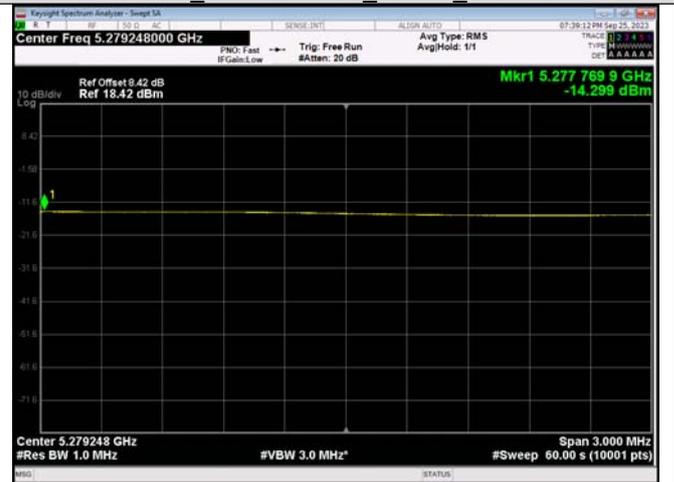


The highest mean power
 Antenna 0_ IEEE 802.11ac_ 80MHz_ Channel 58

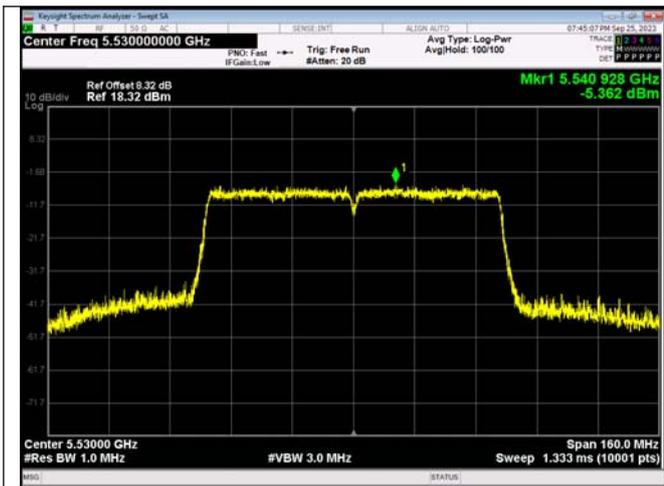


Find the peak value of the power envelope
 Antenna 0_ IEEE 802.11ac_80MHz_Channel 106

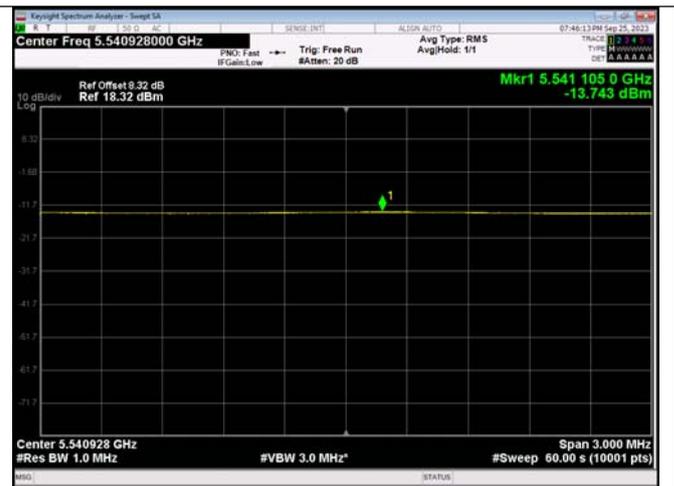


The highest mean power
 Antenna 0_ IEEE 802.11ac_80MHz_Channel 106

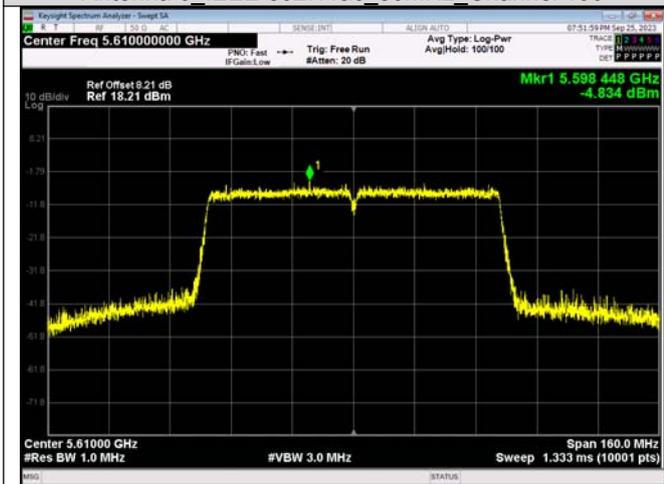


Find the peak value of the power envelope
 Antenna 0_ IEEE 802.11ac_80MHz_Channel 122

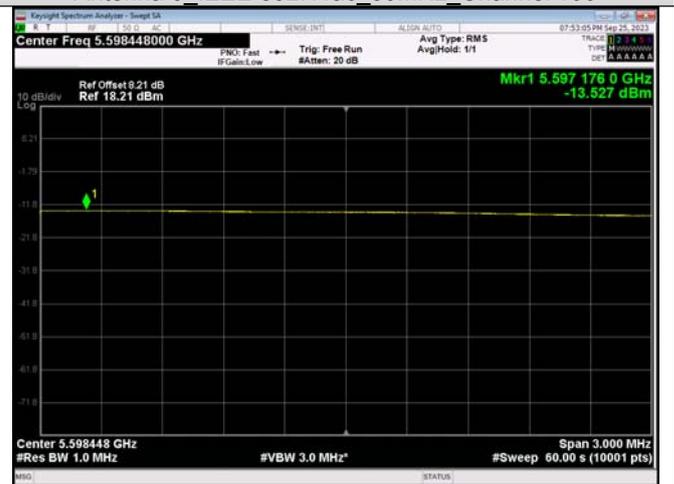


The highest mean power
 Antenna 0_ IEEE 802.11ac_80MHz_Channel 122

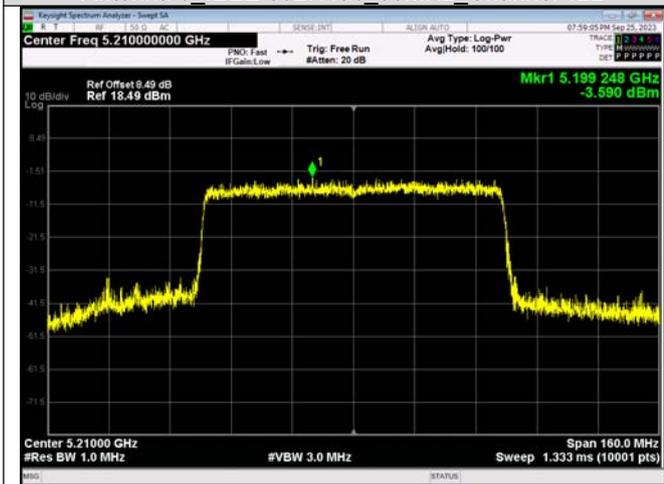

Find the peak value of the power envelope
 Antenna 0_ IEEE 802.11ax_80MHz_Channel 42_RU&Index SU

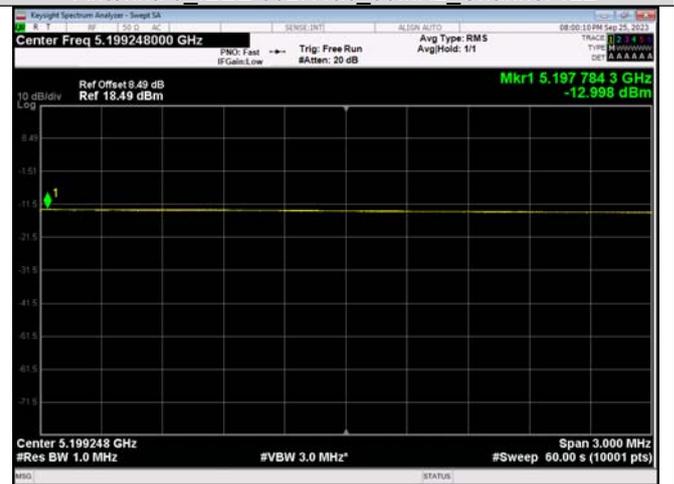


The highest mean power
 Antenna 0_ IEEE 802.11ax_80MHz_Channel 42_RU&Index SU

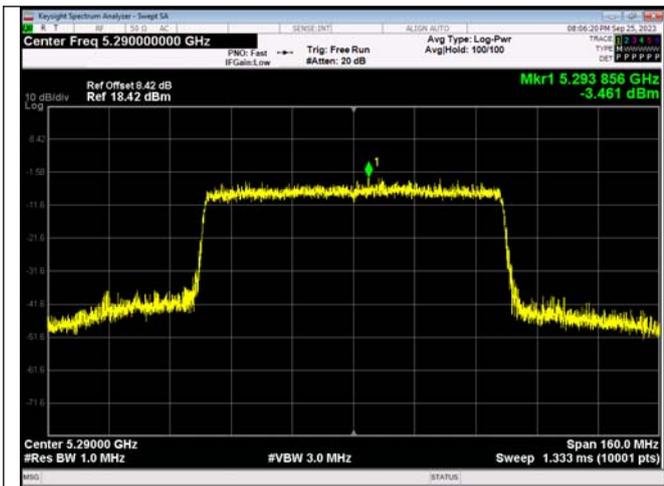


Find the peak value of the power envelope
 Antenna 0_IEEE 802.11ax_80MHz_Channel 58_RU&Index
 SU




The highest mean power
 Antenna 0_IEEE 802.11ax_80MHz_Channel 58_RU&Index
 SU

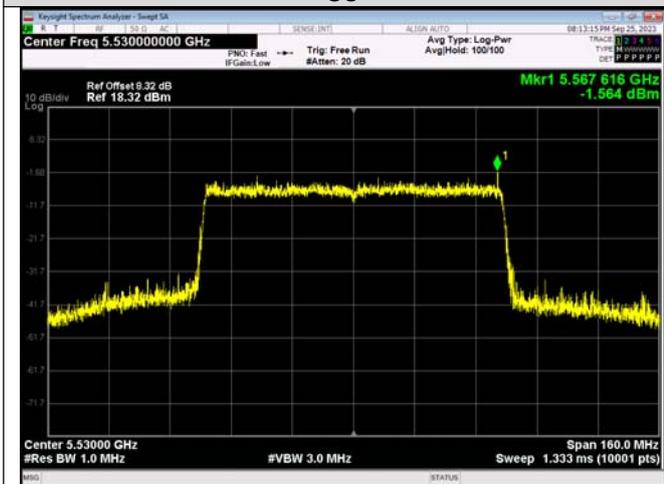


Find the peak value of the power envelope
 Antenna 0_IEEE 802.11ax_80MHz_Channel 106_RU&Index
 SU

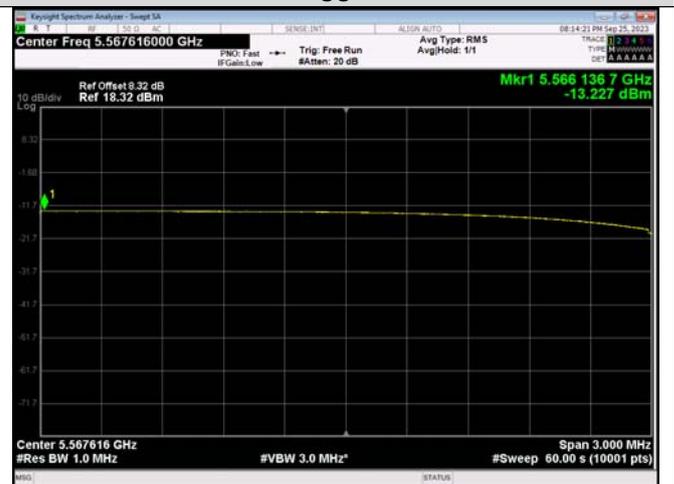

The highest mean power
 Antenna 0_IEEE 802.11ax_80MHz_Channel 106_RU&Index
 SU

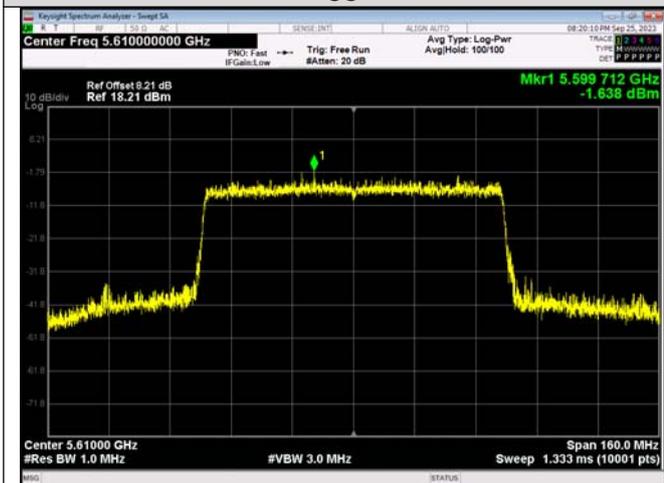


Find the peak value of the power envelope
 Antenna 0_IEEE 802.11ax_80MHz_Channel 122_RU&Index
 SU

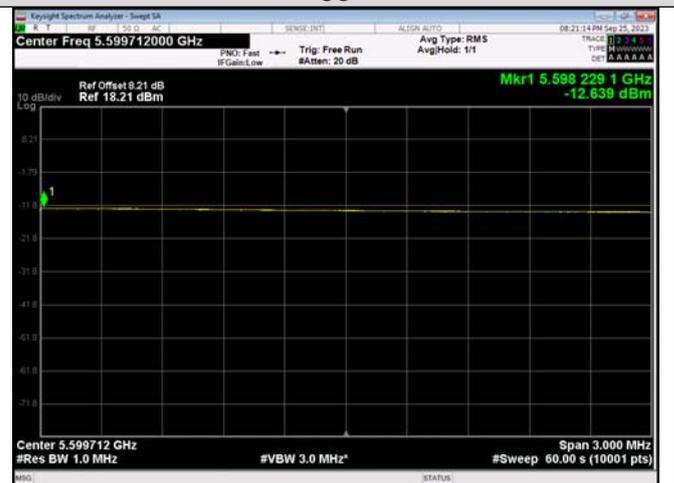

The highest mean power
 Antenna 0_IEEE 802.11ax_80MHz_Channel 122_RU&Index
 SU

Mode	Ch.	RU & Index	PSD (dBm/MHz)	Limit (dBm/MHz)	Result
IEEE 802.11n_20	36	N/A	-4.1030	10	PASS
	40		-3.9260		PASS
	48		-4.2430		PASS
	52		-5.6340	7	PASS
	56		-6.6340		PASS
	64		-5.5510		PASS
	100		-5.2430		PASS
	116		-3.4360		PASS
	140		-1.8440		PASS
IEEE 802.11n_40	38	N/A	-8.1950	10	PASS
	46		-6.0300		PASS
	54		-8.5040		PASS
	62		-7.5150	7	PASS
	102		-6.8740		PASS
	110		-5.0360		PASS
	118		-6.2830		PASS
	134		-5.0680		PASS
IEEE 802.11ac_80	42	N/A	-13.1020	10	PASS
	58		-13.6230		PASS
	106		-11.5270	7	PASS
	122		-9.8240		PASS
IEEE 802.11ax_80	42	SU	-12.1770	10	PASS
	58		-13.6260		PASS
	106		-12.4640	7	PASS
	122		-10.4010		PASS


Test Graphs

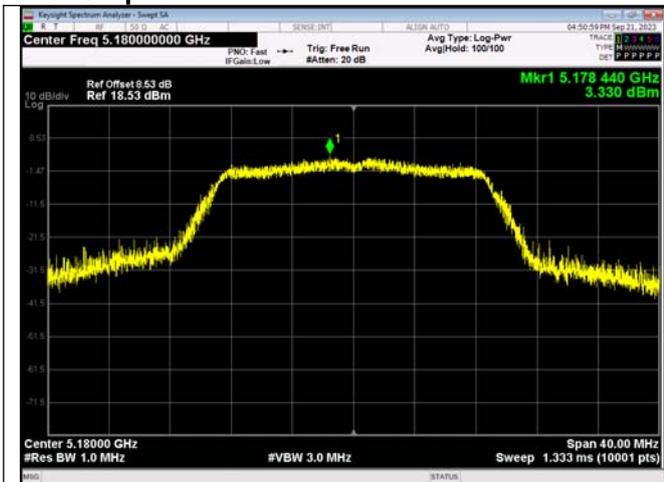

Find the peak value of the power envelope
 Antenna 1_ IEEE 802.11n_20MHz_ Channel 36




The highest mean power
 Antenna 1_ IEEE 802.11n_20MHz_ Channel 36

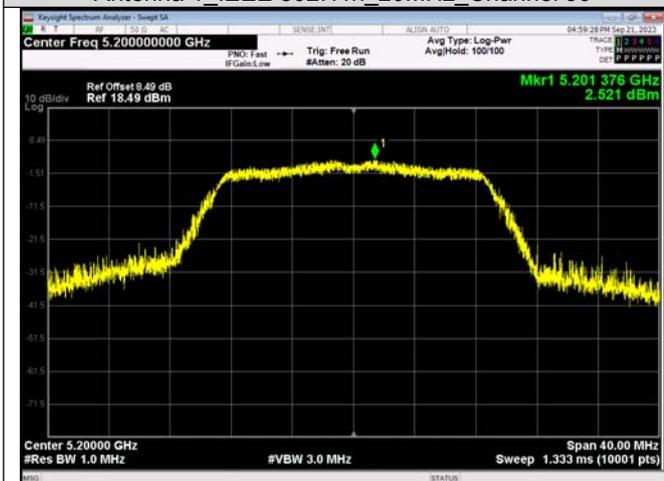


Find the peak value of the power envelope
 Antenna 1_ IEEE 802.11n_20MHz_ Channel 40




The highest mean power
 Antenna 1_ IEEE 802.11n_20MHz_ Channel 40

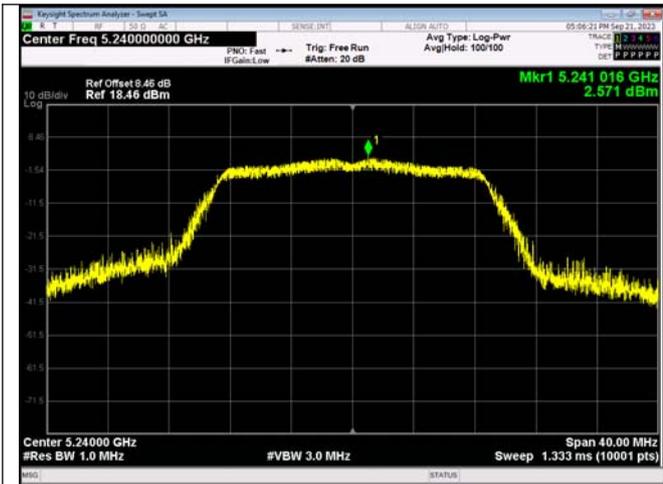

Find the peak value of the power envelope
 Antenna 1_ IEEE 802.11n_ 20MHz_ Channel 48

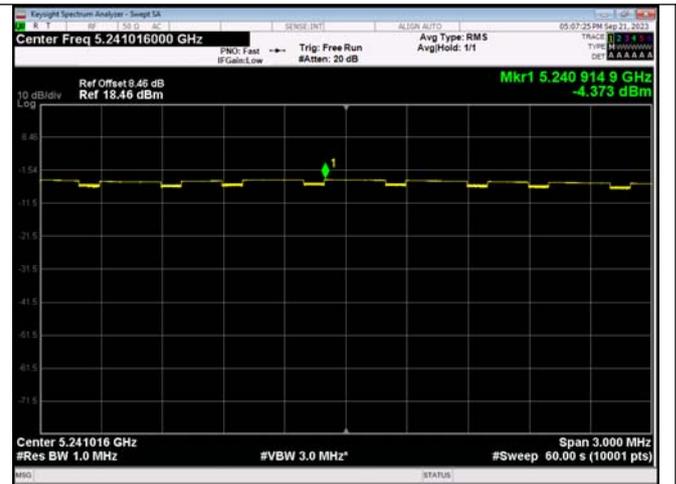


The highest mean power
 Antenna 1_ IEEE 802.11n_ 20MHz_ Channel 48

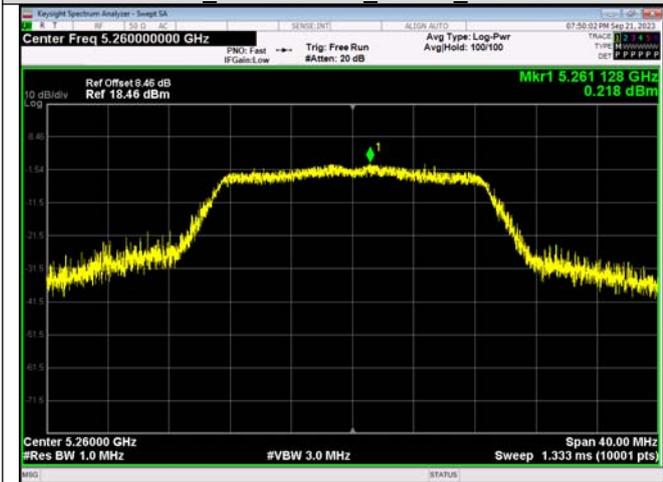

Find the peak value of the power envelope
 Antenna 1_ IEEE 802.11n_ 20MHz_ Channel 52




The highest mean power
 Antenna 1_ IEEE 802.11n_ 20MHz_ Channel 52

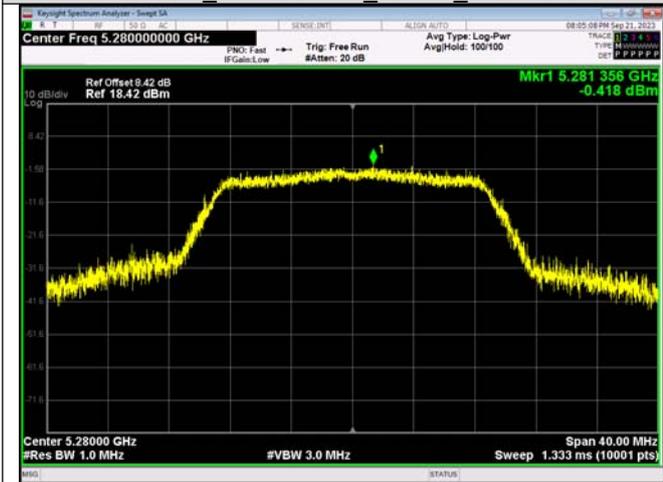

Find the peak value of the power envelope
 Antenna 1_ IEEE 802.11n_ 20MHz_ Channel 56




The highest mean power
 Antenna 1_ IEEE 802.11n_ 20MHz_ Channel 56

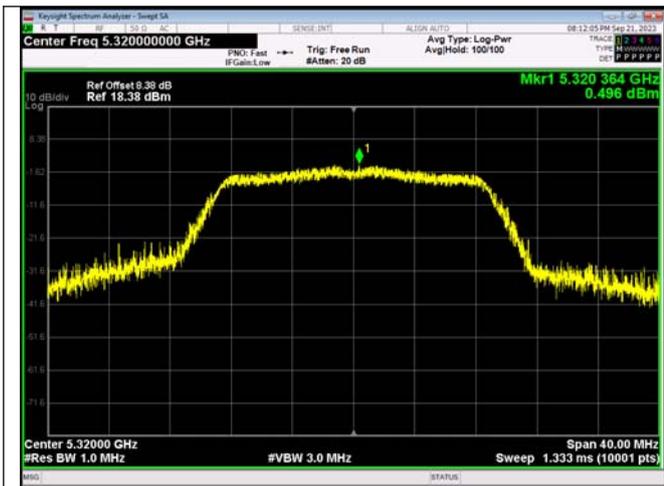


Find the peak value of the power envelope
 Antenna 1_IIEEE 802.11n_20MHz_Channel 64




The highest mean power
 Antenna 1_IIEEE 802.11n_20MHz_Channel 64

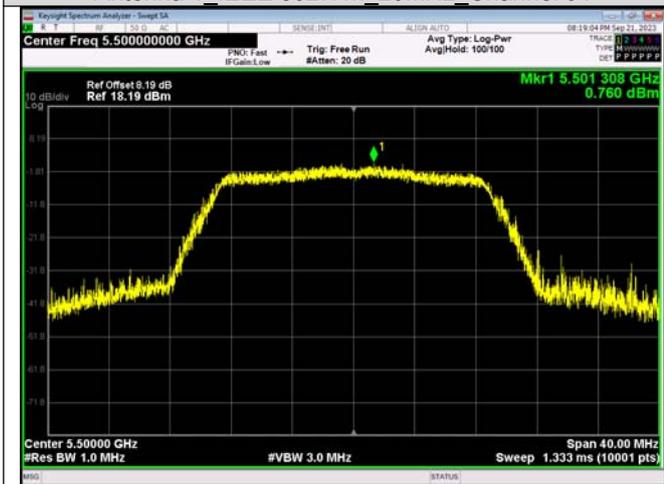


Find the peak value of the power envelope
 Antenna 1_IIEEE 802.11n_20MHz_Channel 100

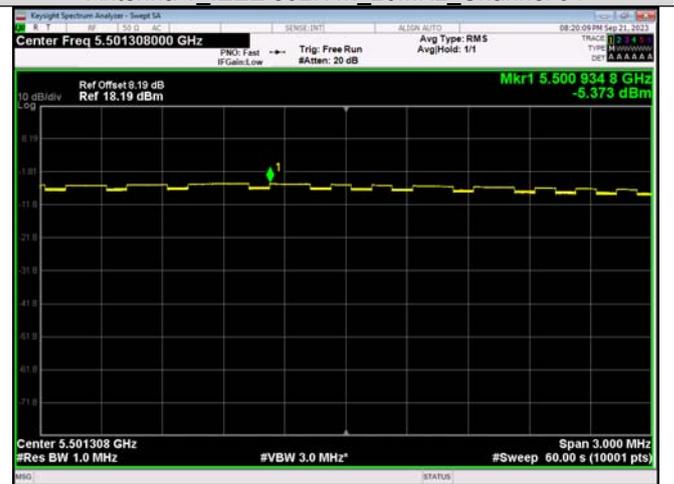

The highest mean power
 Antenna 1_IIEEE 802.11n_20MHz_Channel 100

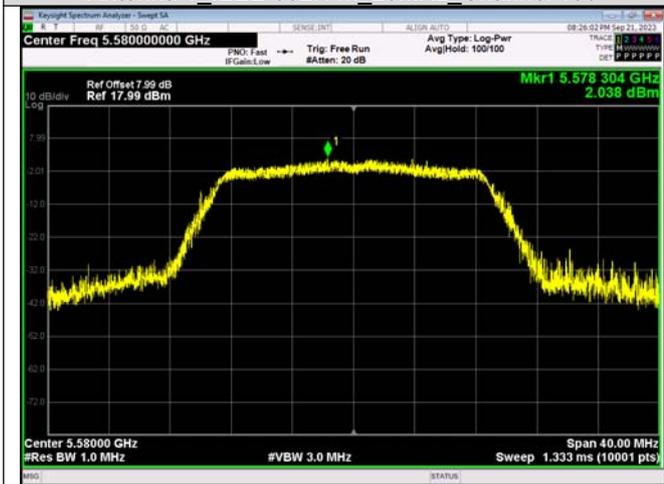


Find the peak value of the power envelope
 Antenna 1_IIEEE 802.11n_20MHz_Channel 116

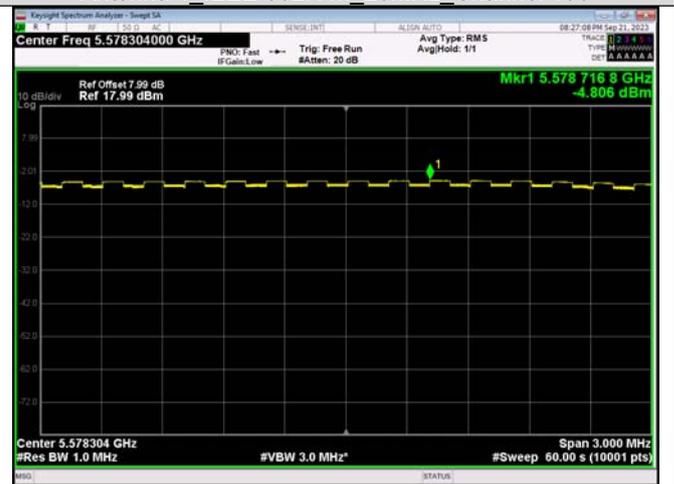


The highest mean power
 Antenna 1_IIEEE 802.11n_20MHz_Channel 116




Find the peak value of the power envelope
 Antenna 1_IEEE 802.11n_20MHz_Channel 140

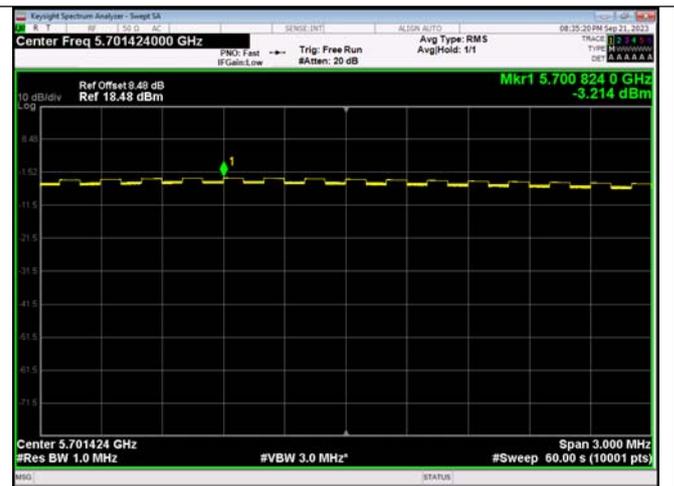

The highest mean power
 Antenna 1_IEEE 802.11n_20MHz_Channel 140

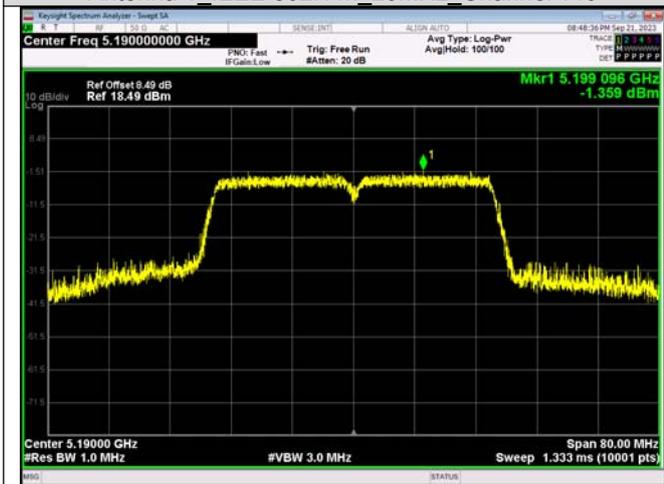

Find the peak value of the power envelope
 Antenna 1_IEEE 802.11n_40MHz_Channel 38

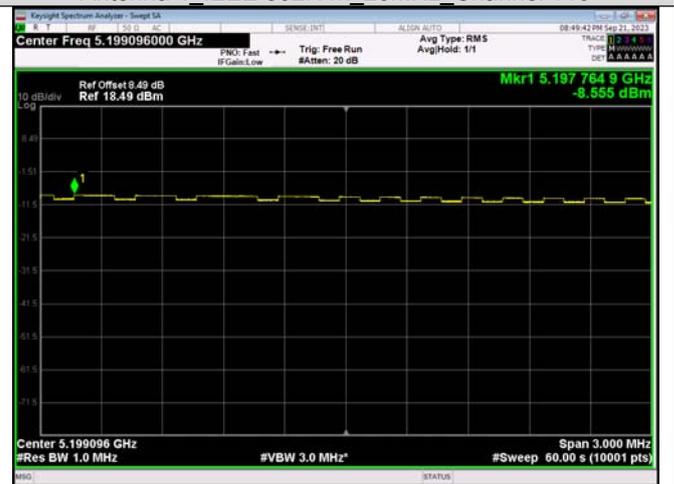


The highest mean power
 Antenna 1_IEEE 802.11n_40MHz_Channel 38




Find the peak value of the power envelope
 Antenna 1_IEEE 802.11n_40MHz_Channel 46




The highest mean power
 Antenna 1_IEEE 802.11n_40MHz_Channel 46

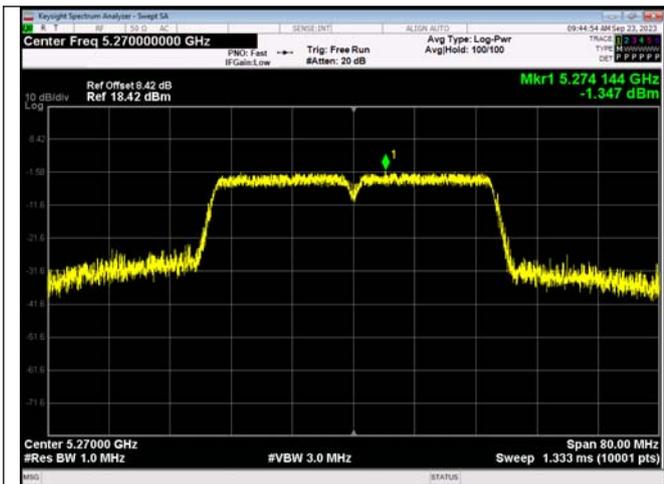


Find the peak value of the power envelope
 Antenna 1_IIEEE 802.11n_40MHz_Channel 54

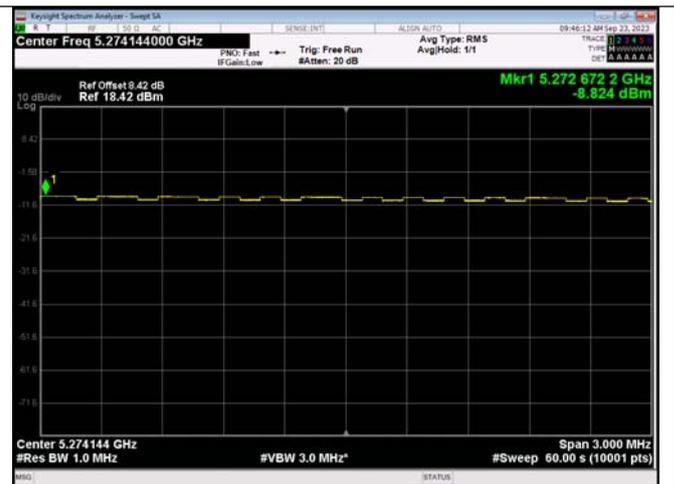


The highest mean power
 Antenna 1_IIEEE 802.11n_40MHz_Channel 54

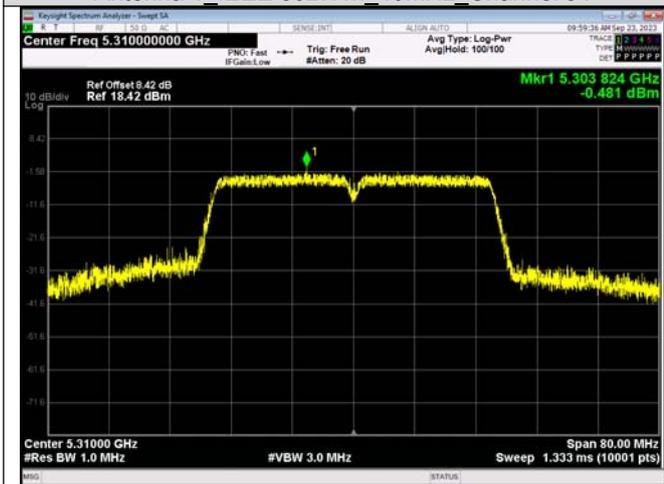


Find the peak value of the power envelope
 Antenna 1_IIEEE 802.11n_40MHz_Channel 62

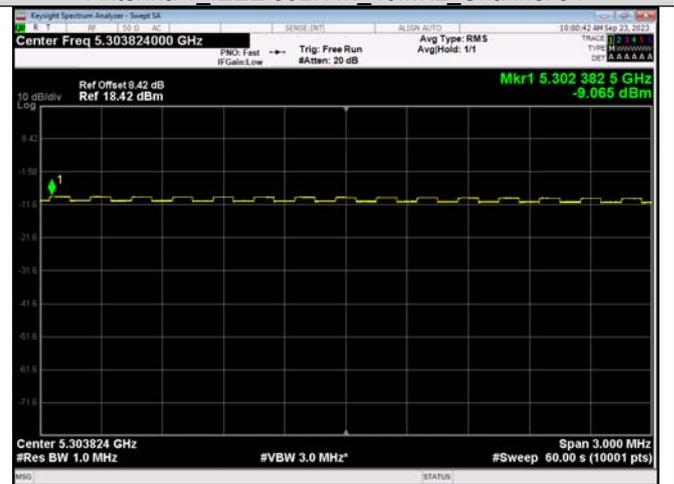


The highest mean power
 Antenna 1_IIEEE 802.11n_40MHz_Channel 62

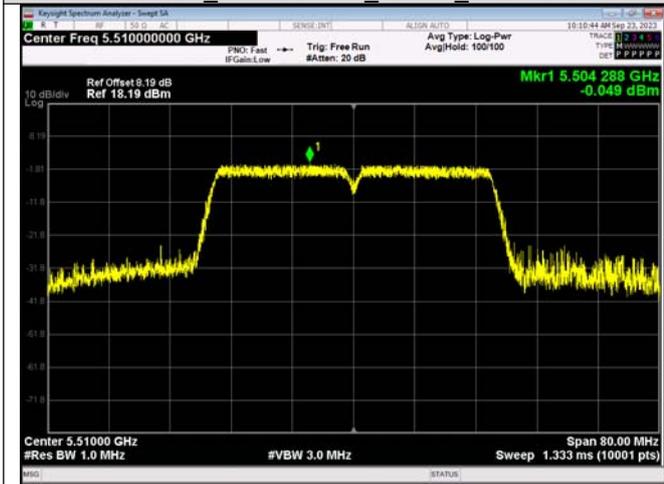


Find the peak value of the power envelope
 Antenna 1_IIEEE 802.11n_40MHz_Channel 102

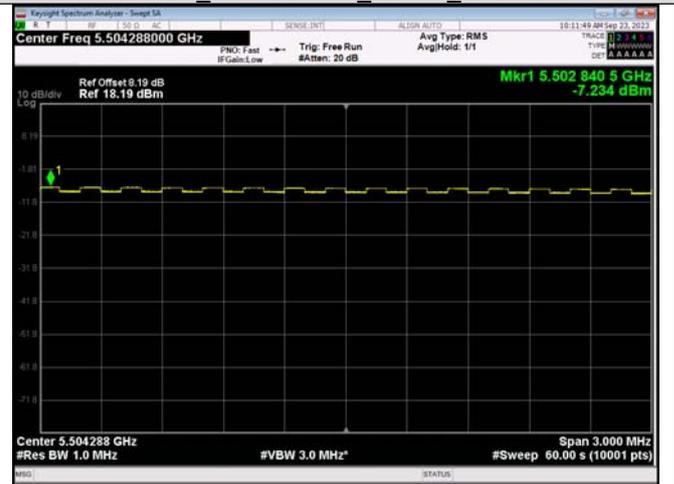


The highest mean power
 Antenna 1_IIEEE 802.11n_40MHz_Channel 102

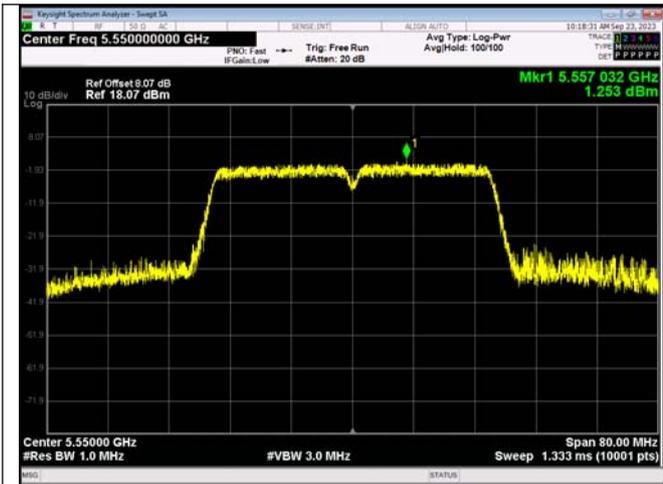


Find the peak value of the power envelope
 Antenna 1 _IEEE 802.11n_ 40MHz_ Channel 110

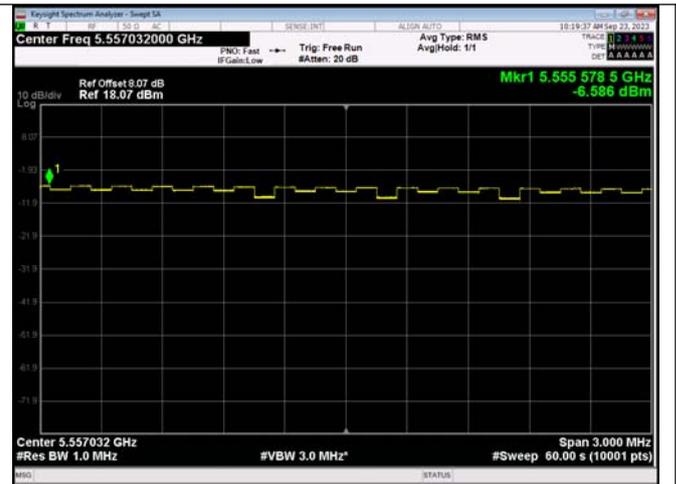


The highest mean power
 Antenna 1 _IEEE 802.11n_ 40MHz_ Channel 110

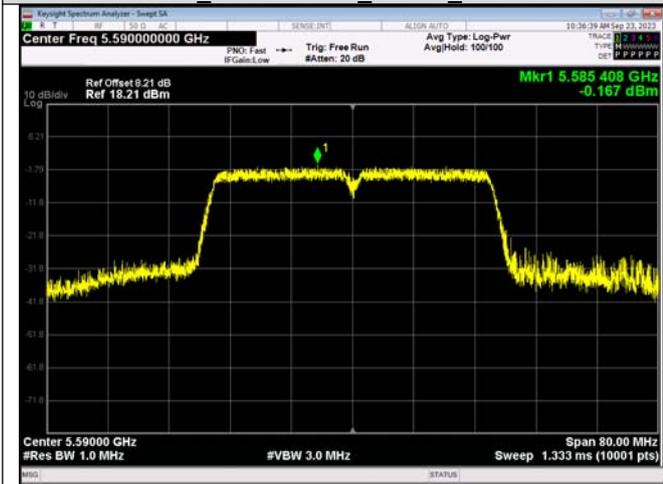


Find the peak value of the power envelope
 Antenna 1 _IEEE 802.11n_ 40MHz_ Channel 118

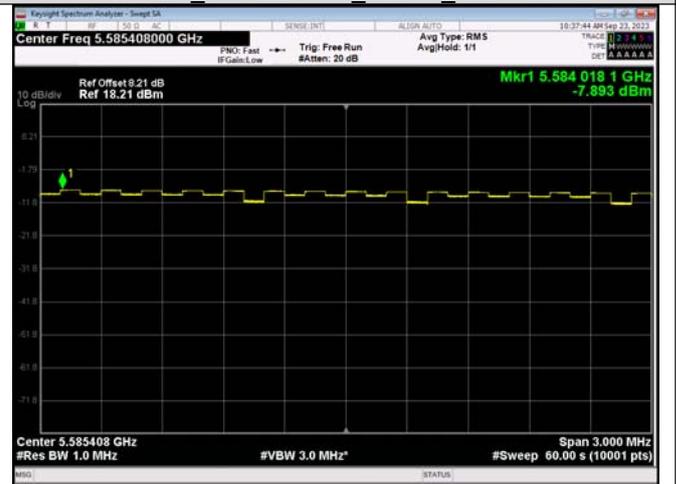

The highest mean power
 Antenna 1 _IEEE 802.11n_ 40MHz_ Channel 118

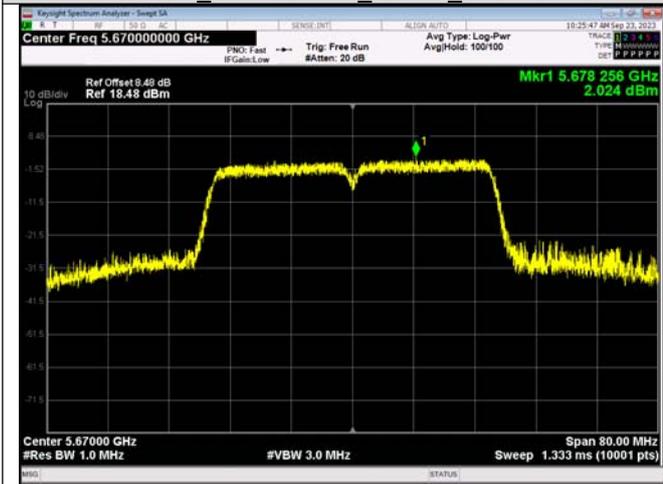


Find the peak value of the power envelope
 Antenna 1 _IEEE 802.11n_ 40MHz_ Channel 134

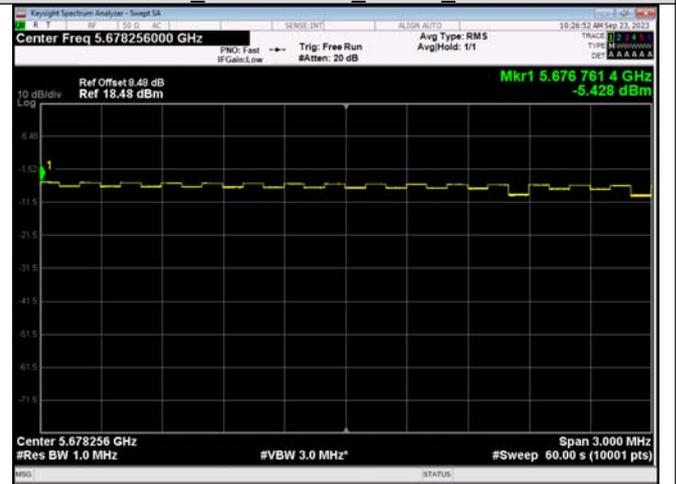


The highest mean power
 Antenna 1 _IEEE 802.11n_ 40MHz_ Channel 134




Find the peak value of the power envelope
 Antenna 1_ IEEE 802.11ac_ 80MHz_ Channel 42

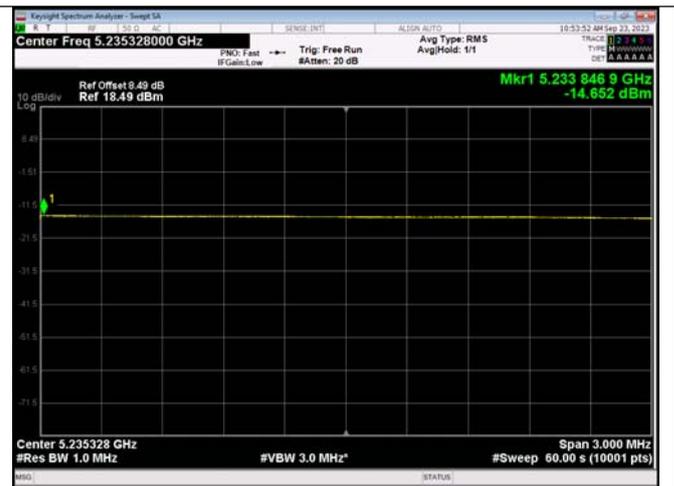


The highest mean power
 Antenna 1_ IEEE 802.11ac_ 80MHz_ Channel 42

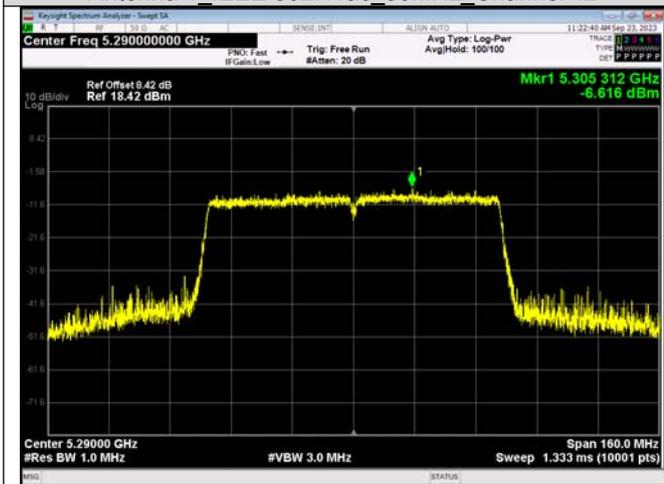


Find the peak value of the power envelope
 Antenna 1_ IEEE 802.11ac_ 80MHz_ Channel 58

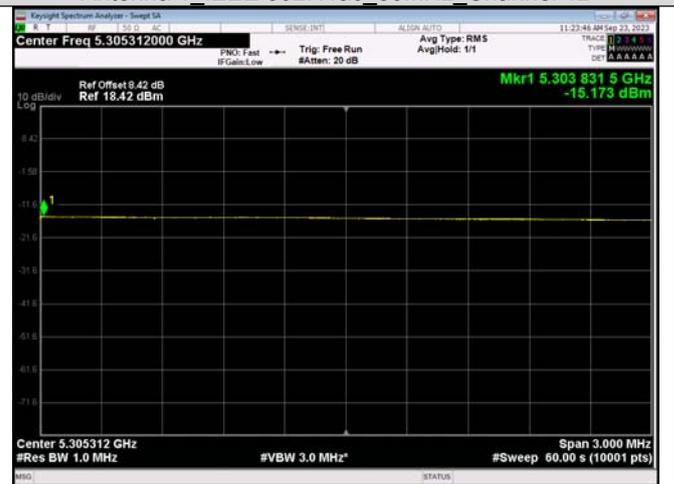


The highest mean power
 Antenna 1_ IEEE 802.11ac_ 80MHz_ Channel 58

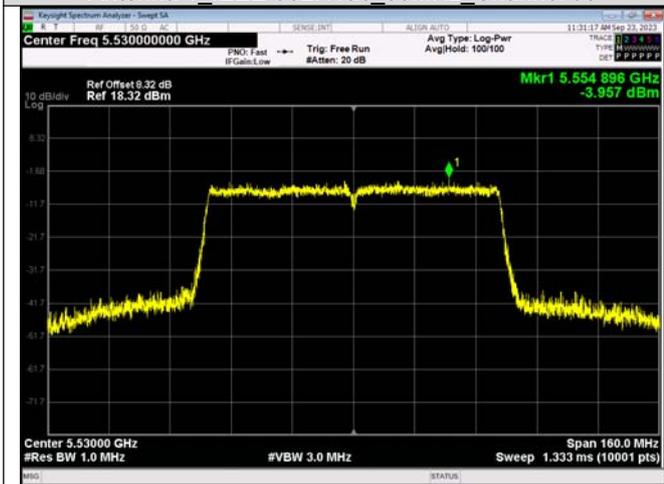


Find the peak value of the power envelope
 Antenna 1_ IEEE 802.11ac_ 80MHz_ Channel 106

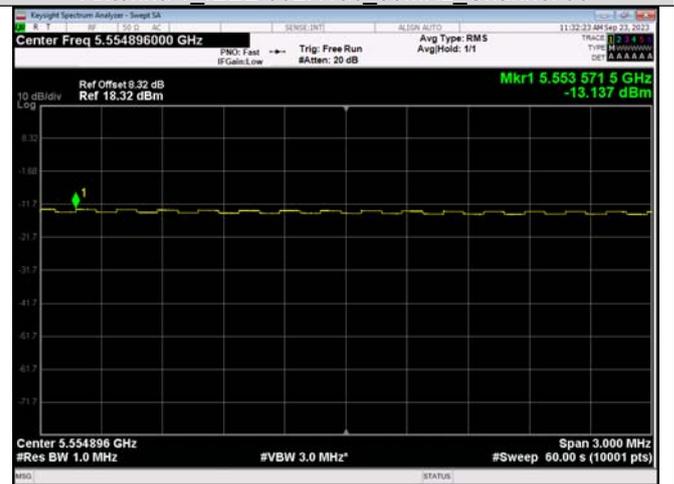


The highest mean power
 Antenna 1_ IEEE 802.11ac_ 80MHz_ Channel 106

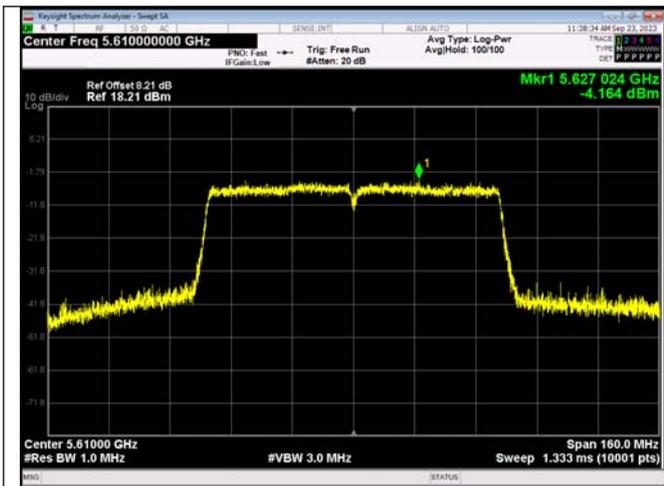


Find the peak value of the power envelope
 Antenna 1 IEEE 802.11ac 80MHz Channel 122

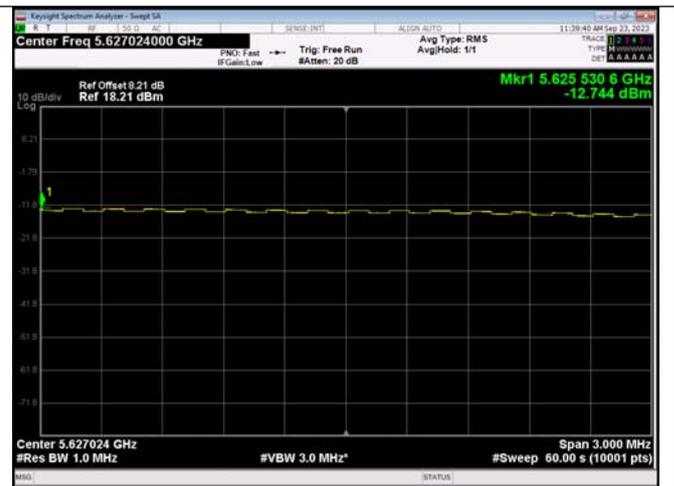


The highest mean power
 Antenna 1 IEEE 802.11ac 80MHz Channel 122

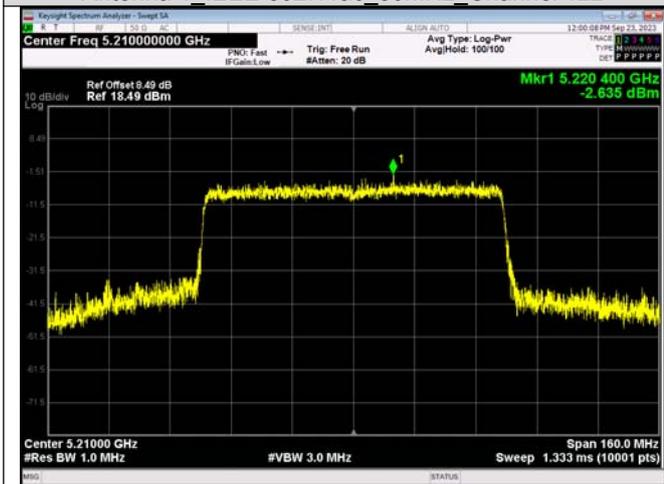


Find the peak value of the power envelope
 Antenna 1 IEEE 802.11ax 80MHz Channel 42_RU&Index SU

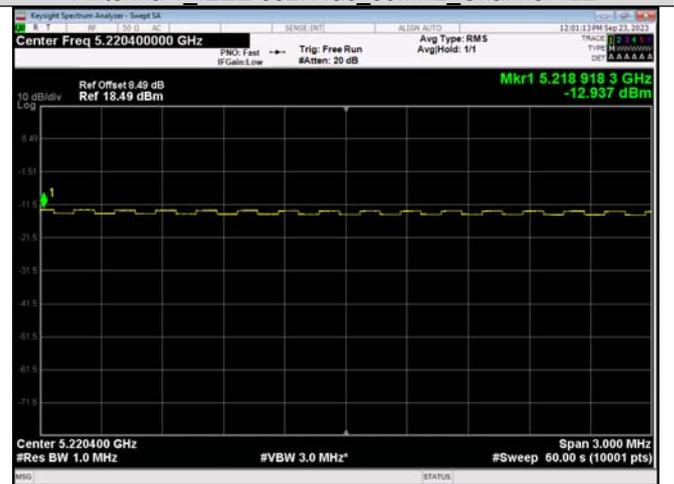


The highest mean power
 Antenna 1 IEEE 802.11ax 80MHz Channel 42_RU&Index SU

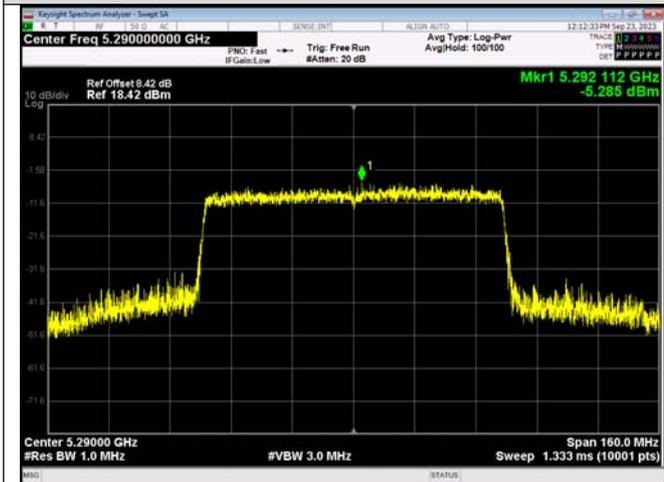


Find the peak value of the power envelope
 Antenna 1 IEEE 802.11ax 80MHz Channel 58_RU&Index SU

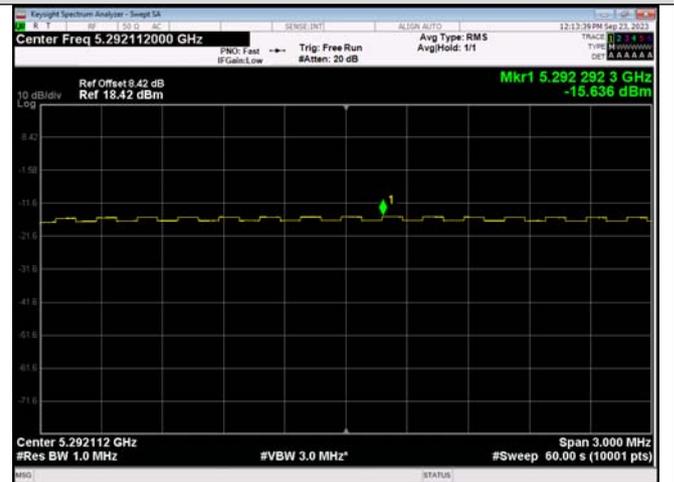


The highest mean power
 Antenna 1 IEEE 802.11ax 80MHz Channel 58_RU&Index SU

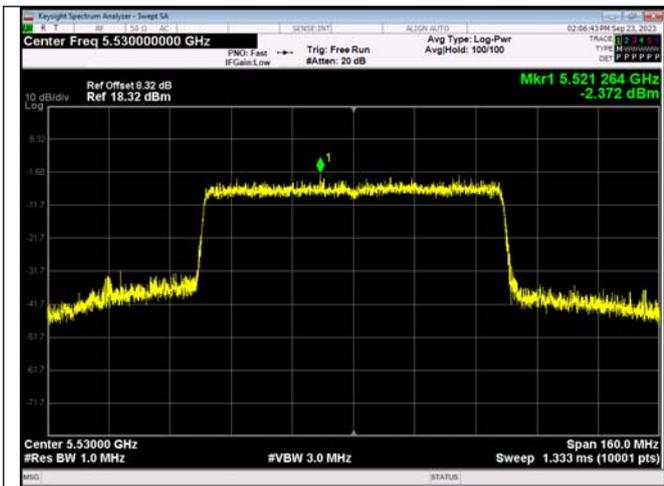


Find the peak value of the power envelope
 Antenna 1_IEEE 802.11ax_80MHz_Channel 106_RU&Index
 SU

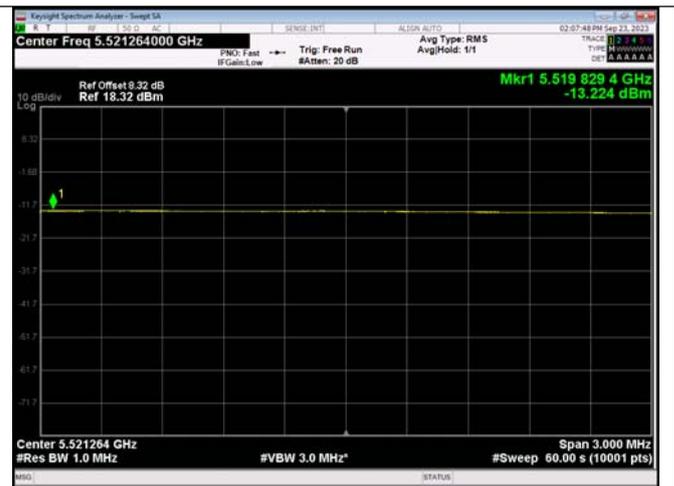

The highest mean power
 Antenna 1_IEEE 802.11ax_80MHz_Channel 106_RU&Index
 SU

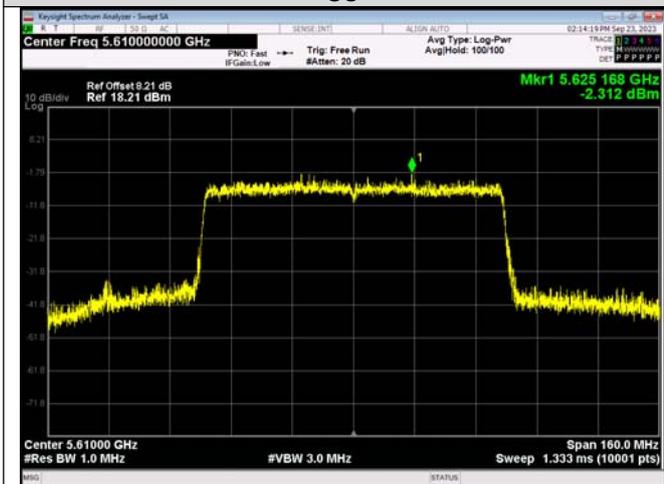

Find the peak value of the power envelope
 Antenna 1_IEEE 802.11ax_80MHz_Channel 122_RU&Index
 SU

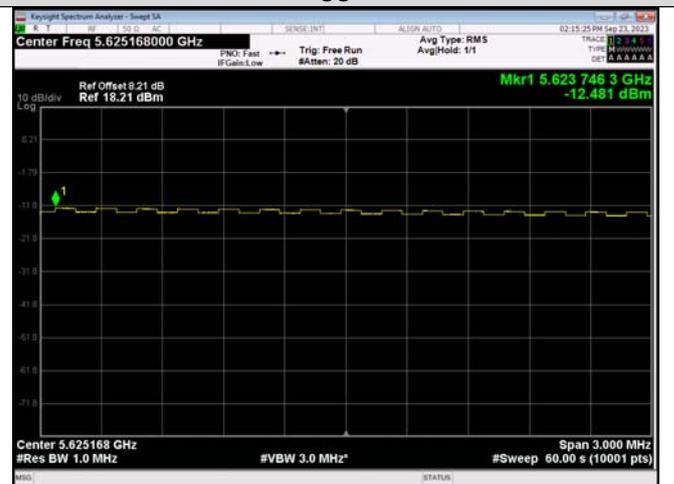

The highest mean power
 Antenna 1_IEEE 802.11ax_80MHz_Channel 122_RU&Index
 SU

6. TRANSMITTER UNWANTED EMISSIONS OUTSIDE THE 5 GHz RLAN BANDS

6.1 APPLIED PROCEDURES / LIMIT

LIMIT

The level of transmitter unwanted emissions outside the 5 GHz RLAN bands shall not exceed the limits given in table 4.

In case of equipment with antenna connectors, these limits apply to emissions at the antenna port (conducted). For emissions radiated by the cabinet or emissions radiated by integral antenna equipment (without antenna connectors), these limits are e.r.p. for emissions up to 1 GHz and e.i.r.p. for emissions above 1 GHz.

Table 4: Transmitter unwanted emission limits outside the 5 GHz RLAN bands

Frequency range	Maximum power	Bandwidth
30 MHz to 47 MHz	-36 dBm	100 kHz
47 MHz to 74 MHz	-54 dBm	100 kHz
74 MHz to 87,5 MHz	-36 dBm	100 kHz
87,5 MHz to 118 MHz	-54 dBm	100 kHz
118 MHz to 174 MHz	-36 dBm	100 kHz
174 MHz to 230 MHz	-54 dBm	100 kHz
230 MHz to 470 MHz	-36 dBm	100 kHz
470 MHz to 862 MHz	-54 dBm	100 kHz
862 MHz to 1 GHz	-36 dBm	100 kHz
1 GHz to 5,15 GHz	-30 dBm	1 MHz
5,35 GHz to 5,47 GHz	-30 dBm	1 MHz
5,725 GHz to 26 GHz	-30 dBm	1 MHz


6.2 CONFORMANCE

Conformance tests as defined in clause 5.4.5 shall be carried out.

6.3 TEST METHOD

According to ETSI EN 301 893 V2.1.1 (2017-05) §5.4.4

6.4 TEST SETUP LAYOUT

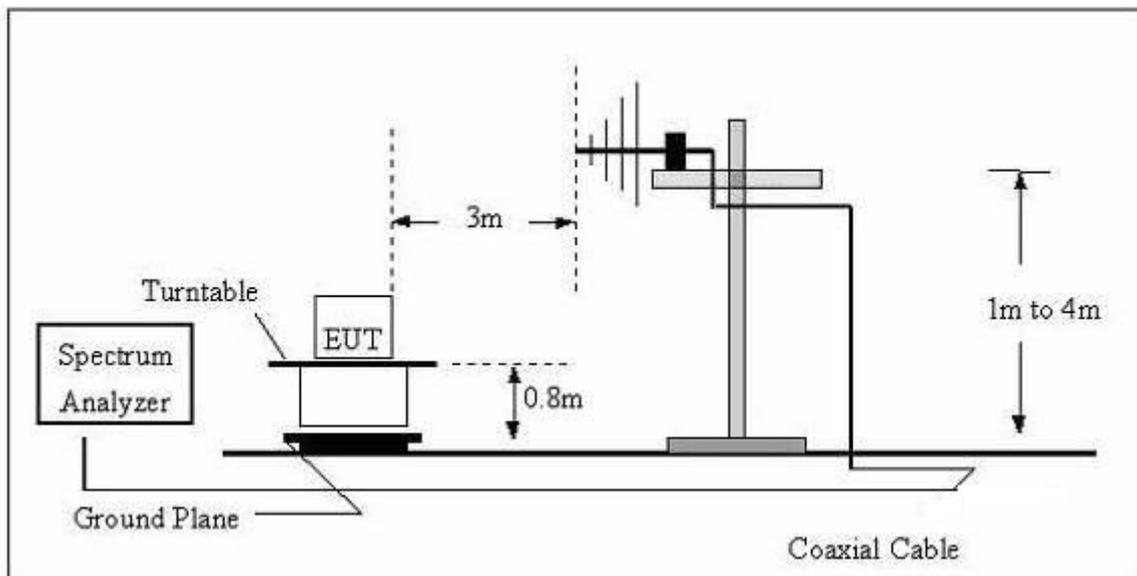

6.5 TEST RESULTS

Below 1GHz

Test Mode:802.11n20 mode-Low			
Temperature:	25°C	Relative Humidity:	60 %
Pressure:	1012 hPa	Test Voltage:	AC 230V/50Hz

Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark	Polarization
136.5423	-49.68	2.37	-47.31	-36	-11.31	peak	Horizontal
253.0142	-49.66	3.56	-46.10	-36	-10.10	peak	Horizontal
341.0216	-50.26	3.64	-46.62	-36	-10.62	peak	Horizontal
520.0361	-68.73	4.05	-64.68	-54	-10.68	peak	Horizontal
706.5362	-68.57	4.65	-63.92	-54	-9.92	peak	Horizontal
823.4012	-68.97	5.58	-63.39	-54	-9.39	peak	Horizontal
88.9536	-66.33	2.21	-64.12	-54	-10.12	peak	Vertical
223.0162	-49.21	3.55	-45.66	-36	-9.66	peak	Vertical
413.0216	-49.83	3.64	-46.19	-36	-10.19	peak	Vertical
516.3026	-68.32	4.05	-64.27	-54	-10.27	peak	Vertical
643.0211	-68.47	4.65	-63.82	-54	-9.82	peak	Vertical
815.0263	-68.95	5.58	-63.37	-54	-9.37	peak	Vertical

Test Mode:802.11n20 mode-High			
Temperature:	25°C	Relative Humidity:	60 %
Pressure:	1012 hPa	Test Voltage:	AC 230V/50Hz

Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark	Polarization
129.6523	-49.63	2.35	-47.28	-36	-11.28	peak	Horizontal
263.4155	-50.32	3.54	-46.78	-36	-10.78	peak	Horizontal
385.0124	-50.47	3.63	-46.84	-36	-10.84	peak	Horizontal
546.0213	-68.53	4.04	-64.49	-54	-10.49	peak	Horizontal
736.5412	-68.95	4.63	-64.32	-54	-10.32	peak	Horizontal
853.0211	-67.83	5.57	-62.26	-54	-8.26	peak	Horizontal
136.5201	-66.39	2.22	-64.17	-54	-10.17	peak	Vertical
256.3014	-50.72	3.56	-47.16	-36	-11.16	peak	Vertical
440.2636	-50.13	3.63	-46.50	-36	-10.50	peak	Vertical
553.0216	-69.32	4.04	-65.28	-54	-11.28	peak	Vertical
668.4012	-70.22	4.64	-65.58	-54	-11.58	peak	Vertical
809.6536	-70.15	5.57	-64.58	-54	-10.58	peak	Vertical

Note:

1. The emission behaviour belongs to narrowband spurious emission.
2. Calculation of result is: Result (dBm)= Reading (dBm)+ Correct Factor (dB).
3. Recorded the worst data 802.11n20 mode for 5150-5250MHz in report.

Above 1GHz

Test Mode:802.11n20 mode-Low			
Temperature:	25°C	Relative Humidity:	60 %
Pressure:	1012 hPa	Test Voltage:	AC 230V/50Hz

Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark	Polarization
5263.514	-53.62	14.25	-39.37	-30	-9.37	peak	Horizontal
7366.326	-56.32	16.54	-39.78	-30	-9.78	peak	Horizontal
11532.062	-60.21	18.66	-41.55	-30	-11.55	peak	Horizontal
13025.461	-59.67	20.39	-39.28	-30	-9.28	peak	Horizontal
16533.269	-60.33	23.22	-37.11	-30	-7.11	peak	Horizontal
21055.326	-62.51	24.25	-38.26	-30	-8.26	peak	Horizontal
5463.216	-55.34	14.25	-41.09	-30	-11.09	peak	Vertical
7362.016	-58.94	16.54	-42.4	-30	-12.4	peak	Vertical
10326.045	-60.21	18.66	-41.55	-30	-11.55	peak	Vertical
14203.261	-61.53	20.39	-41.14	-30	-11.14	peak	Vertical
17684.102	-61.27	23.22	-38.05	-30	-8.05	peak	Vertical
21033.564	-62.03	24.25	-37.78	-30	-7.78	peak	Vertical

Test Mode: Band I 802.11n20 mode-High			
Temperature:	25°C	Relative Humidity:	60 %
Pressure:	1012 hPa	Test Voltage:	AC 230V/50Hz


Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark	Polarization
5233.061	-56.03	14.25	-41.78	-30	-11.78	peak	Horizontal
7365.401	-58.63	16.54	-42.09	-30	-12.09	peak	Horizontal
11253.063	-59.32	18.66	-40.66	-30	-10.66	peak	Horizontal
14536.216	-60.23	20.39	-39.84	-30	-9.84	peak	Horizontal
17963.204	-62.37	23.22	-39.15	-30	-9.15	peak	Horizontal
21035.231	-62.64	24.25	-38.39	-30	-8.39	peak	Horizontal
5412.036	-55.26	14.25	-41.01	-30	-11.01	peak	Vertical
7635.216	-56.39	16.54	-39.85	-30	-9.85	peak	Vertical
11025.365	-60.32	18.66	-41.66	-30	-11.66	peak	Vertical
12365.054	-59.38	20.39	-38.99	-30	-8.99	peak	Vertical
15336.204	-60.41	23.22	-37.19	-30	-7.19	peak	Vertical
10236.466	-62.58	24.25	-38.33	-30	-8.33	peak	Vertical

Note:

1. The emission behaviour belongs to narrowband spurious emission.
2. Calculation of result is: Result (dBm)= Reading (dBm)+ Correct Factor (dB).
3. Recorded the worst data 802.11n20 mode for 5150-5250MHz in report.

7. TRANSMITTER UNWANTED EMISSIONS WITHIN THE 5 GHZ RLAN BANDS

7.1 APPLIED PROCEDURES / LIMIT LIMIT

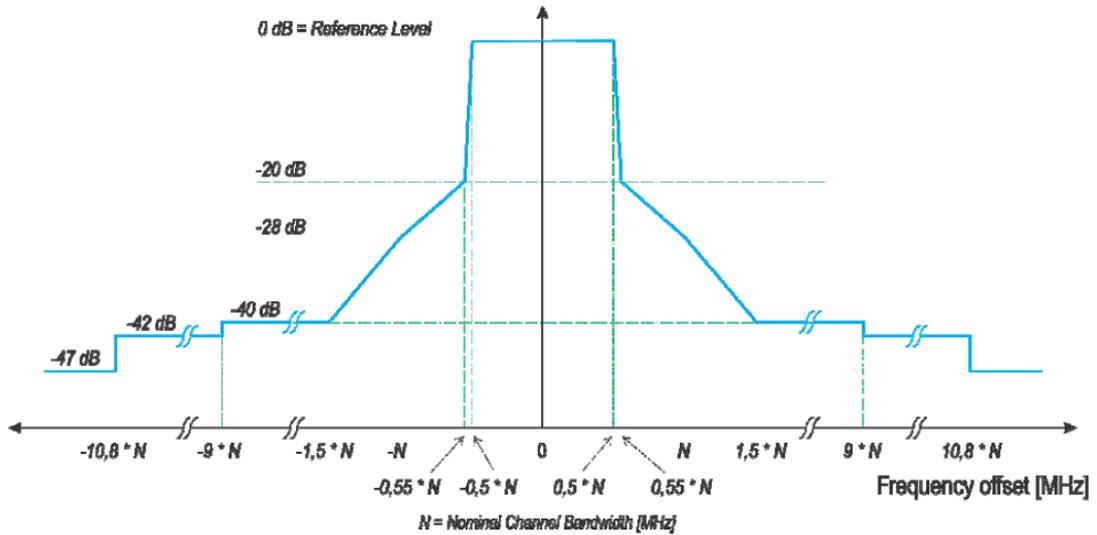


NOTE: dBc is the spectral density relative to the maximum spectral power density of the transmitted signal.

Figure 1: Transmit spectral power mask

7.2 TEST PROCEDURES

According to ETSI EN 301 893 V2.1.1 (2017-05) §5.4.6.2

7.3 TEST SETUP LAYOUT

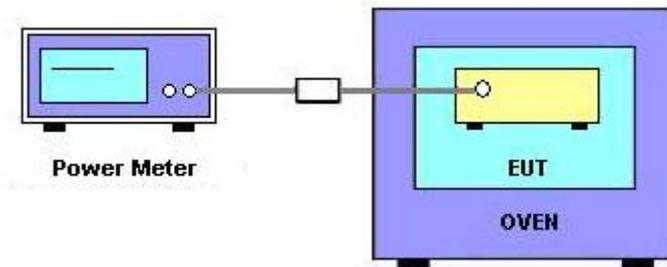

7.4 TEST RESULTS

Mode	Ch.	RU & Index	Ant	Frequency offset start(MHz)	Frequency offset end(MHz)	Start (MHz)	Stop (MHz)	Peak (MHz)	Emission (dBm)	Over Limit (dBm)	Limit (dBm)	Result			
IEEE 802.11n_20	36	N/A	0	-1.5 * N	-N	5150.0	5160	5159.9	-44.149	-12.338	-31.81	PASS			
				-N	-0.55 * N	5160	5169.0	5169.0	-31.902	-8.146	-23.76	PASS			
				-0.55 * N	-0.5 * N	5169.0	5170.0	5170.0	-24.208	-20.175	-4.03	PASS			
				-0.5 * N	0.5 * N	5170.0	5190.0	5180.9	-3.821	-0.081	-3.74	PASS			
				0.5 * N	0.55 * N	5190.0	5191.0	5190.0	-24.857	-21.037	-3.82	PASS			
				0.55 * N	N	5191.0	5200	5191.0	-33.416	-9.672	-23.74	PASS			
	N			1.5 * N	5200	5210.0	5200.1	-46.525	-14.683	-31.84	PASS				
	1.5 * N			9 * N	5210.0	5360	5210.1	-54.447	-10.707	-43.74	PASS				
	10.8 * N			+∞	5396.0	7396.0	5723.7	-60.365	-9.625	-50.74	PASS				
	-9 * N			-1.5 * N	5020	5170.0	5169.9	-55.199	-11.134	-44.06	PASS				
	-1.5 * N			-N	5170.0	5180	5179.8	-44.999	-12.674	-32.33	PASS				
	-N			-0.55 * N	5180	5189.0	5189.0	-32.523	-8.443	-24.08	PASS				
	-0.55 * N			-0.5 * N	5189.0	5190.0	5190.0	-24.736	-20.416	-4.32	PASS				
	-0.5 * N			0.5 * N	5190.0	5210.0	5200.9	-4.214	-0.149	-4.07	PASS				
	0.5 * N			0.55 * N	5210.0	5211.0	5210.0	-25.050	-20.865	-4.19	PASS				
	0.55 * N			N	5211.0	5220	5211.0	-33.824	-9.753	-24.07	PASS				
	N			1.5 * N	5220	5230.0	5220.2	-47.417	-15.128	-32.29	PASS				
	1.5 * N			9 * N	5230.0	5380	5230.0	-54.967	-10.902	-44.06	PASS				
	10.8 * N			+∞	5416.0	7416.0	5720.3	-60.406	-9.341	-51.06	PASS				
	-9 * N			-1.5 * N	5060	5210.0	5209.9	-56.294	-13.085	-43.21	PASS				
	-1.5 * N			-N	5210.0	5220	5219.9	-46.405	-15.084	-31.32	PASS				
	-N			-0.55 * N	5220	5229.0	5229.0	-32.399	-9.180	-23.22	PASS				
	-0.55 * N			-0.5 * N	5229.0	5230.0	5230.0	-23.819	-20.408	-3.41	PASS				
	-0.5 * N			0.5 * N	5230.0	5250.0	5239.1	-3.473	-0.264	-3.21	PASS				
	0.5 * N			0.55 * N	5250.0	5251.0	5250.0	-24.595	-21.186	-3.41	PASS				
	0.55 * N			N	5251.0	5260	5251.0	-33.632	-10.414	-23.22	PASS				
	N			1.5 * N	5260	5270.0	5260.2	-48.404	-17.014	-31.39	PASS				
	1.5 * N			9 * N	5270.0	5420	5270.1	-56.377	-13.168	-43.21	PASS				
	10.8 * N			+∞	5456.0	7456.0	5722.3	-60.441	-10.232	-50.21	PASS				
	-9 * N			-1.5 * N	5080	5230.0	5229.9	-57.186	-13.271	-43.91	PASS				
	-1.5 * N			-N	5230.0	5240	5239.9	-48.114	-16.138	-31.98	PASS				
	-N			-0.55 * N	5240	5249.	5249.	-33.304	-9.380	-23.9	PASS				
				40											
				48											
				52											

				0	0			2				
			-0.55 * N	-0.5 * N	5249.0	5250.0	5250.0	-24.788	-20.712	-4.08	PASS	
			-0.5 * N	0.5 * N	5250.0	5270.0	5260.9	-4.167	-0.252	-3.92	PASS	
			0.5 * N	0.55 * N	5270.0	5271.0	5270.0	-25.048	-20.893	-4.16	PASS	
			0.55 * N	N	5271.0	5280	5271.0	-34.212	-10.286	-23.93	PASS	
			N	1.5 * N	5280	5290.0	5280.1	-50.114	-18.135	-31.98	PASS	
			1.5 * N	9 * N	5290.0	5440	5290.0	-56.888	-12.973	-43.91	PASS	
			9 * N	10.8 * N	5440	5476.0	5472.3	-61.430	-15.515	-45.91	PASS	
			10.8 * N	+∞	5476.0	7476.0	5723.9	-60.438	-9.523	-50.91	PASS	
	56		-9 * N	-1.5 * N	5100	5250.0	5249.9	-57.294	-12.519	-44.77	PASS	
			-1.5 * N	-N	5250.0	5260	5260.0	-48.277	-15.491	-32.79	PASS	
			-N	-0.55 * N	5260	5269.0	5269.0	-34.063	-9.281	-24.78	PASS	
			-0.55 * N	-0.5 * N	5269.0	5270.0	5270.0	-25.620	-20.723	-4.9	PASS	
			-0.5 * N	0.5 * N	5270.0	5290.0	5280.8	-4.979	-0.204	-4.78	PASS	
			0.5 * N	0.55 * N	5290.0	5291.0	5290.0	-25.688	-20.633	-5.06	PASS	
			0.55 * N	N	5291.0	5300	5291.0	-34.648	-9.860	-24.79	PASS	
			N	1.5 * N	5300	5310.0	5300.0	-50.383	-17.590	-32.79	PASS	
			1.5 * N	9 * N	5310.0	5460	5310.2	-57.049	-12.274	-44.77	PASS	
			9 * N	10.8 * N	5460	5496.0	5473.0	-61.508	-14.733	-46.77	PASS	
			10.8 * N	+∞	5496.0	7496.0	5717.4	-60.458	-8.683	-51.77	PASS	
		64		-9 * N	-1.5 * N	5140	5290.0	5289.9	-57.020	-12.406	-44.61	PASS
				-1.5 * N	-N	5290.0	5300	5300.0	-48.530	-15.886	-32.64	PASS
				-N	-0.55 * N	5300	5309.0	5309.0	-33.550	-8.932	-24.62	PASS
				-0.55 * N	-0.5 * N	5309.0	5310.0	5310.0	-25.164	-20.181	-4.98	PASS
				-0.5 * N	0.5 * N	5310.0	5330.0	5321.1	-4.809	-0.195	-4.61	PASS
			0.5 * N	0.55 * N	5330.0	5331.0	5330.0	-26.137	-21.163	-4.97	PASS	
			0.55 * N	N	5331.0	5340	5331.0	-35.449	-10.819	-24.63	PASS	
			N	1.5 * N	5340	5350.0	5340.0	-51.371	-18.734	-32.64	PASS	
			1.5 * N	9 * N	5350.0	5500	5350.0	-57.511	-12.897	-44.61	PASS	
			9 * N	10.8 * N	5500	5536.0	5518.8	-61.509	-14.895	-46.61	PASS	
			10.8 * N	+∞	5536.0	7536.0	5721.4	-60.547	-8.933	-51.61	PASS	
	100			0	-10.8 * N	1	5284.0	5283.8	-60.882	-10.127	-50.76	PASS
				-10.8 * N	-9 * N	5284.0	5320	5290.1	-60.868	-15.113	-45.76	PASS
				-9 * N	-1.5 * N	5320	5470.0	5341.0	-60.902	-17.147	-43.76	PASS
				-1.5 * N	-N	5470.0	5480	5480.0	-45.139	-13.350	-31.79	PASS

	116	-N	-0.55 * N	5480	5489. 0	5489. 0	-32.410	-8.655	-23.7 6	PASS	
		-0.55 * N	-0.5 * N	5489. 0	5490. 0	5490. 0	-24.188	-20.33 6	-3.85	PASS	
		-0.5 * N	0.5 * N	5490. 0	5510. 0	5500. 7	-4.328	-0.573	-3.75	PASS	
		0.5 * N	0.55 * N	5510. 0	5511. 0	5510. 0	-27.066	-22.53 0	-4.54	PASS	
		0.55 * N	N	5511. 0	5520	5511. 0	-35.476	-11.71 4	-23.7 6	PASS	
		N	1.5 * N	5520	5530. 0	5520. 1	-47.675	-15.84 6	-31.8 3	PASS	
		1.5 * N	9 * N	5530. 0	5680	5533. 7	-58.499	-14.74 4	-43.7 6	PASS	
		9 * N	10.8 * N	5680	5716. 0	5708. 3	-60.537	-14.78 2	-45.7 6	PASS	
		10.8 * N	+∞	5716. 0	7716. 0	5718. 2	-60.526	-9.771	-50.7 6	PASS	
		0	-10.8 * N	1	5364. 0	5273. 1	-61.130	-9.901	-51.2 3	PASS	
		-9 * N	-1.5 * N	5400	5550. 0	5549. 5	-58.252	-14.02 3	-44.2 3	PASS	
		-1.5 * N	-N	5550. 0	5560	5559. 9	-46.287	-13.96 4	-32.3 2	PASS	
		-N	-0.55 * N	5560	5569. 0	5569. 0	-33.231	-8.981	-24.2 5	PASS	
		-0.55 * N	-0.5 * N	5569. 0	5570. 0	5570. 0	-24.636	-20.33 6	-4.3	PASS	
		-0.5 * N	0.5 * N	5570. 0	5590. 0	5580. 9	-4.421	-0.192	-4.23	PASS	
	0.5 * N	0.55 * N	5590. 0	5591. 0	5590. 0	-26.444	-21.91 5	-4.53	PASS		
	0.55 * N	N	5591. 0	5600	5591. 0	-35.736	-11.47 6	-24.2 6	PASS		
	N	1.5 * N	5600	5610. 0	5600. 0	-47.345	-15.10 1	-32.2 4	PASS		
	1.5 * N	9 * N	5610. 0	5760	5610. 0	-57.207	-12.97 8	-44.2 3	PASS		
	140	0	-10.8 * N	1	5484. 0	5291. 5	-60.671	-10.37 1	-50.3	PASS	
		-10.8 * N	-9 * N	5484. 0	5520	5519. 4	-61.498	-16.19 8	-45.3	PASS	
		-9 * N	-1.5 * N	5520	5670. 0	5670. 0	-55.173	-11.87 3	-43.3	PASS	
		-1.5 * N	-N	5670. 0	5680	5679. 9	-44.576	-13.20 0	-31.3 8	PASS	
		-N	-0.55 * N	5680	5689. 0	5689. 0	-33.644	-10.31 3	-23.3 3	PASS	
		-0.55 * N	-0.5 * N	5689. 0	5690. 0	5690. 0	-25.249	-21.69 8	-3.55	PASS	
		-0.5 * N	0.5 * N	5690. 0	5710. 0	5700. 9	-3.453	-0.153	-3.3	PASS	
		0.5 * N	0.55 * N	5710. 0	5711. 0	5710. 0	-26.042	-22.14 2	-3.9	PASS	
		0.55 * N	N	5711. 0	5720	5711. 0	-35.170	-11.84 8	-23.3 2	PASS	
		N	1.5 * N	5720	5730. 0	5720. 0	-46.730	-15.39 7	-31.3 3	PASS	
		IEEE 802.11n_40	38	-N	-0.55 * N	5150	5168. 0	5167. 9	-31.962	-6.192	-25.7 7
-0.55 * N				-0.5 * N	5168. 0	5170. 0	5170. 0	-30.026	-24.18 1	-5.85	PASS
-0.5 * N				0.5 * N	5170. 0	5210. 0	5196. 2	-5.808	-0.091	-5.72	PASS
0.5 * N				0.55 * N	5210. 0	5212. 0	5210. 0	-31.954	-26.17 7	-5.78	PASS
0.55 * N				N	5212. 0	5230	5212. 1	-35.048	-9.275	-25.7 7	PASS
N	1.5 * N			5230	5250.	5230.	-39.689	-5.835	-33.8	PASS	


				0	2			5	
	1.5 * N	9 * N	5250. 0	5550	5250. 2	-48.027	-2.310	-45.7 2	PASS
	9 * N	10.8 * N	5550	5622. 0	5620. 9	-61.027	-13.31 0	-47.7 2	PASS
	10.8 * N	+∞	5622. 0	7622. 0	5722. 8	-60.495	-7.778	-52.7 2	PASS
46	-9 * N	-1.5 * N	4870	5170. 0	5169. 9	-55.958	-9.495	-46.4 6	PASS
	-1.5 * N	-N	5170. 0	5190	5190. 0	-43.229	-8.756	-34.4 7	PASS
	-N	-0.55 * N	5190	5208. 0	5207. 7	-37.355	-10.75 3	-26.6	PASS
	-0.55 * N	-0.5 * N	5208. 0	5210. 0	5209. 9	-33.969	-27.14 1	-6.83	PASS
	-0.5 * N	0.5 * N	5210. 0	5250. 0	5234. 7	-6.947	-0.484	-6.46	PASS
	0.5 * N	0.55 * N	5250. 0	5252. 0	5250. 1	-35.084	-28.12 1	-6.96	PASS
	0.55 * N	N	5252. 0	5270	5252. 2	-39.895	-13.36 5	-26.5 3	PASS
	N	1.5 * N	5270	5290. 0	5270. 2	-44.139	-9.573	-34.5 7	PASS
	1.5 * N	9 * N	5290. 0	5590	5291. 7	-55.349	-8.886	-46.4 6	PASS
	9 * N	10.8 * N	5590	5662. 0	5658. 6	-60.552	-12.08 9	-48.4 6	PASS
	10.8 * N	+∞	5662. 0	7662. 0	5717. 8	-60.336	-6.873	-53.4 6	PASS
	54	-9 * N	-1.5 * N	4910	5210. 0	5209. 8	-56.273	-8.350	-47.9 2
-1.5 * N		-N	5210. 0	5230	5229. 8	-44.905	-8.867	-36.0 4	PASS
-N		-0.55 * N	5230	5248. 0	5247. 9	-39.105	-11.14 2	-27.9 6	PASS
-0.55 * N		-0.5 * N	5248. 0	5250. 0	5250. 0	-35.100	-27.11 6	-7.98	PASS
-0.5 * N		0.5 * N	5250. 0	5290. 0	5284. 5	-7.992	-0.069	-7.92	PASS
0.5 * N		0.55 * N	5290. 0	5292. 0	5290. 0	-36.233	-27.96 9	-8.26	PASS
0.55 * N		N	5292. 0	5310	5292. 2	-42.799	-14.79 8	-28.0	PASS
N		1.5 * N	5310	5330. 0	5310. 2	-47.135	-11.118	-36.0 2	PASS
1.5 * N		9 * N	5330. 0	5630	5332. 1	-56.995	-9.072	-47.9 2	PASS
9 * N		10.8 * N	5630	5702. 0	5695. 3	-60.496	-10.57 3	-49.9 2	PASS
10.8 * N		+∞	5702. 0	7702. 0	5723. 1	-60.398	-5.475	-54.9 2	PASS
62		-9 * N	-1.5 * N	4950	5250. 0	5250. 0	-57.143	-8.929	-48.2 1
	-1.5 * N	-N	5250. 0	5270	5270. 0	-47.247	-11.01 6	-36.2 3	PASS
	-N	-0.55 * N	5270	5288. 0	5287. 5	-40.919	-12.48 0	-28.4 4	PASS
	-0.55 * N	-0.5 * N	5288. 0	5290. 0	5290. 0	-35.562	-27.19 4	-8.37	PASS
	-0.5 * N	0.5 * N	5290. 0	5330. 0	5303. 4	-8.425	-0.211	-8.21	PASS
	0.5 * N	0.55 * N	5330. 0	5332. 0	5330. 0	-37.525	-29.13 1	-8.39	PASS
	0.55 * N	N	5332. 0	5350	5332. 0	-44.576	-16.35 4	-28.2 2	PASS
	N	1.5 * N	5350	5370. 0	5350. 0	-48.732	-12.51 8	-36.2 1	PASS
	1.5 * N	9 * N	5370. 0	5670	5663. 7	-60.623	-12.40 9	-48.2 1	PASS

				9 * N	10.8 * N	5670	5742. 0	5718. 4	-60.395	-10.18 1	-50.2 1	PASS							
				-9 * N	-1.5 * N	5150	5450. 0	5346. 4	-60.203	-12.44 9	-47.7 5	PASS							
10 2				-N	-0.55 * N	5470	5488. 0	5481. 1	-36.638	-5.837	-30.8	PASS							
				-0.55 * N	-0.5 * N	5488. 0	5490. 0	5490. 0	-32.941	-25.15 0	-7.79	PASS							
				-0.5 * N	0.5 * N	5490. 0	5530. 0	5496. 4	-8.123	-0.369	-7.75	PASS							
				0.5 * N	0.55 * N	5530. 0	5532. 0	5530. 0	-35.358	-27.52 9	-7.83	PASS							
				0.55 * N	N	5532. 0	5550	5532. 3	-38.886	-11.02 0	-27.8 7	PASS							
				N	1.5 * N	5550	5570. 0	5550. 1	-44.430	-8.644	-35.7 9	PASS							
				1.5 * N	9 * N	5570. 0	5870	5575. 2	-54.845	-7.091	-47.7 5	PASS							
				-10.8 * N	-9 * N	5118. 0	5190	5189. 4	-61.504	-11.89 8	-49.6 1	PASS							
110				-9 * N	-1.5 * N	5190	5490. 0	5489. 7	-51.228	-3.622	-47.6 1	PASS							
				-1.5 * N	-N	5490. 0	5510	5510. 0	-41.056	-5.428	-35.6 3	PASS							
				-N	-0.55 * N	5510	5528. 0	5527. 9	-36.048	-8.393	-27.6 5	PASS							
				-0.55 * N	-0.5 * N	5528. 0	5530. 0	5529. 9	-35.059	-27.02 6	-8.03	PASS							
				-0.5 * N	0.5 * N	5530. 0	5570. 0	5563. 1	-7.851	-0.245	-7.61	PASS							
				0.5 * N	0.55 * N	5570. 0	5572. 0	5570. 0	-36.033	-28.21 7	-7.82	PASS							
				0.55 * N	N	5572. 0	5590	5572. 2	-38.168	-10.47 8	-27.6 9	PASS							
				N	1.5 * N	5590	5610. 0	5590. 0	-42.556	-6.941	-35.6 2	PASS							
				1.5 * N	9 * N	5610. 0	5910	5610. 1	-54.696	-7.090	-47.6 1	PASS							
				0	-10.8 * N	1	5158. 0	5157. 9	-61.699	-7.279	-54.4 2	PASS							
				-10.8 * N	-9 * N	5158. 0	5230	5225. 0	-61.025	-11.60 5	-49.4 2	PASS							
				-9 * N	-1.5 * N	5230	5530. 0	5526. 9	-55.083	-7.663	-47.4 2	PASS							
				-1.5 * N	-N	5530. 0	5550	5549. 9	-45.110	-9.645	-35.4 7	PASS							
				-N	-0.55 * N	5550	5568. 0	5561. 3	-39.139	-8.741	-30.4	PASS							
				-0.55 * N	-0.5 * N	5568. 0	5570. 0	5570. 0	-34.595	-27.14 6	-7.45	PASS							
				118				-0.5 * N	0.5 * N	5570. 0	5610. 0	5595. 3	-7.842	-0.422	-7.42	PASS			
0.5 * N	0.55 * N	5610. 0	5612. 0					5610. 0	-35.176	-27.66 6	-7.51	PASS							
0.55 * N	N	5612. 0	5630					5612. 2	-38.748	-11.26 1	-27.4 9	PASS							
N	1.5 * N	5630	5650. 0					5630. 1	-44.713	-9.245	-35.4 7	PASS							
1.5 * N	9 * N	5650. 0	5950					5657. 3	-56.909	-9.489	-47.4 2	PASS							
0	-10.8 * N	1	5238. 0					5228. 9	-60.721	-5.974	-54.7 5	PASS							
-10.8 * N	-9 * N	5238. 0	5310					5278. 0	-60.573	-10.82 6	-49.7 5	PASS							
-9 * N	-1.5 * N	5310	5610. 0					5610. 0	-52.389	-4.642	-47.7 5	PASS							
-1.5 * N	-N	5610. 0	5630					5629. 6	-44.144	-8.139	-36.0 1	PASS							
-N	-0.55 * N	5630	5648.					5647.	-36.512	-8.587	-27.9	PASS							
13 4																			


IEEE 802.11ac_8 0	42				0	6			2		
		-0.55 * N	-0.5 * N	5648. 0	5650. 0	5650. 0	-35.409	-27.48 7	-7.92	PASS	
		-0.5 * N	0.5 * N	5650. 0	5690. 0	5684. 6	-7.971	-0.224	-7.75	PASS	
		0.5 * N	0.55 * N	5690. 0	5692. 0	5690. 0	-34.590	-26.48 3	-8.11	PASS	
		0.55 * N	N	5692. 0	5710	5699. 1	-39.055	-8.169	-30.8 9	PASS	
		N	1.5 * N	5710	5730. 0	5710. 2	-44.250	-8.409	-35.8 4	PASS	
	58	-N	-0.55 * N	5130	5166. 0	5166. 0	-48.312	-15.57 0	-32.7 4	PASS	
		-0.55 * N	-0.5 * N	5166. 0	5170. 0	5170. 0	-40.403	-27.59 6	-12.8 1	PASS	
		-0.5 * N	0.5 * N	5170. 0	5250. 0	5221. 3	-12.738	-0.141	-12.6 0	PASS	
		0.5 * N	0.55 * N	5250. 0	5254. 0	5250. 0	-39.272	-26.48 4	-12.7 9	PASS	
		0.55 * N	N	5254. 0	5290	5254. 6	-50.569	-17.70 9	-32.8 6	PASS	
		N	1.5 * N	5290	5330. 0	5290. 0	-54.820	-14.07 8	-40.7 4	PASS	
		1.5 * N	9 * N	5330. 0	5930	5331. 5	-58.472	-5.734	-52.7 4	PASS	
		-9 * N	-1.5 * N	4570	5170. 0	5168. 1	-60.338	-6.296	-54.0 4	PASS	
		-1.5 * N	-N	5170. 0	5210	5209. 8	-56.233	-14.14 5	-42.0 9	PASS	
		-N	-0.55 * N	5210	5246. 0	5245. 9	-51.662	-17.60 9	-34.0 5	PASS	
		-0.55 * N	-0.5 * N	5246. 0	5250. 0	5250. 0	-42.284	-28.22 7	-14.0 6	PASS	
		-0.5 * N	0.5 * N	5250. 0	5330. 0	5302. 5	-14.194	-0.152	-14.0 4	PASS	
		0.5 * N	0.55 * N	5330. 0	5334. 0	5330. 0	-41.659	-27.42 7	-14.2 3	PASS	
		0.55 * N	N	5334. 0	5370	5334. 1	-53.658	-19.60 3	-34.0 5	PASS	
		1.5 * N	9 * N	5410. 0	6010	5477. 2	-60.086	-6.044	-54.0 4	PASS	
		10 6	-9 * N	-1.5 * N	4810	5410. 0	5346. 7	-59.267	-5.297	-53.9 7	PASS
			-N	-0.55 * N	5450	5486. 0	5486. 0	-48.805	-14.82 7	-33.9 8	PASS
			-0.55 * N	-0.5 * N	5486. 0	5490. 0	5490. 0	-40.718	-26.73 9	-13.9 8	PASS
	-0.5 * N		0.5 * N	5490. 0	5570. 0	5542. 6	-14.268	-0.298	-13.9 7	PASS	
	0.5 * N		0.55 * N	5570. 0	5574. 0	5570. 0	-40.668	-26.59 3	-14.0 8	PASS	
	0.55 * N		N	5574. 0	5610	5574. 2	-51.104	-17.10 0	-34.0	PASS	
	N		1.5 * N	5610	5650. 0	5610. 6	-55.705	-13.54 8	-42.1 6	PASS	
	1.5 * N		9 * N	5650. 0	6250	5687. 8	-58.270	-4.300	-53.9 7	PASS	
	-9 * N		-1.5 * N	4890	5490. 0	5481. 0	-60.209	-6.001	-54.2 1	PASS	
	-1.5 * N		-N	5490. 0	5530	5529. 5	-54.922	-12.56 3	-42.3 6	PASS	
	-N		-0.55 * N	5530	5566. 0	5566. 0	-49.643	-15.43 3	-34.2 1	PASS	
	-0.55 * N		-0.5 * N	5566. 0	5570. 0	5570. 0	-41.691	-27.47 6	-14.2 1	PASS	
	12 2	-0.5 * N	0.5 * N	5570. 0	5650. 0	5597. 7	-14.424	-0.216		PASS	
		0.5 * N	0.55 * N	5650. 0	5654. 0	5650. 0	-40.943	-26.62 2	-14.3 2	PASS	

IEEE 802.11ax_8 0	42	SU	0.55 * N	N	5654. 0	5690	5654. 8	-51.228	-16.83 8	-34.3 9	PASS
			N	1.5 * N	5690	5730. 0	5690. 3	-55.176	-12.88 1	-42.3	PASS
			-N	-0.55 * N	5130	5166. 0	5165. 7	-46.830	-13.71 5	-33.1 2	PASS
			-0.55 * N	-0.5 * N	5166. 0	5170. 0	5170. 0	-34.010	-20.92 1	-13.0 9	PASS
			-0.5 * N	0.5 * N	5170. 0	5250. 0	5222. 4	-13.058	-0.123	-12.9 4	PASS
			0.5 * N	0.55 * N	5250. 0	5254. 0	5250. 0	-33.969	-20.86 1	-13.11	PASS
			0.55 * N	N	5254. 0	5290	5254. 8	-49.507	-16.27 3	-33.2 3	PASS
			N	1.5 * N	5290	5330. 0	5290. 2	-53.194	-12.07 8	-41.1 2	PASS
			1.5 * N	9 * N	5330. 0	5930	5331. 1	-58.101	-5.043	-53.0 6	PASS
			-9 * N	-1.5 * N	4570	5170. 0	5167. 9	-59.981	-6.428	-53.5 5	PASS
			-1.5 * N	-N	5170. 0	5210	5208. 5	-54.268	-12.26 7	-42.0	PASS
			-N	-0.55 * N	5210	5246. 0	5245. 7	-49.941	-16.32 8	-33.6 1	PASS
	-0.55 * N		-0.5 * N	5246. 0	5250. 0	5250. 0	-34.602	-21.03 3	-13.5 7	PASS	
	-0.5 * N		0.5 * N	5250. 0	5330. 0	5302. 6	-13.573	-0.020	-13.5 5	PASS	
	0.5 * N		0.55 * N	5330. 0	5334. 0	5330. 0	-35.380	-21.73 7	-13.6 4	PASS	
	0.55 * N		N	5334. 0	5370	5334. 0	-52.636	-19.07 5	-33.5 6	PASS	
	1.5 * N		9 * N	5410. 0	6010	5473. 3	-59.810	-6.257	-53.5 5	PASS	
	-9 * N		-1.5 * N	4810	5410. 0	5348. 9	-58.804	-5.371	-53.4 3	PASS	
	-N		-0.55 * N	5450	5486. 0	5484. 9	-47.498	-13.81 4	-33.6 8	PASS	
	-0.55 * N		-0.5 * N	5486. 0	5490. 0	5490. 0	-33.250	-19.80 7	-13.4 4	PASS	
	-0.5 * N		0.5 * N	5490. 0	5570. 0	5541. 3	-13.644	-0.211	-13.4 3	PASS	
	0.5 * N		0.55 * N	5570. 0	5574. 0	5570. 0	-34.600	-21.06 2	-13.5 4	PASS	
	0.55 * N		N	5574. 0	5610	5576. 3	-49.969	-16.02 0	-33.9 5	PASS	
	N		1.5 * N	5610	5650. 0	5610. 1	-54.312	-12.83 9	-41.4 7	PASS	
	1.5 * N		9 * N	5650. 0	6250	5692. 7	-57.953	-4.520	-53.4 3	PASS	
	-9 * N		-1.5 * N	4890	5490. 0	5479. 7	-59.739	-6.409	-53.3 3	PASS	
	-1.5 * N		-N	5490. 0	5530	5528. 3	-53.055	-11.23 0	-41.8 3	PASS	
	-N		-0.55 * N	5530	5566. 0	5565. 8	-48.378	-15.00 1	-33.3 8	PASS	
	-0.55 * N		-0.5 * N	5566. 0	5570. 0	5570. 0	-34.115	-20.77 8	-13.3 4	PASS	
	-0.5 * N		0.5 * N	5570. 0	5650. 0	5621. 5	-13.773	-0.443	-13.3 3	PASS	
	0.5 * N		0.55 * N	5650. 0	5654. 0	5650. 0	-34.743	-21.30 0	-13.4 4	PASS	
	0.55 * N		N	5654. 0	5690	5655. 4	-50.012	-16.37 0	-33.6 4	PASS	
	N		1.5 * N	5690	5730. 0	5690. 0	-53.558	-12.21 7	-41.3 4	PASS	


IEEE 802.11n_20

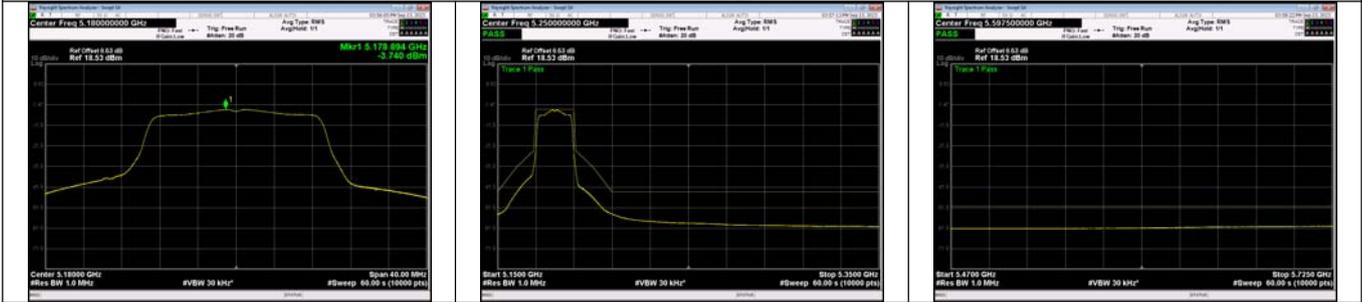


5180MHz_Antenna 0

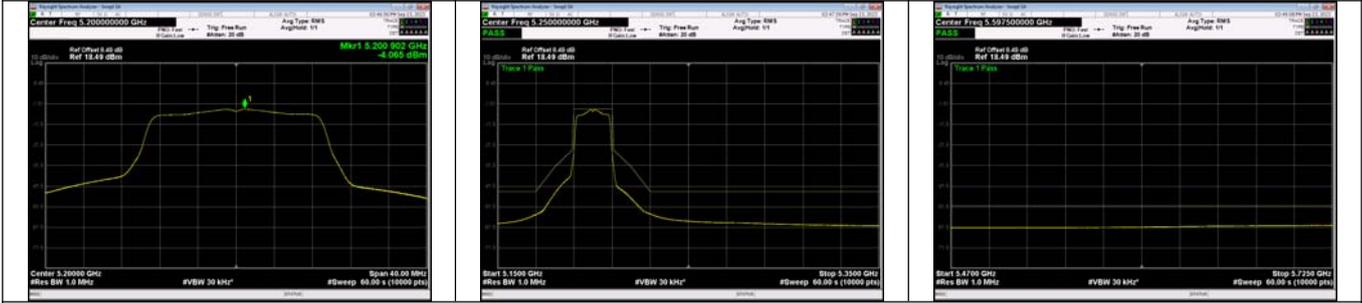


5200MHz_Antenna 0

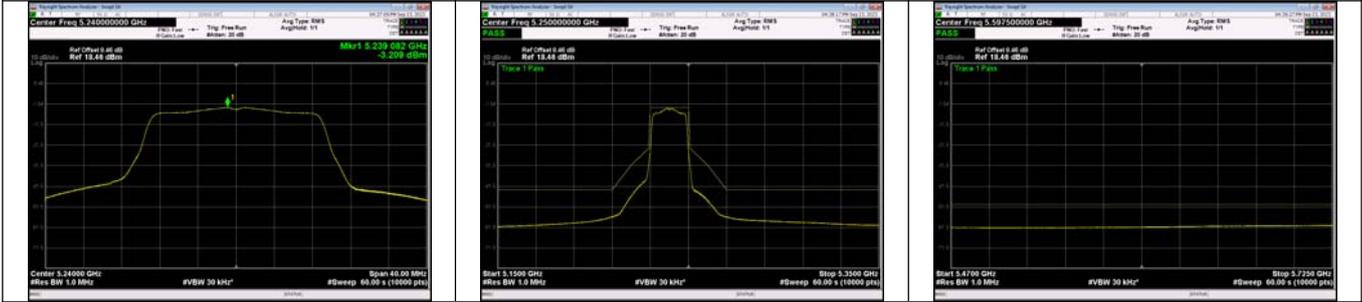


5240MHz_Antenna 0

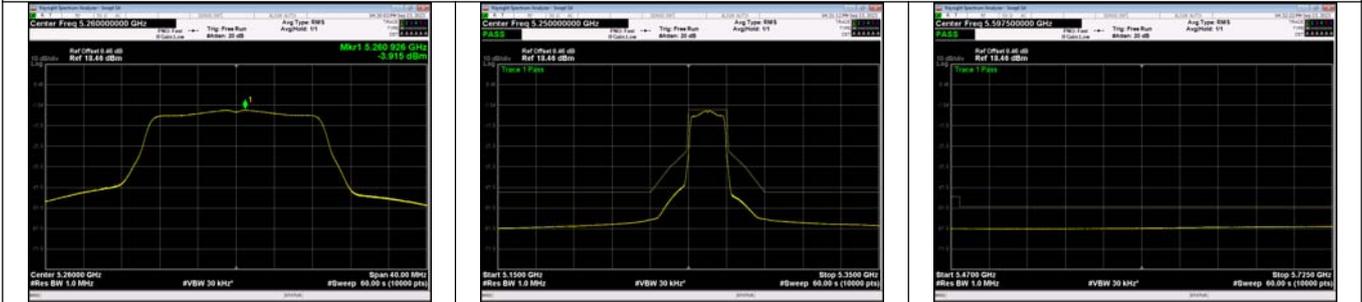


5260MHz_Antenna 0

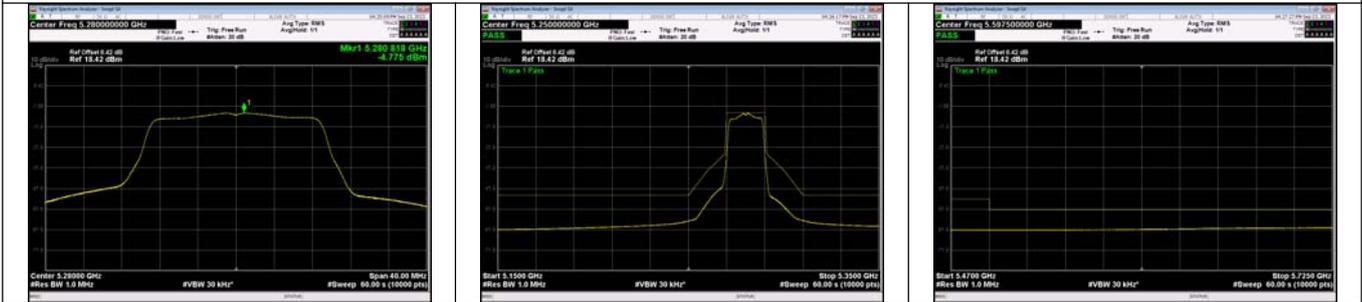

5280MHz_Antenna 0

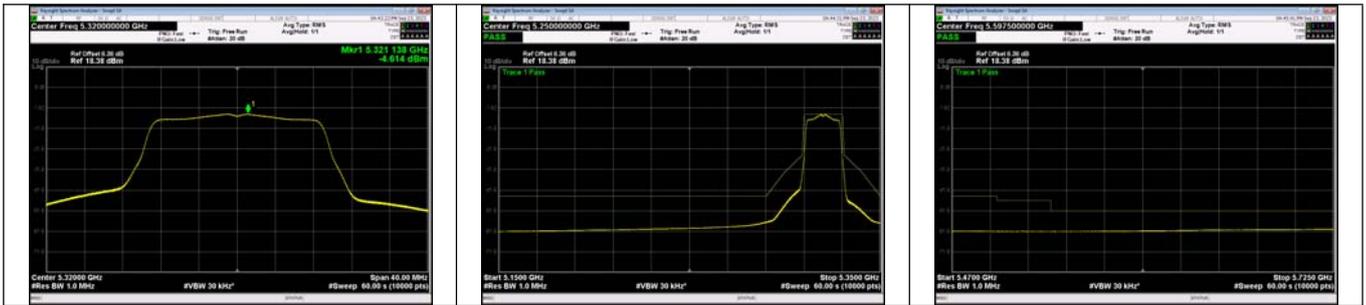


5320MHz_Antenna 0

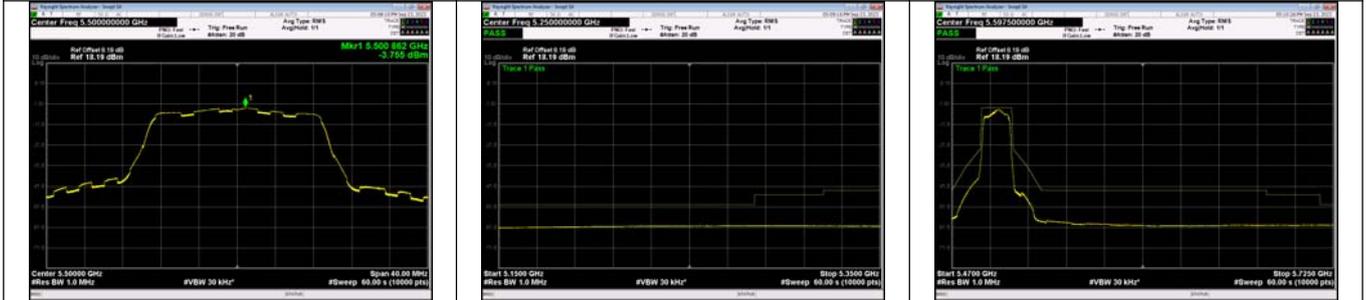


5500MHz_Antenna 0




5580MHz_Antenna 0

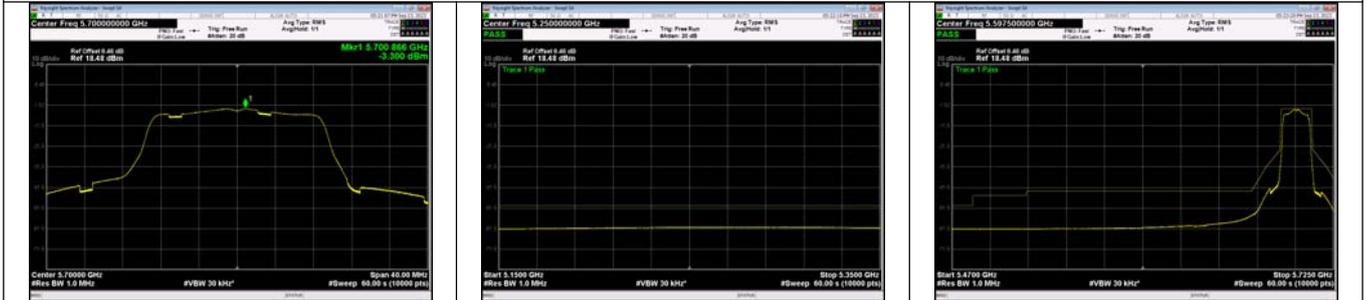

5700MHz_Antenna 0

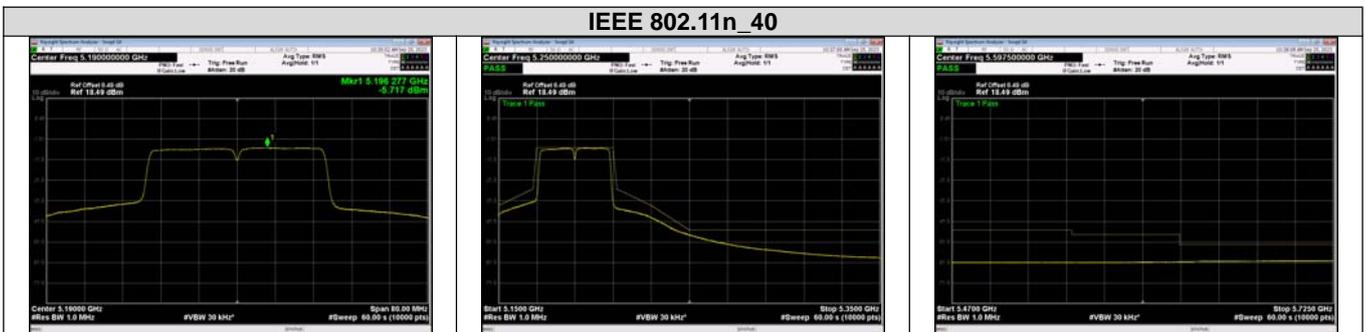


5190MHz_Antenna 0

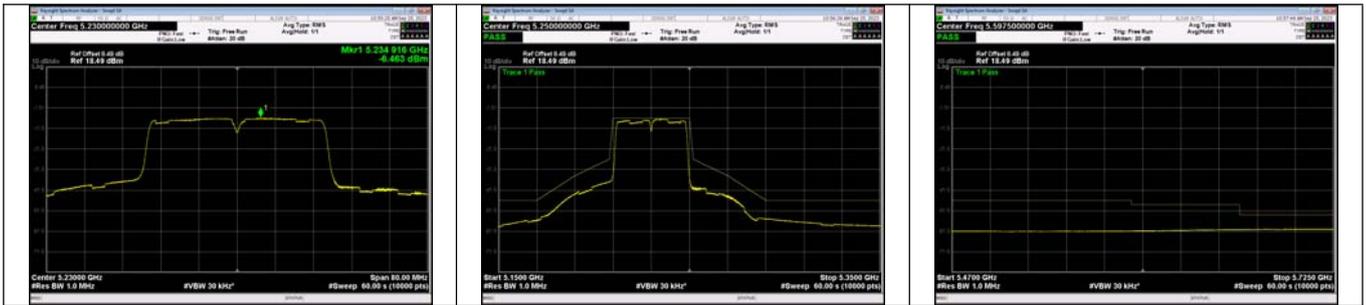


5230MHz_Antenna 0




5270MHz_Antenna 0

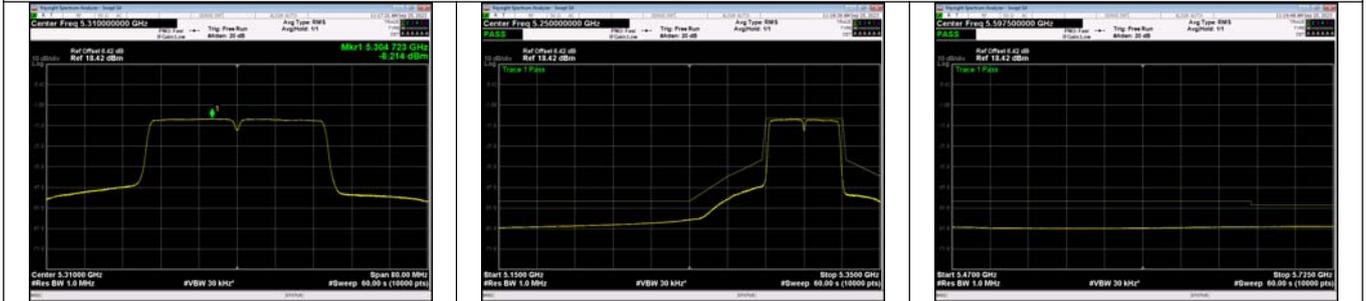


5310MHz_Antenna 0

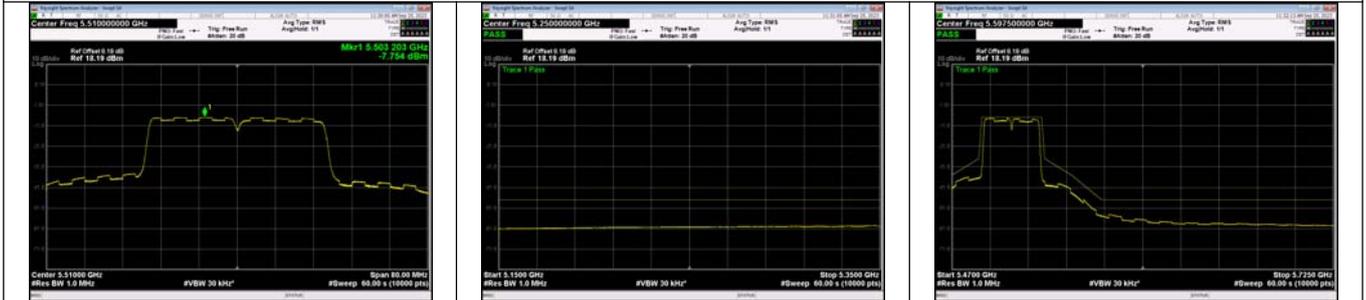



5510MHz_Antenna 0

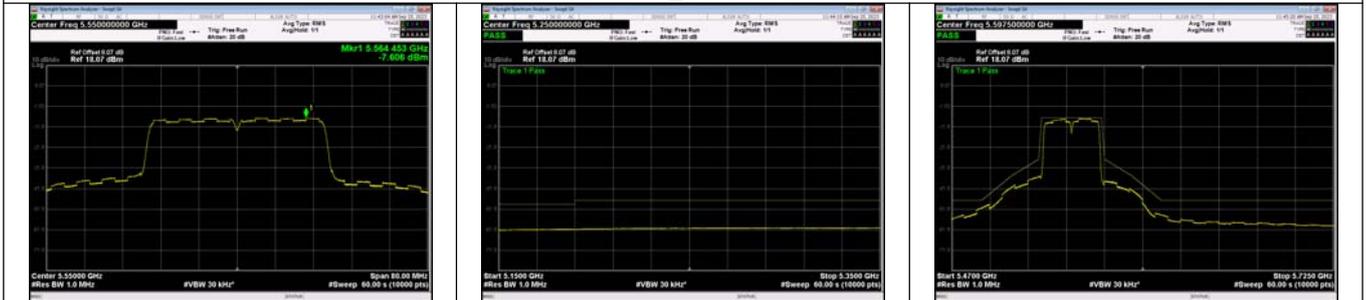

5550MHz_Antenna 0


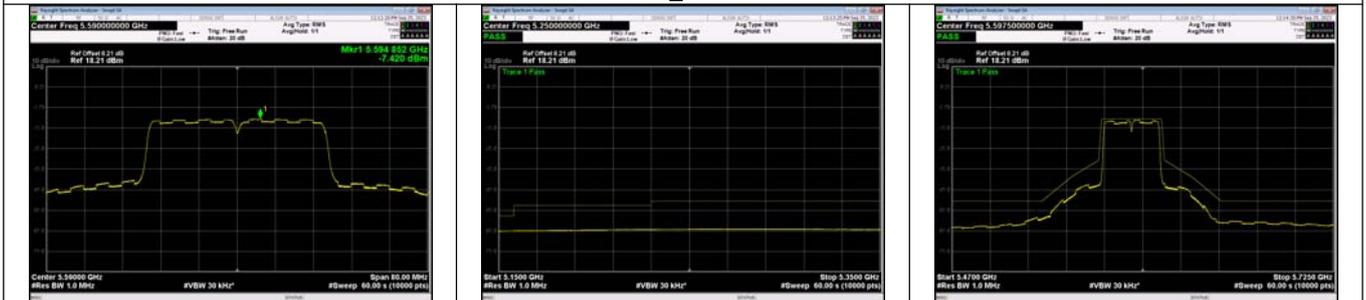


5590MHz_Antenna 0


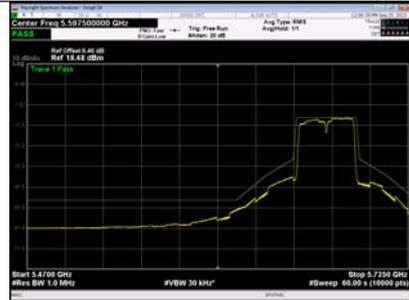
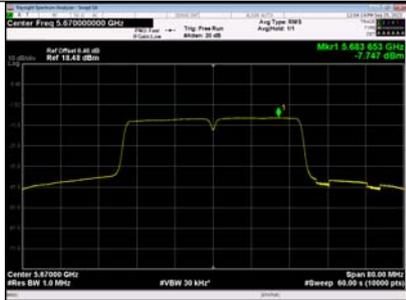


5670MHz_Antenna 0



IEEE 802.11ac_80

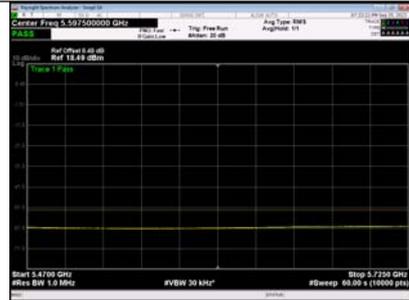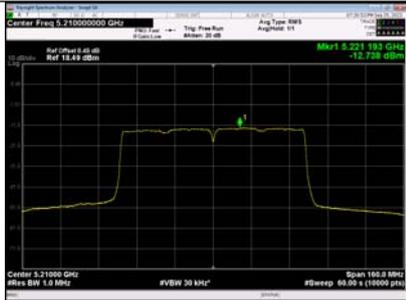




5210MHz_Antenna 0

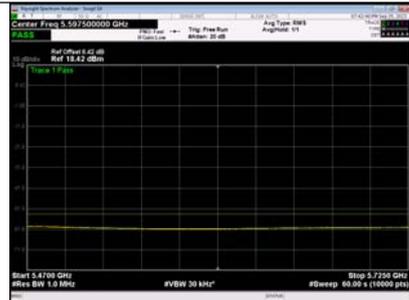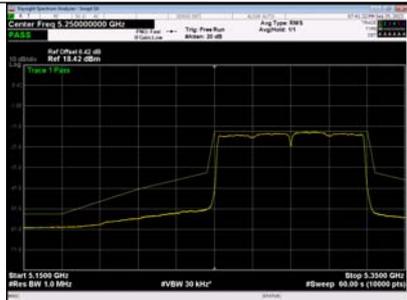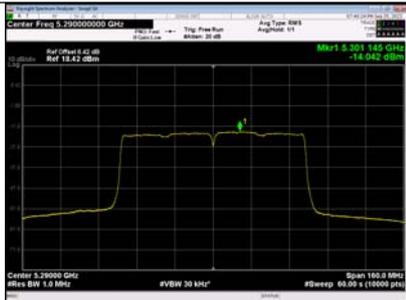

5290MHz_Antenna 0

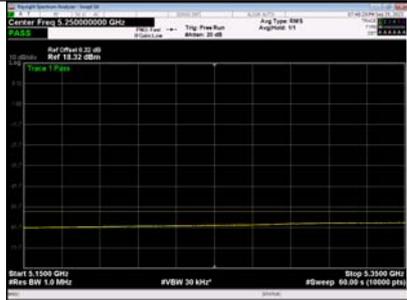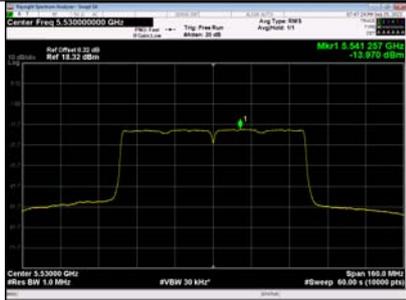

5530MHz_Antenna 0

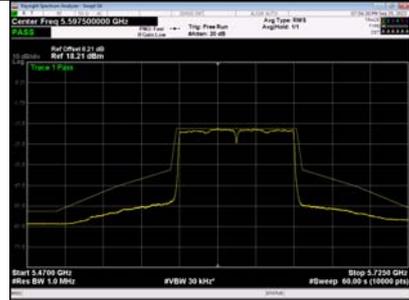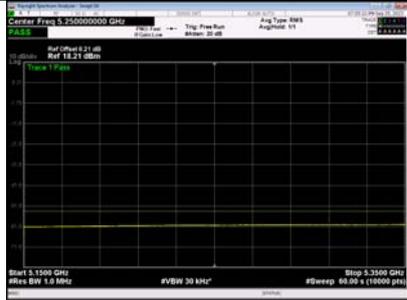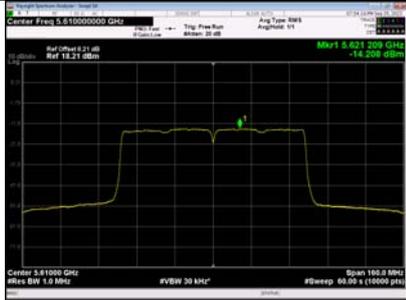


5610MHz_Antenna 0


IEEE 802.11ax_80




5210MHz_RU&Index SU_Antenna 0

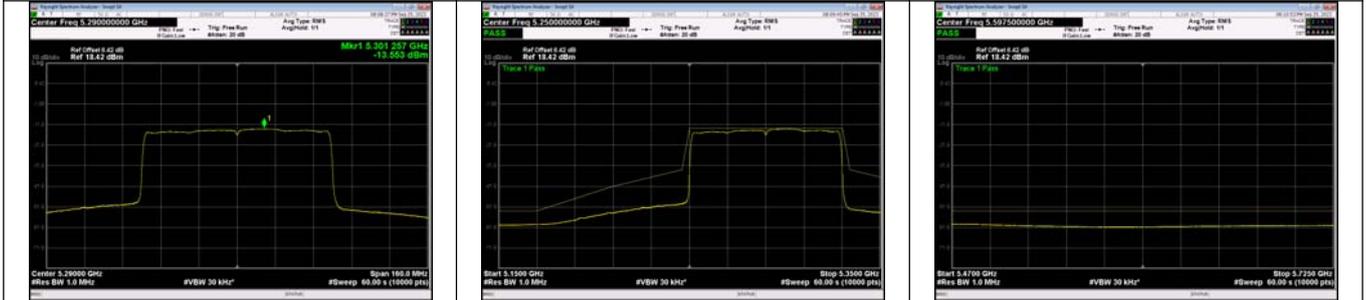

5290MHz_RU&Index SU_Antenna 0

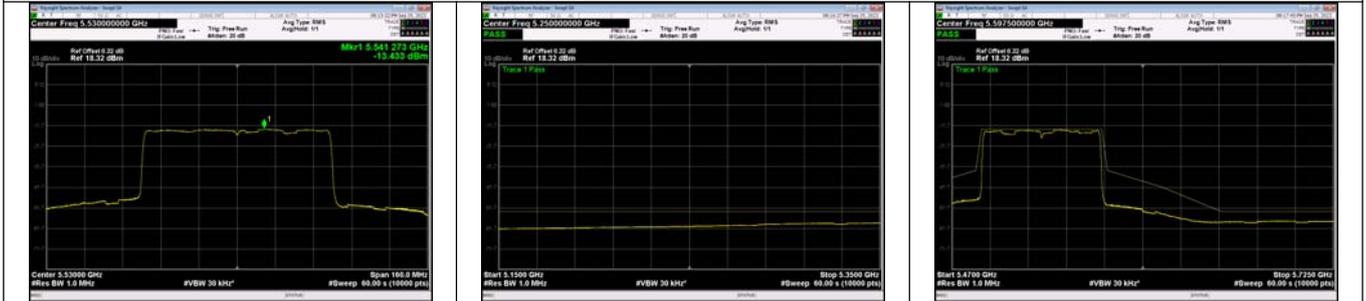

5530MHz_RU&Index SU_Antenna 0

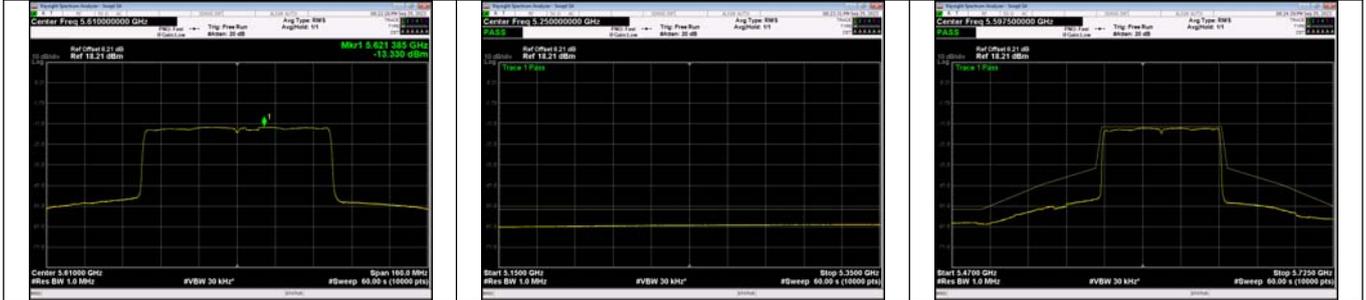

5610MHz_RU&Index SU_Antenna 0

Mode	Ch.	RU & Index	Ant	Frequency offset start(MHz)	Frequency offset end(MHz)	Start (MHz)	Stop (MHz)	Peak (MHz)	Emission (dBm)	Over Limit (dBm)	Limit (dBm)	Result
IEEE 802.11n_20	36	N/A	1	-1.5 * N	-N	5150.0	5160	5160.0	-40.470	-8.322	-32.15	PASS
				-N	-0.55 * N	5160	5169.0	5168.9	-30.473	-6.297	-24.18	PASS
				-0.55 * N	-0.5 * N	5169.0	5170.0	5170.0	-24.123	-19.712	-4.41	PASS
				-0.5 * N	0.5 * N	5170.0	5190.0	5180.9	-4.235	-0.110	-4.12	PASS
				0.5 * N	0.55 * N	5190.0	5191.0	5190.0	-24.832	-20.627	-4.21	PASS
				0.55 * N	N	5191.0	5200	5191.0	-32.231	-8.102	-24.13	PASS
				N	1.5 * N	5200	5210.0	5200.0	-42.325	-10.170	-32.16	PASS
				1.5 * N	9 * N	5210.0	5360	5210.3	-50.140	-6.015	-44.12	PASS
				10.8 * N	+∞	5396.0	7396.0	5722.7	-60.402	-9.277	-51.12	PASS
	40			-9 * N	-1.5 * N	5020	5170.0	5169.7	-56.042	-11.719	-44.32	PASS
				-1.5 * N	-N	5170.0	5180	5179.9	-44.857	-12.466	-32.39	PASS
				-N	-0.55 * N	5180	5189.0	5189.0	-32.868	-8.530	-24.34	PASS
				-0.55 * N	-0.5 * N	5189.0	5190.0	5190.0	-24.831	-20.257	-4.57	PASS
				-0.5 * N	0.5 * N	5190.0	5210.0	5199.0	-4.507	-0.184	-4.32	PASS
				0.5 * N	0.55 * N	5210.0	5211.0	5210.0	-25.277	-20.834	-4.44	PASS
				0.55 * N	N	5211.0	5220	5211.0	-34.097	-9.769	-24.33	PASS
				N	1.5 * N	5220	5230.0	5220.0	-47.302	-14.946	-32.36	PASS
				1.5 * N	9 * N	5230.0	5380	5232.9	-56.716	-12.393	-44.32	PASS
	48			10.8 * N	+∞	5416.0	7416.0	5716.1	-60.435	-9.112	-51.32	PASS
				-9 * N	-1.5 * N	5060	5210.0	5209.9	-55.752	-11.401	-44.35	PASS
				-1.5 * N	-N	5210.0	5220	5219.9	-44.600	-12.161	-32.44	PASS
				-N	-0.55 * N	5220	5229.0	5229.0	-32.629	-8.267	-24.36	PASS
				-0.55 * N	-0.5 * N	5229.0	5230.0	5230.0	-24.761	-20.222	-4.54	PASS
				-0.5 * N	0.5 * N	5230.0	5250.0	5240.9	-4.392	-0.041	-4.35	PASS
				0.5 * N	0.55 * N	5250.0	5251.0	5250.0	-25.537	-20.986	-4.55	PASS
				0.55 * N	N	5251.0	5260	5251.0	-34.284	-9.906	-24.38	PASS
				N	1.5 * N	5260	5270.0	5260.0	-47.247	-14.883	-32.36	PASS
	52			1.5 * N	9 * N	5270.0	5420	5270.1	-55.505	-11.154	-44.35	PASS
				10.8 * N	+∞	5456.0	7456.0	5714.8	-60.402	-9.051	-51.35	PASS
				-9 * N	-1.5 * N	5080	5230.0	5229.9	-50.183	-4.807	-45.38	PASS
				-1.5 * N	-N	5230.0	5240	5239.9	-39.602	-6.141	-33.46	PASS
				-N	-0.55 * N	5240	5249.0	5249.0	-30.460	-5.075	-25.38	PASS
				-0.55 * N	-0.5 * N	5249.0	5250.0	5250.0	-25.033	-19.51	-5.52	PASS

				0	0	0		1				
			-0.5 * N	0.5 * N	5250. 0	5270. 0	5260. 9	-5.557	-0.181	-5.38	PASS	
			0.5 * N	0.55 * N	5270. 0	5271. 0	5270. 0	-25.861	-20.24 5	-5.62	PASS	
			0.55 * N	N	5271. 0	5280	5271. 0	-32.251	-6.846	-25.4	PASS	
			N	1.5 * N	5280	5290. 0	5280. 2	-41.106	-7.546	-33.5 6	PASS	
			1.5 * N	9 * N	5290. 0	5440	5290. 5	-49.568	-4.192	-45.3 8	PASS	
			9 * N	10.8 * N	5440	5476. 0	5473. 2	-61.200	-13.82 4	-47.3 8	PASS	
			10.8 * N	+∞	5476. 0	7476. 0	5721. 3	-60.376	-8.000	-52.3 8	PASS	
	56		-9 * N	-1.5 * N	5100	5250. 0	5250. 0	-56.456	-9.598	-46.8 6	PASS	
			-1.5 * N	-N	5250. 0	5260	5260. 0	-46.731	-11.86 2	-34.8 7	PASS	
			-N	-0.55 * N	5260	5269. 0	5269. 0	-35.124	-8.258	-26.8 7	PASS	
			-0.55 * N	-0.5 * N	5269. 0	5270. 0	5270. 0	-27.480	-20.51 7	-6.96	PASS	
			-0.5 * N	0.5 * N	5270. 0	5290. 0	5281. 0	-7.030	-0.172	-6.86	PASS	
			0.5 * N	0.55 * N	5290. 0	5291. 0	5290. 0	-27.660	-20.52 2	-7.14	PASS	
			0.55 * N	N	5291. 0	5300	5291. 0	-36.053	-9.183	-26.8 7	PASS	
			N	1.5 * N	5300	5310. 0	5300. 3	-48.667	-13.50 3	-35.1 6	PASS	
			1.5 * N	9 * N	5310. 0	5460	5310. 1	-56.124	-9.266	-46.8 6	PASS	
			9 * N	10.8 * N	5460	5496. 0	5473. 4	-61.353	-12.49 5	-48.8 6	PASS	
			10.8 * N	+∞	5496. 0	7496. 0	5723. 4	-60.436	-6.578	-53.8 6	PASS	
		64		-9 * N	-1.5 * N	5140	5290. 0	5289. 9	-55.624	-9.403	-46.2 2	PASS
				-1.5 * N	-N	5290. 0	5300	5300. 0	-45.682	-11.43 1	-34.2 5	PASS
				-N	-0.55 * N	5300	5309. 0	5309. 0	-34.323	-8.098	-26.2 2	PASS
			-0.55 * N	-0.5 * N	5309. 0	5310. 0	5310. 0	-26.579	-20.30 3	-6.28	PASS	
			-0.5 * N	0.5 * N	5310. 0	5330. 0	5319. 0	-6.404	-0.183	-6.22	PASS	
			0.5 * N	0.55 * N	5330. 0	5331. 0	5330. 0	-27.507	-20.92 6	-6.58	PASS	
			0.55 * N	N	5331. 0	5340	5331. 0	-35.750	-9.513	-26.2 4	PASS	
			N	1.5 * N	5340	5350. 0	5340. 1	-48.378	-14.06 2	-34.3 2	PASS	
			1.5 * N	9 * N	5350. 0	5500	5350. 0	-55.969	-9.748	-46.2 2	PASS	
			9 * N	10.8 * N	5500	5536. 0	5502. 5	-61.377	-13.15 6	-48.2 2	PASS	
			10.8 * N	+∞	5536. 0	7536. 0	5717. 9	-60.464	-7.243	-53.2 2	PASS	
	100			0	-10.8 * N	1	5284. 0	5270. 0	-60.904	-8.269	-52.6 3	PASS
				-10.8 * N	-9 * N	5284. 0	5320	5290. 9	-60.888	-13.25 3	-47.6 3	PASS
				-9 * N	-1.5 * N	5320	5470. 0	5322. 2	-60.962	-15.32 7	-45.6 3	PASS
			-1.5 * N	-N	5470. 0	5480	5479. 9	-49.479	-15.71 8	-33.7 6	PASS	
			-N	-0.55 * N	5480	5489. 0	5489. 0	-35.974	-10.33 8	-25.6 4	PASS	

IEEE 802.11n_40	116	-0.55 * N	-0.5 * N	5489. 0	5490. 0	5490. 0	-26.853	-21.13 2	-5.72	PASS
		-0.5 * N	0.5 * N	5490. 0	5510. 0	5498. 9	-5.672	-0.037	-5.63	PASS
		0.5 * N	0.55 * N	5510. 0	5511. 0	5510. 0	-28.064	-22.15 9	-5.91	PASS
		0.55 * N	N	5511. 0	5520	5511. 0	-37.130	-11.46 5	-25.6 6	PASS
		N	1.5 * N	5520	5530. 0	5520. 1	-50.672	-16.96 4	-33.7 1	PASS
		1.5 * N	9 * N	5530. 0	5680	5531. 4	-59.238	-13.60 3	-45.6 3	PASS
		9 * N	10.8 * N	5680	5716. 0	5704. 6	-60.342	-12.70 7	-47.6 3	PASS
		10.8 * N	+∞	5716. 0	7716. 0	5716. 1	-60.277	-7.642	-52.6 3	PASS
		0	-10.8 * N	1	5364. 0	5251. 0	-61.117	-9.376	-51.7 4	PASS
		-9 * N	-1.5 * N	5400	5550. 0	5549. 9	-56.763	-12.02 2	-44.7 4	PASS
		-1.5 * N	-N	5550. 0	5560	5560. 0	-49.085	-16.34 2	-32.7 4	PASS
		-N	-0.55 * N	5560	5569. 0	5569. 0	-33.956	-9.193	-24.7 6	PASS
		-0.55 * N	-0.5 * N	5569. 0	5570. 0	5570. 0	-25.317	-20.50 8	-4.81	PASS
		-0.5 * N	0.5 * N	5570. 0	5590. 0	5582. 7	-5.721	-0.980	-4.74	PASS
	0.5 * N	0.55 * N	5590. 0	5591. 0	5590. 0	-25.797	-20.75 6	-5.04	PASS	
	0.55 * N	N	5591. 0	5600	5591. 0	-34.516	-9.767	-24.7 5	PASS	
	N	1.5 * N	5600	5610. 0	5600. 1	-48.563	-15.68 5	-32.8 8	PASS	
	1.5 * N	9 * N	5610. 0	5760	5610. 4	-58.438	-13.69 7	-44.7 4	PASS	
	0	-10.8 * N	1	5484. 0	5267. 7	-60.679	-10.07 5	-50.6	PASS	
	-10.8 * N	-9 * N	5484. 0	5520	5503. 5	-61.483	-15.87 9	-45.6	PASS	
	-9 * N	-1.5 * N	5520	5670. 0	5669. 8	-56.599	-12.99 5	-43.6	PASS	
	-1.5 * N	-N	5670. 0	5680	5679. 9	-48.667	-16.98 7	-31.6 8	PASS	
	-N	-0.55 * N	5680	5689. 0	5689. 0	-33.061	-9.449	-23.6 1	PASS	
	-0.55 * N	-0.5 * N	5689. 0	5690. 0	5690. 0	-24.523	-20.67 3	-3.85	PASS	
	-0.5 * N	0.5 * N	5690. 0	5710. 0	5701. 1	-3.874	-0.270	-3.6	PASS	
	0.5 * N	0.55 * N	5710. 0	5711. 0	5710. 0	-25.733	-22.03 9	-3.69	PASS	
	0.55 * N	N	5711. 0	5720	5711. 1	-35.319	-11.67 0	-23.6 5	PASS	
	N	1.5 * N	5720	5730. 0	5720. 0	-47.293	-15.65 7	-31.6 4	PASS	
	-N	-0.55 * N	5150	5168. 0	5163. 7	-38.854	-8.039	-30.8 1	PASS	
	-0.55 * N	-0.5 * N	5168. 0	5170. 0	5170. 0	-36.632	-27.61 0	-9.02	PASS	
	-0.5 * N	0.5 * N	5170. 0	5210. 0	5203. 5	-8.922	-0.132	-8.79	PASS	
	0.5 * N	0.55 * N	5210. 0	5212. 0	5210. 0	-37.807	-28.82 5	-8.98	PASS	
	0.55 * N	N	5212. 0	5230	5212. 2	-41.377	-12.38 1	-29.0	PASS	
	N	1.5 * N	5230	5250. 0	5231. 5	-46.304	-8.501	-37.8	PASS	
	1.5 * N	9 * N	5250.	5550	5250.	-55.372	-6.450	-48.9	PASS	


				0		3		2	
	9 * N	10.8 * N	5550	5622. 0	5615. 2	-60.989	-10.06 7	-50.9 2	PASS
	10.8 * N	+∞	5622. 0	7622. 0	5708. 9	-60.392	-4.470	-55.9 2	PASS
46	-9 * N	-1.5 * N	4870	5170. 0	5169. 7	-52.346	-5.260	-47.0 9	PASS
	-1.5 * N	-N	5170. 0	5190	5189. 9	-41.179	-6.023	-35.1 6	PASS
	-N	-0.55 * N	5190	5208. 0	5208. 0	-34.837	-7.745	-27.0 9	PASS
	-0.55 * N	-0.5 * N	5208. 0	5210. 0	5210. 0	-32.510	-25.33 3	-7.18	PASS
	-0.5 * N	0.5 * N	5210. 0	5250. 0	5235. 2	-7.199	-0.113	-7.09	PASS
	0.5 * N	0.55 * N	5250. 0	5252. 0	5250. 0	-34.582	-27.39 6	-7.19	PASS
	0.55 * N	N	5252. 0	5270	5252. 1	-38.585	-11.47 7	-27.11	PASS
	N	1.5 * N	5270	5290. 0	5270. 2	-43.198	-7.996	-35.2	PASS
	1.5 * N	9 * N	5290. 0	5590	5290. 1	-51.685	-4.599	-47.0 9	PASS
	9 * N	10.8 * N	5590	5662. 0	5649. 2	-60.631	-11.54 5	-49.0 9	PASS
	10.8 * N	+∞	5662. 0	7662. 0	5704. 2	-60.508	-6.422	-54.0 9	PASS
	54	-9 * N	-1.5 * N	4910	5210. 0	5208. 0	-55.198	-6.366	-48.8 3
-1.5 * N		-N	5210. 0	5230	5230. 0	-43.587	-6.736	-36.8 5	PASS
-N		-0.55 * N	5230	5248. 0	5247. 9	-37.584	-8.729	-28.8 5	PASS
-0.55 * N		-0.5 * N	5248. 0	5250. 0	5250. 0	-36.457	-27.56 9	-8.89	PASS
-0.5 * N		0.5 * N	5250. 0	5290. 0	5284. 6	-9.283	-0.451	-8.83	PASS
0.5 * N		0.55 * N	5290. 0	5292. 0	5290. 0	-37.842	-28.87 0	-8.97	PASS
0.55 * N		N	5292. 0	5310	5296. 5	-41.395	-10.57 5	-30.8 2	PASS
N		1.5 * N	5310	5330. 0	5310. 0	-45.609	-8.767	-36.8 4	PASS
1.5 * N		9 * N	5330. 0	5630	5335. 5	-55.492	-6.660	-48.8 3	PASS
9 * N		10.8 * N	5630	5702. 0	5692. 2	-60.466	-9.634	-50.8 3	PASS
10.8 * N		+∞	5702. 0	7702. 0	5721. 4	-60.440	-4.608	-55.8 3	PASS
62		-9 * N	-1.5 * N	4950	5250. 0	5243. 4	-57.056	-7.734	-49.3 2
	-1.5 * N	-N	5250. 0	5270	5269. 9	-45.494	-8.107	-37.3 9	PASS
	-N	-0.55 * N	5270	5288. 0	5283. 4	-40.149	-8.789	-31.3 6	PASS
	-0.55 * N	-0.5 * N	5288. 0	5290. 0	5290. 0	-37.017	-27.66 3	-9.35	PASS
	-0.5 * N	0.5 * N	5290. 0	5330. 0	5304. 6	-9.465	-0.143	-9.32	PASS
	0.5 * N	0.55 * N	5330. 0	5332. 0	5330. 0	-38.687	-29.18 5	-9.5	PASS
	0.55 * N	N	5332. 0	5350	5332. 6	-42.194	-12.58 8	-29.6 1	PASS
	N	1.5 * N	5350	5370. 0	5350. 0	-46.858	-9.536	-37.3 2	PASS
	1.5 * N	9 * N	5370. 0	5670	5478. 3	-60.122	-10.80 0	-49.3 2	PASS
	9 * N	10.8 * N	5670	5742. 0	5720. 3	-60.417	-9.095	-51.3 2	PASS

10 2	110	-9 * N	-1.5 * N	5150	5450. 0	5346. 8	-60.173	-12.53 2	-47.6 4	PASS
		-N	-0.55 * N	5470	5488. 0	5479. 5	-39.725	-8.312	-31.4 1	PASS
		-0.55 * N	-0.5 * N	5488. 0	5490. 0	5490. 0	-34.167	-26.48 9	-7.68	PASS
		-0.5 * N	0.5 * N	5490. 0	5530. 0	5505. 4	-7.908	-0.267	-7.64	PASS
		0.5 * N	0.55 * N	5530. 0	5532. 0	5530. 0	-36.050	-28.33 4	-7.72	PASS
		0.55 * N	N	5532. 0	5550	5540. 1	-42.400	-11.16 7	-31.2 3	PASS
		N	1.5 * N	5550	5570. 0	5550. 2	-47.008	-11.24 4	-35.7 6	PASS
		1.5 * N	9 * N	5570. 0	5870	5574. 1	-56.049	-8.408	-47.6 4	PASS
		-10.8 * N	-9 * N	5118. 0	5190	5190. 0	-61.526	-12.51 2	-49.0 1	PASS
		-9 * N	-1.5 * N	5190	5490. 0	5489. 8	-55.033	-8.019	-47.0 1	PASS
-1.5 * N	-N	5490. 0	5510	5507. 6	-45.322	-8.847	-36.4 7	PASS		
-N	-0.55 * N	5510	5528. 0	5524. 5	-39.555	-10.98 5	-28.5 7	PASS		
-0.55 * N	-0.5 * N	5528. 0	5530. 0	5530. 0	-36.441	-29.14 4	-7.3	PASS		
-0.5 * N	0.5 * N	5530. 0	5570. 0	5556. 1	-7.392	-0.378	-7.01	PASS		
0.5 * N	0.55 * N	5570. 0	5572. 0	5570. 0	-35.214	-27.99 0	-7.22	PASS		
0.55 * N	N	5572. 0	5590	5572. 8	-40.926	-13.56 8	-27.3 6	PASS		
N	1.5 * N	5590	5610. 0	5590. 3	-44.629	-9.437	-35.1 9	PASS		
1.5 * N	9 * N	5610. 0	5910	5618. 3	-57.676	-10.66 2	-47.0 1	PASS		
0	-10.8 * N	1	5158. 0	5150. 0	-61.644	-6.236	-55.4 1	PASS		
-10.8 * N	-9 * N	5158. 0	5230	5229. 1	-61.004	-10.59 6	-50.4 1	PASS		
-9 * N	-1.5 * N	5230	5530. 0	5529. 9	-55.068	-6.660	-48.4 1	PASS		
-1.5 * N	-N	5530. 0	5550	5549. 8	-44.593	-8.048	-36.5 4	PASS		
-N	-0.55 * N	5550	5568. 0	5567. 7	-38.756	-10.22 6	-28.5 3	PASS		
-0.55 * N	-0.5 * N	5568. 0	5570. 0	5570. 0	-36.767	-28.33 3	-8.43	PASS		
-0.5 * N	0.5 * N	5570. 0	5610. 0	5596. 3	-8.665	-0.257	-8.41	PASS		
0.5 * N	0.55 * N	5610. 0	5612. 0	5610. 0	-38.072	-29.57 3	-8.5	PASS		
0.55 * N	N	5612. 0	5630	5612. 2	-41.458	-12.94 9	-28.5 1	PASS		
N	1.5 * N	5630	5650. 0	5630. 0	-45.631	-9.206	-36.4 3	PASS		
1.5 * N	9 * N	5650. 0	5950	5652. 0	-56.872	-8.464	-48.4 1	PASS		
0	-10.8 * N	1	5238. 0	5236. 7	-60.798	-8.027	-52.7 7	PASS		
-10.8 * N	-9 * N	5238. 0	5310	5290. 1	-60.672	-12.90 1	-47.7 7	PASS		
-9 * N	-1.5 * N	5310	5610. 0	5609. 1	-53.584	-7.813	-45.7 7	PASS		
-1.5 * N	-N	5610. 0	5630	5628. 1	-43.200	-8.313	-34.8 9	PASS		
-N	-0.55 * N	5630	5648. 0	5645. 1	-36.864	-9.793	-27.0 7	PASS		
-0.55 * N	-0.5 * N	5648.	5650.	5650.	-37.421	-31.44	-5.97	PASS		


					0	0	0		7						
					-0.5 * N	0.5 * N	5650.0	5690.0	5677.7	-6.454	-0.683	-5.77	PASS		
					0.5 * N	0.55 * N	5690.0	5692.0	5690.0	-33.334	-27.458	-5.88	PASS		
					0.55 * N	N	5692.0	5710	5692.3	-37.946	-12.051	-25.9	PASS		
					N	1.5 * N	5710	5730.0	5710.1	-41.932	-8.112	-33.82	PASS		
IEEE 802.11ac_8 0	42				-N	-0.55 * N	5130	5166.0	5162.3	-49.634	-14.860	-34.77	PASS		
					-0.55 * N	-0.5 * N	5166.0	5170.0	5170.0	-41.485	-27.497	-13.99	PASS		
					-0.5 * N	0.5 * N	5170.0	5250.0	5222.5	-13.961	-0.147	-13.81	PASS		
					0.5 * N	0.55 * N	5250.0	5254.0	5250.0	-41.032	-27.021	-14.01	PASS		
					0.55 * N	N	5254.0	5290	5258.0	-51.518	-16.670	-34.85	PASS		
					N	1.5 * N	5290	5330.0	5297.4	-55.304	-11.131	-44.17	PASS		
					1.5 * N	9 * N	5330.0	5930	5334.9	-58.332	-4.371	-53.96	PASS		
			58				-9 * N	-1.5 * N	4570	5170.0	5168.7	-60.343	-4.915	-55.43	PASS
							-1.5 * N	-N	5170.0	5210	5209.9	-56.962	-13.493	-43.47	PASS
							-N	-0.55 * N	5210	5246.0	5245.9	-52.084	-16.632	-35.45	PASS
							-0.55 * N	-0.5 * N	5246.0	5250.0	5250.0	-43.254	-27.815	-15.44	PASS
							-0.5 * N	0.5 * N	5250.0	5330.0	5302.5	-15.428	-0.201	-15.227	PASS
						0.5 * N	0.55 * N	5330.0	5334.0	5330.0	-42.545	-27.027	-15.52	PASS	
						0.55 * N	N	5334.0	5370	5334.0	-53.368	-17.936	-35.43	PASS	
						1.5 * N	9 * N	5410.0	6010	5474.8	-58.857	-3.429	-55.43	PASS	
		10 6					-9 * N	-1.5 * N	4810	5410.0	5345.2	-59.110	-5.584	-53.53	PASS
							-N	-0.55 * N	5450	5486.0	5486.0	-49.935	-16.407	-33.53	PASS
							-0.55 * N	-0.5 * N	5486.0	5490.0	5490.0	-40.704	-27.168	-13.54	PASS
							-0.5 * N	0.5 * N	5490.0	5570.0	5541.3	-13.678	-0.152	-13.53	PASS
						0.5 * N	0.55 * N	5570.0	5574.0	5570.0	-40.972	-27.341	-13.63	PASS	
						0.55 * N	N	5574.0	5610	5574.2	-50.662	-17.097	-33.57	PASS	
						N	1.5 * N	5610	5650.0	5610.1	-55.512	-13.953	-41.56	PASS	
						1.5 * N	9 * N	5650.0	6250	5724.2	-57.107	-3.581	-53.53	PASS	
			12 2				-9 * N	-1.5 * N	4890	5490.0	5470.4	-59.636	-6.514	-53.12	PASS
							-1.5 * N	-N	5490.0	5530	5529.6	-54.596	-13.361	-41.23	PASS
							-N	-0.55 * N	5530	5566.0	5566.0	-48.258	-15.128	-33.13	PASS
							-0.55 * N	-0.5 * N	5566.0	5570.0	5570.0	-40.636	-27.463	-13.17	PASS
						-0.5 * N	0.5 * N	5570.0	5650.0	5601.1	-13.559	-0.437	-13.12	PASS	
						0.5 * N	0.55 * N	5650.0	5654.0	5650.0	-40.675	-27.441	-13.23	PASS	
						0.55 * N	N	5654.0	5690	5655.0	-49.165	-15.822	-33.34	PASS	

IEEE 802.11ax_8 0	42	SU	N	1.5 * N	5690	5730. 0	5690. 0	-52.878	-11.75 3	-41.1 3	PASS
			-N	-0.55 * N	5130	5166. 0	5165. 9	-46.578	-13.43 1	-33.1 5	PASS
			-0.55 * N	-0.5 * N	5166. 0	5170. 0	5170. 0	-35.646	-22.48 1	-13.1 6	PASS
			-0.5 * N	0.5 * N	5170. 0	5250. 0	5222. 4	-13.203	-0.069	-13.1 3	PASS
			0.5 * N	0.55 * N	5250. 0	5254. 0	5250. 0	-34.636	-21.45 1	-13.1 8	PASS
			0.55 * N	N	5254. 0	5290	5260. 8	-49.106	-14.45 4	-34.6 5	PASS
	N		1.5 * N	5290	5330. 0	5297. 8	-53.376	-9.897	-43.4 8	PASS	
	1.5 * N		9 * N	5330. 0	5930	5340. 3	-57.820	-4.686	-53.1 3	PASS	
	-9 * N		-1.5 * N	4570	5170. 0	5164. 7	-60.206	-5.187	-55.0 2	PASS	
	-1.5 * N		-N	5170. 0	5210	5205. 2	-55.355	-10.90 8	-44.4 5	PASS	
	-N		-0.55 * N	5210	5246. 0	5244. 4	-49.562	-14.18 0	-35.3 8	PASS	
	-0.55 * N		-0.5 * N	5246. 0	5250. 0	5250. 0	-37.623	-22.59 0	-15.0 3	PASS	
	-0.5 * N		0.5 * N	5250. 0	5330. 0	5297. 2	-15.173	-0.153	-15.0 2	PASS	
	0.5 * N		0.55 * N	5330. 0	5334. 0	5330. 0	-36.798	-21.68 8	-15.11	PASS	
	0.55 * N		N	5334. 0	5370	5337. 7	-51.541	-15.69 4	-35.8 5	PASS	
	1.5 * N		9 * N	5410. 0	6010	5471. 9	-58.663	-3.643	-55.0 2	PASS	
	-9 * N		-1.5 * N	4810	5410. 0	5347. 4	-58.479	-5.317	-53.1 6	PASS	
	-N		-0.55 * N	5450	5486. 0	5486. 0	-43.243	-10.07 3	-33.1 7	PASS	
	-0.55 * N		-0.5 * N	5486. 0	5490. 0	5490. 0	-33.026	-19.85 4	-13.1 7	PASS	
	-0.5 * N		0.5 * N	5490. 0	5570. 0	5542. 5	-13.340	-0.178	-13.1 6	PASS	
	0.5 * N		0.55 * N	5570. 0	5574. 0	5570. 0	-34.206	-20.93 9	-13.2 7	PASS	
	0.55 * N		N	5574. 0	5610	5574. 8	-45.661	-12.32 9	-33.3 3	PASS	
	N		1.5 * N	5610	5650. 0	5610. 3	-50.792	-9.551	-41.2 4	PASS	
	1.5 * N		9 * N	5650. 0	6250	5695. 8	-56.344	-3.182	-53.1 6	PASS	
	-9 * N		-1.5 * N	4890	5490. 0	5484. 8	-59.425	-6.478	-52.9 5	PASS	
	-1.5 * N		-N	5490. 0	5530	5528. 7	-52.300	-10.95 8	-41.3 4	PASS	
	-N		-0.55 * N	5530	5566. 0	5565. 6	-47.105	-14.07 6	-33.0 3	PASS	
	-0.55 * N		-0.5 * N	5566. 0	5570. 0	5570. 0	-33.499	-20.54 4	-12.9 5	PASS	
	-0.5 * N		0.5 * N	5570. 0	5650. 0	5597. 3	-13.257	-0.310	-13.3 3	PASS	
	0.5 * N		0.55 * N	5650. 0	5654. 0	5650. 0	-34.217	-21.15 8	-13.0 6	PASS	
	0.55 * N		N	5654. 0	5690	5654. 2	-48.731	-15.74 9	-32.9 8	PASS	
	N		1.5 * N	5690	5730. 0	5690. 0	-51.666	-10.71 6	-40.9 5	PASS	


IEEE 802.11n_20

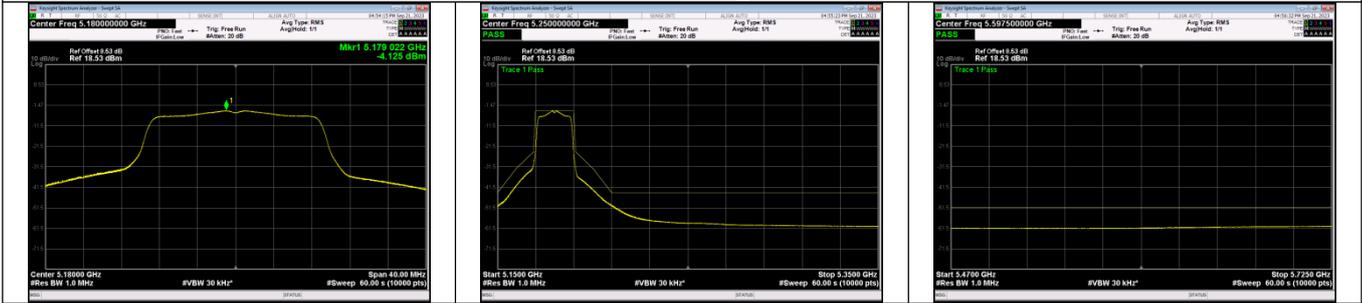


5180MHz_Antenna 1

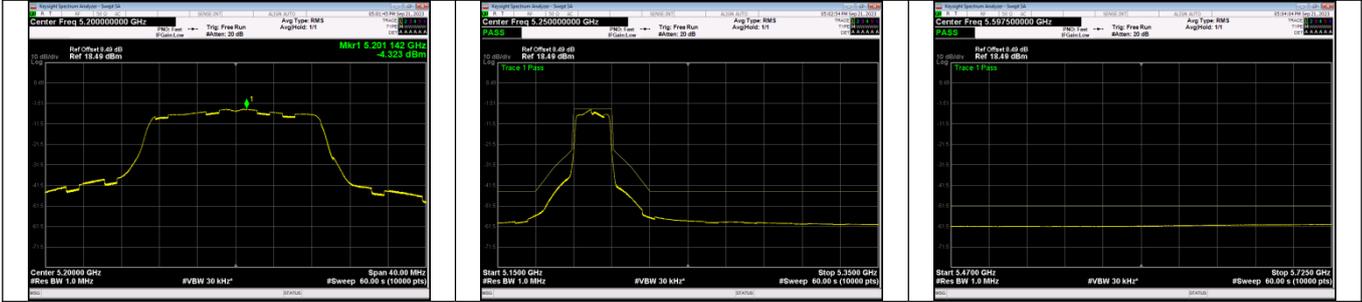


5200MHz_Antenna 1

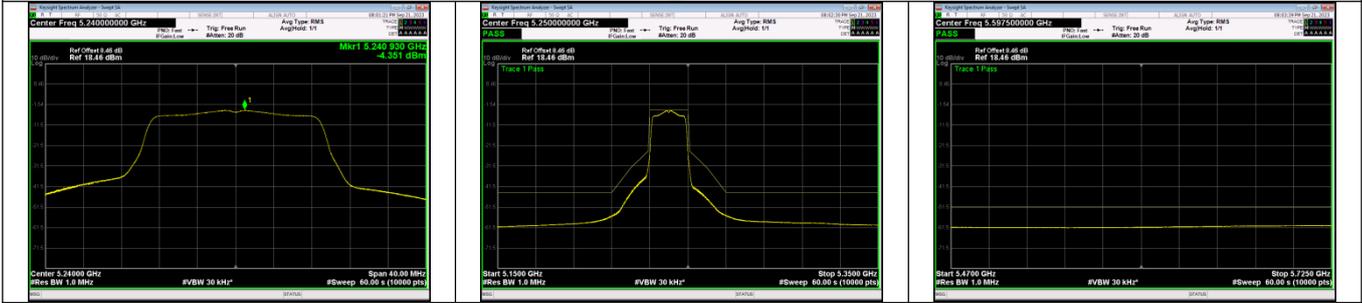


5240MHz_Antenna 1

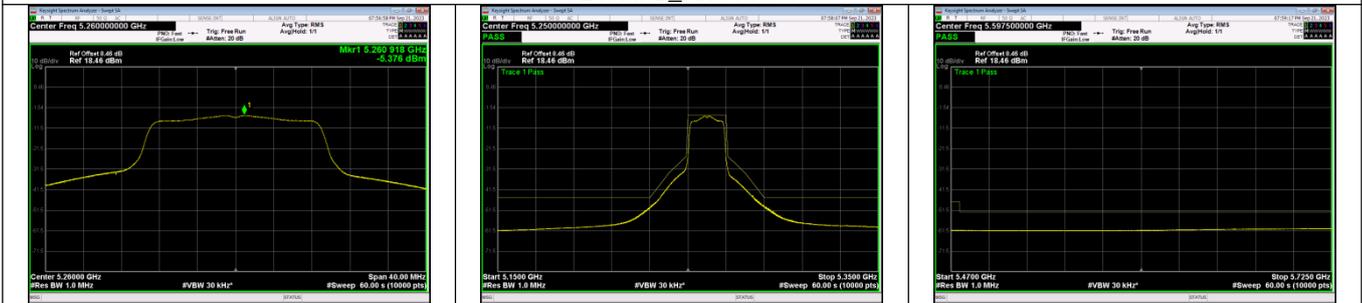


5260MHz_Antenna 1

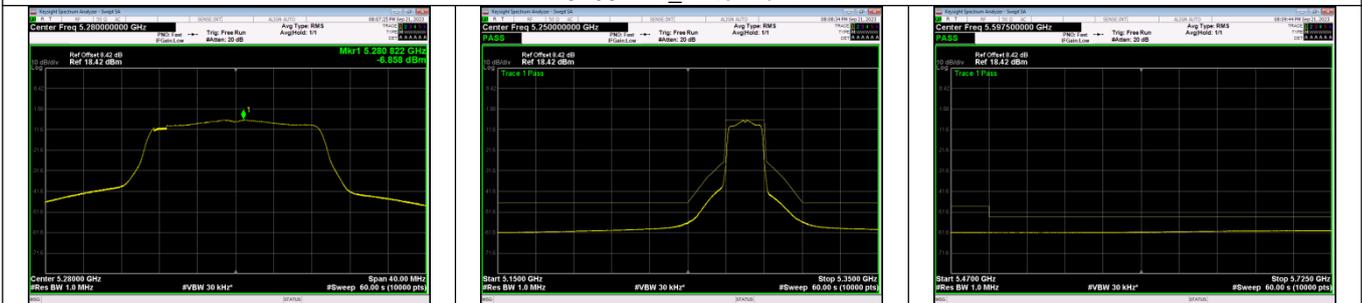

5280MHz_Antenna 1

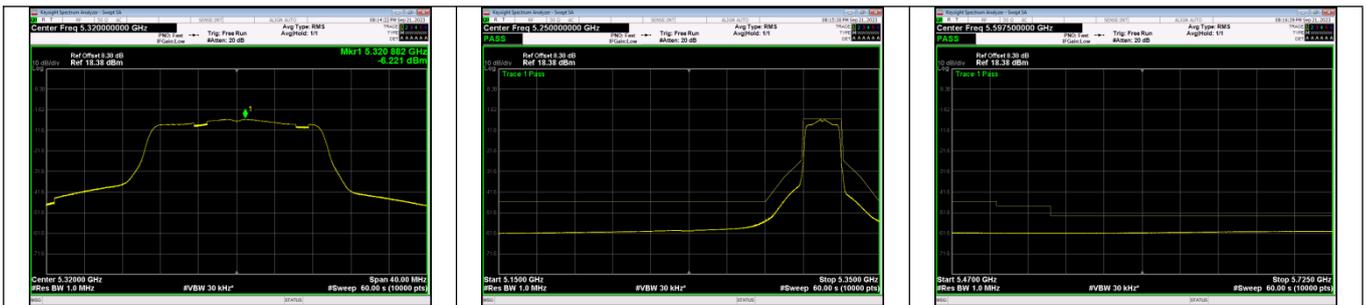

5320MHz_Antenna 1

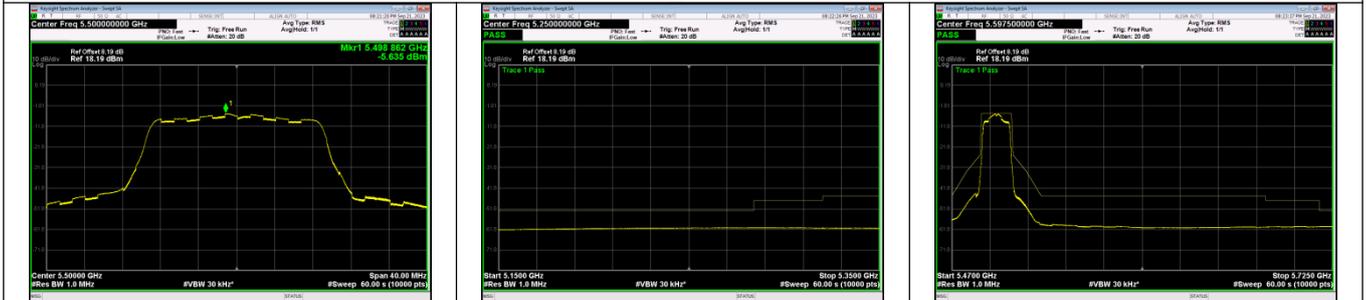


5500MHz_Antenna 1




5580MHz_Antenna 1




5700MHz_Antenna 1

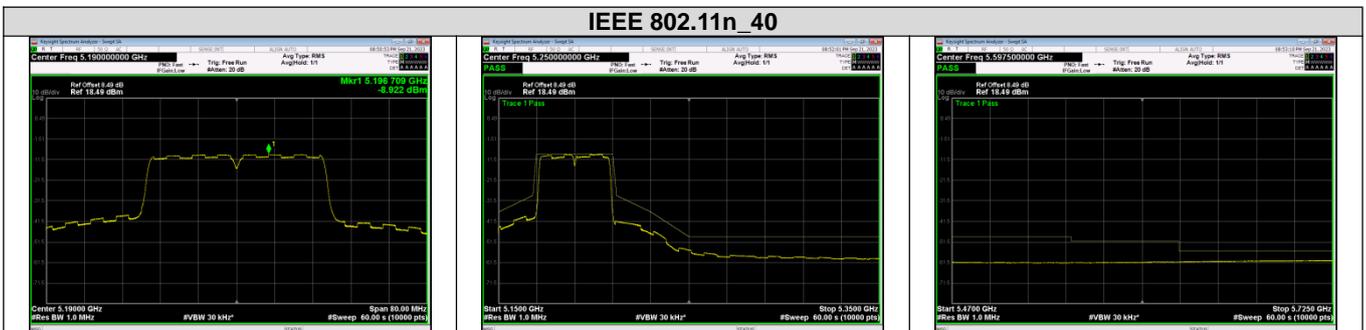

5190MHz_Antenna 1

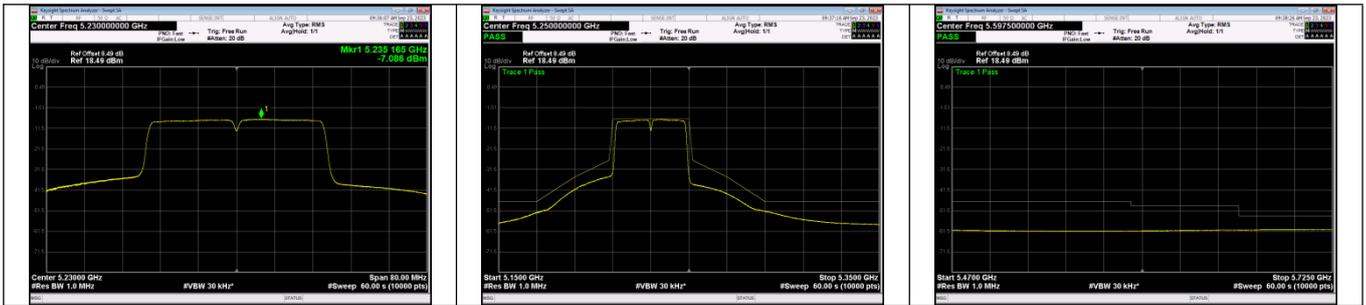


5230MHz_Antenna 1

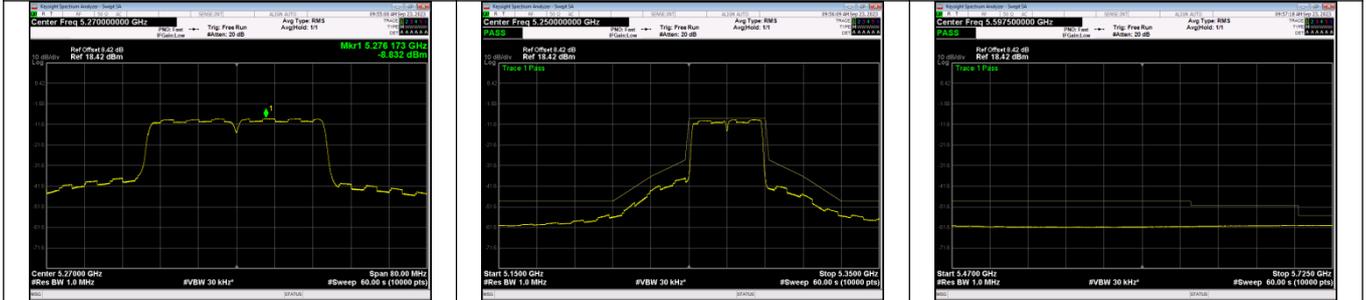


5270MHz_Antenna 1




5310MHz_Antenna 1

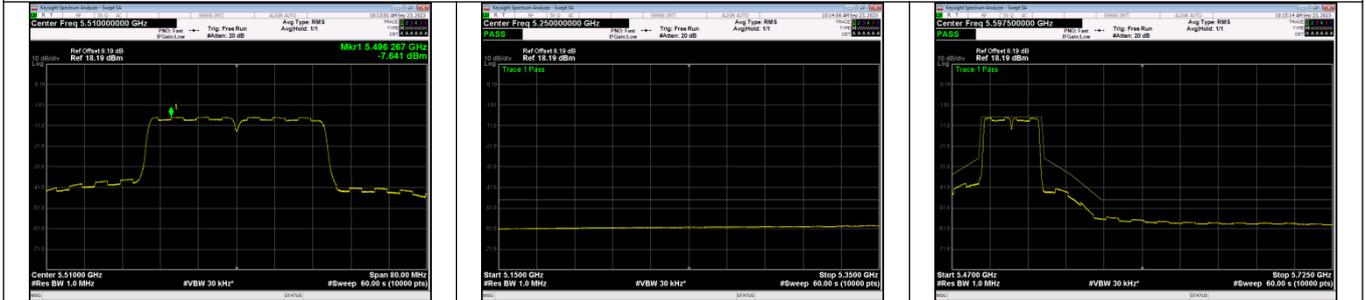

5310MHz_Antenna 1

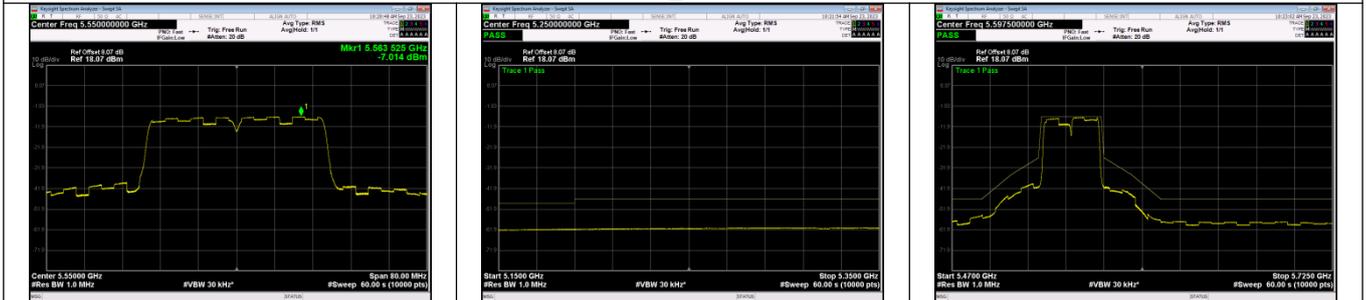


5510MHz_Antenna 1

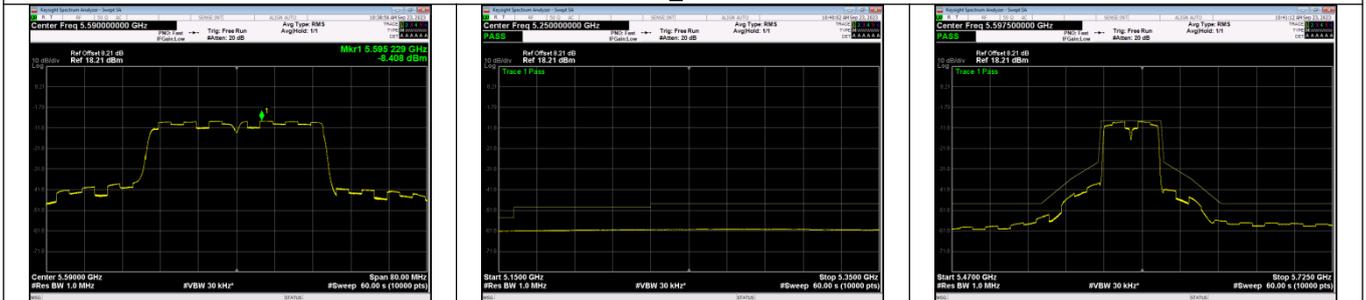


5550MHz_Antenna 1


5590MHz_Antenna 1

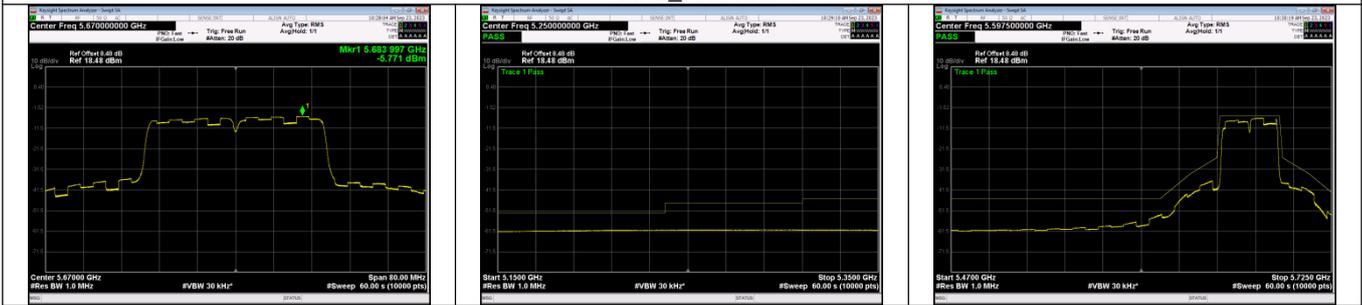

5670MHz_Antenna 1

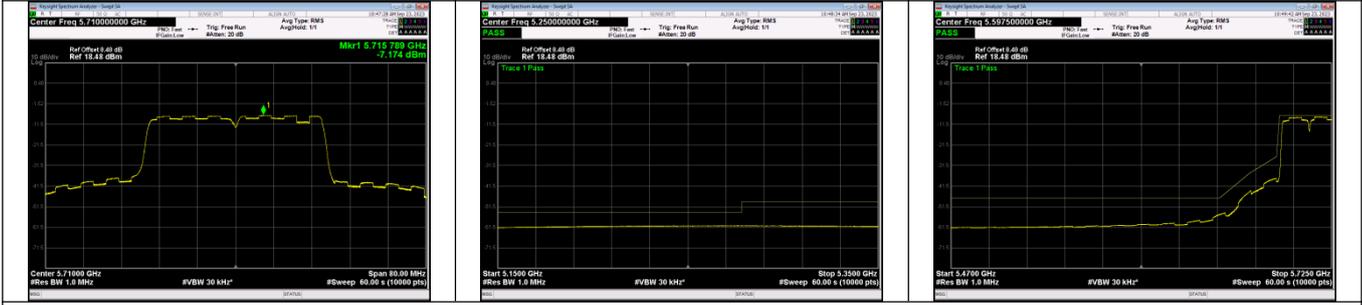

5710MHz_Antenna 1

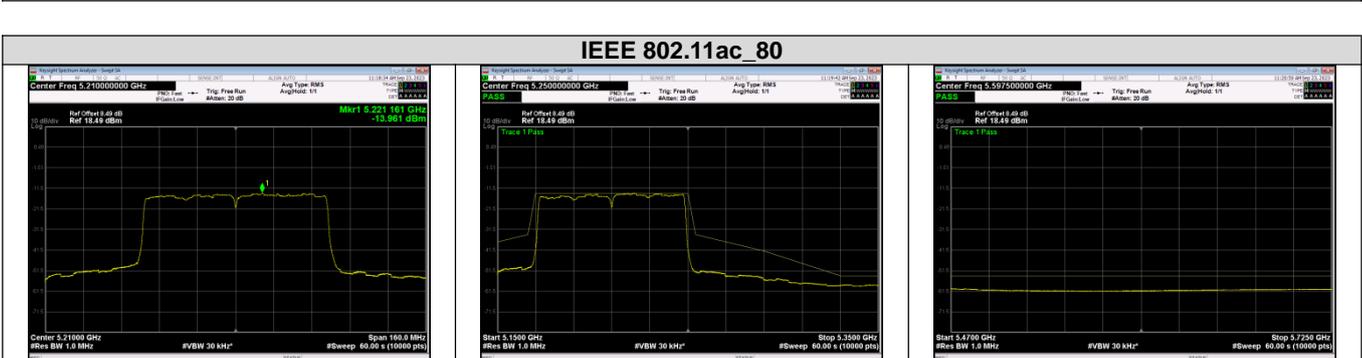


IEEE 802.11ac_80








5210MHz_Antenna 1



5290MHz_Antenna 1

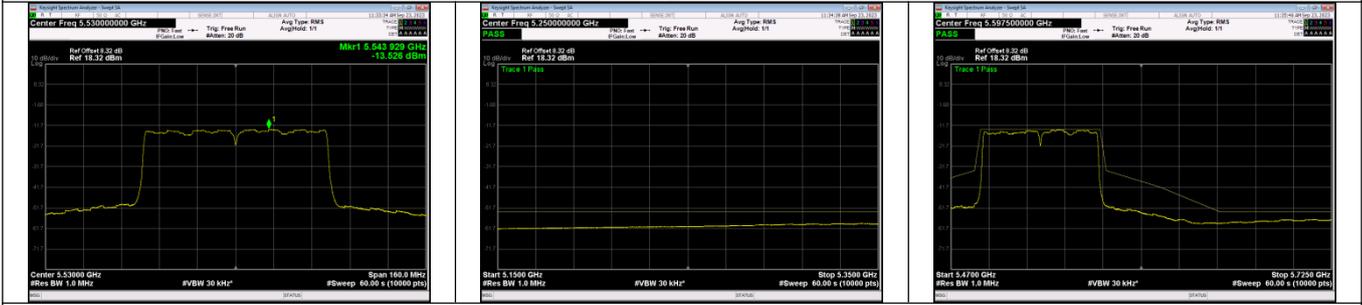

5530MHz_Antenna 1

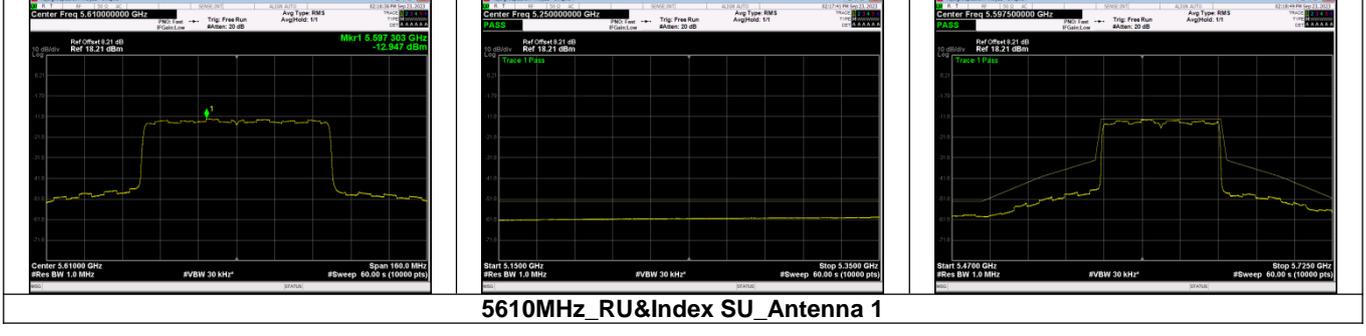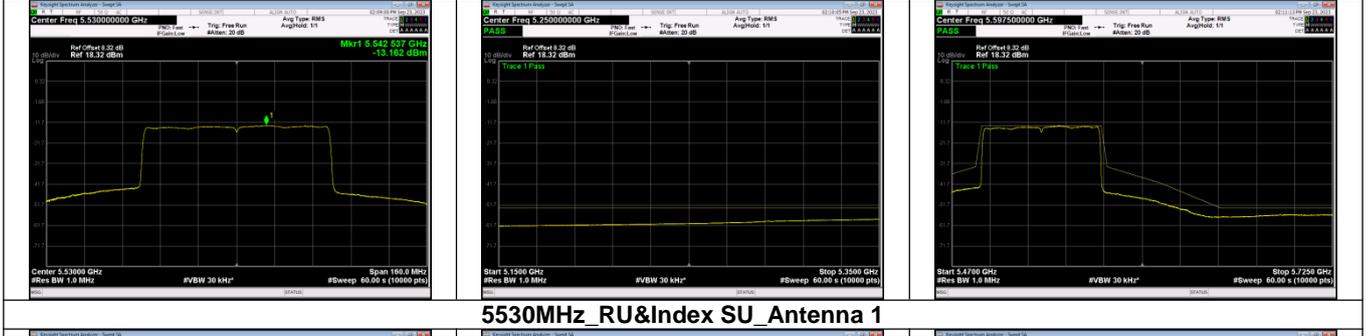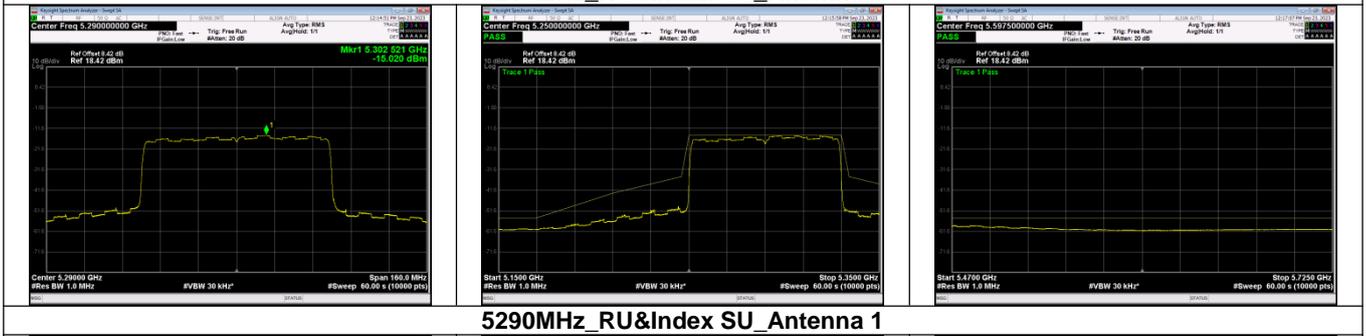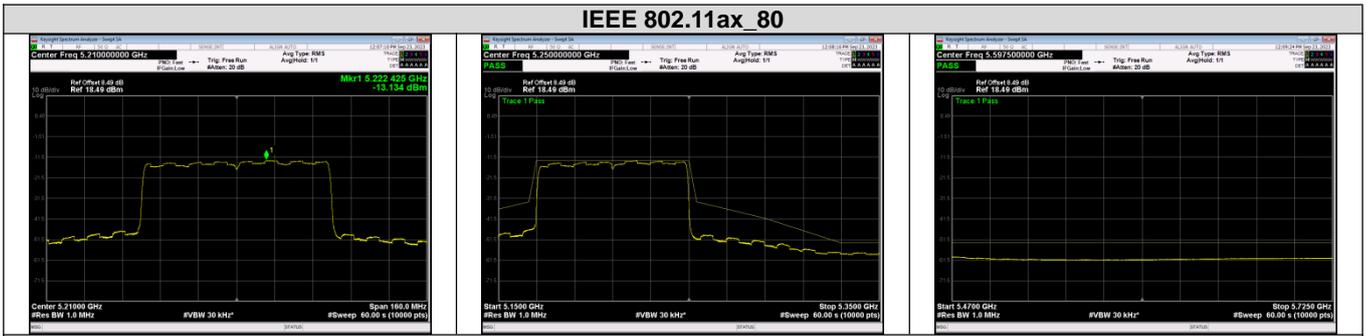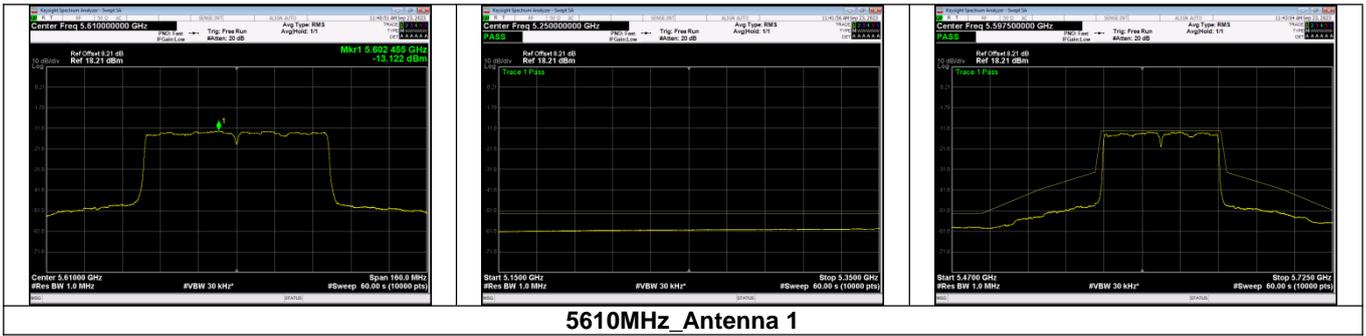

8. RECEIVER SPURIOUS EMISSIONS

8.1 APPLIED PROCEDURES / LIMIT

LIMIT

The spurious emissions of the receiver shall not exceed the limits given in table 5.

Table 5: Spurious radiated emission limits

Frequency range	Maximum power	Measurement bandwidth
30 MHz to 1 GHz	-57 dBm	100 kHz
1 GHz to 26 GHz	-47 dBm	1 MHz

8.2 TEST PROCEDURES

According to ETSI EN 301 893 V2.1.1 (2017-05) §5.4.7.2

8.3 TEST SETUP LAYOUT

This test setup layout is the same as that shown in section 6.1.4

8.4 TEST RESULTS

Below 1GHz

Test Mode: 802.11n20 mode-Low			
Temperature:	25°C	Relative Humidity:	60 %
Pressure:	1012 hPa	Test Voltage:	AC 230V/50Hz

Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark	Polarization
126.3051	-68.53	2.34	-66.19	-57	-9.19	peak	Horizontal
213.0623	-68.94	3.55	-65.39	-57	-8.39	peak	Horizontal
519.8563	-69.32	3.65	-65.67	-57	-8.67	peak	Horizontal
658.9341	-69.77	4.01	-65.76	-57	-8.76	peak	Horizontal
769.5329	-70.34	4.76	-65.58	-57	-8.58	peak	Horizontal
925.0366	-70.46	5.68	-64.78	-57	-7.78	peak	Horizontal
139.6541	-67.83	2.21	-65.62	-57	-8.62	peak	Vertical
265.3105	-69.43	3.56	-65.87	-57	-8.87	peak	Vertical
536.4101	-68.94	3.65	-65.29	-57	-8.29	peak	Vertical
6359.214	-69.83	4.01	-65.82	-57	-8.82	peak	Vertical
823.6415	-69.66	4.72	-64.94	-57	-7.94	peak	Vertical
874.0163	-69.74	5.62	-64.12	-57	-7.12	peak	Vertical

Test Mode: 802.11n20 mode-High			
Temperature:	25°C	Relative Humidity:	60 %
Pressure:	1012 hPa	Test Voltage:	AC 230V/50Hz

Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark	Polarization
225.6413	-68.53	3.36	-65.17	-57	-8.17	peak	Horizontal
379.6451	-69.74	3.58	-66.16	-57	-9.16	peak	Horizontal
581.0263	-69.53	3.85	-65.68	-57	-8.68	peak	Horizontal
673.4156	-70.16	3.94	-66.22	-57	-9.22	peak	Horizontal
853.0416	-70.53	4.51	-66.02	-57	-9.02	peak	Horizontal
916.0253	-71.02	5.51	-65.51	-57	-8.51	peak	Horizontal
245.1023	-68.94	3.21	-65.73	-57	-8.73	peak	Vertical
369.5422	-68.53	3.52	-65.01	-57	-8.01	peak	Vertical
463.5123	-69.53	3.74	-65.79	-57	-8.79	peak	Vertical
574.1036	-70.23	3.84	-66.39	-57	-9.39	peak	Vertical
826.3562	-70.32	4.59	-65.73	-57	-8.73	peak	Vertical
965.3201	-71.49	5.58	-65.91	-57	-8.91	peak	Vertical

Note:

1. The emission behaviour belongs to narrowband spurious emission.
2. Calculation of result is: Result (dBm)= Reading (dBm)+ Correct Factor (dB).
3. Recorded the worst data 802.11n20 mode for 5150-5250MHz in report.

Above 1GHz

Test Mode: 802.11n20 mode-Low			
Temperature:	25°C	Relative Humidity:	60 %
Pressure:	1012 hPa	Test Voltage:	AC 230V/50Hz

Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark	Polarization
4963.512	-71.53	14.29	-57.24	-47	-10.24	peak	Horizontal
8563.216	-74.53	16.54	-57.99	-47	-10.99	peak	Horizontal
11402.326	-76.34	18.15	-58.19	-47	-11.19	peak	Horizontal
13025.163	-75.49	20.21	-55.28	-47	-8.28	peak	Horizontal
16842.516	-78.94	21.99	-56.95	-47	-9.95	peak	Horizontal
20332.451	-78.46	23.57	-54.89	-47	-7.89	peak	Horizontal
4867.416	-72.36	14.29	-58.07	-47	-11.07	peak	Vertical
8451.025	-72.16	16.54	-55.62	-47	-8.62	peak	Vertical
10236.516	-72.35	18.15	-54.2	-47	-7.2	peak	Vertical
14356.012	-75.61	20.21	-55.4	-47	-8.4	peak	Vertical
17653.263	-76.94	21.99	-54.95	-47	-7.95	peak	Vertical
20356.145	-78.94	23.57	-55.37	-47	-8.37	peak	Vertical

Test Mode: 802.11n20 mode-High			
Temperature:	25°C	Relative Humidity:	60 %
Pressure:	1012 hPa	Test Voltage:	AC 230V/50Hz

Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark	Polarization
5463.621	-71.36	14.29	-57.07	-47	-10.07	peak	Horizontal
8145.326	-74.63	16.54	-58.09	-47	-11.09	peak	Horizontal
12054.163	-74.46	18.15	-56.31	-47	-9.31	peak	Horizontal
16532.014	-76.53	20.21	-56.32	-47	-9.32	peak	Horizontal
18653.269	-77.02	21.99	-55.03	-47	-8.03	peak	Horizontal
20516.354	-78.49	23.57	-54.92	-47	-7.92	peak	Horizontal
5639.421	-70.23	14.29	-55.94	-47	-8.94	peak	Vertical
8453.21	-72.53	16.54	-55.99	-47	-8.99	peak	Vertical
12036.253	-74.62	18.15	-56.47	-47	-9.47	peak	Vertical
16853.205	-74.53	20.21	-54.32	-47	-7.32	peak	Vertical
17493.656	-77.96	21.99	-55.97	-47	-8.97	peak	Vertical
21403.255	-78.49	23.57	-54.92	-47	-7.92	peak	Vertical

Note:

1. The emission behaviour belongs to narrowband spurious emission.
2. Calculation of result is: Result (dBm)= Reading (dBm)+ Correct Factor (dB).
3. Recorded the worst data 802.11n20 mode for 5150-5250MHz in report.

9. ADAPTIVITY (CHANNEL ACCESS MECHANISM)

9.1 APPLICABILITY OF ADAPTIVE REQUIREMENTS AND LILIT

This requirement applies to equipment, testing shall be performed using the highest nominal channel Bandwidth. The manufacturer shall state whether the UUT is capable of operating as a Frame Based Equipment or Load Based Equipment. See tables for the applicability of adaptive requirements and limit for each of the operational modes.

Applicability of adaptive requirements and limit

Requirement	Operational Mode		
	Frame Based Equipment	Load Based Equipment (CCA using 'energy detect')	Load Based Equipment (CCA not using any of the mechanisms referenced)
Minimum Clear Channel Assessment (CCA) Time	20 us (see note 1)	(see note 2)	20 us (see note 1)
Maximum Channel Occupancy (COT) Time	1ms to 10 ms	(see note 2)	(13/32)*q ms (see note 3)
Minimum Idle Period	5% of COT	(see note 2)	N/A
Extended CCA check	N/A	(see note 2)	N*CCA (see note 4)
Short Control Signalling Transmissions	Maximum duty cycle of 5% within an observation period of 50 ms (see note 5)		
<p>Note 1: The CCA time used by the equipment shall be declared by the manufacturer.</p> <p>Note 2: LBT based spectrum sharing mechanism based on the Clear Channel Assessment (CCA) mode using 'energy detect', as described in IEEE 802.11™-2007[9], clauses 15 and 17, in IEEE 802.11n™ -2009[10], clauses 20.</p> <p>Note 3: q is selected by the manufacturer in the range [4...32]</p> <p>Note 4: The value of N shall be randomly selected in the range [1...q]</p> <p>Note 5: Adaptive equipment may or may not have Short Control Signaling Transmissions.</p>			


Interference threshold level

Maximum transmit power (P _H) EIRP dBm	Threshold Level (TL) (see note 1 and 2)
23	-73 dBm / MHz
<p>Note 1: TL = -73 dBm / MHz + 23 –PH (assuming a 0 dBi receive antenna and PH specified in dBm e.i.r.p)</p> <p>Note 2: Transmitter the CCA threshold level (TL) shall be equal or lower than -73 dBm / MHz at the input to the receiver (assuming a 0 dBi receive antenna).</p>	

9.2 TEST PROCEDURE

Reference to ETSI EN 301 893 V2.1.1 (2017-05) clause 5.4.9.2

9.3 TEST SETUP CONFIGURATION

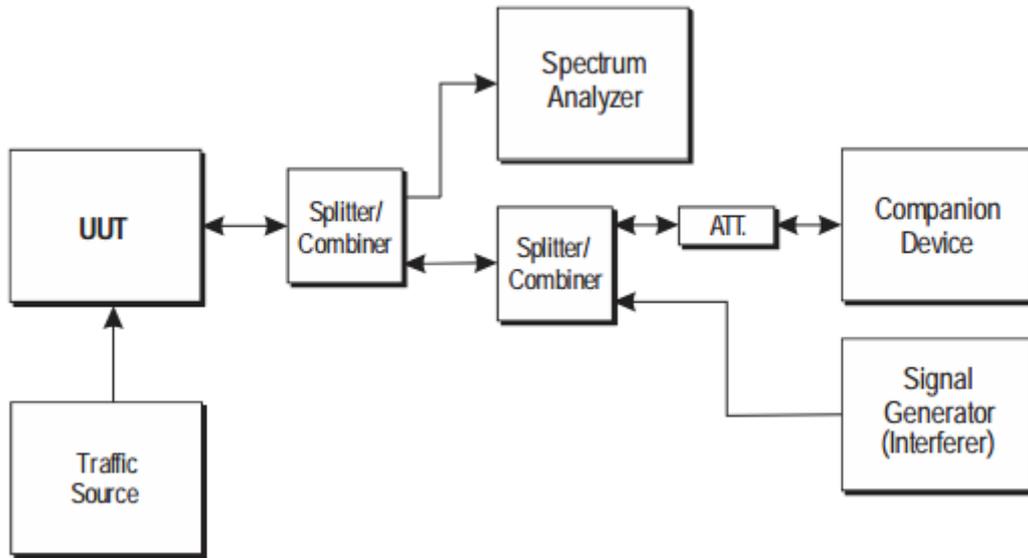



9.4 LIST OF MEASUREMENTS

UUT operational Mode		
Frame Based Equipment	Load Based Equipment (CCA using 'energy detect')	Load Based Equipment (CCA not using any of the mechanisms referenced)
	V	


Clause	Test Parameter	Remarks	PASS/FAIL
5.4.9.2.1	Adaptive (Frame Based Equipment)	Not Applicable	N/A
5.4.9.2.2	Adaptive (Load Based Equipment)	Applicable	PASS
5.4.9.2.3	Short Control Signaling Transmissions	Applicable	PASS

9.5 TEST RESULTS



Test Mode: 802.11n20 Low	
AWGN Interference Level (dBm)	-55.43
Interference Start Time (ms)	711.206
Suggest q Level	0
Max COT (ms)	9.42
Idle Time (ms)	0.24
Duty Cycle (%)	2.11

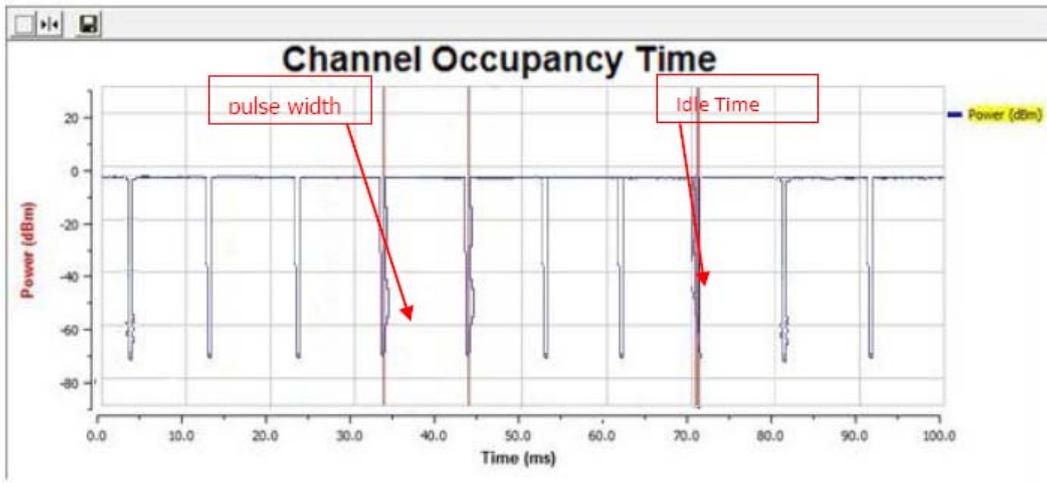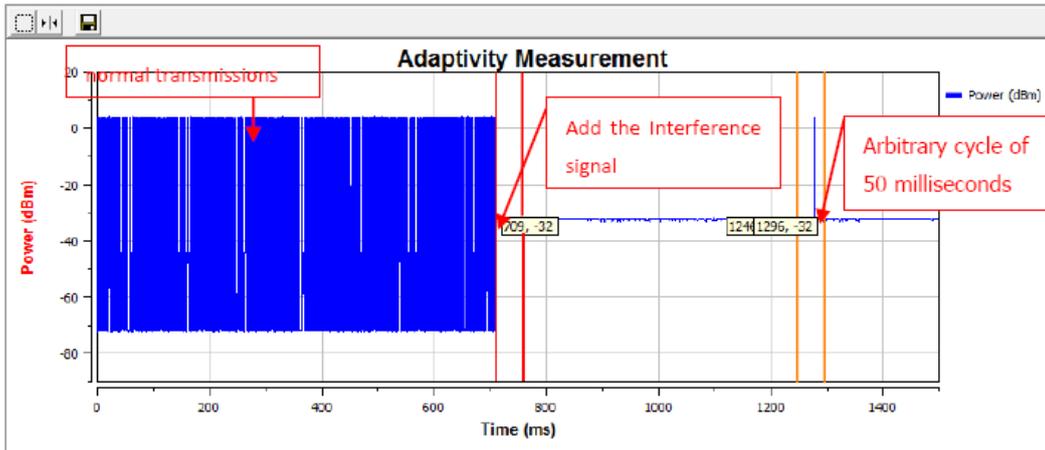


Arbitrary cycle of 50

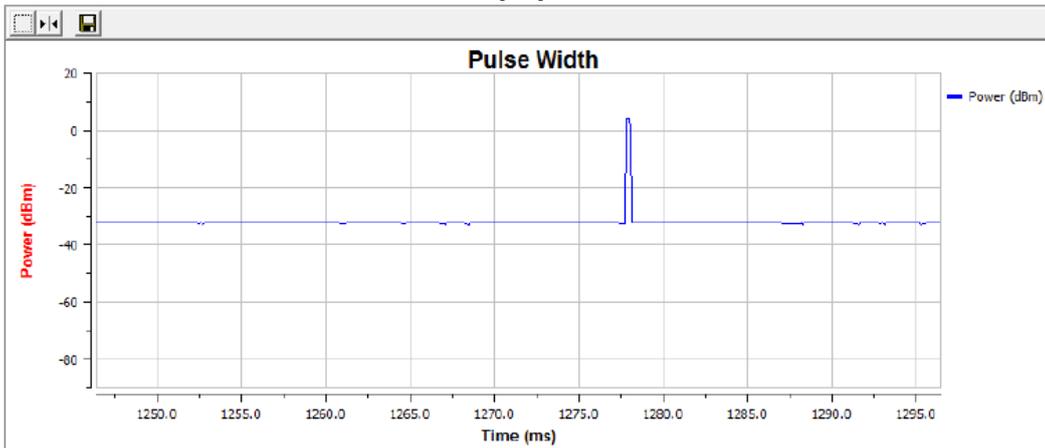

Test Mode: 802.11n20 High	
AWGN Interference Level (dBm)	-55.32
Interference Start Time (ms)	595.29
Suggest q Level	0
Max COT (ms)	9.51
Idle Time (ms)	0.33
Duty Cycle (%)	1.26

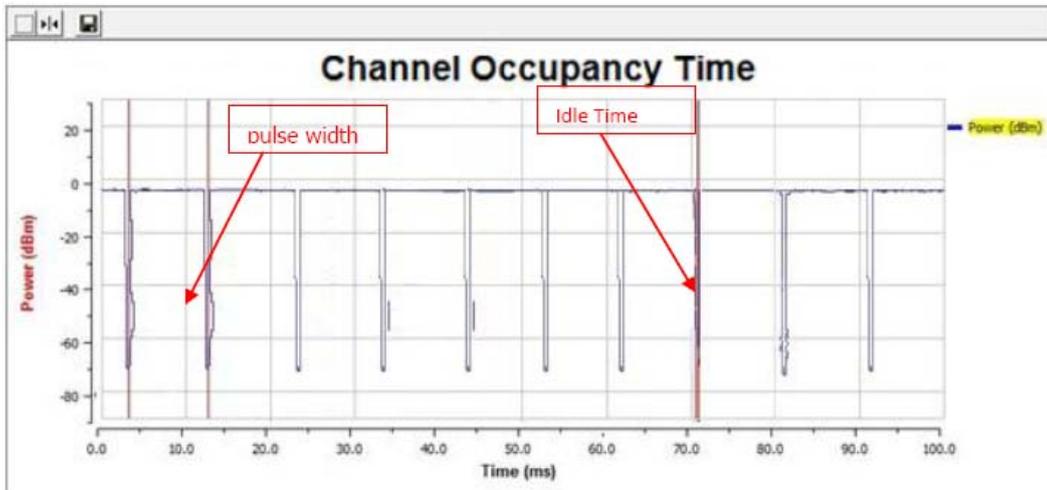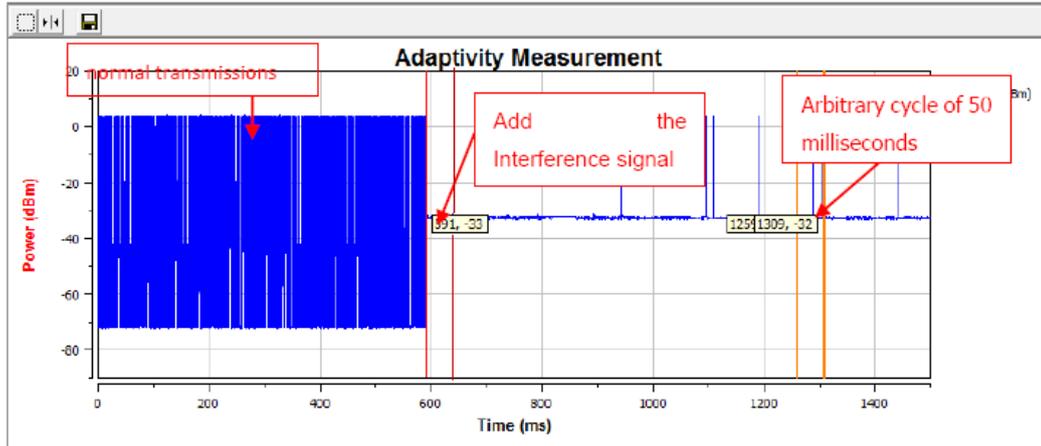

Arbitrary cycle of 50

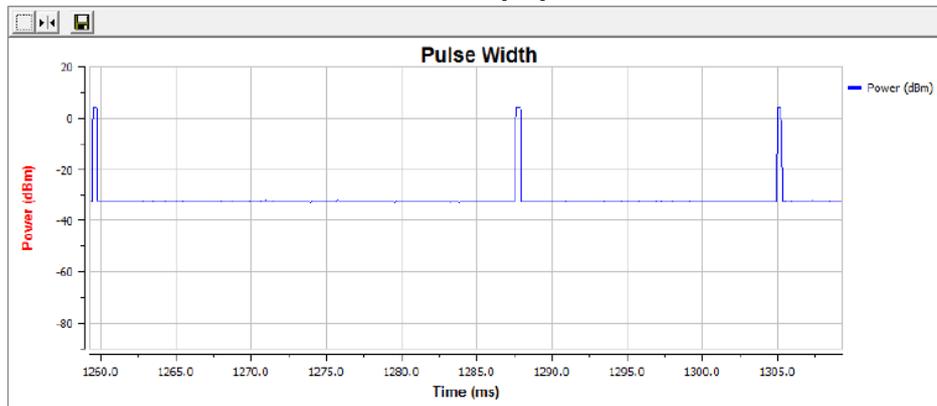

Note: We have tested all modes and found that the data of 802.11n20 mode was the worst; the test data of 802.11n20 mode was recorded in the report.

10. MEDIUM ACCESS PROTOCOL

10.1 APPLIED PROCEDURES / LIMIT

A medium access protocol is a mechanism designed to facilitate spectrum sharing with other devices in a wireless network.

A medium access protocol shall be implemented by the equipment.

10.2 TEST RESULTS

The EUT is accord with medium access protocol.

11. RECEIVER BLOCKING

11.1 LIMITS

While maintaining the minimum performance criteria as defined in clause 4.2.8.3, the blocking levels at specified frequency offsets shall be equal to or greater than the limits defined in table 9.

Table 9: Receiver Blocking parameters

Wanted signal mean power from companion device (dBm)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 2)		Type of blocking signal
		Master or Slave with radar detection (see table D.2, note 2)	Slave without radar detection (see table D.2, note 2)	
P _{min} + 6 dB	5 100	-53	-59	Continuous Wave
P _{min} + 6 dB	4 900 5 000 5 975	-47	-53	Continuous Wave

NOTE 1: P_{min} is the minimum level of the wanted signal (in dBm) required to meet the minimum performance criteria as defined clause 4.2.8.3 in the absence of any blocking signal.

NOTE 2: The levels specified are levels in front of the UUT antenna. In case of conducted measurements, the same levels should be used at the antenna connector irrespective of antenna gain.

11.2 TEST PROCEDURE


Refer to chapter 5.4.10.2.1 of ETSI EN 301 893 V2.1.1 (2017-05)

Measurement	
<input checked="" type="checkbox"/> Conducted measurement	<input type="checkbox"/> Radiated measurement

11.3 DEVIATION FROM TEST STANDARD

No deviation

11.4 TEST SETUP

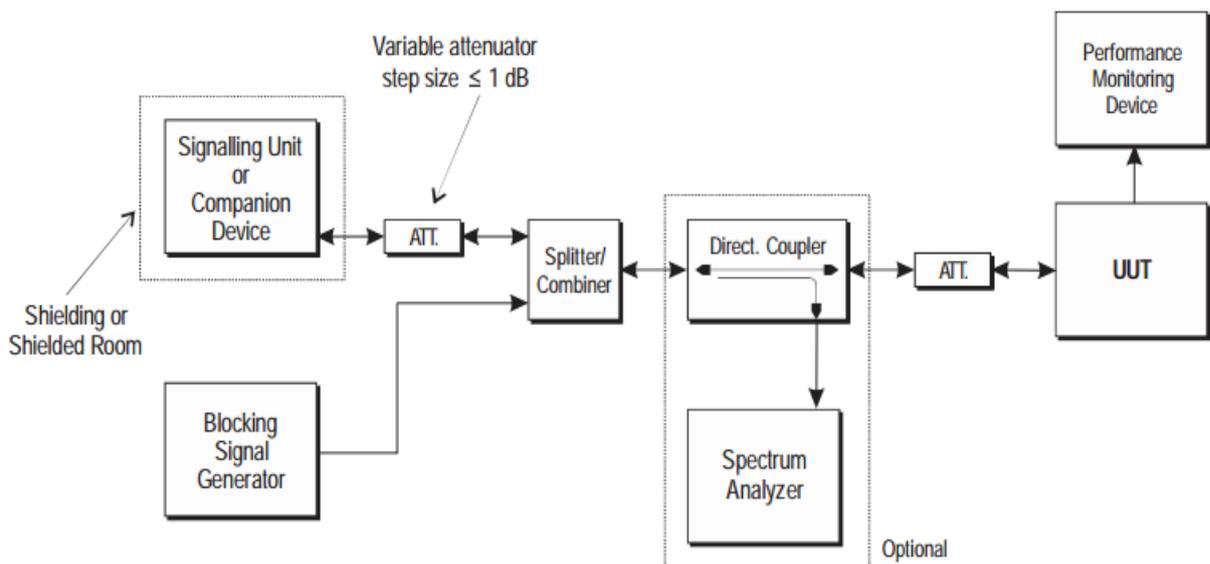

11.5 TEST RESULTS

Test Mode	802.11n20 Low Channel					
Pmin	-80.13dBm					
Wanted signal Mean power From companion device (dBm)	Blocking signal frequency (MHz)	Blocking signal Power (dBm)	Type of blocking signal	PER (%)	PER (%) Limit	Result
Pmin + 6 dB	5100	-59	CW	0.24	≤ 10	Pass
Pmin + 6 dB	4900	-53	CW	0.06	≤ 10	Pass
	5000			0.21		Pass
	5975			0.52		Pass

Test Mode	802.11n20 Low Channel					
Pmin	-80.13dBm					
Wanted signal Mean power From companion device (dBm)	Blocking signal frequency (MHz)	Blocking signal Power (dBm)	Type of blocking signal	PER (%)	PER (%) Limit	Result
Pmin + 6 dB	5100	-59	CW	0.30	≤ 10	Pass
Pmin + 6 dB	4900	-53	CW	0.43	≤ 10	Pass
	5000			0.12		Pass
	5975			0.27		Pass

Note: We have tested all modes and found that the data of 802.11n20 mode was the worst; the test data of 802.11n20 mode was recorded in the report.

12. DYNAMIC FREQUENCY SELECTION (DFS)

12.1 DFS PARAMETERS

Table D.1: DFS requirement values

Parameter	Value
Channel Availability Check Time	60 s (see note 1)
Minimum Off-Channel CAC Time	6 minutes (see note 2)
Maximum Off-Channel CAC Time	4 hours (see note 2)
Channel Move Time	10 s
Channel Closing Transmission Time	1 s
Non-Occupancy Period	30 minutes
NOTE 1: For channels whose nominal bandwidth falls completely or partly within the band 5 600 MHz to 5 650 MHz, the <i>Channel Availability Check Time</i> shall be 10 minutes.	
NOTE 2: For channels whose nominal bandwidth falls completely or partly within the band 5 600 MHz to 5 650 MHz, the <i>Off-Channel CAC Time</i> shall be within the range 1 hour to 24 hours.	

Table D.2: Radar Detection Threshold Levels

e.i.r.p. Spectral Density (dBm/MHz)	Value (see note 1 and note 2)
10	-62 dBm
NOTE 1: This is the level at the input of the receiver of an RLAN device with a maximum e.i.r.p. density of 10 dBm/MHz and assuming a 0 dBi receive antenna. For devices employing different e.i.r.p. spectral density and/or a different receive antenna gain G (dBi) the Radar Detection Threshold Level at the receiver input follows the following relationship: DFS Detection Threshold (dBm) = -62 + 10 - e.i.r.p. Spectral Density (dBm/MHz) + G (dBi); however the Radar Detection Threshold Level shall not be less than -64 dBm assuming a 0 dBi receive antenna gain.	
NOTE 2: Slave devices with a maximum e.i.r.p. of less than 23 dBm do not have to implement radar detection unless these devices are used in fixed outdoor point to point or fixed outdoor point to multipoint applications (see clause 4.2.6.1.3).	

Table D.3: Parameters of the reference DFS test signal


Pulse width W (µs)	Pulse repetition frequency PRF (PPS)	Pulses per burst (PPB)
1	700	18

Table D.4: Parameters of radar test signals

Radar test signal # (see note 1 to note 3)	Pulse width W (µs)		Pulse repetition frequency PRF (PPS)		Number of different PRFs	Pulses per burst for each PRF (PPB) (see note 5)
	Min	Max	Min	Max		
1	0,5	5	200	1 000	1	10 (see note 6)
2	0,5	15	200	1 600	1	15 (see note 6)
3	0,5	15	2 300	4 000	1	25
4	20	30	2 000	4 000	1	20
5	0,5	2	300	400	2/3	10 (see note 6)
6	0,5	2	400	1 200	2/3	15 (see note 6)

NOTE 1: Radar test signals #1 to #4 are constant PRF based signals. See figure D.1. These radar test signals are intended to simulate also radars using a packet based Staggered PRF. See figure D.2.

NOTE 2: Radar test signal #4 is a modulated radar test signal. The modulation to be used is a chirp modulation with a ±2,5 MHz frequency deviation which is described below.

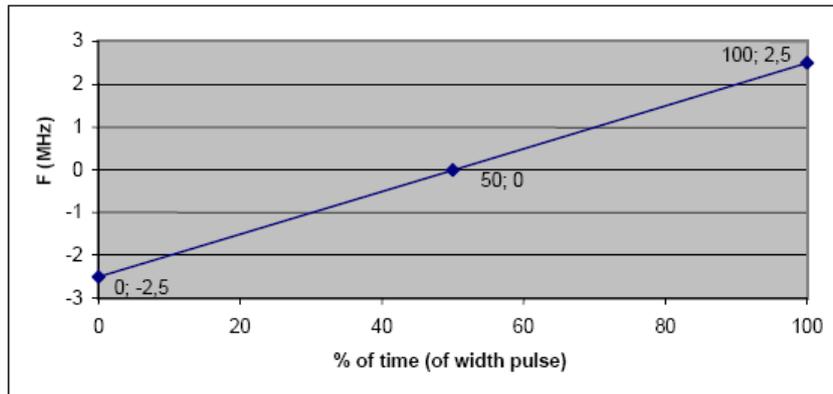

NOTE 3: Radar test signals #5 and #6 are single pulse based Staggered PRF radar test signals using 2 or 3 different PRF values. For radar test signal #5, the difference between the PRF values chosen shall be between 20 PPS and 50 PPS. For radar test signal #6, the difference between the PRF values chosen shall be between 80 PPS and 400 PPS. See figure D.3.

NOTE 4: Apart for the Off-Channel CAC testing, the radar test signals above shall only contain a single burst of pulses. See figure D.1, figure D.3 and figure D.4. For the Off-Channel CAC testing, repetitive bursts shall be used for the total duration of the test. See figure D.2 and figure D.5. See also clause 4.2.6.2.3, clause 5.4.8.2.1.4.2 and clause 5.4.8.2.1.4.3.

NOTE 5: The total number of pulses in a burst is equal to the number of pulses for a single PRF multiplied by the number of different PRFs used.

NOTE 6: For the CAC and Off-Channel CAC requirements, the minimum number of pulses (for each PRF) for any of the radar test signals to be detected in the band 5 600 MHz to 5 650 MHz shall be 18.

Table D.5: Detection probability

Parameter	Detection Probability (P_d)	
	Channels whose nominal bandwidth falls partly or completely within the 5 600 MHz to 5 650 MHz band	Other channels
CAC, Off-Channel CAC	99,99 %	60 %
In-Service Monitoring	60 %	60 %

NOTE: P_d gives the probability of detection per simulated radar burst and represents a minimum level of detection performance under defined conditions. Therefore P_d does not represent the overall detection probability for any particular radar under real life conditions.

12.2 APPLICABILITY

Table 6 lists the DFS related technical requirements and their applicability for every operational mode. If the RLAN device is capable of operating in more than one operational mode then every operating mode shall be assessed separately.

Table 6: Applicability of DFS requirements

Requirement	DFS Operational mode		
	Master	Slave without radar detection (see table D.2, note 2)	Slave with radar detection (see table D.2, note 2)
Channel Availability Check	Required	Not required	Required (see note 2)
Off-Channel CAC (see note 1)	Required	Not required	Required (see note 2)
In-Service Monitoring	Required	Not required	Required
Channel Shutdown	Required	Required	Required
Non-Occupancy Period	Required	Not required	Required
Uniform Spreading	Required	Not required	Not required
NOTE 1: Where implemented by the manufacturer.			
NOTE 2: A slave with radar detection is not required to perform a CAC or <i>Off-Channel CAC</i> at initial use of the channel but only after the slave has detected a radar signal on the <i>Operating Channel</i> by <i>In-Service Monitoring</i> and the <i>Non-Occupancy Period</i> resulting from this detection has elapsed.			

12.3 CHANNEL AVAILABILITY CHECK

LIMIT

The Channel Availability Check shall be performed during a continuous period in time (Channel Availability Check Time) which shall not be less than the value defined in table D.1. During the Channel Availability Check, the RLAN device shall be capable of detecting any of the radar test signals that fall within the ranges given by table D.4 with a level above the Radar Detection Threshold Level defined in table D.2. The RLAN device shall comply with the minimum detection probability as defined in table D.5.

12.4 OFF-CHANNEL CAC (OFF-CHANNEL CHANNEL AVAILABILITY CHECK)

LIMIT

Where implemented, the Off-Channel CAC Time shall be declared by the manufacturer. However, the declared Off-Channel CAC Time shall be within the range specified in table D.1.

During the Off-Channel CAC, the RLAN device shall be capable of detecting any of the radar test signals that fall within the ranges given by table D.4 with a level above the Radar Detection Threshold Level defined in table D.2.

The RLAN device shall comply with the minimum detection probability as defined in table D.5.

12.5 IN-SERVICE MONITORING

LIMIT

The In-Service Monitoring shall be used to monitor each Operating Channel.

The In-Service-Monitoring shall start immediately after the RLAN device has started transmissions on a channel.

During the In-Service Monitoring, the RLAN device shall be capable of detecting any of the radar test signals that fall within the ranges given by table D.4 with a level above the Radar Detection Threshold Level defined in table D.2.

The RLAN device shall comply with the minimum detection probability associated with a given radar test signal as defined in table D.5.

12.6 CHANNEL SHUTDOWN

LIMIT

The Channel Move Time shall not exceed the limit defined in table D.1. The Channel Closing Transmission Time shall not exceed the limit defined in table D.1.

12.7 NON-OCCUPANCY

LIMIT

The Non-Occupancy Period shall not be less than the value defined in table D.1.

12.8 UNIFORM SPREADING

LIMIT

Each of the declared Channel Plans (see clause 3.1) shall make use of at least 60 % of the spectrum available in the applicable sub-band(s).

The Uniform Spreading is limited to the usable channels being declared as part of the channel plan.

Usable channels do not include channels which are precluded by either:

the intended outdoor usage of the RLAN; or

previous detection of a radar on the channel (Unavailable Channel or Unusable Channel); or

national regulations; or

the restriction to only operate in the band 5 150 MHz to 5 250 MHz for RLAN devices without a radar detection capability.

Each of the Usable Channels shall be used with approximately equal probability. RLAN equipment for which the declared channel plan includes channels whose nominal bandwidth falls completely or partly within the band 5 600 MHz to 5 650 MHz may omit these channels from the list of Usable Channels at initial power up or at initial installation. Channels being used by other RLAN equipment may be omitted from the list of Usable Channels.

12.9 TEST PROCEDURE

Refer to chapter 5.4.8.2 of ETSI EN 301 893 V2.1.1 (2017-05)

12.10 TEST SETUP

Set-up A

Set-up A is a set-up whereby the UUT is an RLAN device operating in master mode. Radar test signals are injected into the UUT. This set-up also contains an RLAN device operating in slave mode which is associated with the UUT.

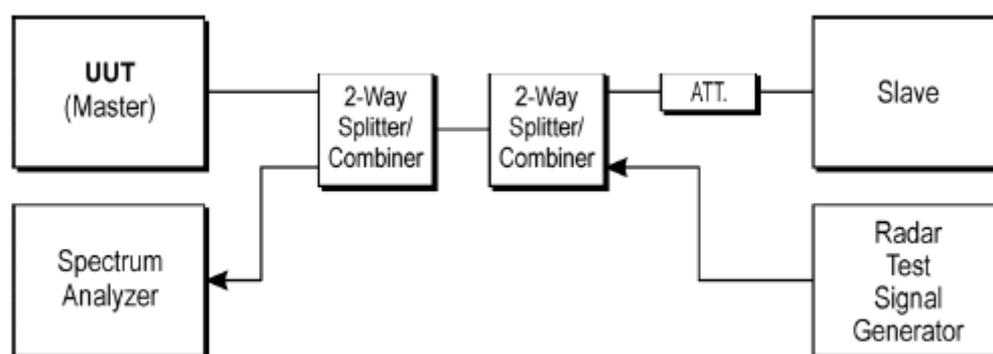


Figure 5: Set-up A

Set-up B

Set-up B is a set-up whereby the UUT is an RLAN device operating in slave mode, with or without Radar Interference Detection function. This set-up also contains an RLAN device operating in master mode. The radar test signals are injected into the master device. The UUT (slave device) is associated with the master device.

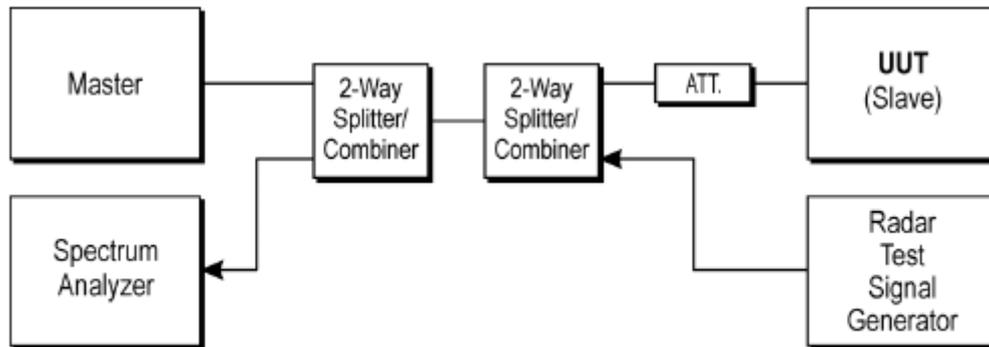


Figure 6: Set-up B

Set-up C

The UUT is an RLAN device operating in slave mode with Radar Interference Detection function. Radar test signals are injected into the slave device. This set-up also contains an RLAN device operating in master mode. The UUT (slave device) is associated with the master device.

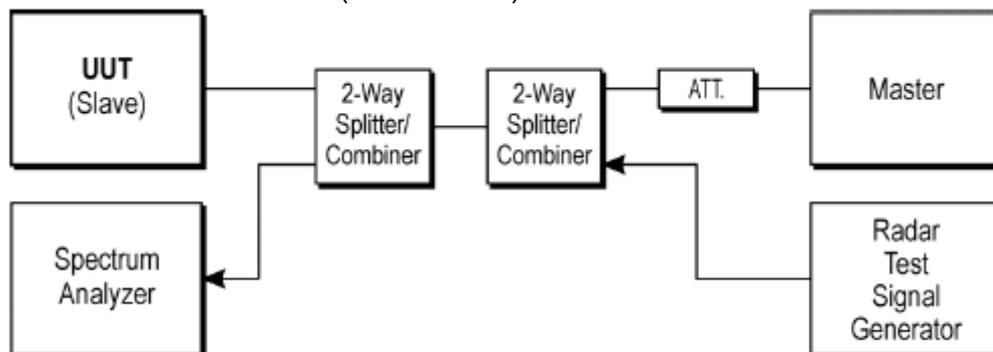



Figure 7: Set-up C

12.11 TEST RESULTS

Not Applicable

13. TEST PHOTOGRAPH

Spurious Emission Test

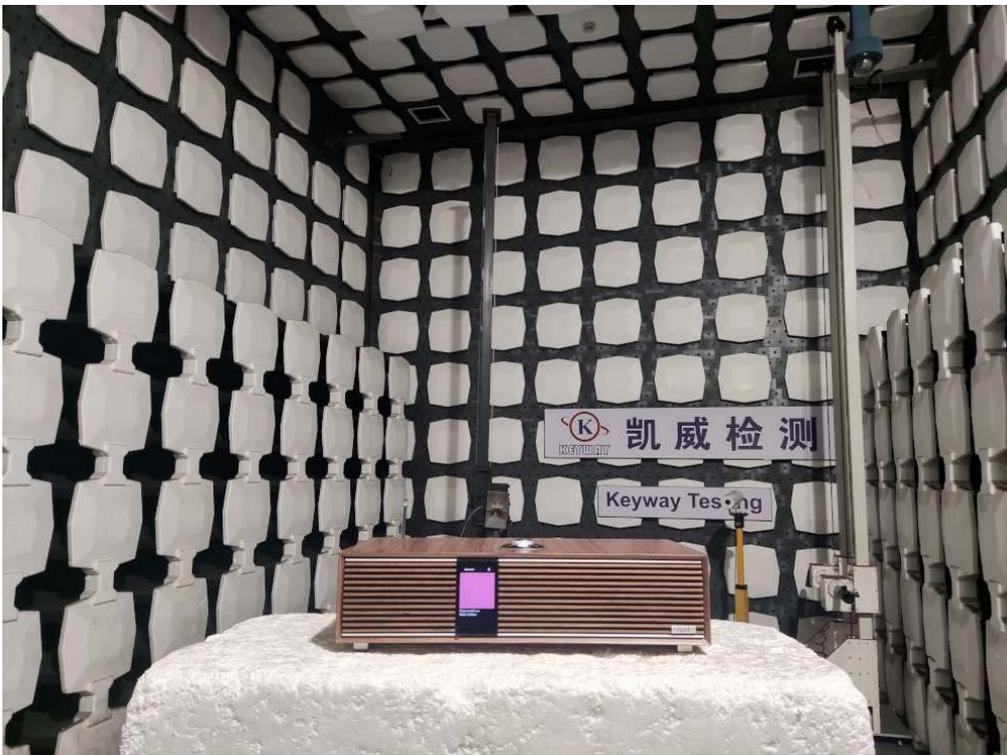

14. EUT Constructional Details

Reference to the test report No. TR23040454-E-002.

*** the end of report ***