



RSS-247 TEST REPORT

IC :30457-ZD3

Report Number..... : ZKT-241031L14347
 Date of Test..... Oct. 18, 2024 to Nov. 06, 2024
 Date of issue..... : Nov. 06, 2024
 Total number of pages..... 91
 Test Result : PASS

Testing Laboratory..... : Shenzhen ZKT Technology Co., Ltd.
 Address : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name : Shenzhen Foresight Technology Co.,Ltd.
 Address : 3rd Floor, Building 10, Aohua Industrial Zone, Gaofeng Community, Dalang Street, Longhua District, Shenzhen China

Manufacturer's name : Shenzhen Foresight Technology Co.,Ltd.
 Address : 3rd Floor, Building 10, Aohua Industrial Zone, Gaofeng Community, Dalang Street, Longhua District, Shenzhen China

Test specification:
 Standard..... : RSS-Gen Issue 5, February 2021
 : RSS-247 Issue 3 August 2023
 Test procedure..... : /
 Non-standard test method : N/A

Test Report Form No..... : TRF-EL-111_V0
Test Report Form(s) Originator..... : ZKT Testing
Master TRF : Dated: 2020-01-06

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.
 This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

Product name..... : Audio Amplifier
 Trademark : Fosi Audio
 Model/Type reference..... : ZD3
 Ratings..... : DC 12V from Adapter



Testing procedure and testing location:

Testing Laboratory.....:

Shenzhen ZKT Technology Co., Ltd.

Address.....:

1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Tested by (name + signature).....:

Alen He

Reviewer (name + signature).....:

Joe Liu

Approved (name + signature).....:

Lake Xie





Table of Contents

	Page
1. VERSION	5
2. TEST SUMMARY	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 Test Setup Configuration	9
3.3 Support Equipment	10
3.4 Test Mode	11
3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
4. EMC EMISSION TEST	12
4.1 Conducted emissions	14
4.1.1 POWER LINE CONDUCTED EMISSION Limits	14
4.1.2 TEST PROCEDURE	14
4.1.3 DEVIATION FROM TEST STANDARD	14
4.1.4 TEST SETUP	15
4.1.5 EUT OPERATING CONDITIONS	15
4.1.6 Test Result (Worst case GFSK 2402MHz)	16
4.2 Radiated emissions	18
4.2.1 Radiated Emission Limits	18
4.2.2 TEST PROCEDURE	18
4.2.3 DEVIATION FROM TEST STANDARD	19
4.2.4 TEST SETUP	19
4.2.5 EUT OPERATING CONDITIONS	20
4.2.6 TEST RESULTS	21
5. RADIATED BAND EMISSION MEASUREMENT	30
5.1 Test Requirement:	30
5.2 TEST PROCEDURE	30
5.3 DEVIATION FROM TEST STANDARD	31
5.4 TEST SETUP	31
5.5 EUT OPERATING CONDITIONS	31
5.6 TEST RESULT	32
6. CONDUCTED BAND EDGE AND SPURIOUS EMISSION	36
6.1 Limit	36
6.2 Test Setup	36
6.3 Test procedure	36
6.4 DEVIATION FROM STANDARD	36
6.5 Test Result	37
7. 20DB&99% BANDWIDTH	58
7.1 Test Setup	58
7.2 Limit	58
7.3 Test procedure	58
7.4 DEVIATION FROM STANDARD	58



7.5 Test Result	58
8. MAXIMUM PEAK OUTPUT POWER AND EIRP	64
8.1 Block Diagram Of Test Setup	64
8.2 Limit	64
8.3 Test procedure	64
8.4 DEVIATION FROM STANDARD	64
8.5 Test Result	65
9. HOPPING CHANNEL SEPARATION	70
9.1 Test Setup	70
9.2 Test procedure	70
9.3 DEVIATION FROM STANDARD	70
9.4 Test Result	71
10.NUMBER OF HOPPING FREQUENCY	76
10.1 Test Setup	76
10.2 Test procedure	76
10.3 DEVIATION FROM STANDARD	76
10.4 Test Result	77
11. DWELL TIME	79
11.1 Test Setup	79
11.2 Test procedure	79
11.3 DEVIATION FROM STANDARD	79
11.4 Test Result	80
12. ANTENNA REQUIREMENT	90
13. TEST SETUP PHOTO	91
14. EUT CONSTRUCTIONAL DETAILS	91



1. VERSION

Report No.	Version	Description	Approved
ZKT-241031L14347	Rev.00	Initial issue of report	Nov. 06, 2024



2. TEST SUMMARY

Test procedures according to the technical standards:

RSS-Gen, RSS-247 Issue 3			
Standard Section	Test Item	Result	Remark
RSS-Gen Section 6.8 RSS-247 5.4	Antenna Requirement	PASS	
RSS-Gen Section 8.8	AC Power Line Conducted Emission	PASS	
RSS-247 Section 5.4	Conducted Peak Output Power and EIRP	PASS	
RSS-247 Section 5.1 RSS-Gen Section 6.7	20dB Occupied Bandwidth 99% OCB	PASS	
RSS-247 Section 5.1 RSS-Gen Section 6.7	Carrier Frequencies Separation	PASS	
RSS-247 Section 5.1 RSS-Gen Section 6.7	Hopping Channel Number	PASS	
RSS-247 Section 5.1 RSS-Gen Section 6.7	Dwell Time	PASS	
RSS-247 Section 5.5 RSS GEN 8.9 RSS GEN 8.10	Radiated Emission and Restricted Band	PASS	
RSS-247 Section 5.5 RSS GEN 8.10	Conducted Unwanted emissions and Band Edge	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report



2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.

Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 692225

Designation Number: CN1299

IC Registered No.: 27033

CAB identifier: CN0110

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power conducted	$\pm 0.16\text{dB}$
3	Spurious emissions conducted	$\pm 0.21\text{dB}$
4	All emissions radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$
8	Occupied Bandwidth	$\pm 10\text{Hz}$



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Applicant's name :	Shenzhen Foresight Technology Co.,Ltd.
Address :	3rd Floor, Building 10, Aohua Industrial Zone, Gaofeng Community, Dalang Street, Longhua District, Shenzhen China
Manufacturer's name :	Shenzhen Foresight Technology Co.,Ltd.
Address :	3rd Floor, Building 10, Aohua Industrial Zone, Gaofeng Community, Dalang Street, Longhua District, Shenzhen China
Product Name:	Audio Amplifier
HVIN.:	ZD3
FVIN.:	V1.0
Test sample number:	ZKT-202415269
Model Different.:	N/A
Sample ID	N/A
Sample(s) Status:	Engineer sample
Channel numbers:	79
Operation Frequency:	2402MHz~2480MHz
Modulation technology:	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Antenna Type:	Glue stick antenna(External detachable)
Antenna gain:	2.22dBi
Power supply:	DC 12V from Adapter
Adapter:	Model:FJ-SW1241201500U Manufacturer:HUIZHOU FUJIAAPPLIANCE TECH CO., LTD Input: AC100-240V~ 50/60Hz 0.6A Max Output: 12V=== 1500mA

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz



13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The Highest channel	2480MHz

Note: This EUT supports DH1/DH3/DH5/2DH1/2DH3/2DH5/3DH1/3DH3/3DH5, Only DH5/2DH5/3DH5 record in this report

3.2 Test Setup Configuration

Conducted Emission



Radiated Emission



Conducted Spurious





3.3 Support Equipment

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
/	/	/	/	/	/

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



3.4 Test Mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

Test Software	BT Test Tool
Power level setup	<7dBm



3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation emissions& Radio Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	9020A	MY55370835	A.17.05	Nov. 02, 2023	Nov. 01, 2024
2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSV40-N	100363	1.71 SP2	Nov. 02, 2023	Nov. 01, 2024
3	EMI Test Receiver (9kHz-7GHz)	R&S	ESCI7	100969	4.32	Nov. 02, 2023	Nov. 01, 2024
4	Bilog Antenna (30MHz-1500MHz)	Schwarzbeck	VULB9168	N/A	N/A	Nov. 13, 2023	Nov. 12, 2024
5	Horn Antenna (1GHz-18GHz)	Agilent	AH-118	071145	N/A	Nov. 13, 2023	Nov. 12, 2024
6	Horn Antenna (15GHz-40GHz)	A.H.System	SAS-574	588	N/A	Nov. 13, 2023	Nov. 12, 2024
7	Loop Antenna	TESEQ	HLA6121	58357	N/A	Nov. 16, 2023	Nov. 15, 2024
8	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	60747	N/A	Nov. 02, 2023	Nov. 01, 2024
9	Amplifier (1GHz-26.5GHz)	HuiPu	8449B	3008A00315	N/A	Nov. 02, 2023	Nov. 01, 2024
10	Amplifier (500MHz-40GHz)	QuanJuDa	DLE-161	097	N/A	Nov. 02, 2023	Nov. 01, 2024
11	Test Cable	N/A	R-01	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
12	Test Cable	N/A	R-02	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
13	Test Cable	N/A	R-03	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
14	Test Cable	N/A	RF-01	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
15	Test Cable	N/A	RF-02	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
16	Test Cable	N/A	RF-03	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
17	ESG Signal Generator	Agilent	E4421B	N/A	B.03.84	Nov. 02, 2023	Nov. 01, 2024
18	Signal Generator	Agilent	N5182A	N/A	A.01.87	Nov. 02, 2023	Nov. 01, 2024
19	Magnetic Field Probe Tester	Narda	ELT-400	0-0344	N/A	Nov. 16, 2023	Nov. 15, 2024
20	Wideband Radio Communication Test	R&S	CMW500	106504	V 3.7.22	Nov. 02, 2023	Nov. 01, 2024
21	MWRF Power Meter Test system	MW	MW100-RF CB	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
22	D.C. Power Supply	LongWei	TPR-6405D	N/A	N/A	\	\
23	EMC Software	Frad	EZ-EMC	Ver.EMC-CO N 3A1.1	N/A	\	\
24	RF Software	MW	MTS8310	V2.0.0.0	N/A	\	\
25	Turntable	MF	MF-7802BS	N/A	N/A	\	\
26	Antenna tower	MF	MF-7802BS	N/A	N/A	\	\



Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	N/A	Nov. 14, 2023	Nov. 13, 2024
2	LISN	CYBERTEK	EM5040A	E1850400149	N/A	Nov. 02, 2023	Nov. 01, 2024
3	Test Cable	N/A	C-01	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
4	Test Cable	N/A	C-02	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
5	Test Cable	N/A	C-03	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
6	EMI Test Receiver	R&S	ESCI3	101393	4.42 SP3	Nov. 02, 2023	Nov. 01, 2024
7	Triple-Loop Antenna	N/A	RF300	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
8	Absorbing Clamp	DZ	ZN23201	15034	N/A	Nov. 07, 2023	Nov. 06, 2024
9	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	N/A	\	\



4. EMC EMISSION TEST

4.1 Conducted emissions

Test Requirement:	RSS-Gen Section 8.8
Test Method:	RSS-Gen
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.

4.1.2 TEST PROCEDURE


- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation



4.1.4 TEST SETUP

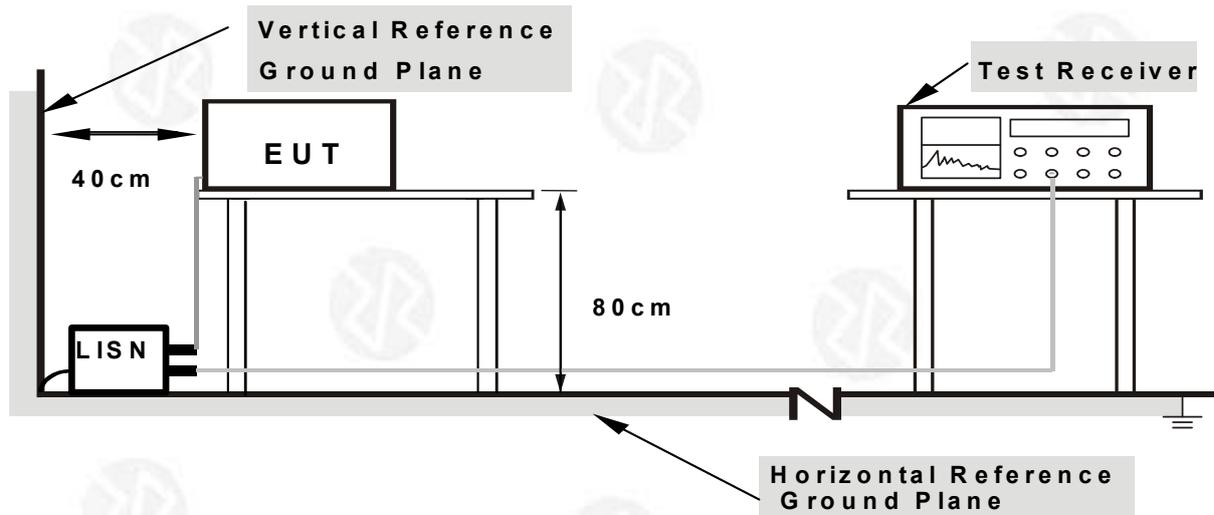

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 230V, the worst voltage was AC 120V and the data recording in the report.



4.1.6 Test Result (Worst case GFSK 2402MHz)

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	L1
Test Voltage :	AC 120V/60Hz		

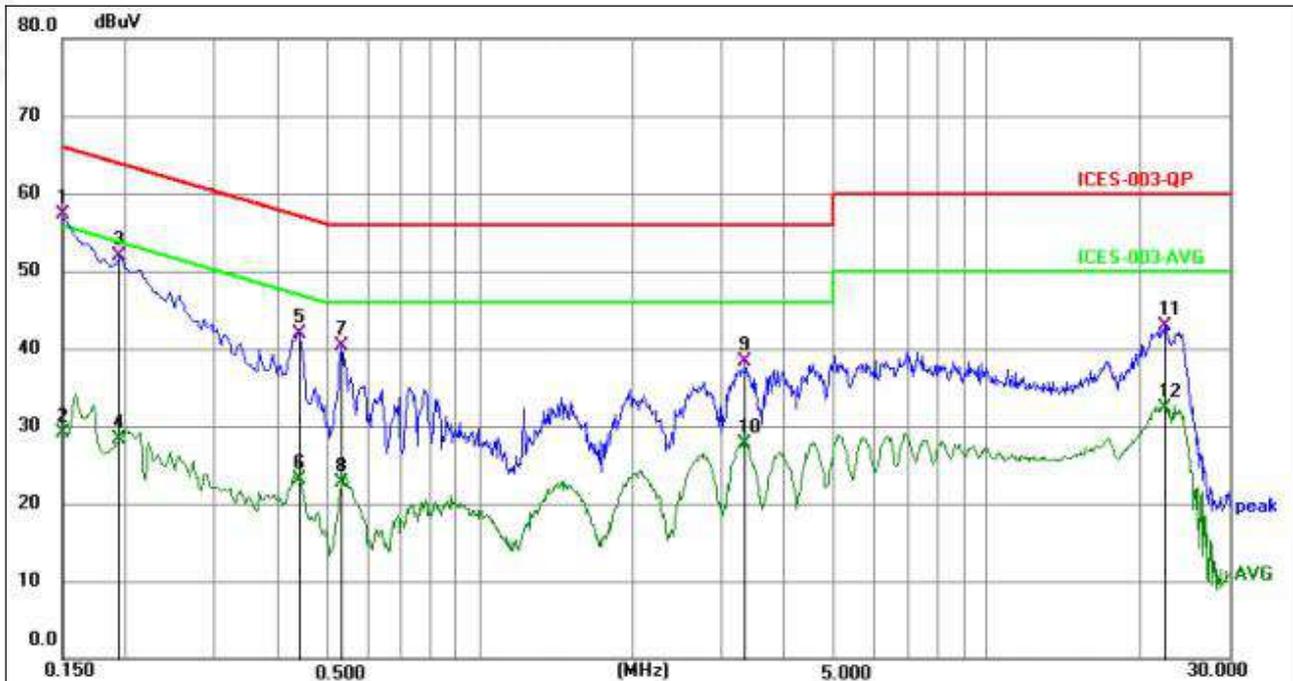


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1 *	0.1500	47.75	9.51	57.26	66.00	-8.74	QP	P	
2	0.1500	19.54	9.51	29.05	56.00	-26.95	AVG	P	
3	0.1949	42.26	9.69	51.95	63.83	-11.88	QP	P	
4	0.1949	18.56	9.69	28.25	53.83	-25.58	AVG	P	
5	0.4380	32.31	9.63	41.94	57.10	-15.16	QP	P	
6	0.4380	13.46	9.63	23.09	47.10	-24.01	AVG	P	
7	0.5322	30.61	9.64	40.25	56.00	-15.75	QP	P	
8	0.5322	13.06	9.64	22.70	46.00	-23.30	AVG	P	
9	3.3359	28.63	9.60	38.23	56.00	-17.77	QP	P	
10	3.3359	18.02	9.60	27.62	46.00	-18.38	AVG	P	
11	22.3661	33.20	9.62	42.82	60.00	-17.18	QP	P	
12	22.3661	22.60	9.62	32.22	50.00	-17.78	AVG	P	

Notes:
 1. An initial pre-scan was performed on the line and neutral lines with peak detector.
 2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
 3. Measurement Level = Reading level + Correct Factor



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz		

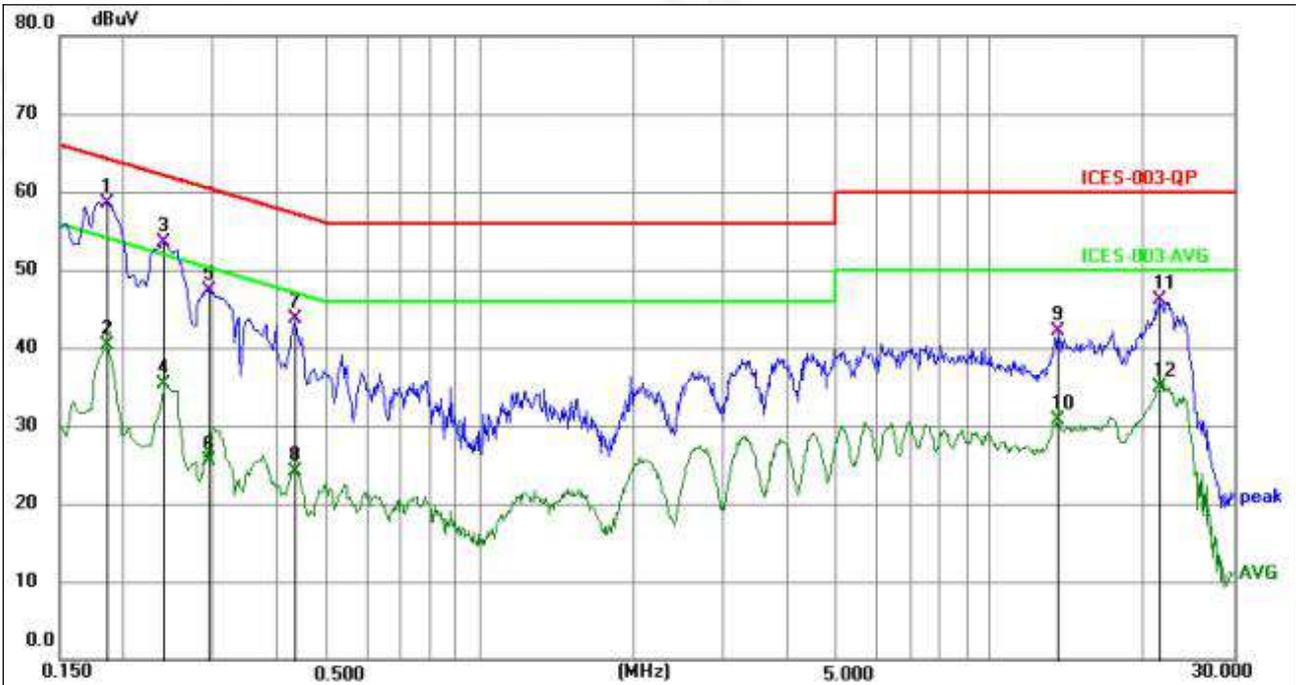

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1 *	0.1859	48.87	9.65	58.52	64.22	-5.70	QP	P	
2	0.1859	30.69	9.65	40.34	54.22	-13.88	AVG	P	
3	0.2400	43.85	9.70	53.55	62.10	-8.55	QP	P	
4	0.2400	25.55	9.70	35.25	52.10	-16.85	AVG	P	
5	0.2938	37.61	9.68	47.29	60.42	-13.13	QP	P	
6	0.2938	15.75	9.68	25.43	50.42	-24.99	AVG	P	
7	0.4334	34.06	9.63	43.69	57.19	-13.50	QP	P	
8	0.4334	14.48	9.63	24.11	47.19	-23.08	AVG	P	
9	13.5600	32.33	9.77	42.10	60.00	-17.90	QP	P	
10	13.5600	20.94	9.77	30.71	50.00	-19.29	AVG	P	
11	21.5069	36.49	9.61	46.10	60.00	-13.90	QP	P	
12	21.5069	25.29	9.61	34.90	50.00	-15.10	AVG	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor



4.2 Radiated emissions

Test Requirement:	RSS-247 Section 3.3 & RSS-Gen Section 8.9				
Test Method:	RSS-Gen				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

4.2.1 Radiated Emission Limits

Frequencies (MHz)	Field Strength (micровolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.



- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

4.2.3 DEVIATION FROM TEST STANDARD

No deviation


4.2.4 TEST SETUP

(A) Radiated Emission Test-Up Frequency Below 30MHz

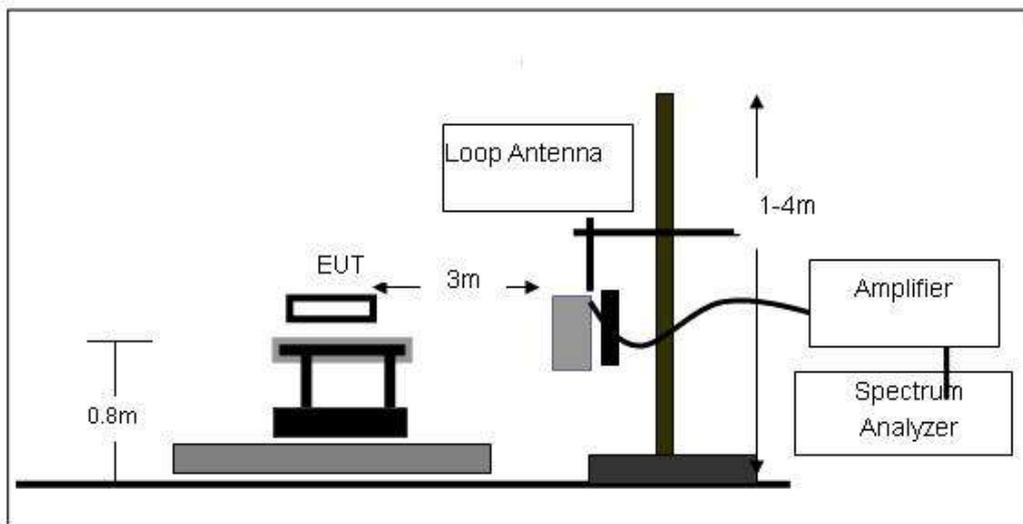




(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

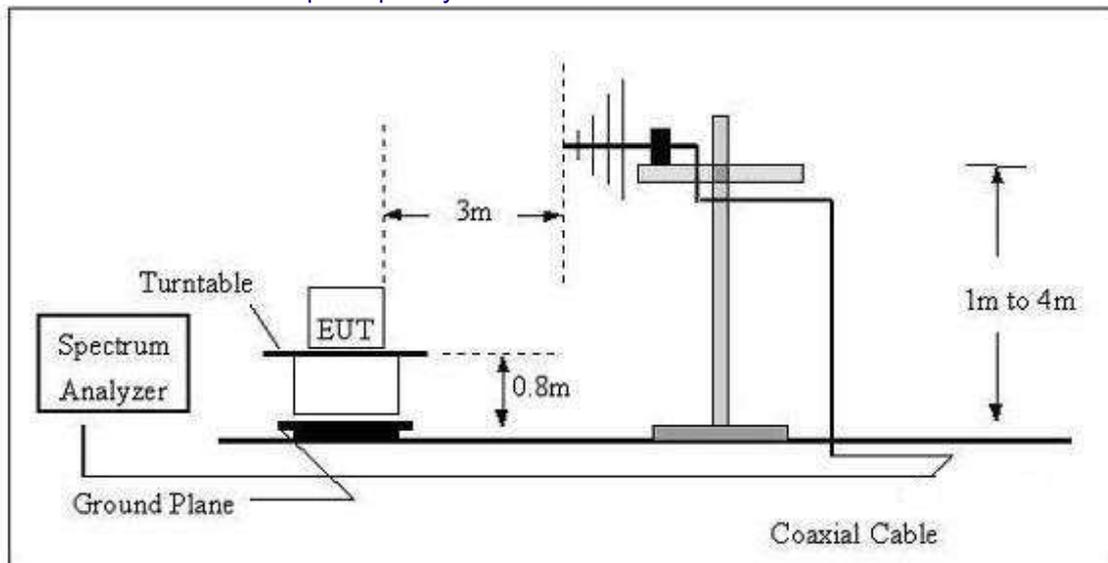

(C) Radiated Emission Test-Up Frequency Above 1GHz

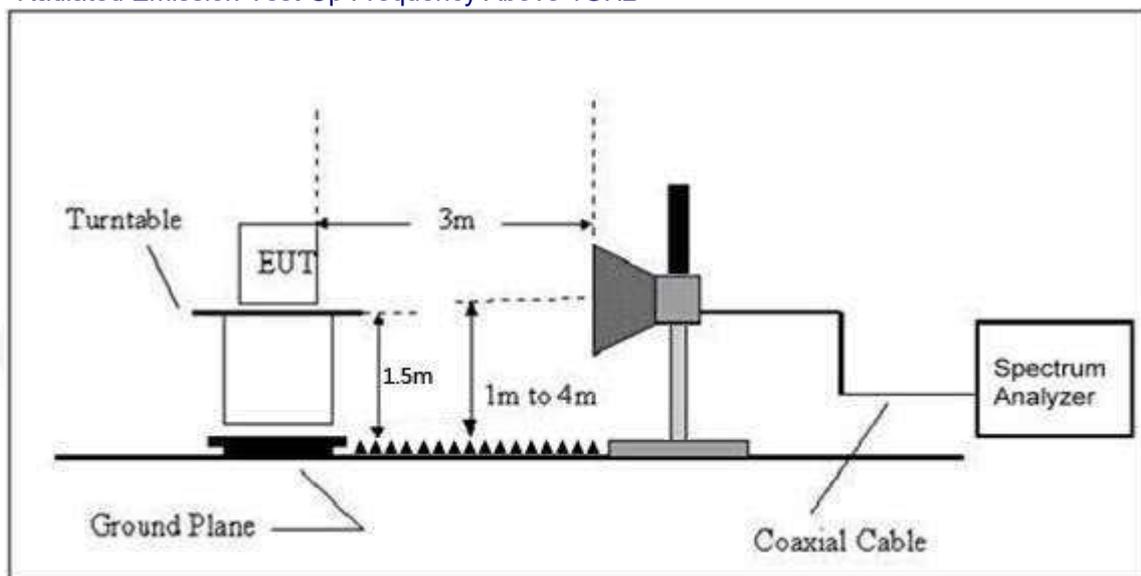

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



4.2.6 TEST RESULTS


Between 9KHz – 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.



Between 30MHz – 1GHz (Worst case GFSK 2402MHz)


Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

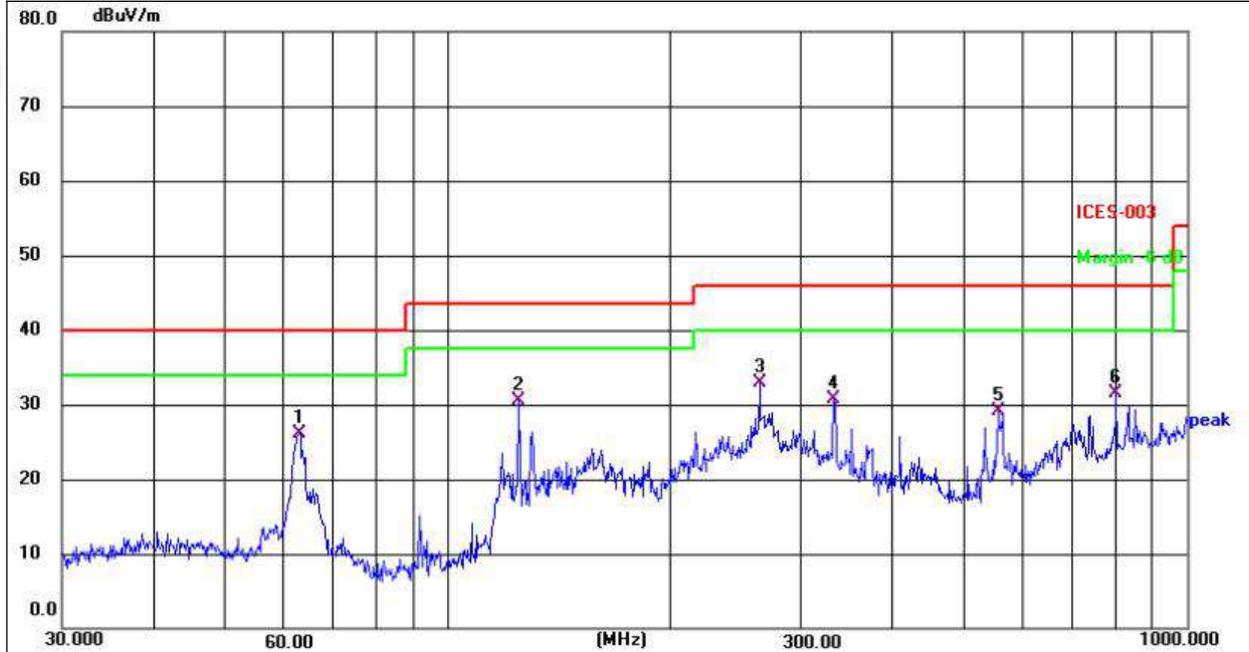

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	62.8708	43.58	-17.56	26.02	40.00	-13.98	QP
2 *	124.5690	48.41	-17.92	30.49	43.50	-13.01	QP
3	263.8190	50.35	-17.45	32.90	46.00	-13.10	QP
4	332.5187	45.99	-15.27	30.72	46.00	-15.28	QP
5	554.8254	38.74	-9.65	29.09	46.00	-16.91	QP
6	801.7863	35.85	-4.40	31.45	46.00	-14.55	QP



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

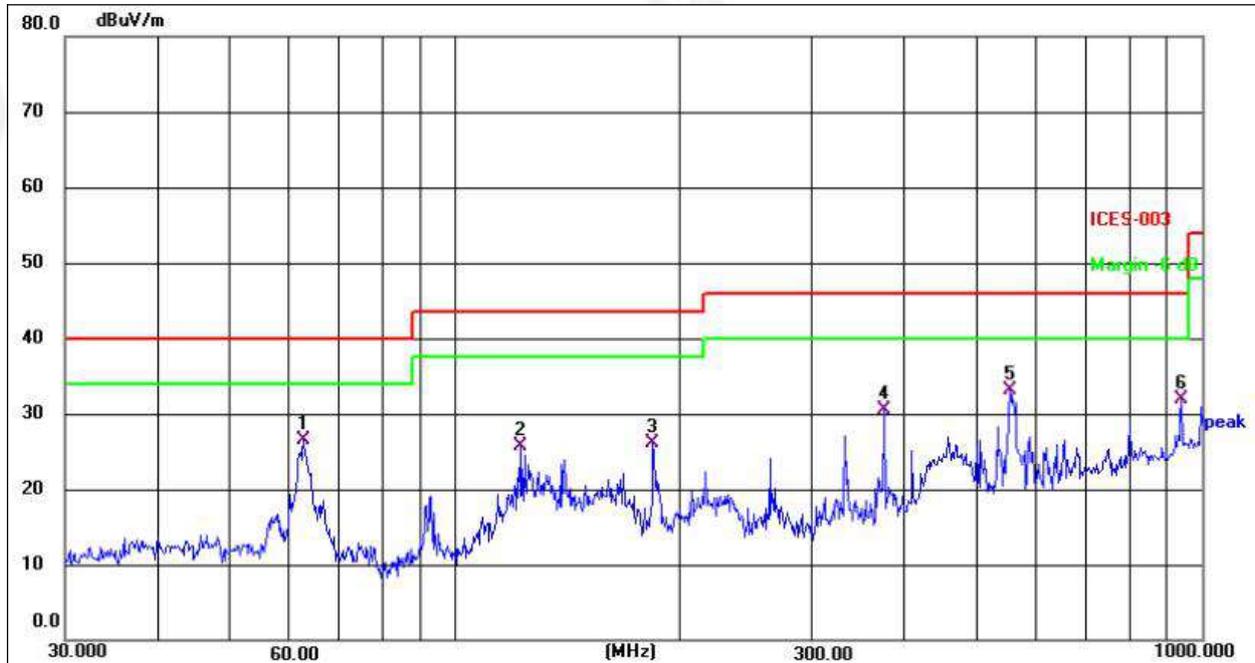

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	62.6507	44.11	-17.54	26.57	40.00	-13.43	QP
2	122.4040	43.75	-18.03	25.72	43.50	-17.78	QP
3	183.8440	44.51	-18.32	26.19	43.50	-17.31	QP
4	375.9385	44.58	-14.11	30.47	46.00	-15.53	QP
5 *	552.8832	42.88	-9.69	33.19	46.00	-12.81	QP
6	938.8326	34.71	-2.84	31.87	46.00	-14.13	QP

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. The test data shows only the worst case GFSK mode



1GHz~25GHz

GFSK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804.00	52.69	30.55	5.77	24.66	52.57	74.00	-21.43	Pk
V	4804.00	43.60	30.55	5.77	24.66	43.48	54.00	-10.52	AV
V	7206.00	52.05	30.33	6.32	24.55	52.59	74.00	-21.41	Pk
V	7206.00	43.87	30.33	6.32	24.55	44.41	54.00	-9.59	AV
V	9608.00	50.56	30.85	7.45	24.69	51.85	74.00	-22.15	Pk
V	9608.00	43.74	30.85	7.45	24.69	45.03	54.00	-8.97	AV
V	12010.00	50.92	31.02	8.99	25.57	54.46	74.00	-19.54	Pk
V	12010.00	43.91	31.02	8.99	25.57	47.45	54.00	-6.55	AV
H	4804.00	50.28	30.55	5.77	24.66	50.16	74.00	-23.84	Pk
H	4804.00	43.68	30.55	5.77	24.66	43.56	54.00	-10.44	AV
H	7206.00	51.66	30.33	6.32	24.55	52.20	74.00	-21.80	Pk
H	7206.00	43.94	30.33	6.32	24.55	44.48	54.00	-9.52	AV
H	9608.00	53.63	30.85	7.45	24.69	54.92	74.00	-19.08	Pk
H	9608.00	43.91	30.85	7.45	24.69	45.20	54.00	-8.80	AV
H	12010.00	53.32	31.02	8.99	25.57	56.86	74.00	-17.14	Pk
H	12010.00	43.01	31.02	8.99	25.57	46.55	54.00	-7.45	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2441MHz									
V	4882.00	54.93	30.55	5.77	24.66	54.81	74.00	-19.19	Pk
V	4882.00	43.06	30.55	5.77	24.66	42.94	54.00	-11.06	AV
V	7323.00	54.65	30.33	6.32	24.55	55.19	74.00	-18.81	Pk
V	7323.00	43.95	30.33	6.32	24.55	44.49	54.00	-9.51	AV
V	9764.00	53.73	30.85	7.45	24.69	55.02	74.00	-18.98	Pk
V	9764.00	43.32	30.85	7.45	24.69	44.61	54.00	-9.39	AV
V	12205.00	52.41	31.02	8.99	25.57	55.95	74.00	-18.05	Pk
V	12205.00	43.88	31.02	8.99	25.57	47.42	54.00	-6.58	AV
H	4882.00	50.48	30.55	5.77	24.66	50.36	74.00	-23.64	Pk
H	4882.00	43.95	30.55	5.77	24.66	43.83	54.00	-10.17	AV
H	7323.00	52.86	30.33	6.32	24.55	53.40	74.00	-20.60	Pk
H	7323.00	43.77	30.33	6.32	24.55	44.31	54.00	-9.69	AV
H	9764.00	50.54	30.85	7.45	24.69	51.83	74.00	-22.17	Pk
H	9764.00	43.75	30.85	7.45	24.69	45.04	54.00	-8.96	AV
H	12205.00	52.32	31.02	8.99	25.57	55.86	74.00	-18.14	Pk
H	12205.00	43.45	31.02	8.99	25.57	46.99	54.00	-7.01	AV



Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2480MHz									
V	4960.00	53.54	30.55	5.77	24.66	53.42	74.00	-20.58	Pk
V	4960.00	43.64	30.55	5.77	24.66	43.52	54.00	-10.48	AV
V	7440.00	52.79	30.33	6.32	24.55	53.33	74.00	-20.67	Pk
V	7440.00	43.85	30.33	6.32	24.55	44.39	54.00	-9.61	AV
V	9920.00	52.16	30.85	7.45	24.69	53.45	74.00	-20.55	Pk
V	9920.00	43.18	30.85	7.45	24.69	44.47	54.00	-9.53	AV
V	12400.00	54.83	31.02	8.99	25.57	58.37	74.00	-15.63	Pk
V	12400.00	43.83	31.02	8.99	25.57	47.37	54.00	-6.63	AV
H	4960.00	52.68	30.55	5.77	24.66	52.56	74.00	-21.44	Pk
H	4960.00	43.14	30.55	5.77	24.66	43.02	54.00	-10.98	AV
H	7440.00	54.70	30.33	6.32	24.55	55.24	74.00	-18.76	Pk
H	7440.00	43.50	30.33	6.32	24.55	44.04	54.00	-9.96	AV
H	9920.00	53.25	30.85	7.45	24.69	54.54	74.00	-19.46	Pk
H	9920.00	43.81	30.85	7.45	24.69	45.10	54.00	-8.90	AV
H	12400.00	51.56	31.02	8.99	25.57	55.10	74.00	-18.90	Pk
H	12400.00	43.60	31.02	8.99	25.57	47.14	54.00	-6.86	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



$\pi/4$ -DQPSK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804.00	53.90	30.55	5.77	24.66	53.78	74.00	-20.22	Pk
V	4804.00	43.12	30.55	5.77	24.66	43.00	54.00	-11.00	AV
V	7206.00	53.05	30.33	6.32	24.55	53.59	74.00	-20.41	Pk
V	7206.00	43.71	30.33	6.32	24.55	44.25	54.00	-9.75	AV
V	9608.00	51.11	30.85	7.45	24.69	52.40	74.00	-21.60	Pk
V	9608.00	43.97	30.85	7.45	24.69	45.26	54.00	-8.74	AV
V	12010.00	54.26	31.02	8.99	25.57	57.80	74.00	-16.20	Pk
V	12010.00	43.91	31.02	8.99	25.57	47.45	54.00	-6.55	AV
H	4804.00	51.28	30.55	5.77	24.66	51.16	74.00	-22.84	Pk
H	4804.00	43.04	30.55	5.77	24.66	42.92	54.00	-11.08	AV
H	7206.00	52.13	30.33	6.32	24.55	52.67	74.00	-21.33	Pk
H	7206.00	43.94	30.33	6.32	24.55	44.48	54.00	-9.52	AV
H	9608.00	54.36	30.85	7.45	24.69	55.65	74.00	-18.35	Pk
H	9608.00	43.05	30.85	7.45	24.69	44.34	54.00	-9.66	AV
H	12010.00	50.92	31.02	8.99	25.57	54.46	74.00	-19.54	Pk
H	12010.00	43.67	31.02	8.99	25.57	47.21	54.00	-6.79	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2441MHz									
V	4882.00	51.44	30.55	5.77	24.66	51.32	74.00	-22.68	Pk
V	4882.00	43.33	30.55	5.77	24.66	43.21	54.00	-10.79	AV
V	7323.00	54.17	30.33	6.32	24.55	54.71	74.00	-19.29	Pk
V	7323.00	43.41	30.33	6.32	24.55	43.95	54.00	-10.05	AV
V	9764.00	53.11	30.85	7.45	24.69	54.40	74.00	-19.60	Pk
V	9764.00	43.12	30.85	7.45	24.69	44.41	54.00	-9.59	AV
V	12205.00	50.52	31.02	8.99	25.57	54.06	74.00	-19.94	Pk
V	12205.00	43.32	31.02	8.99	25.57	46.86	54.00	-7.14	AV
H	4882.00	50.82	30.55	5.77	24.66	50.70	74.00	-23.30	Pk
H	4882.00	43.80	30.55	5.77	24.66	43.68	54.00	-10.32	AV
H	7323.00	52.55	30.33	6.32	24.55	53.09	74.00	-20.91	Pk
H	7323.00	43.96	30.33	6.32	24.55	44.50	54.00	-9.50	AV
H	9764.00	51.03	30.85	7.45	24.69	52.32	74.00	-21.68	Pk
H	9764.00	43.51	30.85	7.45	24.69	44.80	54.00	-9.20	AV
H	12205.00	50.04	31.02	8.99	25.57	53.58	74.00	-20.42	Pk
H	12205.00	43.76	31.02	8.99	25.57	47.30	54.00	-6.70	AV



Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2480MHz									
V	4960.00	53.04	30.55	5.77	24.66	52.92	74.00	-21.08	Pk
V	4960.00	43.29	30.55	5.77	24.66	43.17	54.00	-10.83	AV
V	7440.00	54.63	30.33	6.32	24.55	55.17	74.00	-18.83	Pk
V	7440.00	43.35	30.33	6.32	24.55	43.89	54.00	-10.11	AV
V	9920.00	54.39	30.85	7.45	24.69	55.68	74.00	-18.32	Pk
V	9920.00	43.75	30.85	7.45	24.69	45.04	54.00	-8.96	AV
V	12400.00	51.93	31.02	8.99	25.57	55.47	74.00	-18.53	Pk
V	12400.00	43.58	31.02	8.99	25.57	47.12	54.00	-6.88	AV
H	4960.00	52.44	30.55	5.77	24.66	52.32	74.00	-21.68	Pk
H	4960.00	43.48	30.55	5.77	24.66	43.36	54.00	-10.64	AV
H	7440.00	53.79	30.33	6.32	24.55	54.33	74.00	-19.67	Pk
H	7440.00	43.96	30.33	6.32	24.55	44.50	54.00	-9.50	AV
H	9920.00	51.49	30.85	7.45	24.69	52.78	74.00	-21.22	Pk
H	9920.00	43.95	30.85	7.45	24.69	45.24	54.00	-8.76	AV
H	12400.00	51.52	31.02	8.99	25.57	55.06	74.00	-18.94	Pk
H	12400.00	43.84	31.02	8.99	25.57	47.38	54.00	-6.62	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



8-DPSK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804.00	50.46	30.55	5.77	24.66	50.34	74.00	-23.66	Pk
V	4804.00	43.05	30.55	5.77	24.66	42.93	54.00	-11.07	AV
V	7206.00	51.56	30.33	6.32	24.55	52.10	74.00	-21.90	Pk
V	7206.00	43.70	30.33	6.32	24.55	44.24	54.00	-9.76	AV
V	9608.00	50.35	30.85	7.45	24.69	51.64	74.00	-22.36	Pk
V	9608.00	43.33	30.85	7.45	24.69	44.62	54.00	-9.38	AV
V	12010.00	51.28	31.02	8.99	25.57	54.82	74.00	-19.18	Pk
V	12010.00	43.92	31.02	8.99	25.57	47.46	54.00	-6.54	AV
H	4804.00	54.12	30.55	5.77	24.66	54.00	74.00	-20.00	Pk
H	4804.00	43.80	30.55	5.77	24.66	43.68	54.00	-10.32	AV
H	7206.00	50.77	30.33	6.32	24.55	51.31	74.00	-22.69	Pk
H	7206.00	43.05	30.33	6.32	24.55	43.59	54.00	-10.41	AV
H	9608.00	54.84	30.85	7.45	24.69	56.13	74.00	-17.87	Pk
H	9608.00	43.18	30.85	7.45	24.69	44.47	54.00	-9.53	AV
H	12010.00	54.23	31.02	8.99	25.57	57.77	74.00	-16.23	Pk
H	12010.00	43.14	31.02	8.99	25.57	46.68	54.00	-7.32	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2441MHz									
V	4882.00	53.59	30.55	5.77	24.66	53.47	74.00	-20.53	Pk
V	4882.00	43.19	30.55	5.77	24.66	43.07	54.00	-10.93	AV
V	7323.00	53.92	30.33	6.32	24.55	54.46	74.00	-19.54	Pk
V	7323.00	43.23	30.33	6.32	24.55	43.77	54.00	-10.23	AV
V	9764.00	50.34	30.85	7.45	24.69	51.63	74.00	-22.37	Pk
V	9764.00	43.68	30.85	7.45	24.69	44.97	54.00	-9.03	AV
V	12205.00	51.34	31.02	8.99	25.57	54.88	74.00	-19.12	Pk
V	12205.00	43.86	31.02	8.99	25.57	47.40	54.00	-6.60	AV
H	4882.00	52.74	30.55	5.77	24.66	52.62	74.00	-21.38	Pk
H	4882.00	43.29	30.55	5.77	24.66	43.17	54.00	-10.83	AV
H	7323.00	53.21	30.33	6.32	24.55	53.75	74.00	-20.25	Pk
H	7323.00	43.20	30.33	6.32	24.55	43.74	54.00	-10.26	AV
H	9764.00	50.19	30.85	7.45	24.69	51.48	74.00	-22.52	Pk
H	9764.00	43.48	30.85	7.45	24.69	44.77	54.00	-9.23	AV
H	12205.00	54.87	31.02	8.99	25.57	58.41	74.00	-15.59	Pk
H	12205.00	43.91	31.02	8.99	25.57	47.45	54.00	-6.55	AV



Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High Channel:2480MHz									
V	4960.00	54.63	30.55	5.77	24.66	54.51	74.00	-19.49	Pk
V	4960.00	43.24	30.55	5.77	24.66	43.12	54.00	-10.88	AV
V	7440.00	53.60	30.33	6.32	24.55	54.14	74.00	-19.86	Pk
V	7440.00	43.51	30.33	6.32	24.55	44.05	54.00	-9.95	AV
V	9920.00	50.39	30.85	7.45	24.69	51.68	74.00	-22.32	Pk
V	9920.00	43.27	30.85	7.45	24.69	44.56	54.00	-9.44	AV
V	12400.00	52.53	31.02	8.99	25.57	56.07	74.00	-17.93	Pk
V	12400.00	43.50	31.02	8.99	25.57	47.04	54.00	-6.96	AV
H	4960.00	52.79	30.55	5.77	24.66	52.67	74.00	-21.33	Pk
H	4960.00	43.01	30.55	5.77	24.66	42.89	54.00	-11.11	AV
H	7440.00	51.30	30.33	6.32	24.55	51.84	74.00	-22.16	Pk
H	7440.00	43.11	30.33	6.32	24.55	43.65	54.00	-10.35	AV
H	9920.00	50.03	30.85	7.45	24.69	51.32	74.00	-22.68	Pk
H	9920.00	43.56	30.85	7.45	24.69	44.85	54.00	-9.15	AV
H	12400.00	53.90	31.02	8.99	25.57	57.44	74.00	-16.56	Pk
H	12400.00	43.93	31.02	8.99	25.57	47.47	54.00	-6.53	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



5. RADIATED BAND EMISSION MEASUREMENT

5.1 Test Requirement:

Test Requirement:	RSS-247Section 3.3 & RSS-Gen Section 8.10				
Test Method:	RSS-Gen				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

5.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported




5.3 DEVIATION FROM TEST STANDARD

No deviation

5.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

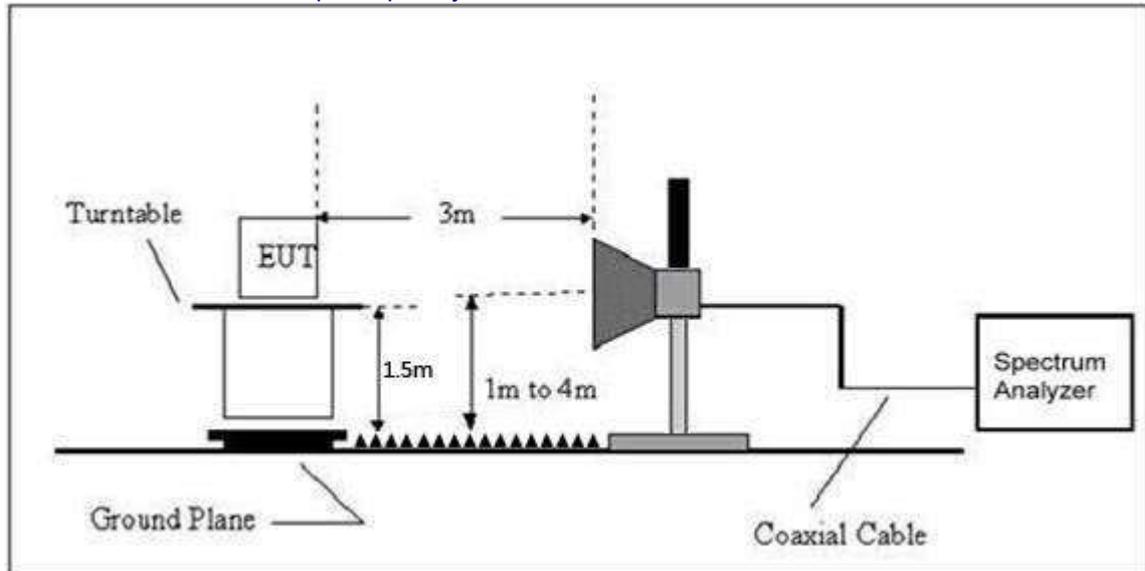

5.5 EUT OPERATING CONDITIONS


The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



5.6 TEST RESULT

All modes were tested (Worst case GFSK)


Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Test channel	2402MHz(worst case)

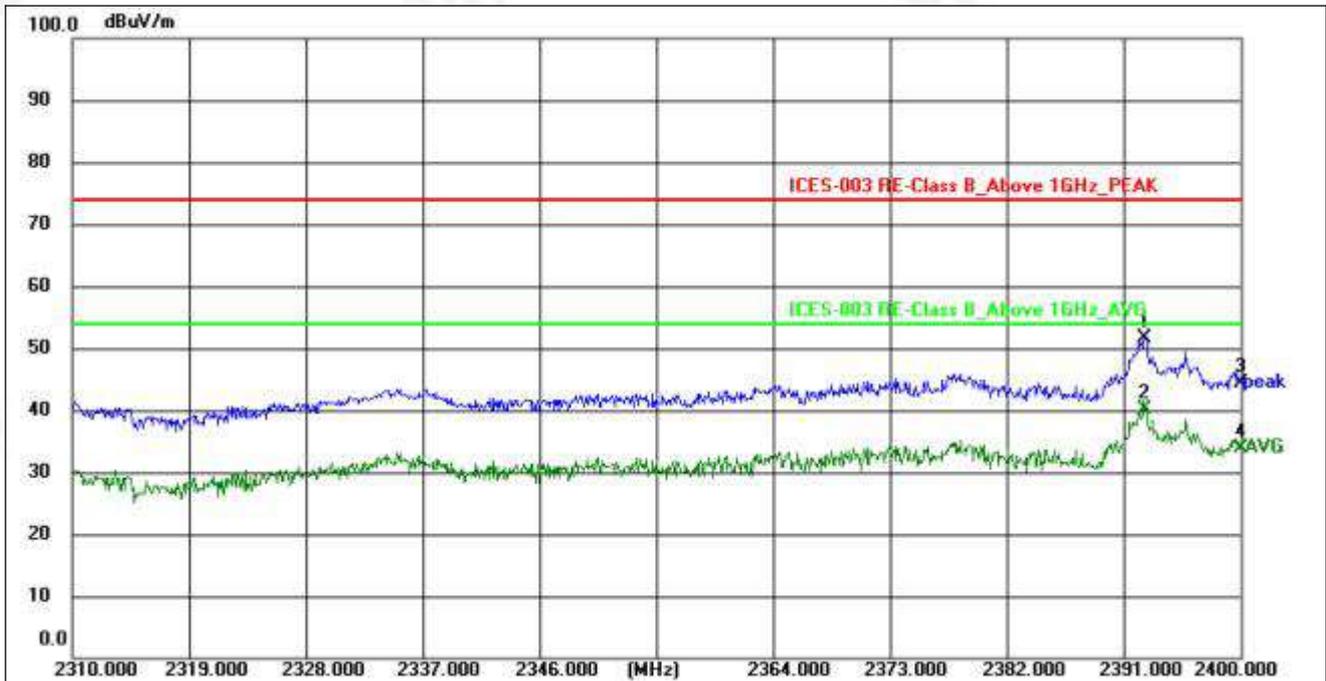

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2392.620	55.63	-4.10	51.53	74.00	-22.47	peak
2 *	2392.620	44.24	-4.10	40.14	54.00	-13.86	AVG
3	2400.000	48.40	-4.09	44.31	74.00	-29.69	peak
4	2400.000	38.08	-4.09	33.99	54.00	-20.01	AVG



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Test channel	2402MHz(worst case)

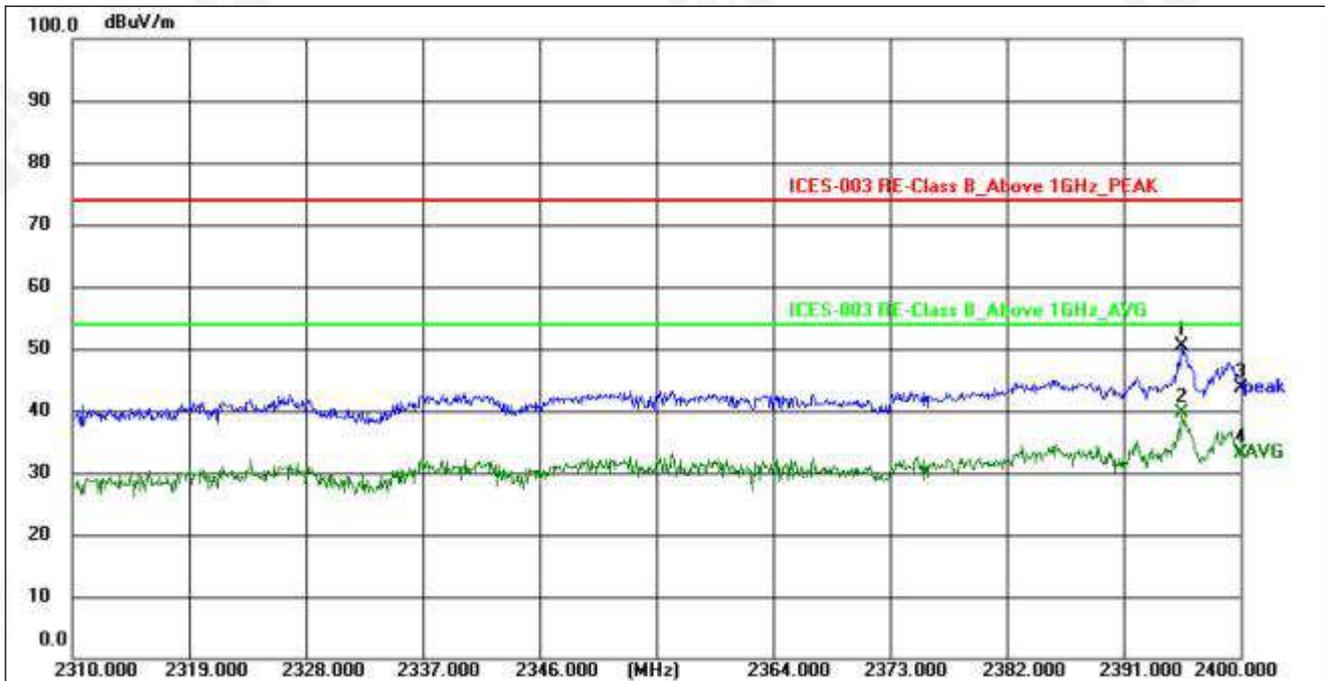


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2395.500	54.37	-3.95	50.42	74.00	-23.58	peak
2 *	2395.500	43.62	-3.95	39.67	54.00	-14.33	AVG
3	2400.000	47.55	-3.93	43.62	74.00	-30.38	peak
4	2400.000	37.08	-3.93	33.15	54.00	-20.85	AVG



Test model


Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Test channel	2480MHz(worst case)

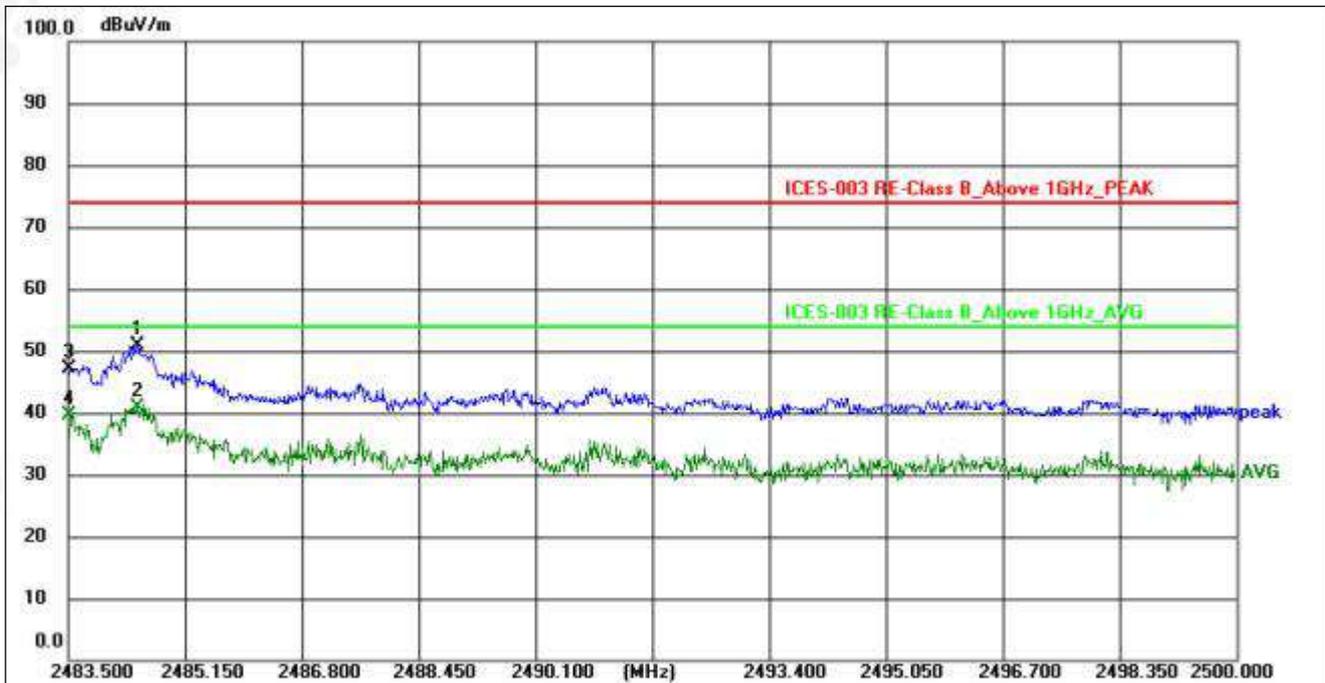

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2484.485	54.44	-3.57	50.87	74.00	-23.13	peak
2 *	2484.485	44.56	-3.57	40.99	54.00	-13.01	AVG
3	2483.500	50.65	-3.58	47.07	74.00	-26.93	peak
4	2483.500	43.23	-3.58	39.65	54.00	-14.35	AVG



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Test channel	2480MHz(worst case)

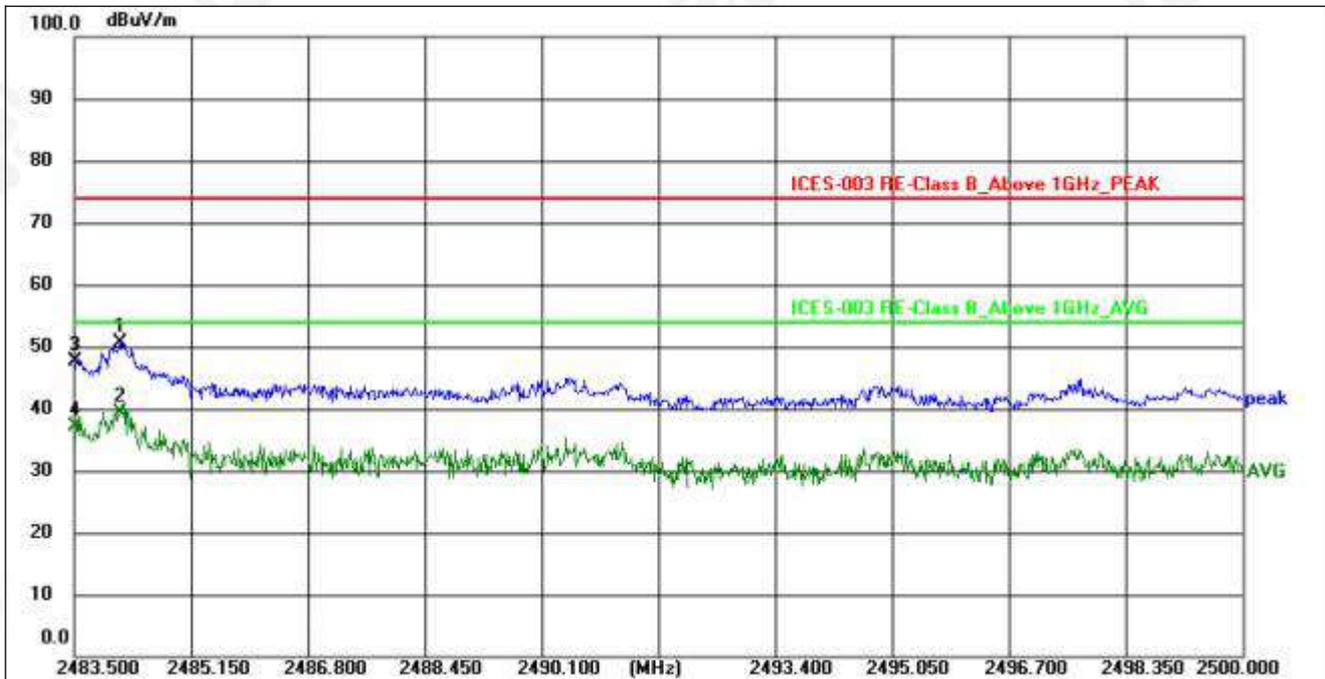

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2484.165	54.21	-3.57	50.64	74.00	-23.36	peak
2 *	2484.165	42.94	-3.57	39.37	54.00	-14.63	AVG
3	2483.500	51.15	-3.58	47.57	74.00	-26.43	peak
4	2483.500	40.73	-3.58	37.15	54.00	-16.85	AVG

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss - Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.



6. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	RSS-247 Section 5.5
Test Method:	RSS-Gen

6.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

6.2 Test Setup



6.3 Test procedure

Using the following spectrum analyzer setting:

- A) Set the RBW = 100KHz.
- B) Set the VBW = 300KHz.
- C) Sweep time = auto couple.
- D) Detector function = peak.
- E) Trace mode = max hold.
- F) Allow trace to fully stabilize.

6.4 DEVIATION FROM STANDARD


No deviation.



6.5 Test Result




Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Ref

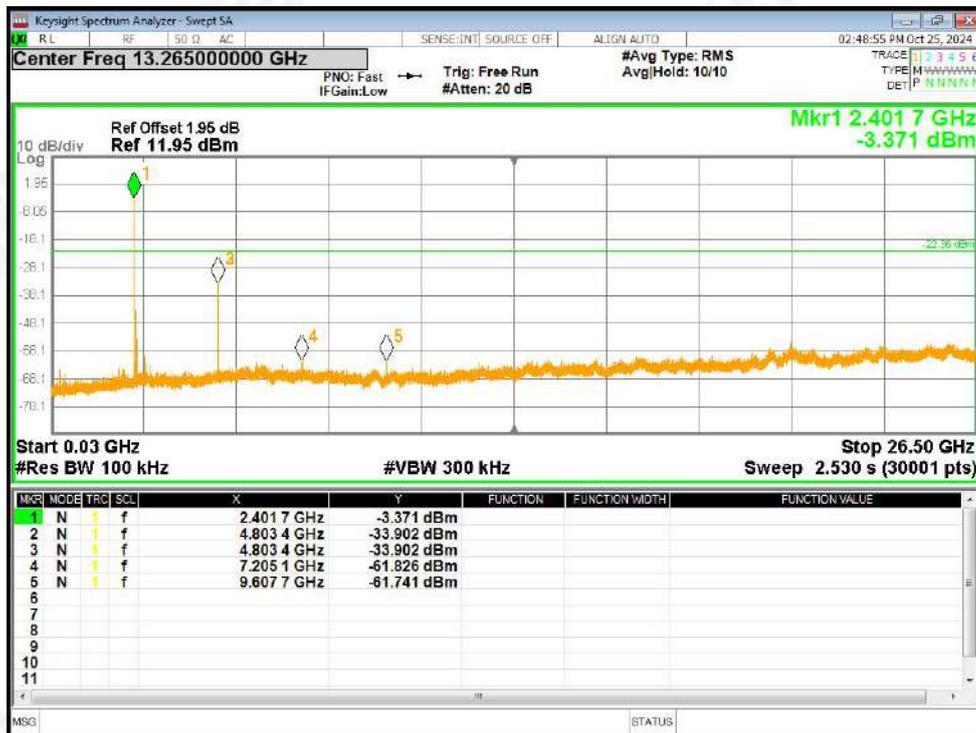

Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Emission




Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Ref

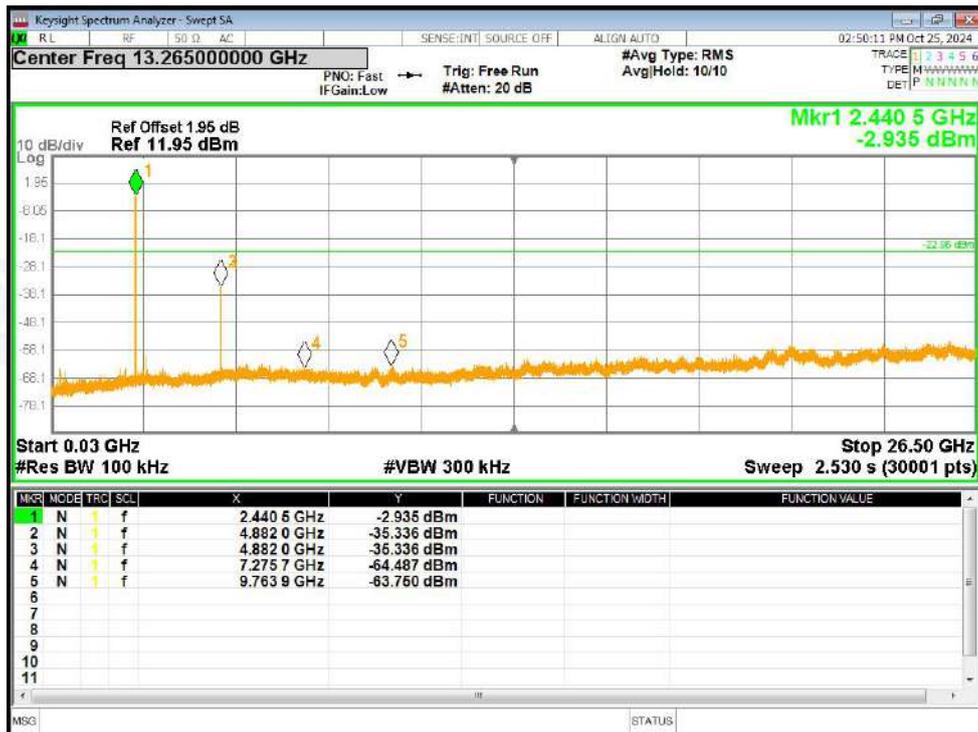

Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Emission




Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Ref

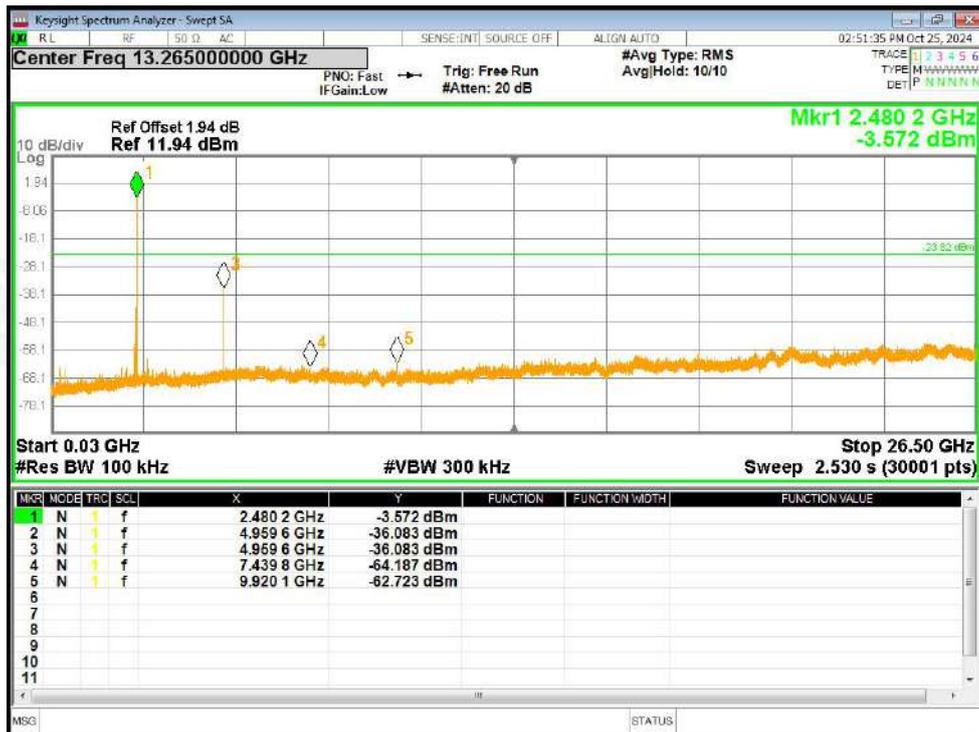

Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Emission




Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Ref

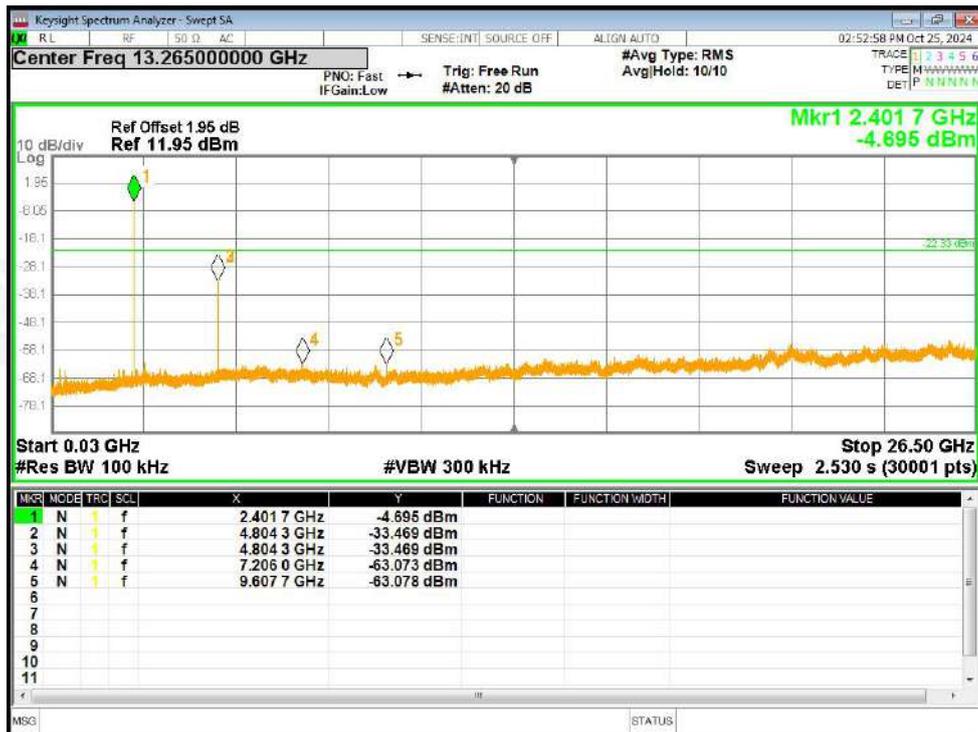

Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Emission




Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Ref

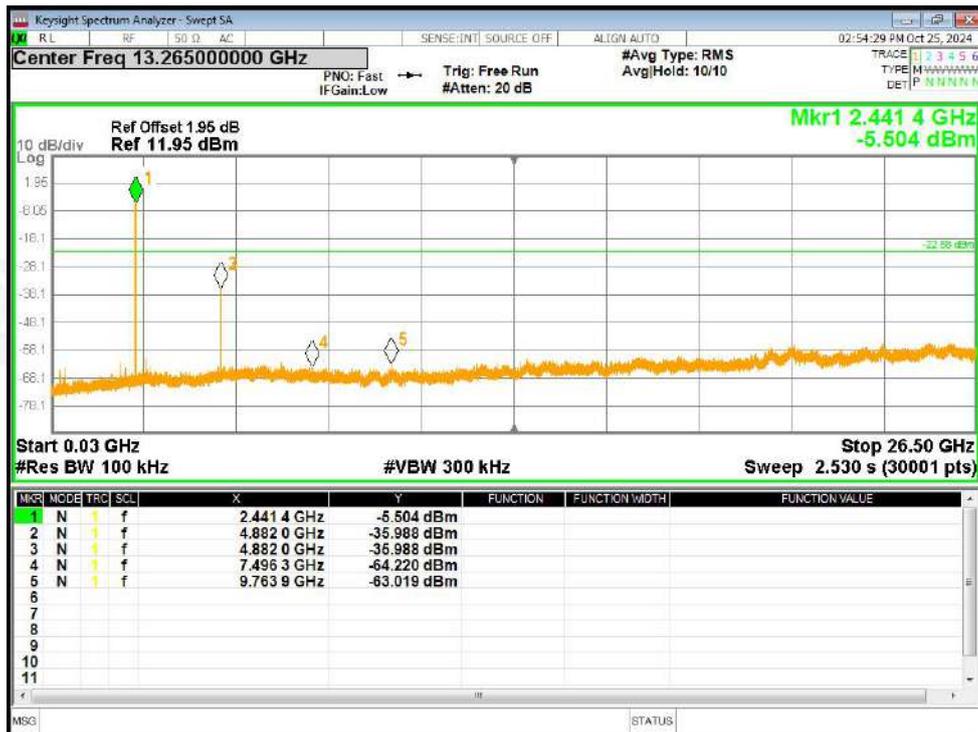

Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Emission




Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Ref

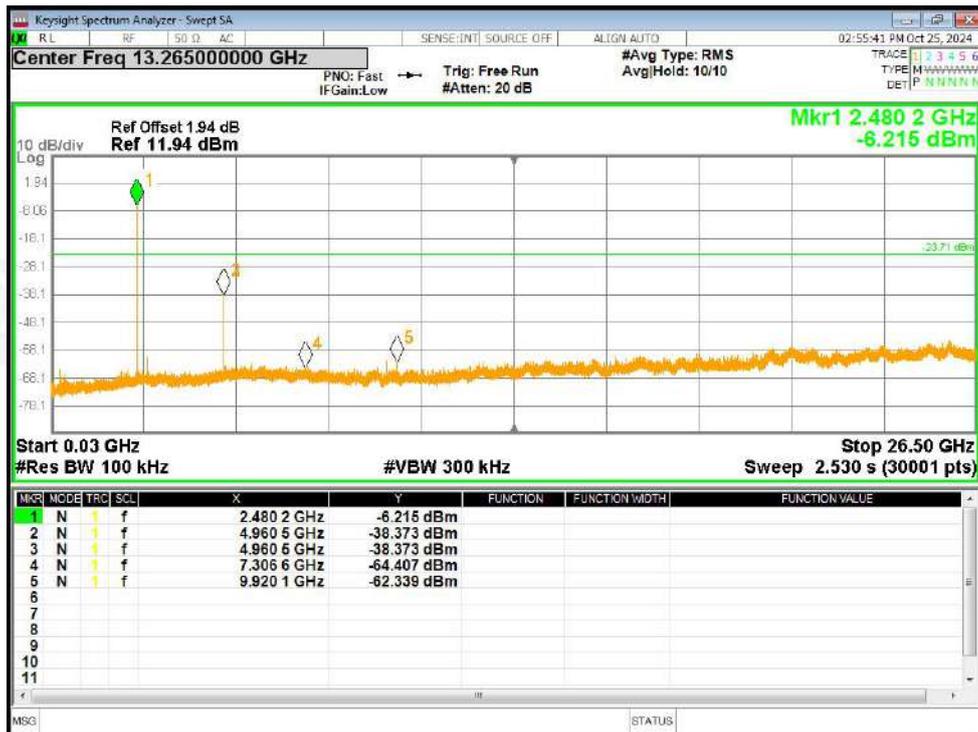

Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Emission




Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Ref

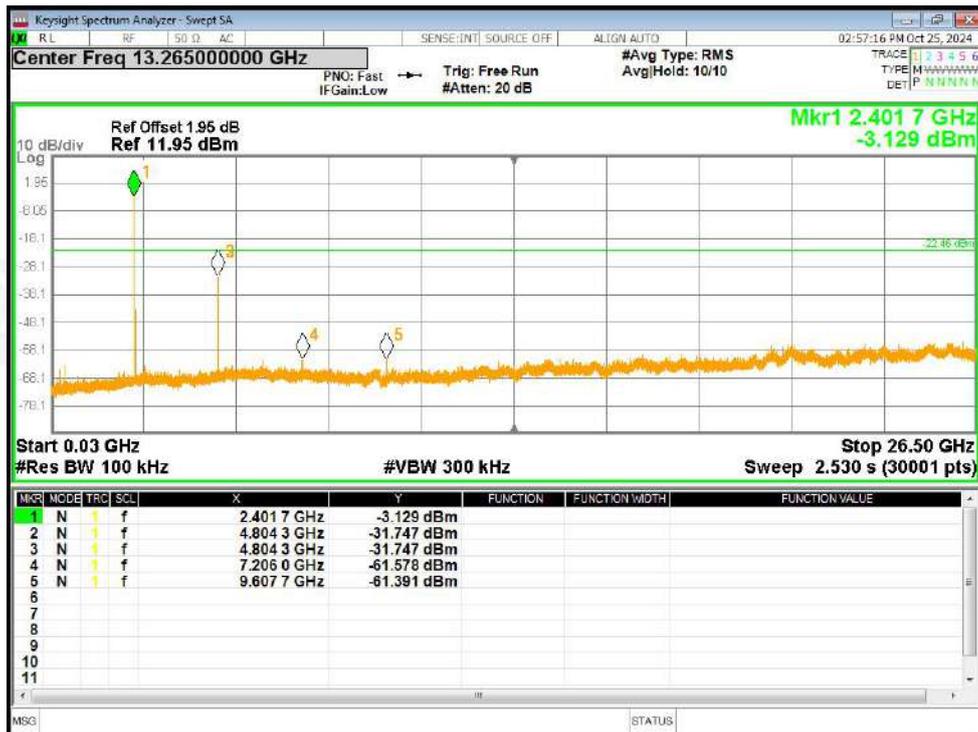

Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Emission




Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Ref

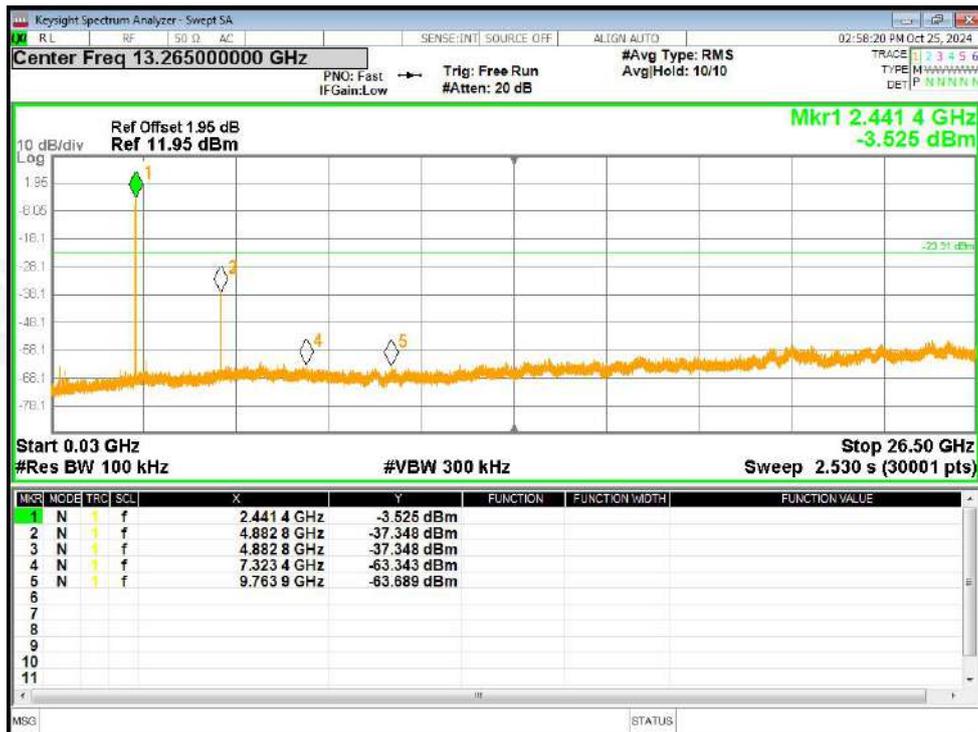


Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Emission




Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Ref

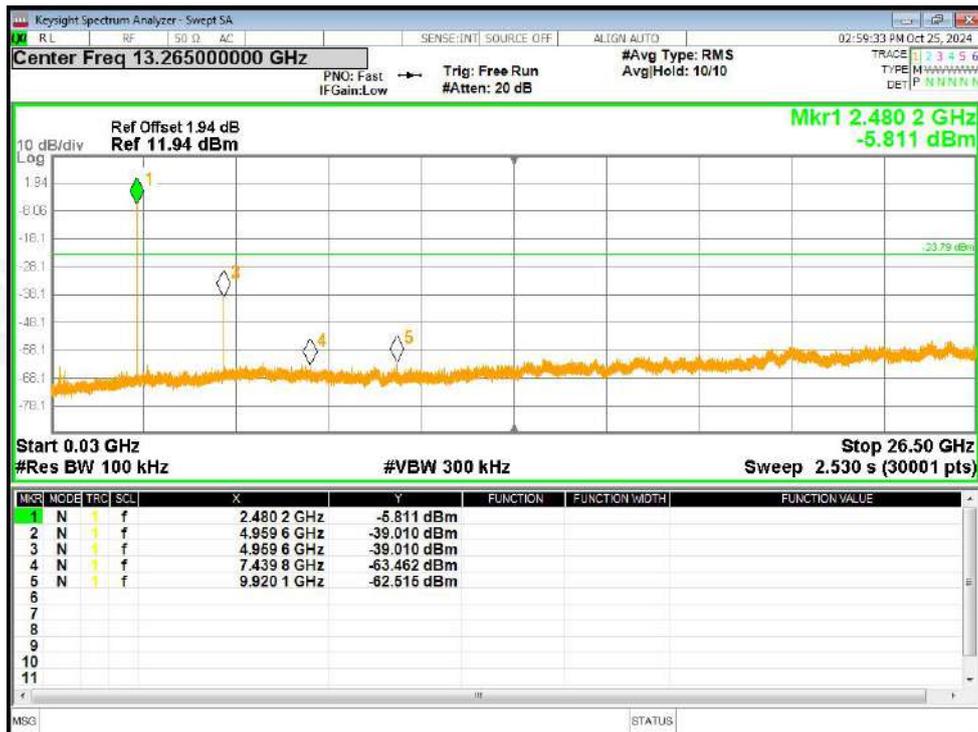


Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Emission

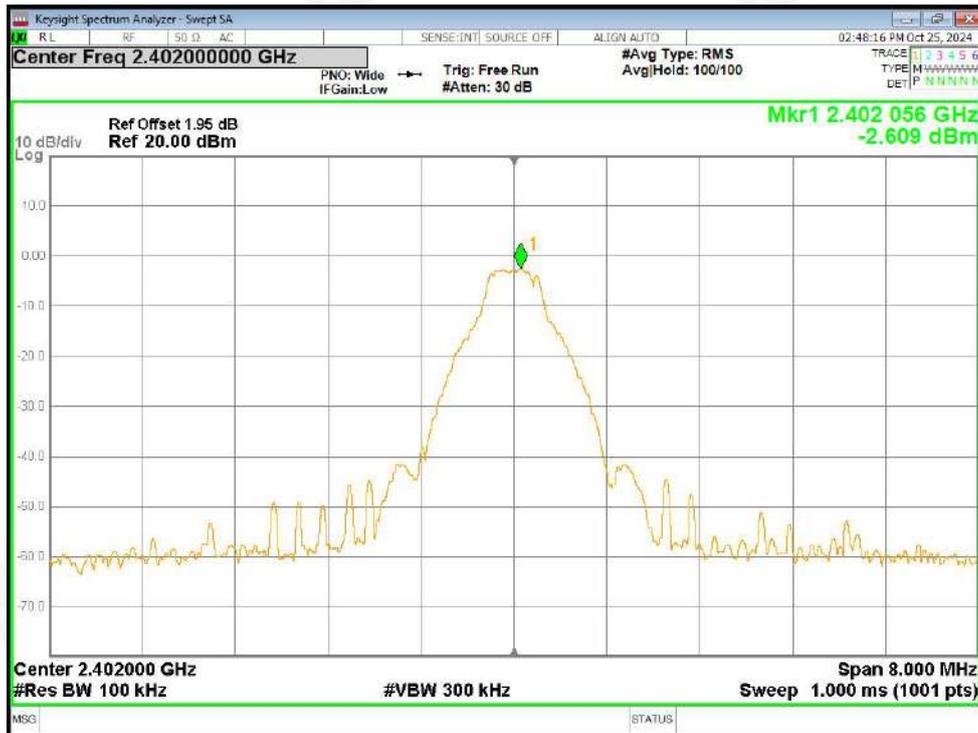


Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Ref

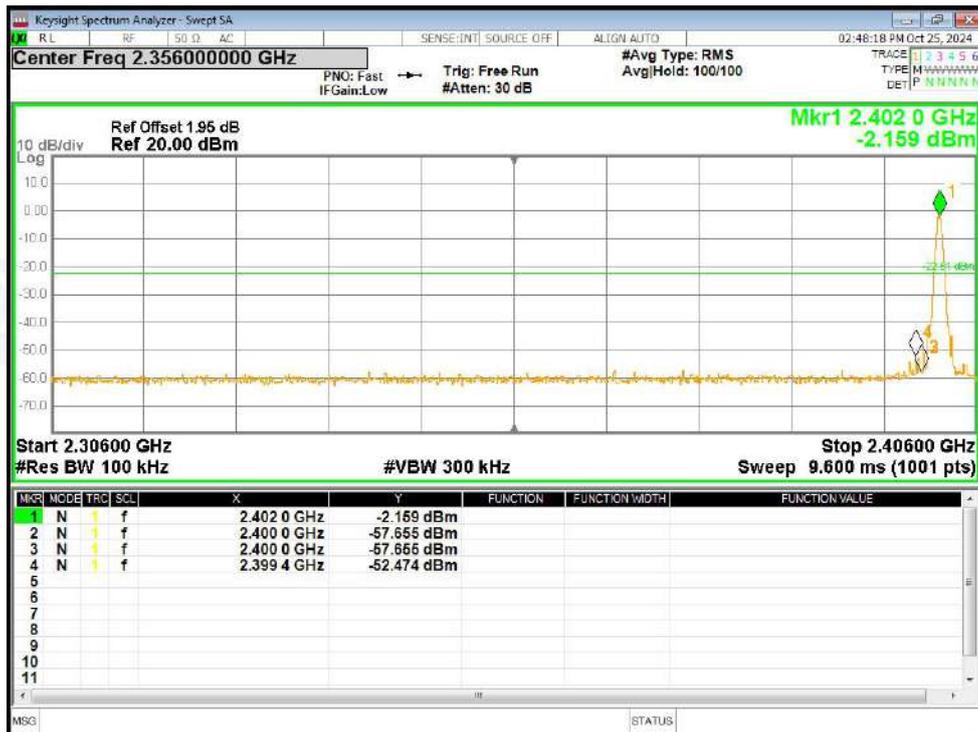


Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Emission

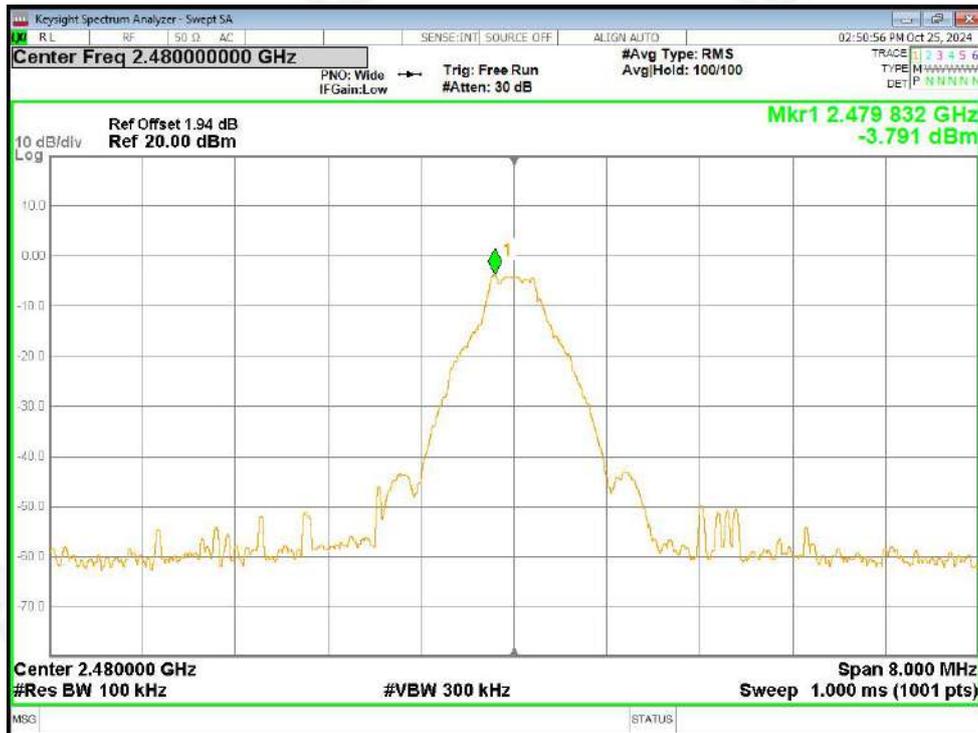


Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Ref

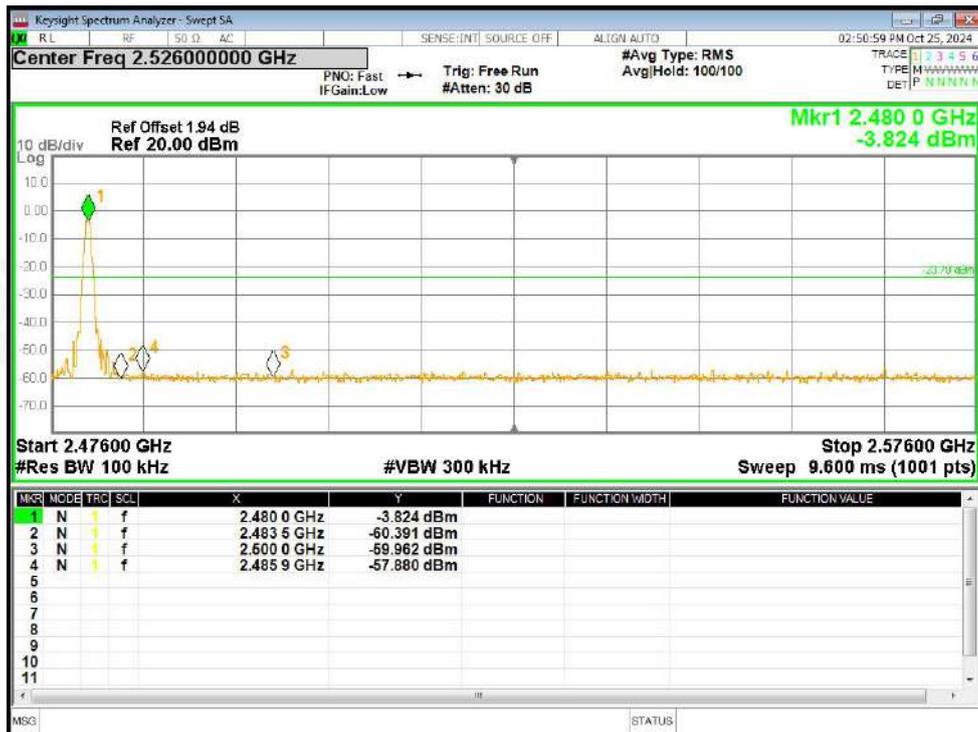


Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Emission

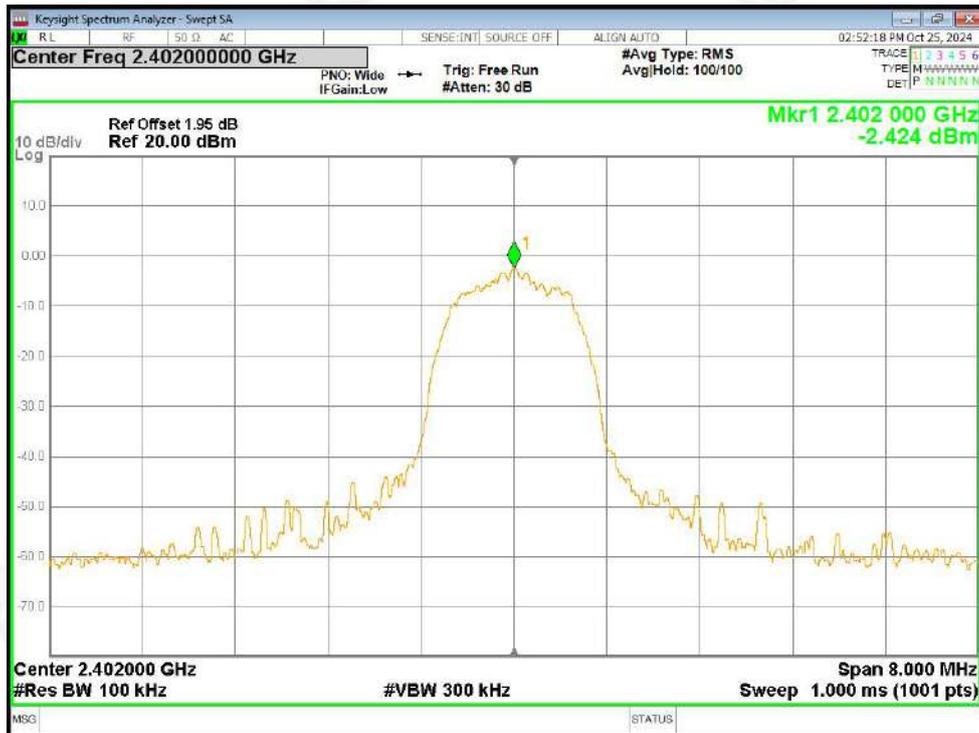


Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Ref

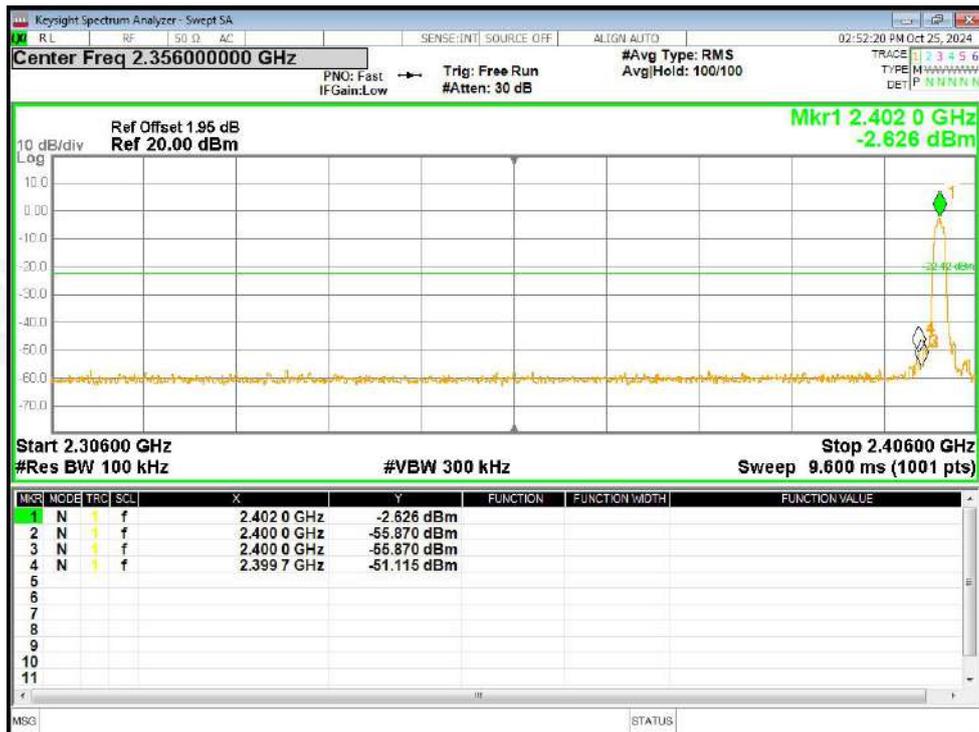


Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Emission

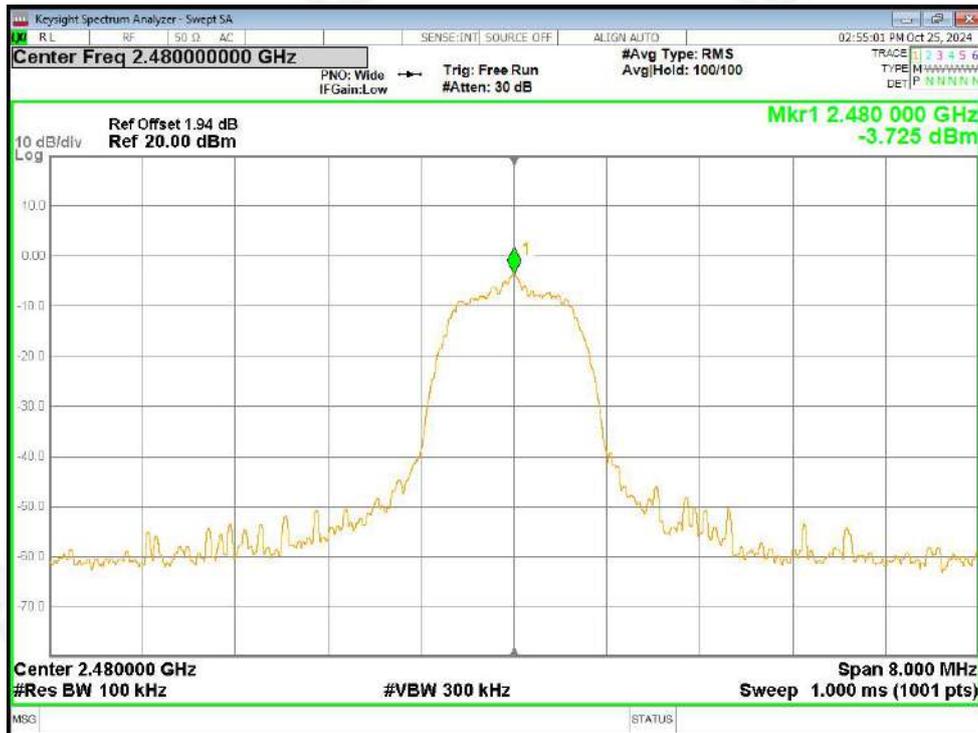


Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Ref

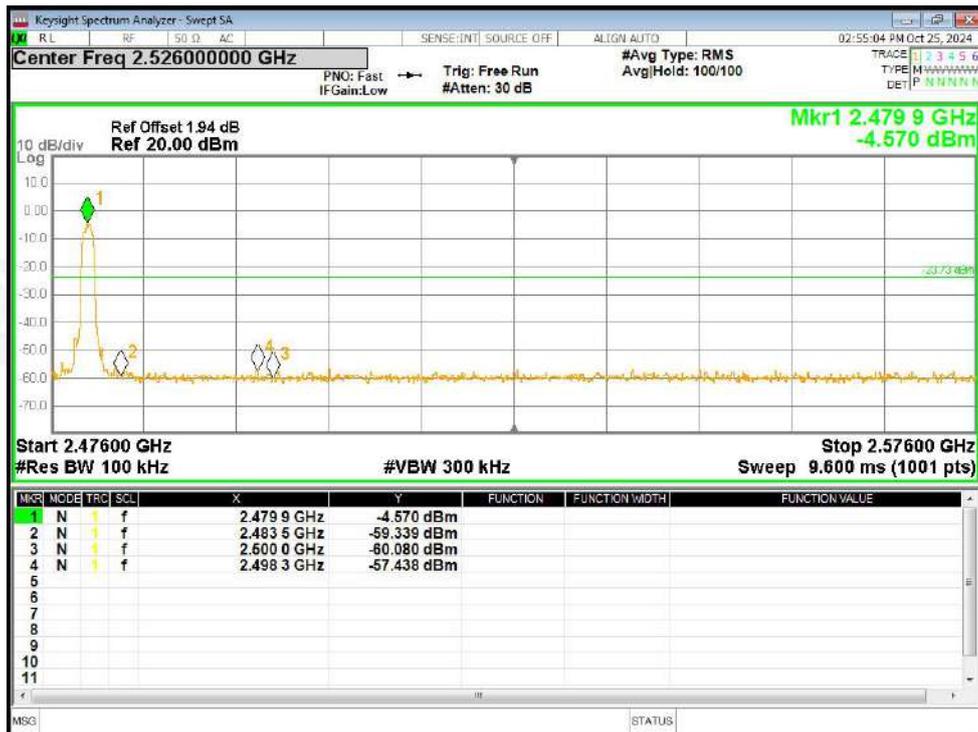


Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Emission

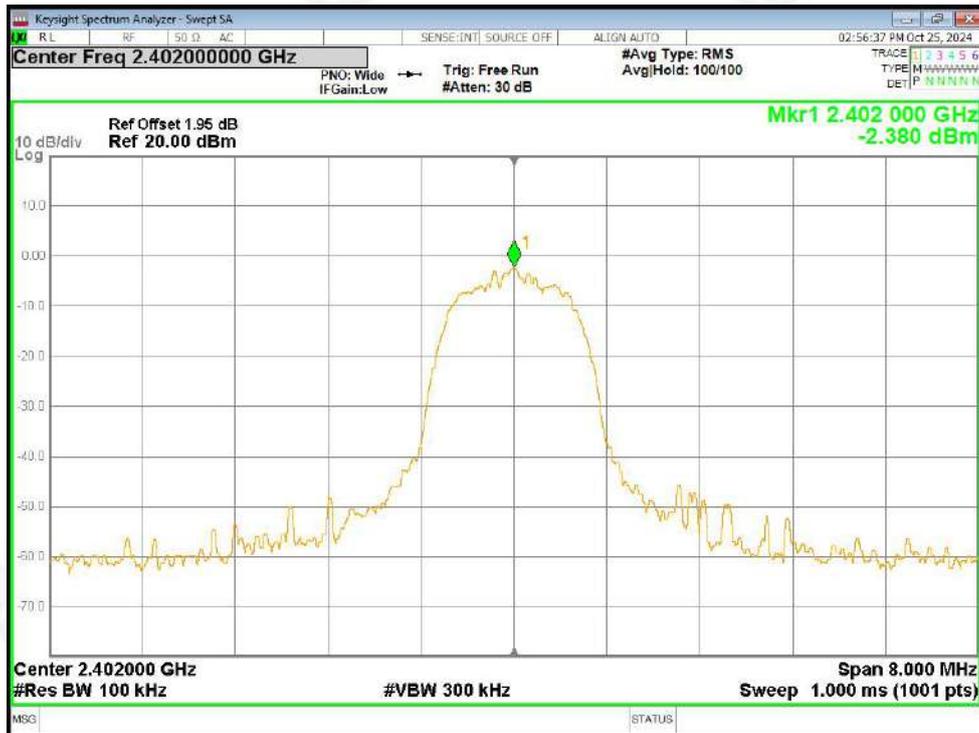


Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Ref

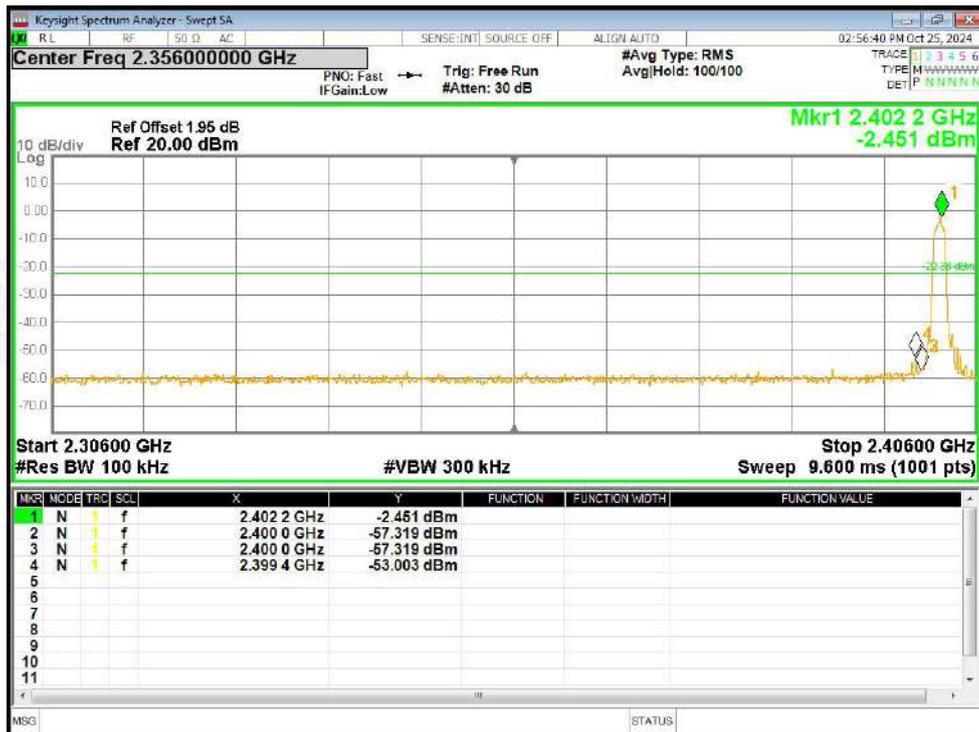


Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Emission

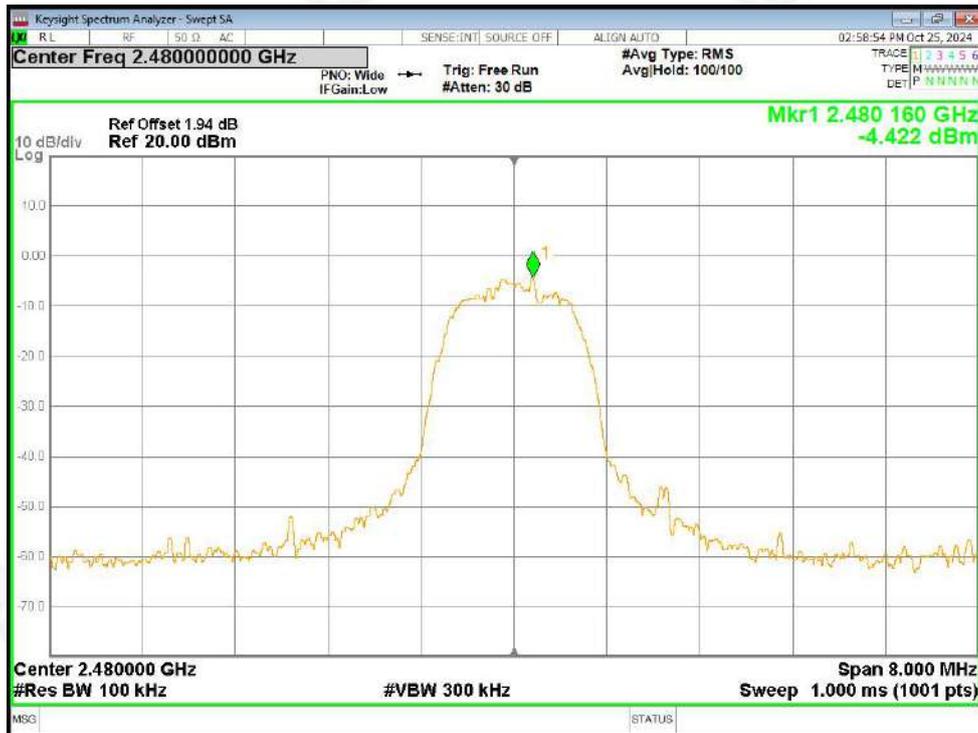


Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Ref

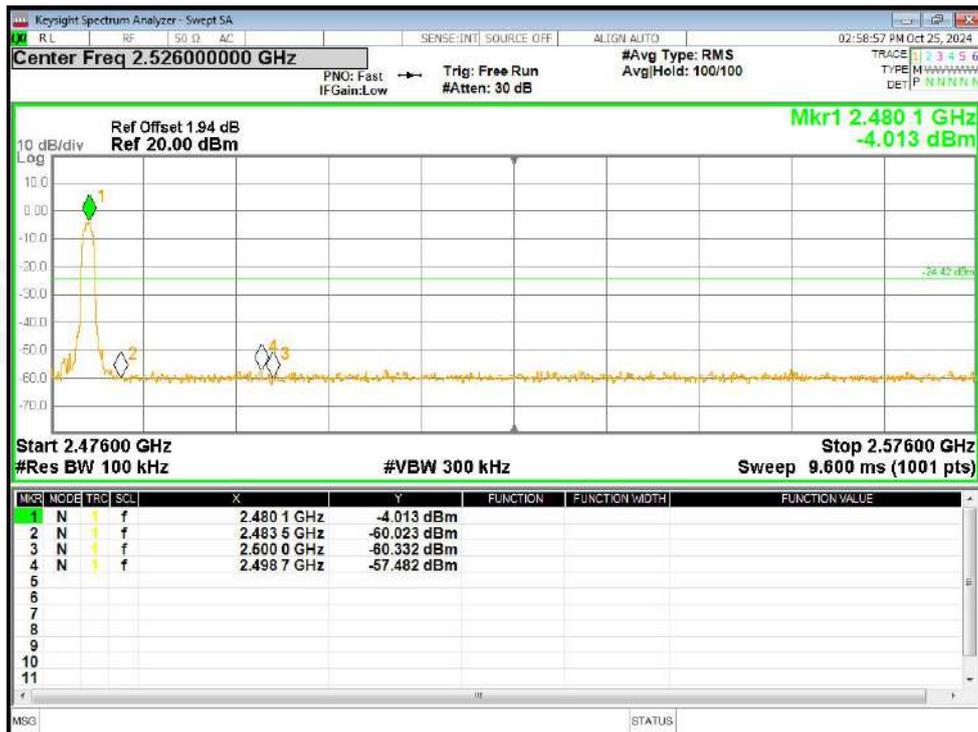


Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Emission

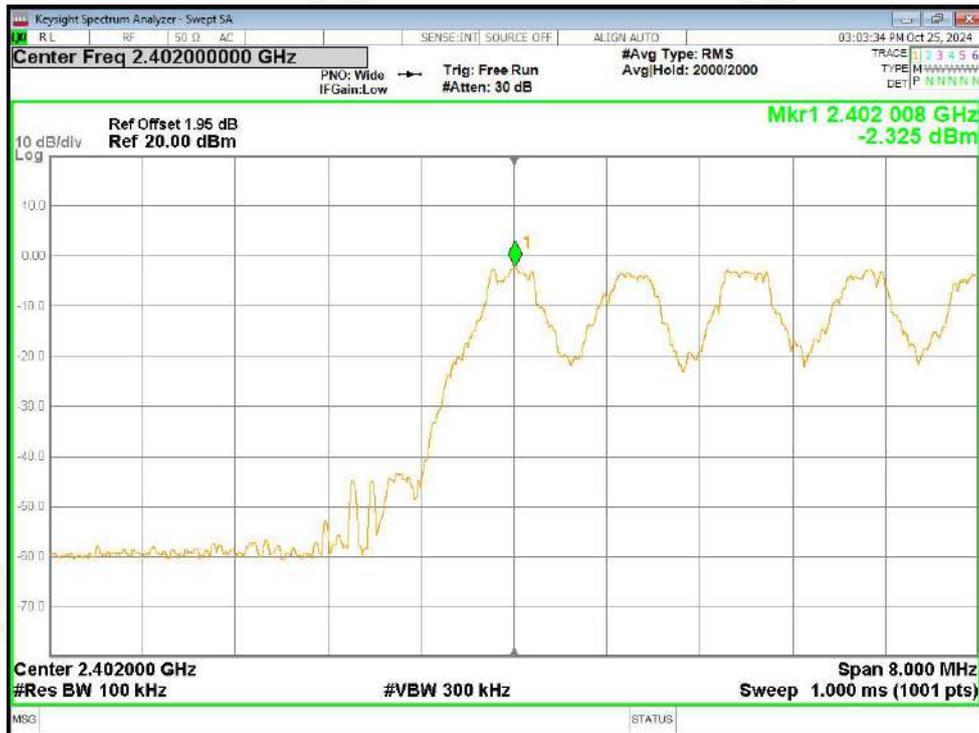


Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Ref

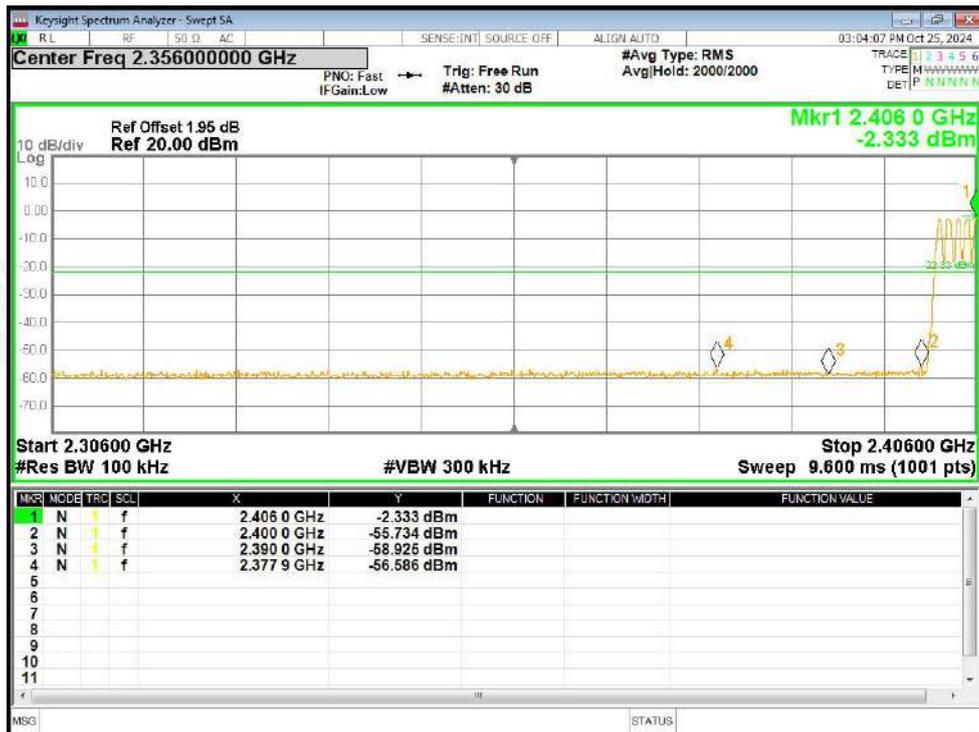


Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Emission

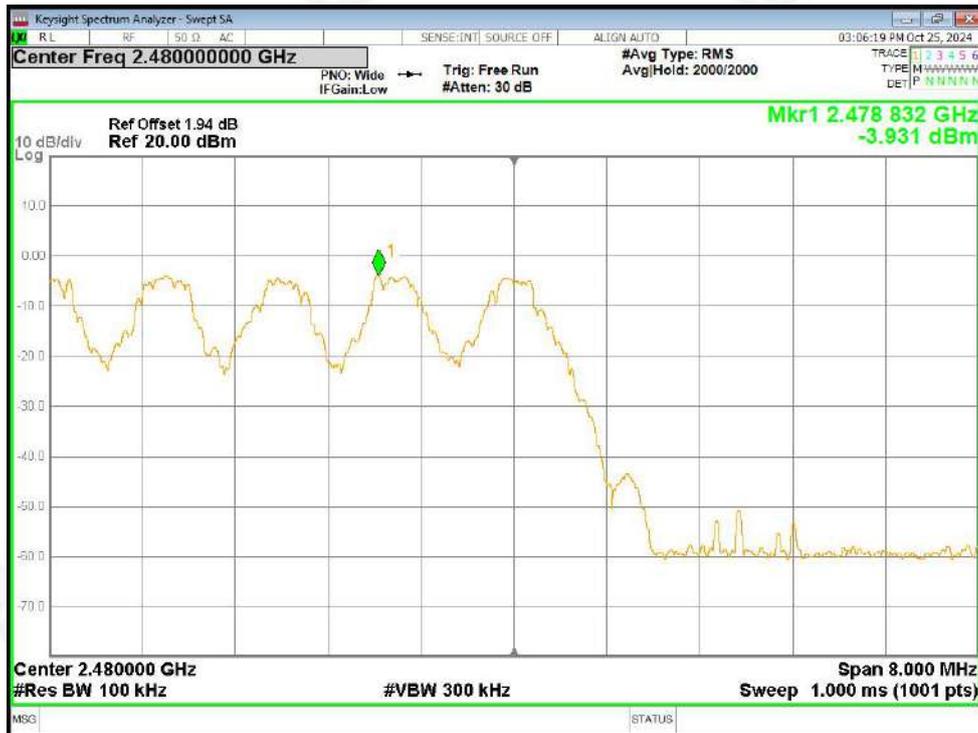


Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Ref

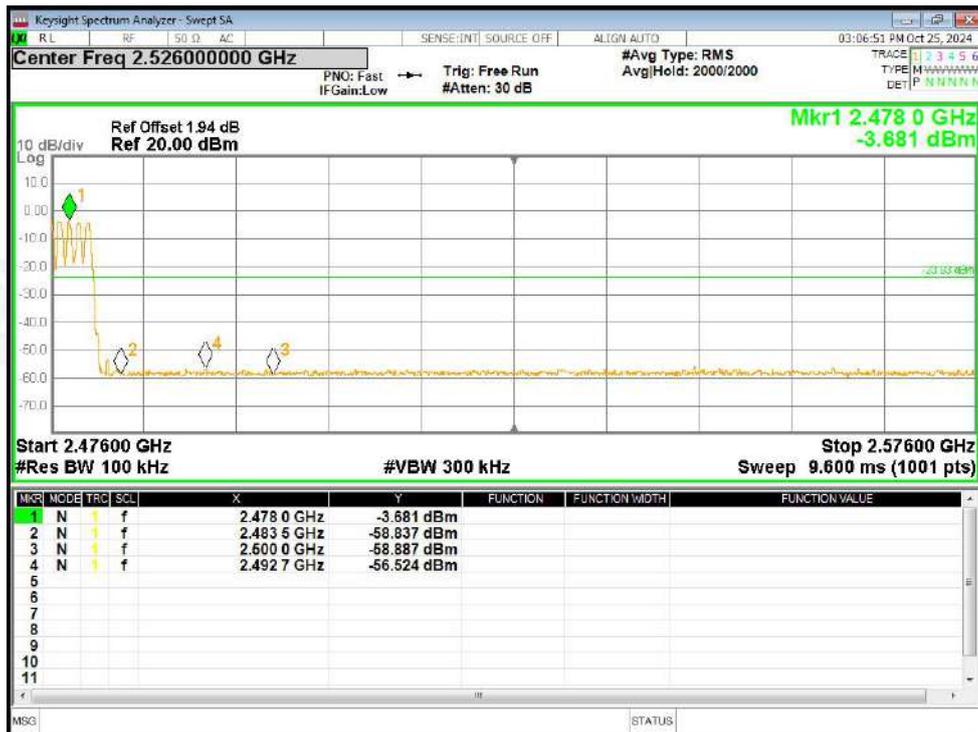

Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Emission

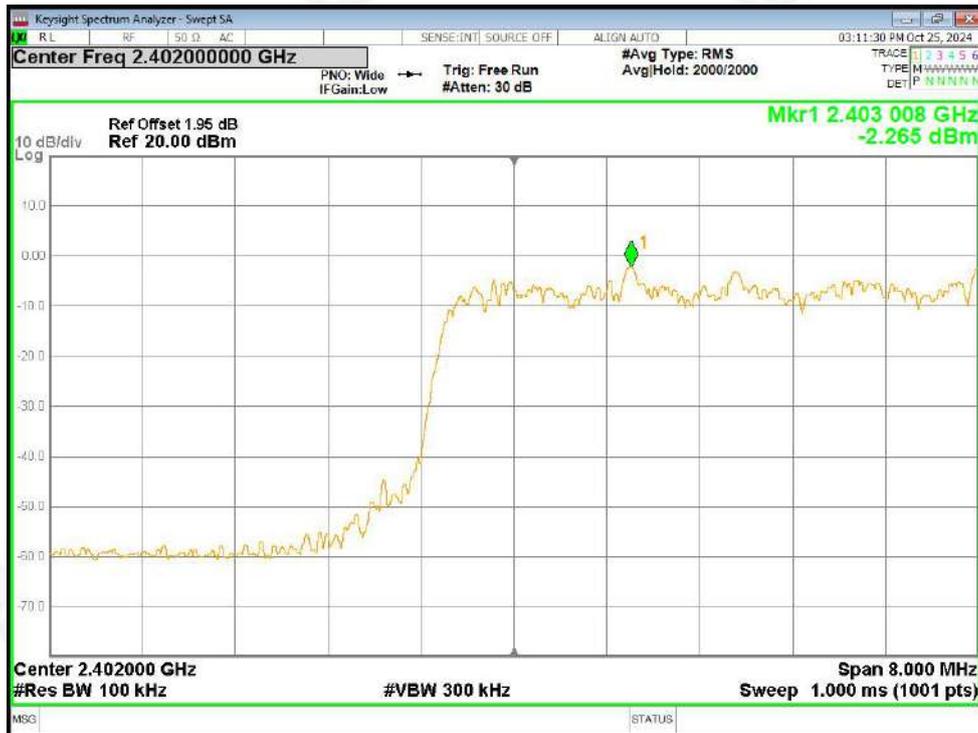


Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Ref

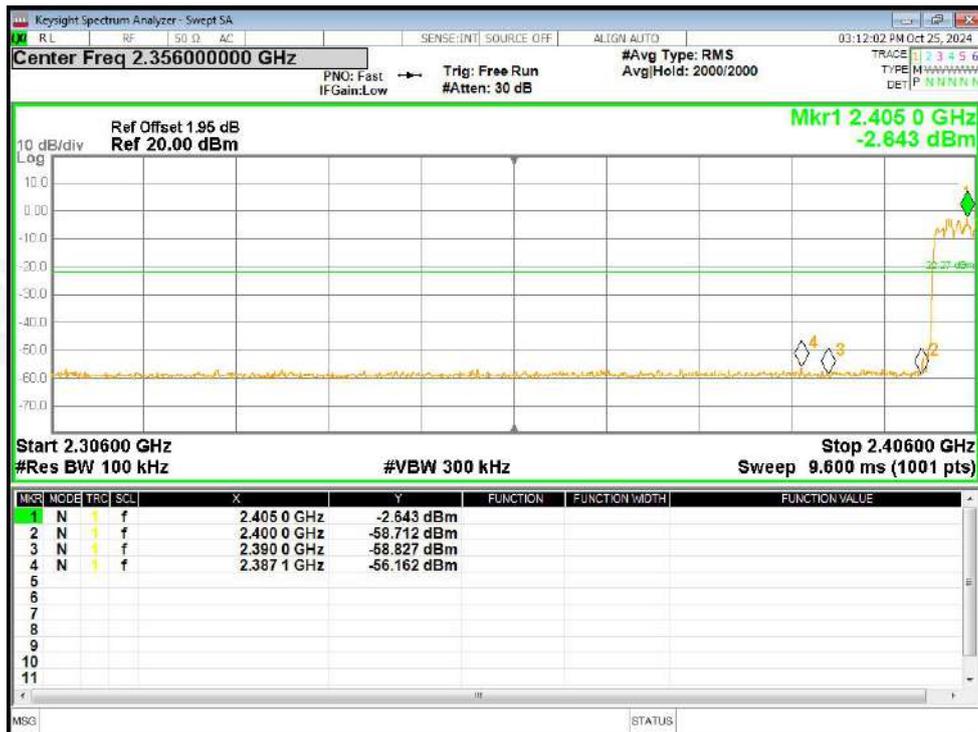


Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Emission




Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Ref

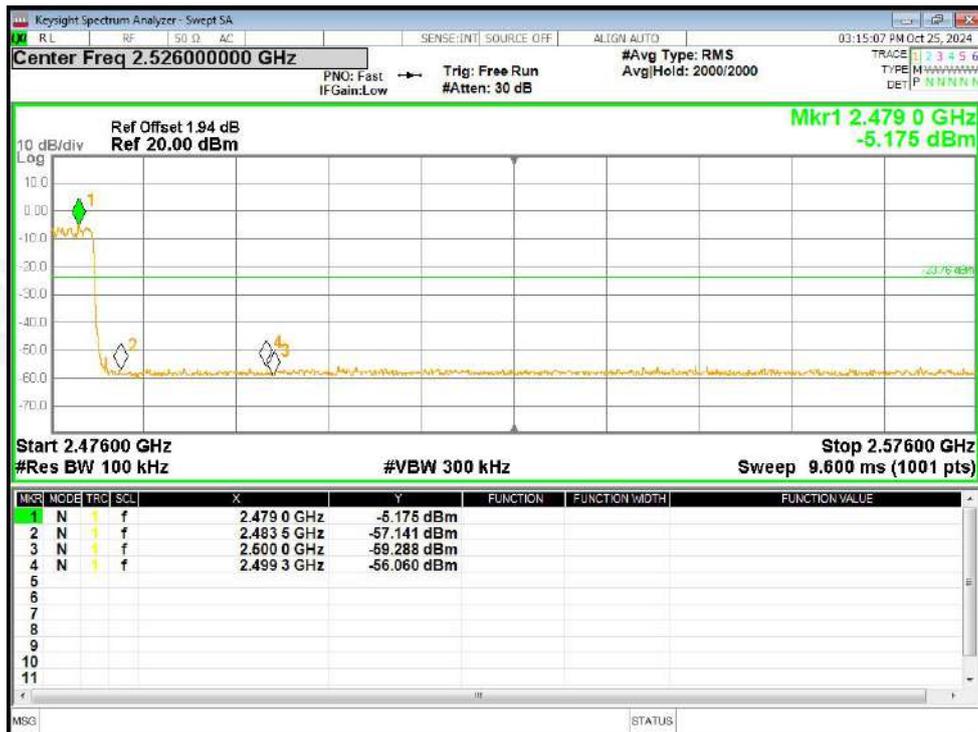

Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Emission

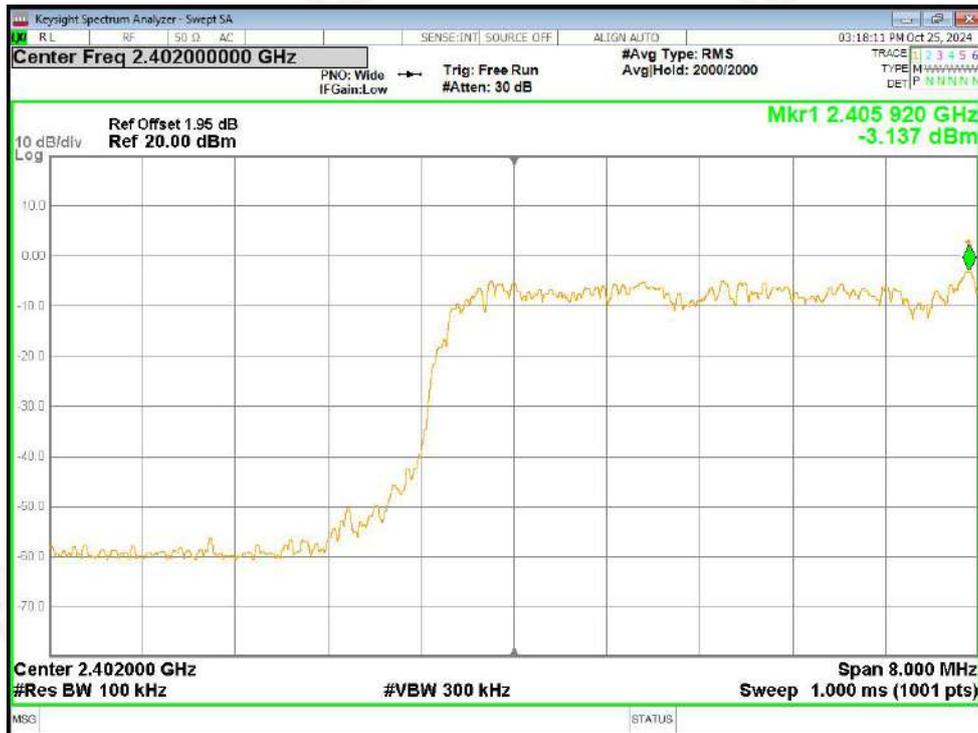


Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Ref

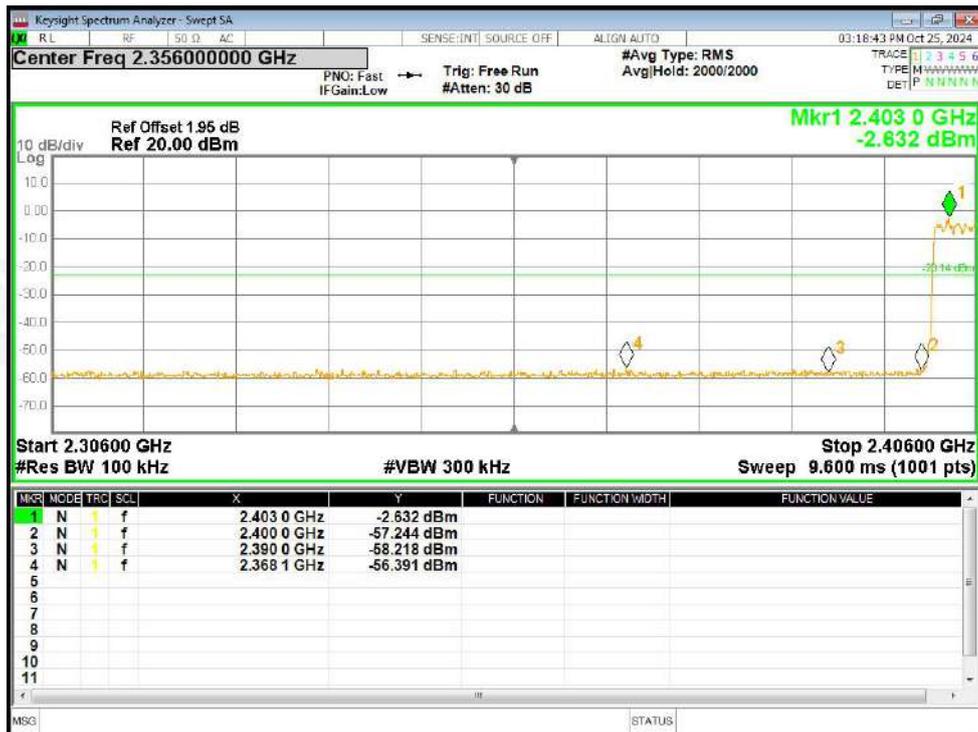

Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Emission



Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Ref

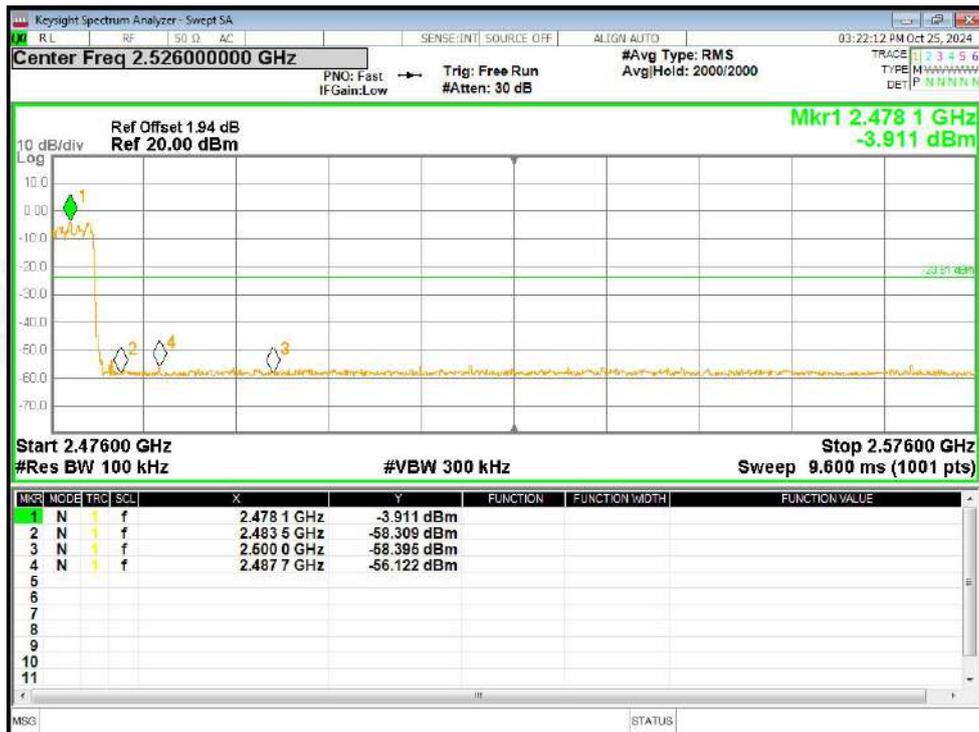

Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Emission



7. 20DB&99% BANDWIDTH

Test Requirement:	RSS-247 Section 5.1
Test Method:	RSS-Gen

7.1 Test Setup



7.2 Limit

N/A

7.3 Test procedure

1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.4 DEVIATION FROM STANDARD


No deviation.

7.5 Test Result

Mode	Test channel	20dB Emission Bandwidth (MHz)	99%Bandwidth (MHz)	Result
GFSK	Lowest	0.948	0.847	Pass
	Middle	0.951	0.855	
	Highest	0.953	0.856	
$\pi/4$ -DQPSK	Lowest	1.278	1.180	Pass
	Middle	1.272	1.174	
	Highest	1.278	1.177	
8-DPSK	Lowest	1.283	1.175	Pass
	Middle	1.324	1.186	
	Highest	1.313	1.177	



Test plots

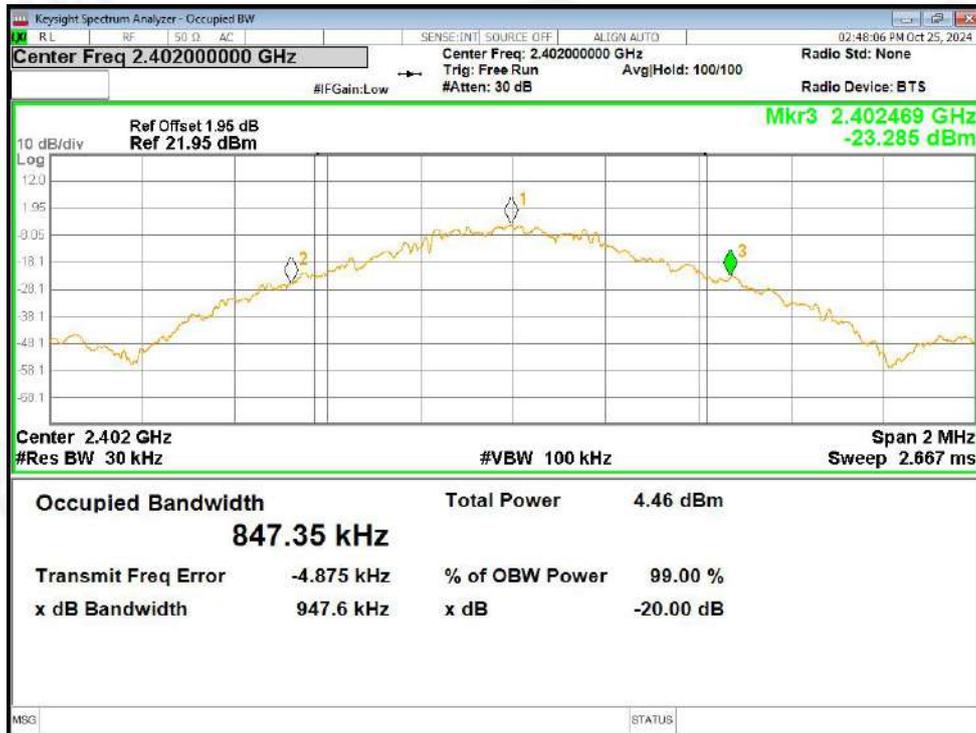


-20dB Bandwidth NVNT 1-DH5 2402MHz Ant1




-20dB Bandwidth NVNT 1-DH5 2441MHz Ant1




-20dB Bandwidth NVNT 1-DH5 2480MHz Ant1

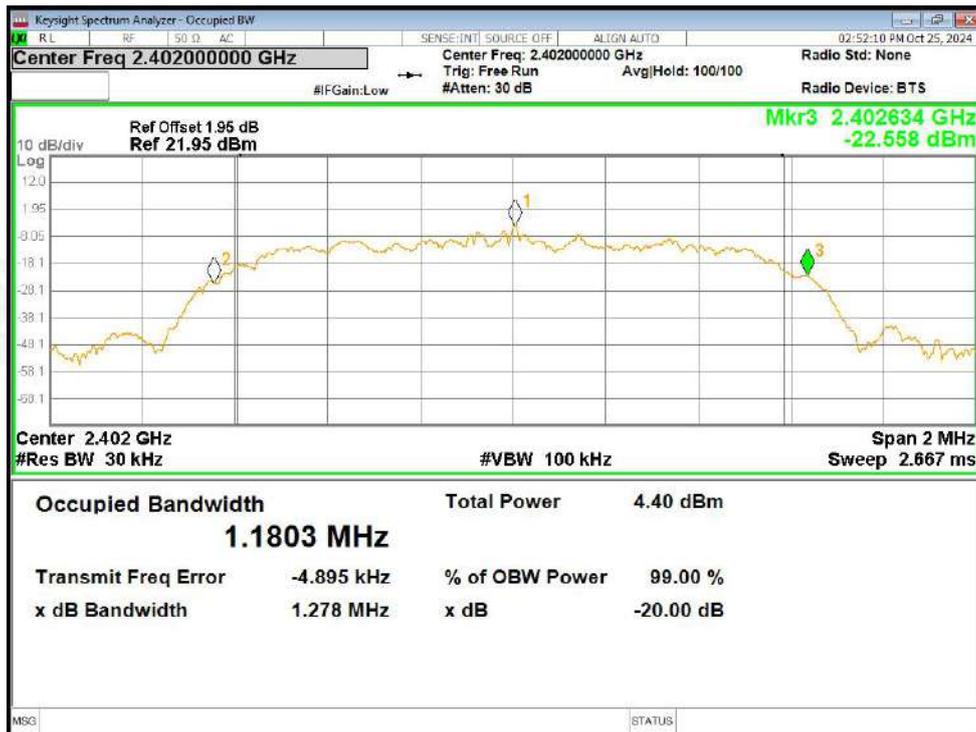


-20dB Bandwidth NVNT 2-DH5 2402MHz Ant1

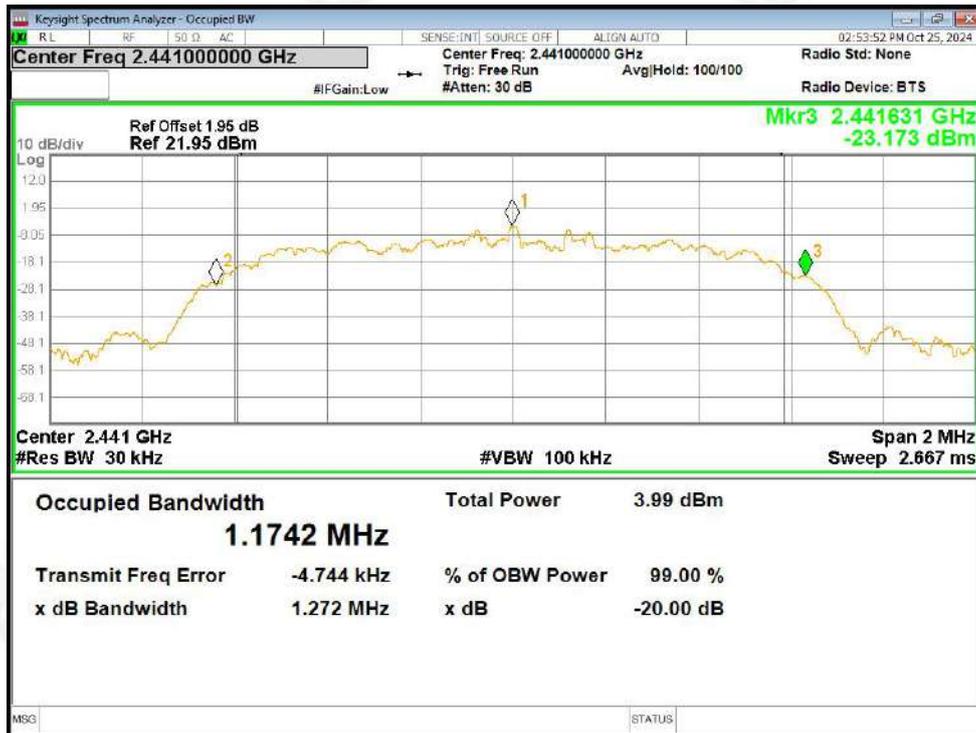


-20dB Bandwidth NVNT 2-DH5 2441MHz Ant1

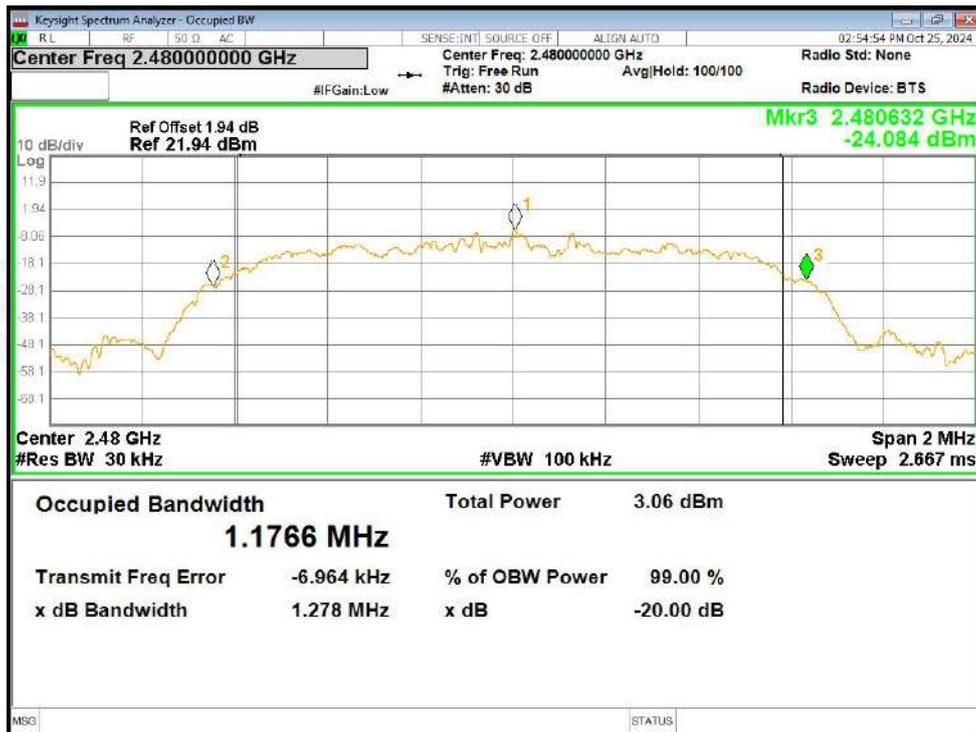

-20dB Bandwidth NVNT 2-DH5 2480MHz Ant1

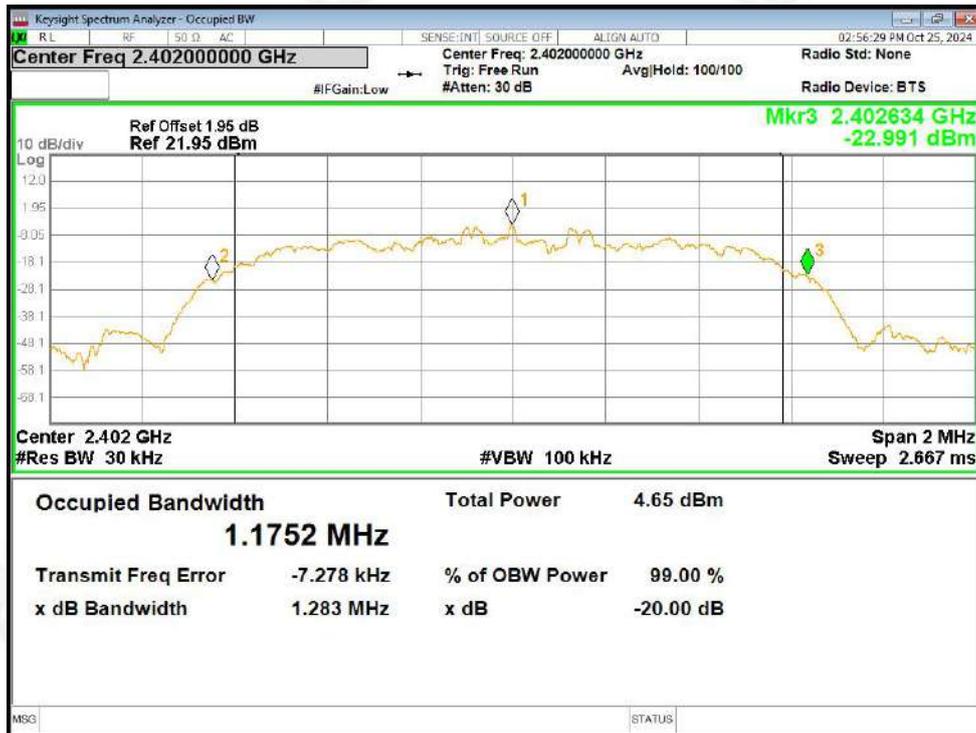

-20dB Bandwidth NVNT 3-DH5 2402MHz Ant1

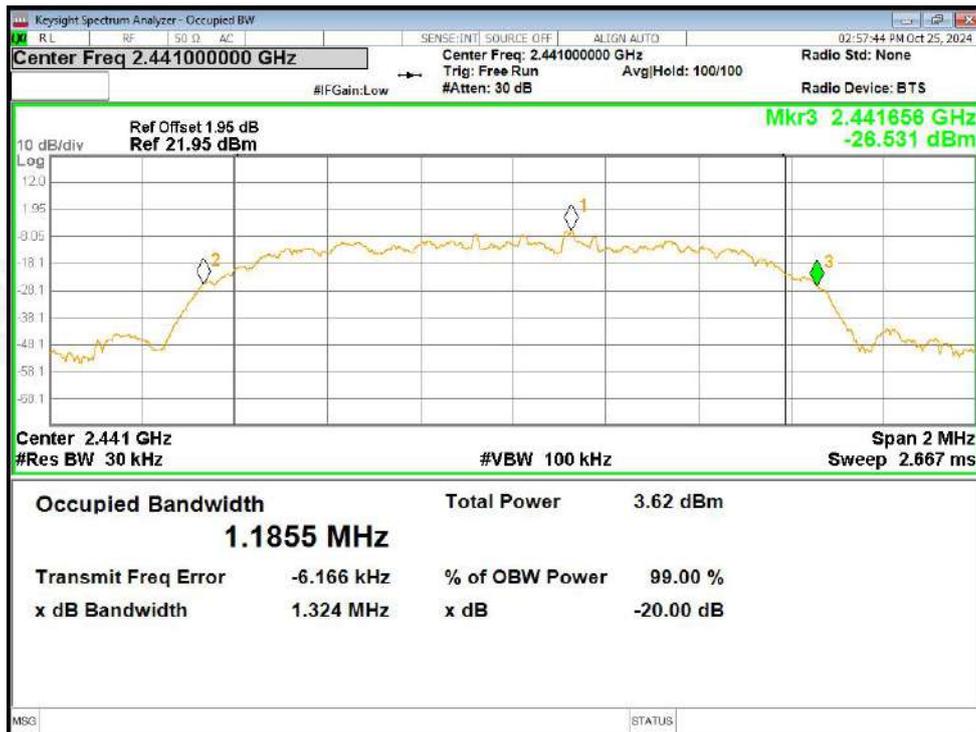

-20dB Bandwidth NVNT 3-DH5 2441MHz Ant1



-20dB Bandwidth NVNT 3-DH5 2480MHz Ant1



8. Maximum Peak Output Power and EIRP

Test Requirement:	RSS-247 Section 5.4(b)
Test Method:	RSS-Gen
Limit:	GFSK:30 dBm π/4-DQPSK&8-DPSK:20.97 dBm EIRP: 4W(36dBm)

8.1 Block Diagram Of Test Setup



8.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

For FHSS operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W. FHSS shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, FHSS operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW =6MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

8.4 DEVIATION FROM STANDARD

No deviation.




8.5 Test Result


Mode	Test channel	Peak Output Power (dBm)	Limit (dBm)	e.i.r.p. (dBm)	Result
GFSK	Lowest	-1.72	30.00	0.5	Pass
	Middle	-2.35		-0.13	Pass
	Highest	-3.3		-1.08	Pass
$\pi/4$ -DQPSK	Lowest	0.39	21.00	2.61	Pass
	Middle	-0.23		1.99	Pass
	Highest	-1.14		1.08	Pass
8-DPSK	Lowest	0.32	21.00	2.54	Pass
	Middle	-0.26		1.96	Pass
	Highest	-1.17		1.05	Pass

Note: EIRP=Peak Output Power+Antenna Gain

Test plots

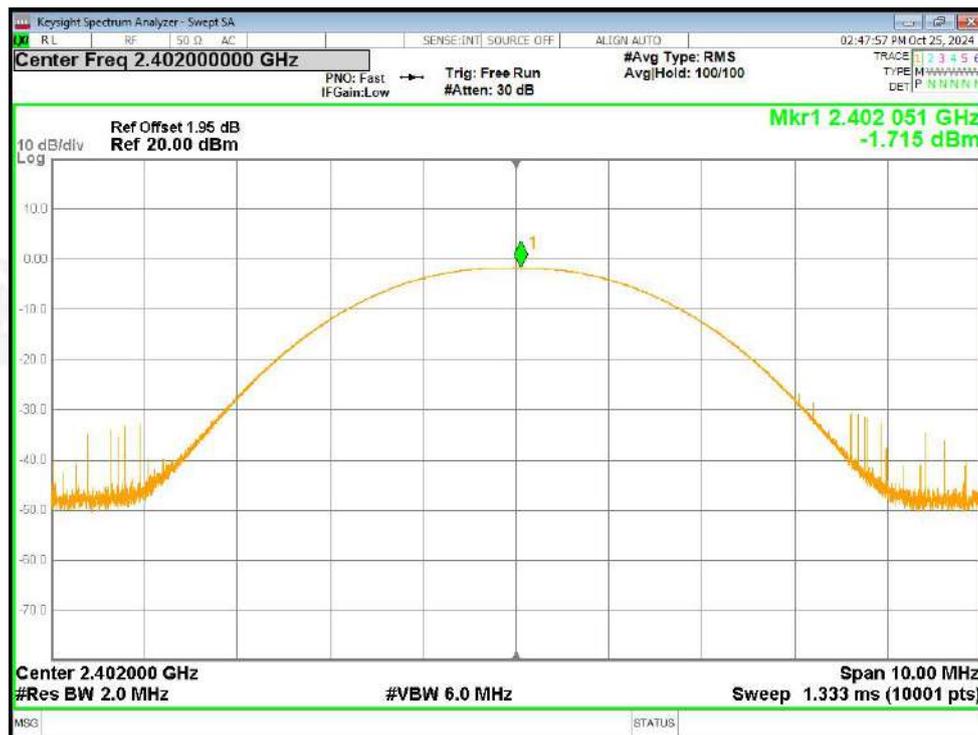


Peak Power NVNT 1-DH5 2402MHz Ant1

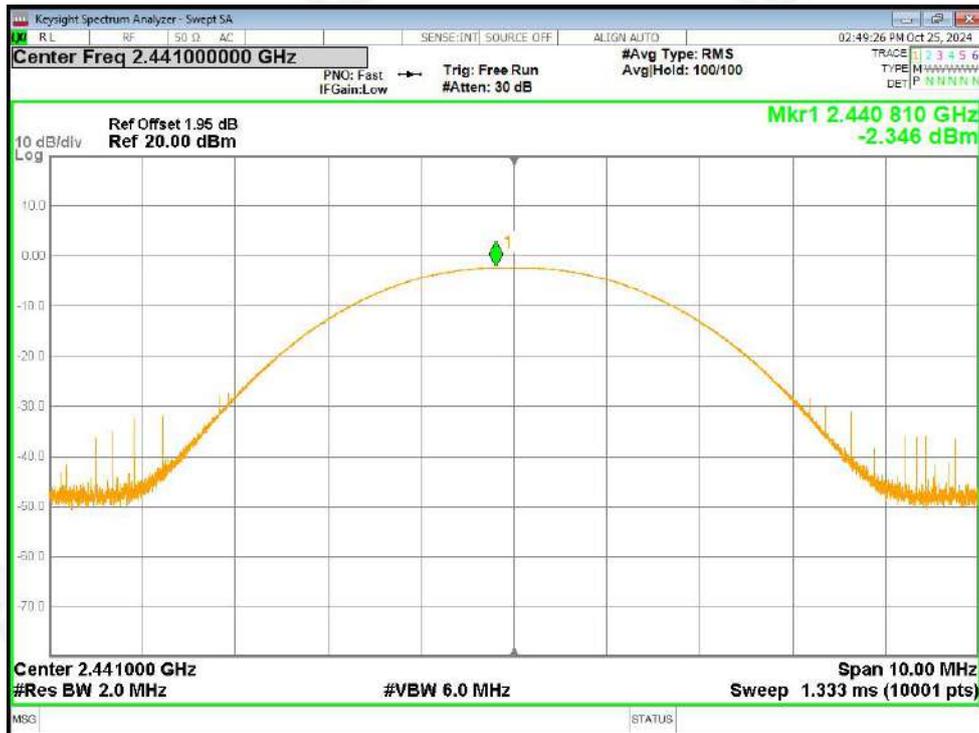


Peak Power NVNT 1-DH5 2441MHz Ant1




Peak Power NVNT 1-DH5 2480MHz Ant1

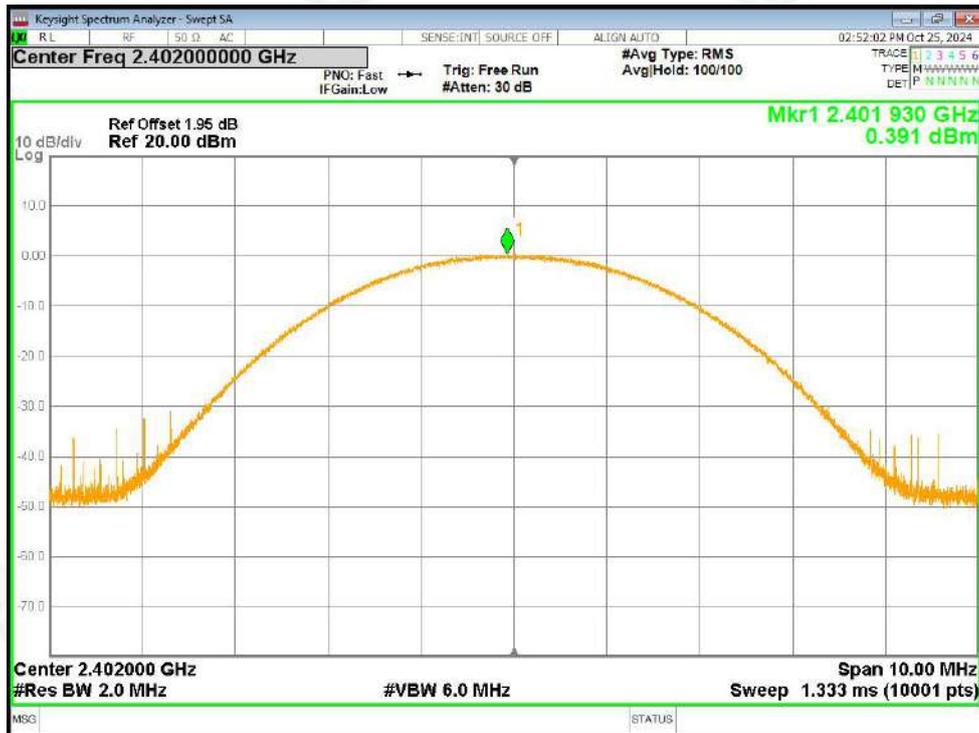


Peak Power NVNT 2-DH5 2402MHz Ant1

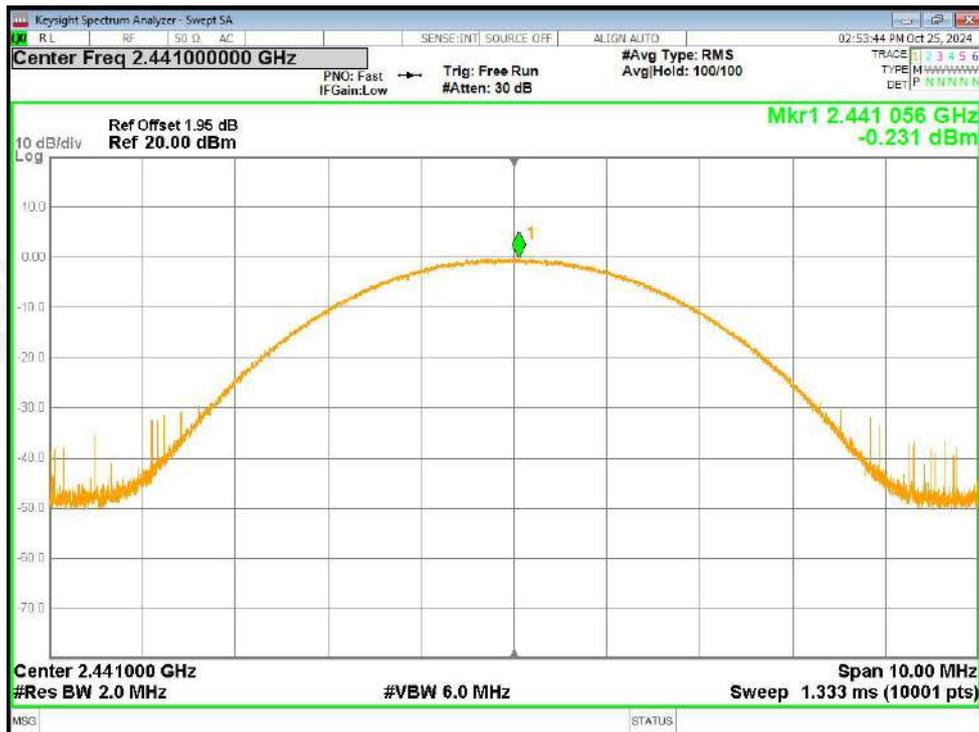


Peak Power NVNT 2-DH5 2441MHz Ant1

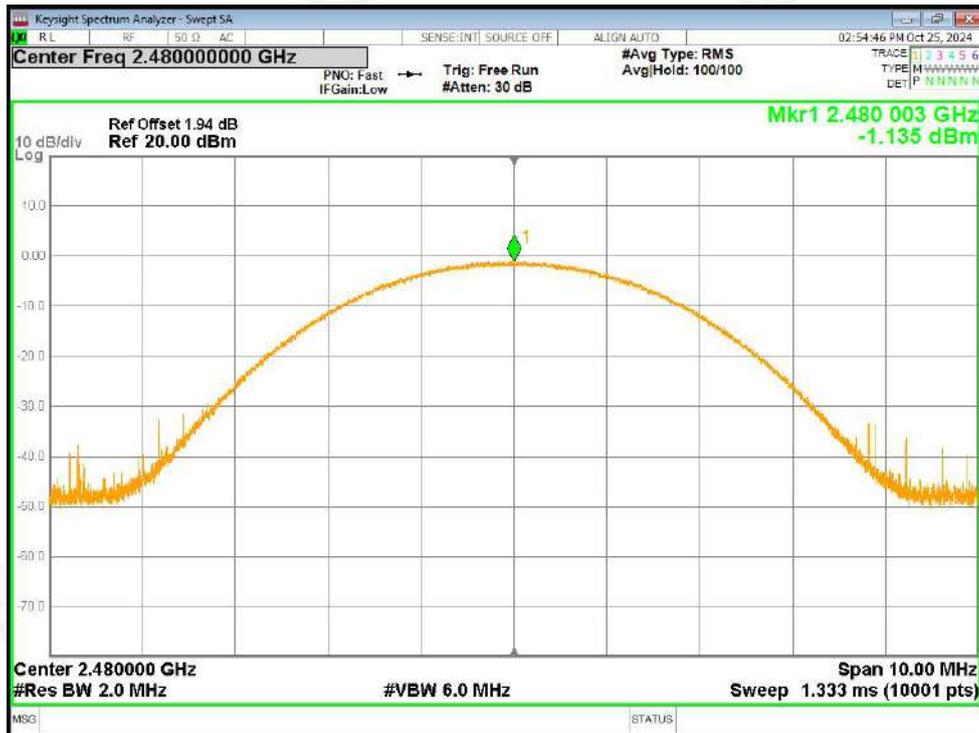


Peak Power NVNT 2-DH5 2480MHz Ant1

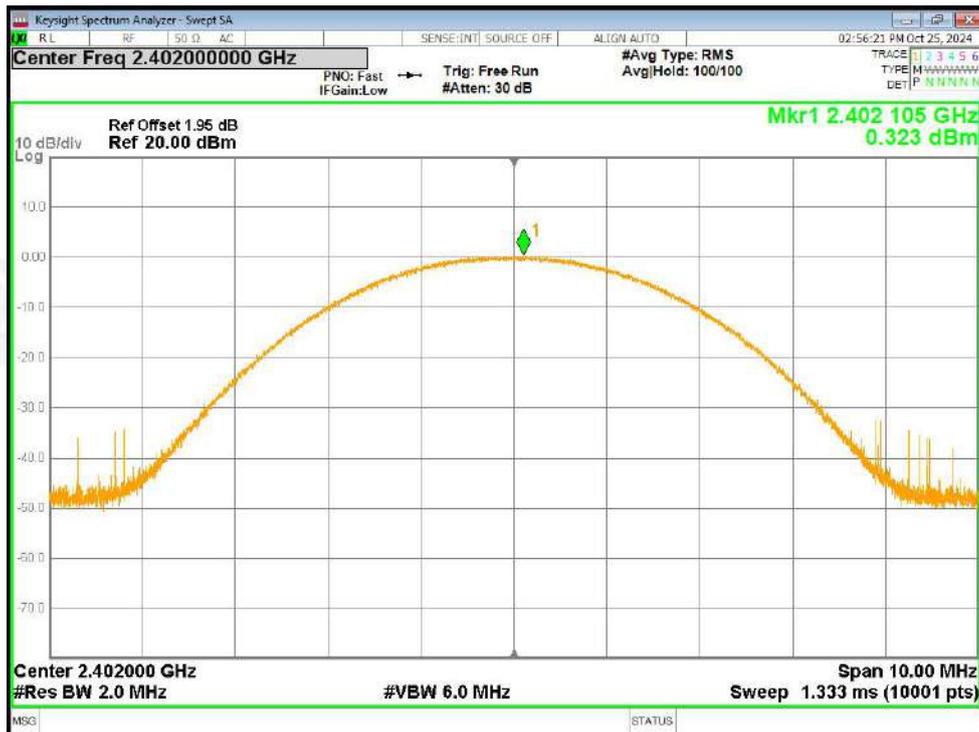

Peak Power NVNT 3-DH5 2402MHz Ant1

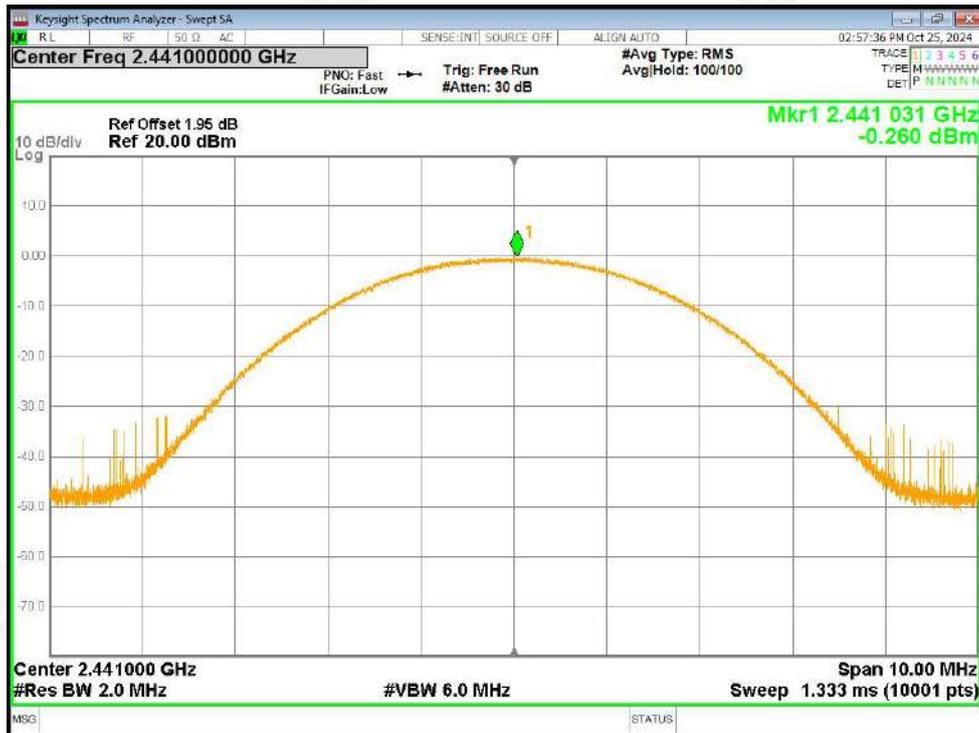

Peak Power NVNT 3-DH5 2441MHz Ant1

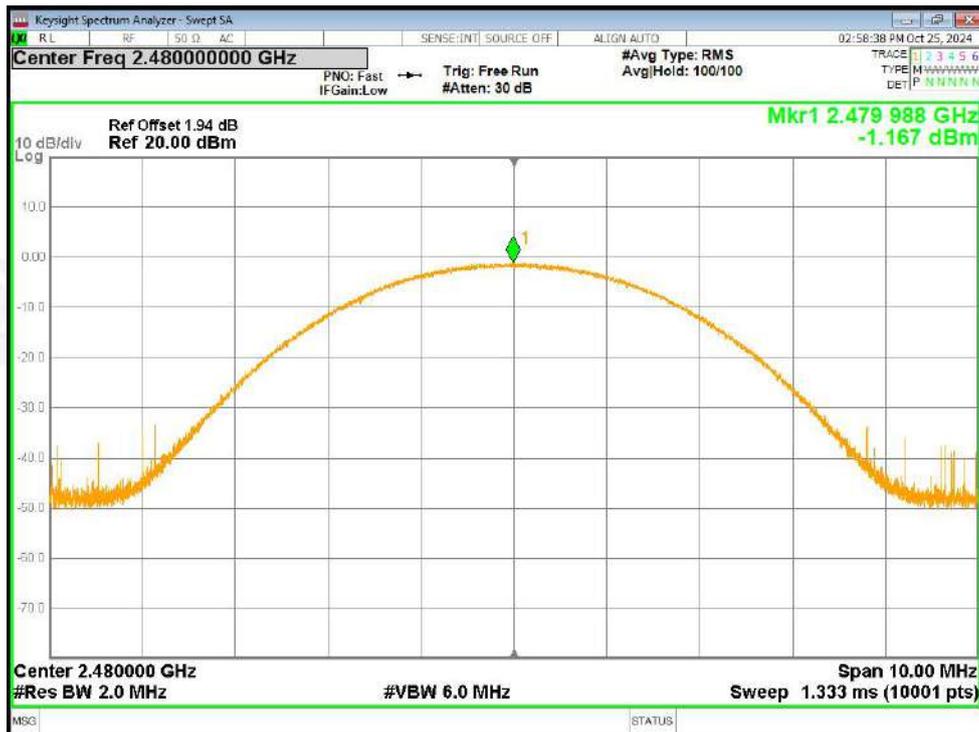

Peak Power NVNT 3-DH5 2480MHz Ant1



9. HOPPING CHANNEL SEPARATION

Test Requirement:	RSS-247 Section 5.1(a)
Test Method:	RSS-Gen
Receiver setup:	RBW=300KHz, VBW=910KHz, detector=Peak
Limit:	GFSK: 20dB bandwidth $\pi/4$ -DQPSK & 8DSK: 0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)

9.1 Test Setup



9.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 300kHz. VBW = 910kHz , Span = 2.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

9.3 DEVIATION FROM STANDARD

No deviation.



9.4 Test Result

Modulation	Test Channel	Separation (MHz)	Limit(MHz)	Result
GFSK	Low	1.16	0.948	PASS
GFSK	Middle	1.172	0.951	PASS
GFSK	High	1.004	0.953	PASS
$\pi/4$ -DQPSK	Low	1.008	0.672	PASS
$\pi/4$ -DQPSK	Middle	1.31	0.873	PASS
$\pi/4$ -DQPSK	High	1.286	0.857	PASS
8-DPSK	Low	1.182	0.788	PASS
8-DPSK	Middle	1.136	0.757	PASS
8-DPSK	High	1.072	0.715	PASS

Test plots




CFS NVNT 1-DH5 2402MHz Ant1




CFS NVNT 1-DH5 2441MHz Ant1




CFS NVNT 1-DH5 2480MHz Ant1

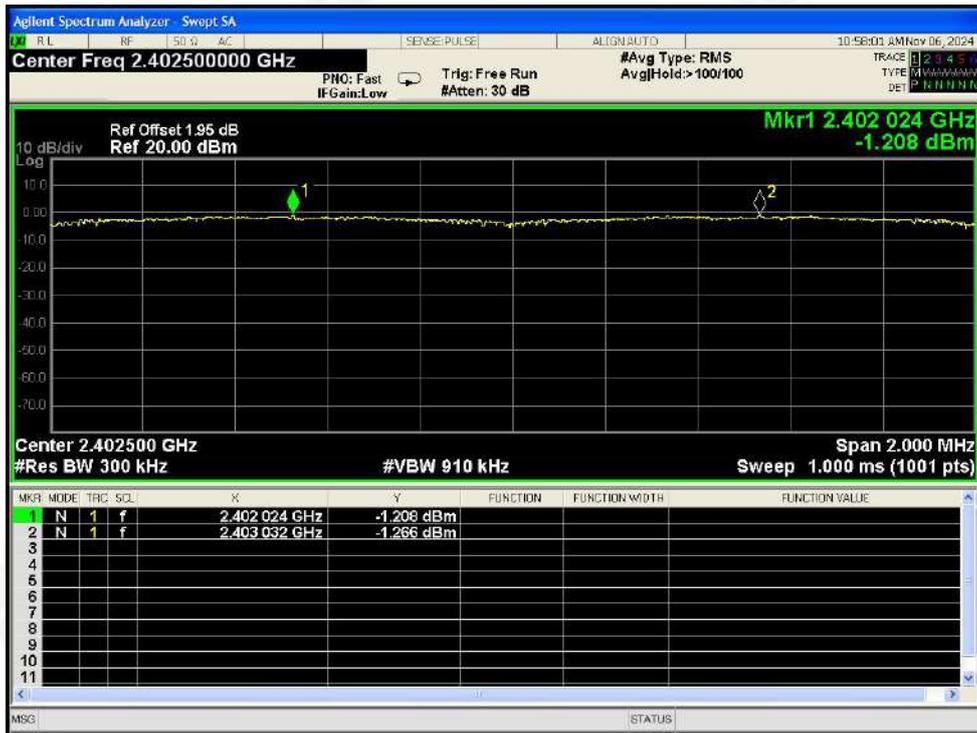


CFS NVNT 2-DH5 2402MHz Ant1

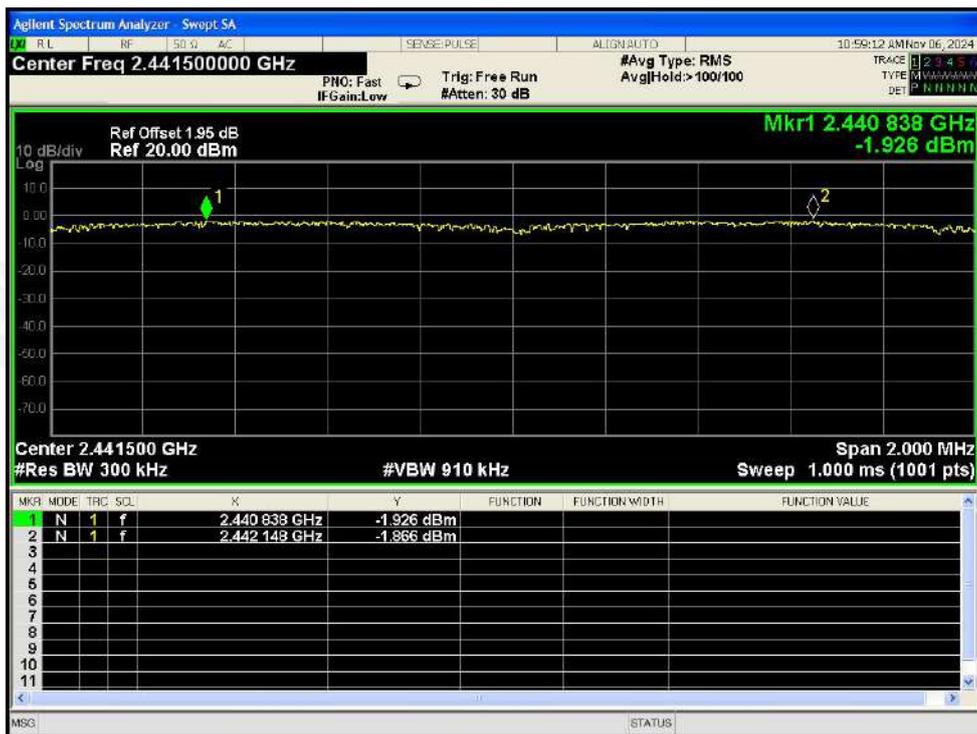


CFS NVNT 2-DH5 2441MHz Ant1

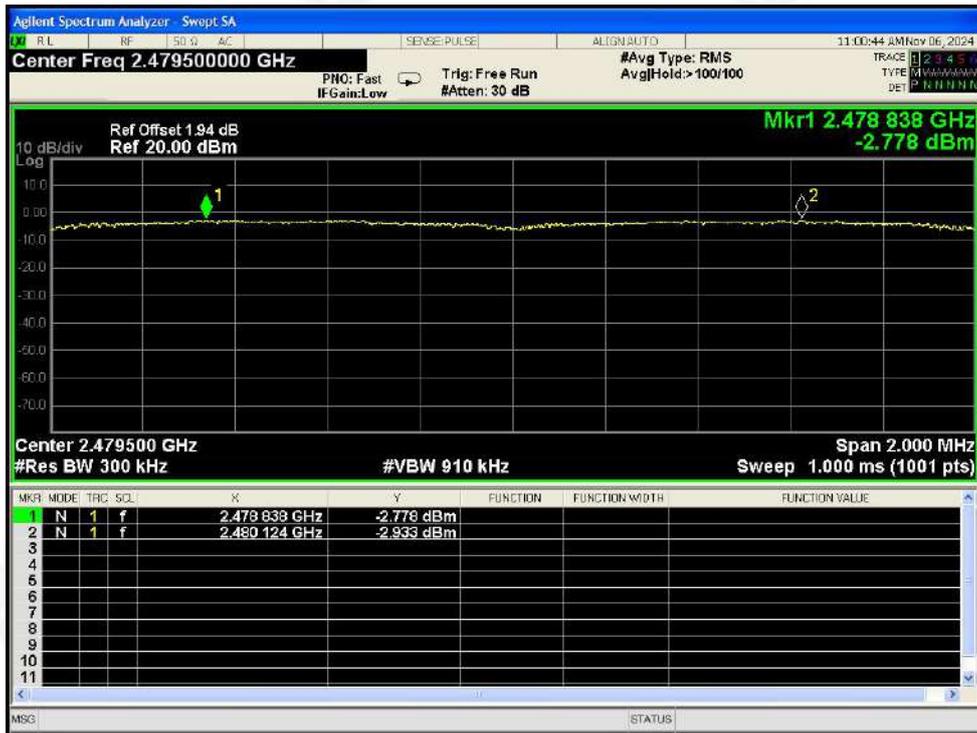


CFS NVNT 2-DH5 2480MHz Ant1

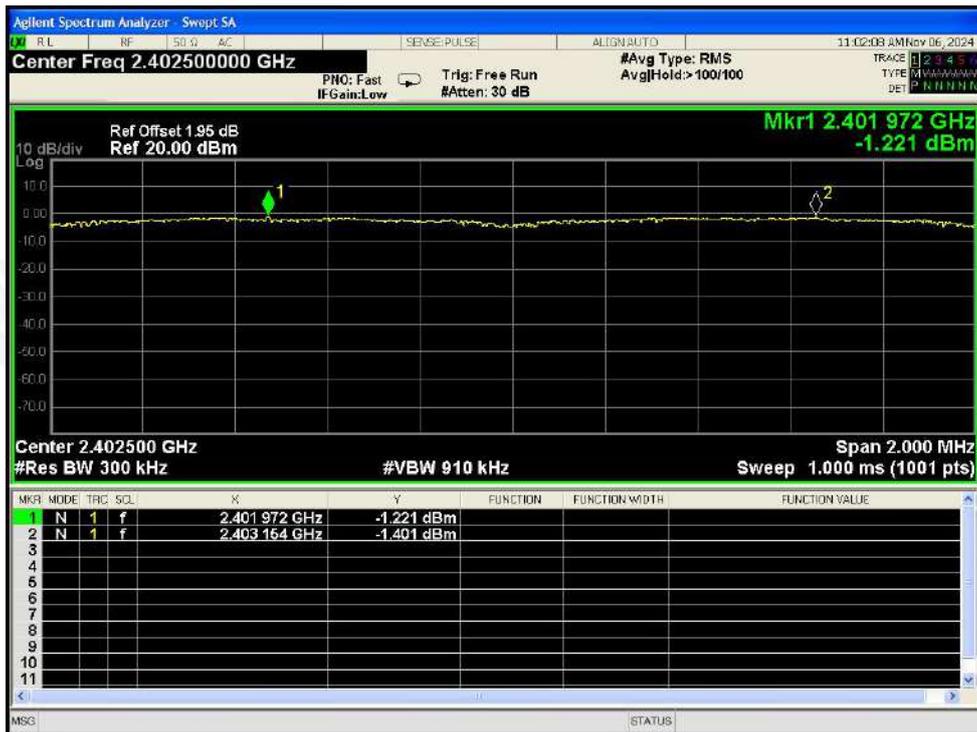

CFS NVNT 3-DH5 2402MHz Ant1

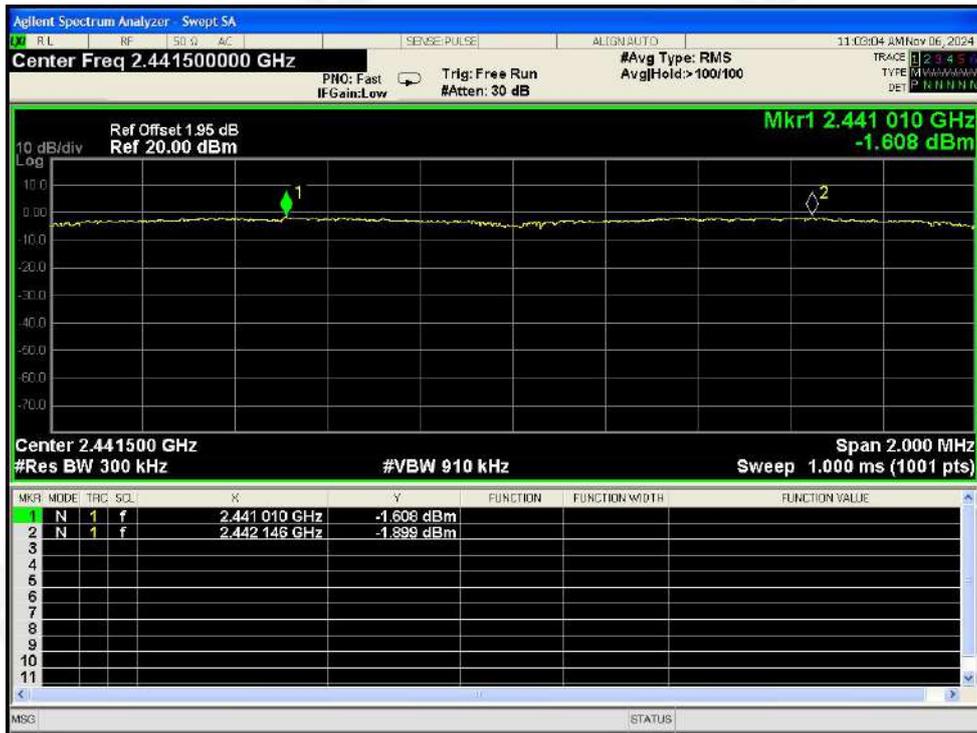

CFS NVNT 3-DH5 2441MHz Ant1

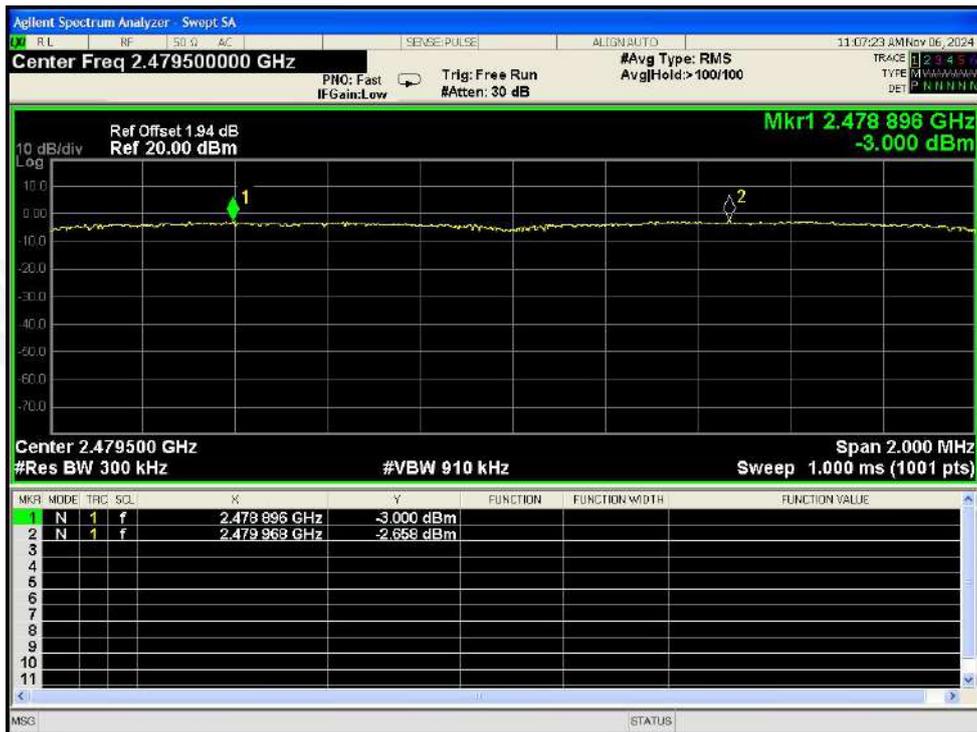

CFS NVNT 3-DH5 2480MHz Ant1



10.NUMBER OF HOPPING FREQUENCY

Test Requirement:	RSS-247 Section 5.1(a)
Test Method:	RSS-Gen
Receiver setup:	RBW=100kHz, VBW=300kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak
Limit:	15 channels

10.1 Test Setup



10.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;


10.3 DEVIATION FROM STANDARD

No deviation.




10.4 Test Result

Test Plots: 79 Channels in total

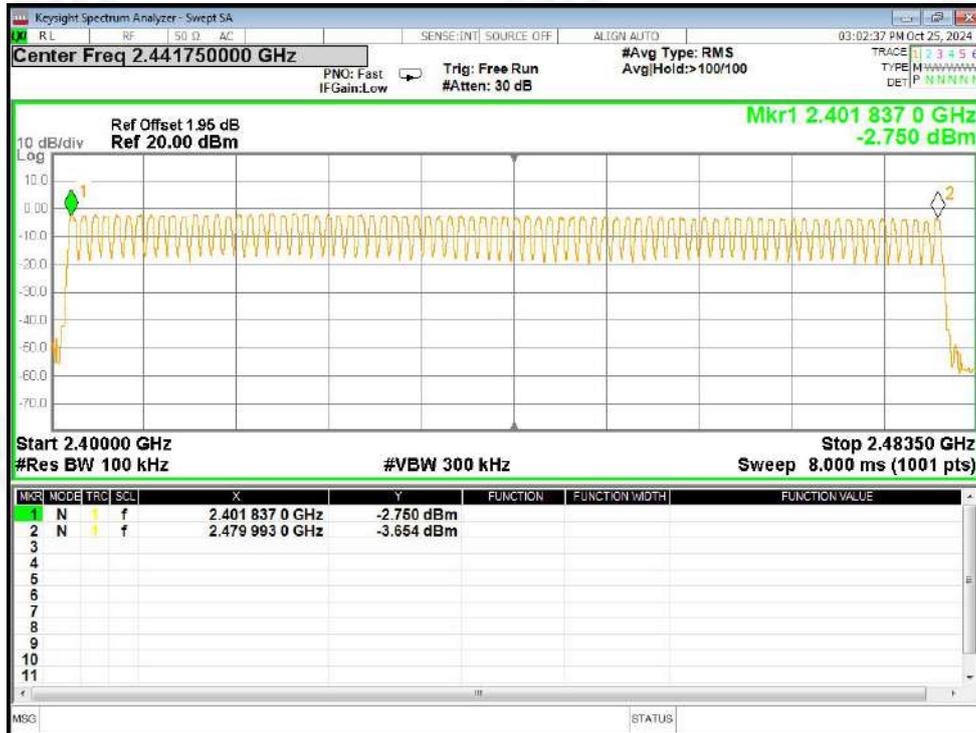

Hopping No. NVNT 1-DH5 2402MHz Ant1

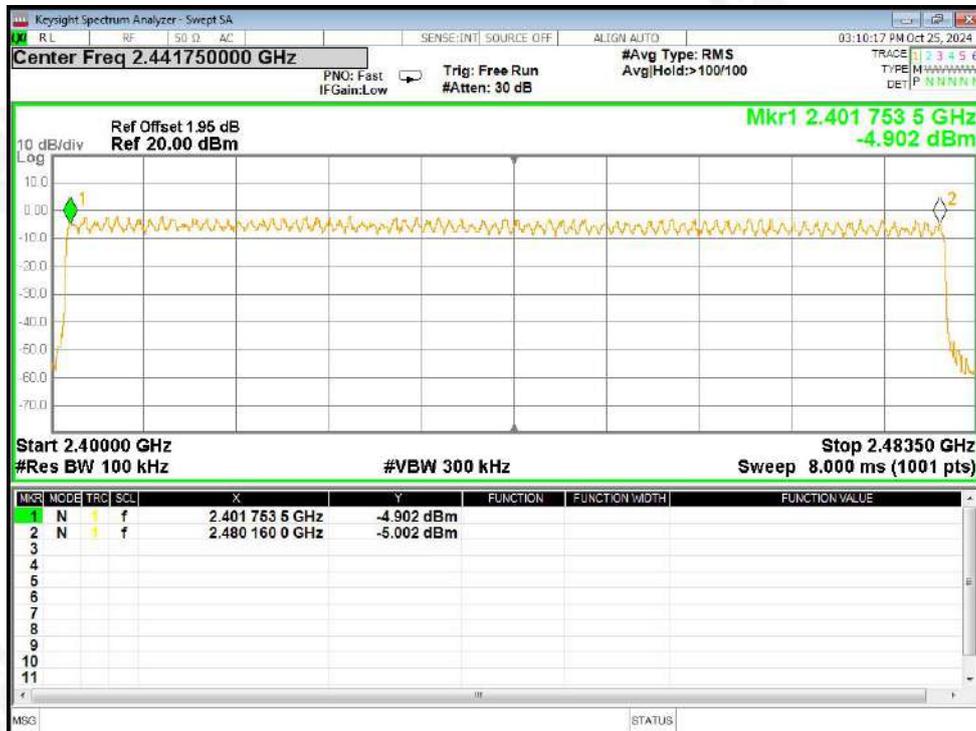

Hopping No. NVNT 2-DH5 2402MHz Ant1



Hopping No. NVNT 3-DH5 2402MHz Ant1



11. DWELL TIME

Test Requirement:	RSS-247 Section 5.1(a)
Test Method:	RSS-Gen
Receiver setup:	RBW=1MHz, VBW=3MHz, Span=0Hz, Detector=Peak
Limit:	≤0.4 Second

11.1 Test Setup



11.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0Hz;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH1/DH2/2DH1/2DH3/3DH1/3DH3 DH5/2DH5/3DH5 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

11.3 DEVIATION FROM STANDARD

No deviation.



11.4 Test Result


Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
1-DH5	2402	Ant1	2.905	310.835	107	31600	400	Pass
1-DH5	2441	Ant1	2.905	325.36	112	31600	400	Pass
1-DH5	2480	Ant1	2.905	299.215	103	31600	400	Pass
2-DH5	2402	Ant1	2.91	299.73	103	31600	400	Pass
2-DH5	2441	Ant1	2.909	331.626	114	31600	400	Pass
2-DH5	2480	Ant1	2.91	299.73	103	31600	400	Pass
3-DH5	2402	Ant1	2.91	311.37	107	31600	400	Pass
3-DH5	2441	Ant1	2.892	312.336	108	31600	400	Pass
3-DH5	2480	Ant1	2.909	293.809	101	31600	400	Pass

Note1: Total Dwell Time (ms)=Pulse Time (ms)*Burst Count

Note2: Only the worst test data DH5/2DH5/3DH5 put in the report




Test Plots

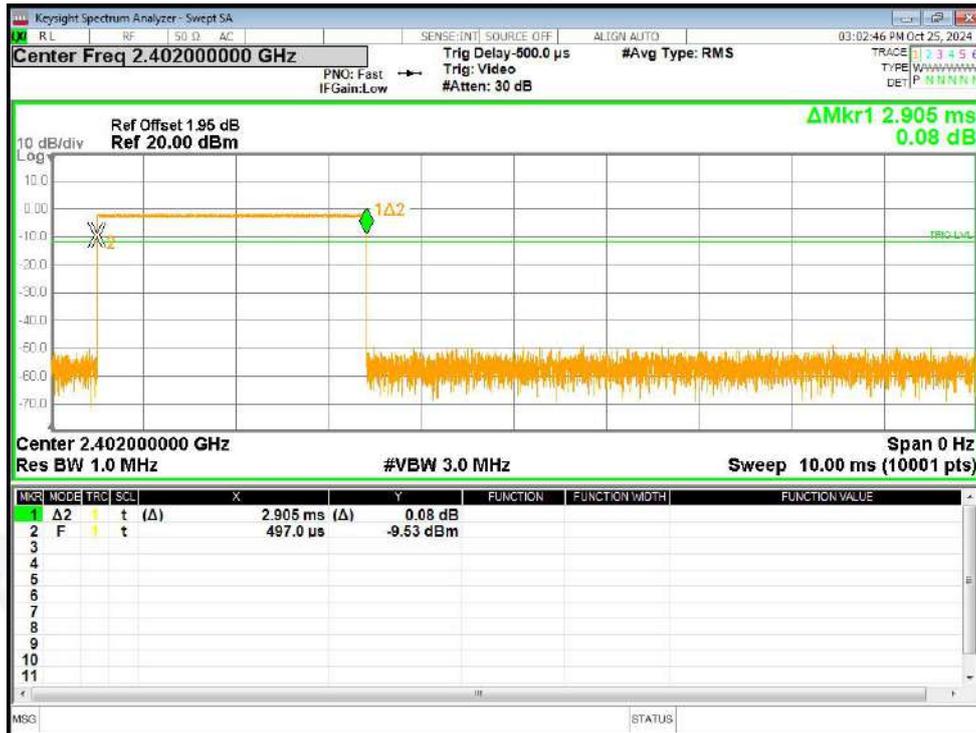


Dwell NVNT 1-DH5 2402MHz Ant1 One Burst




Dwell NVNT 1-DH5 2402MHz Ant1 Accumulated

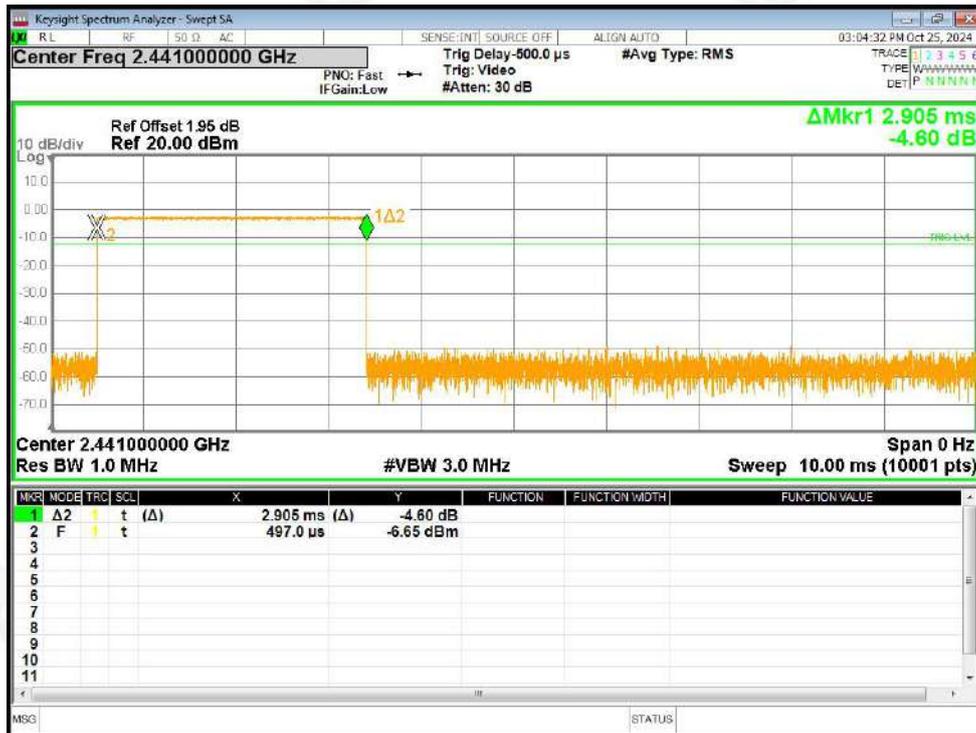

Dwell NVNT 1-DH5 2441MHz Ant1 One Burst

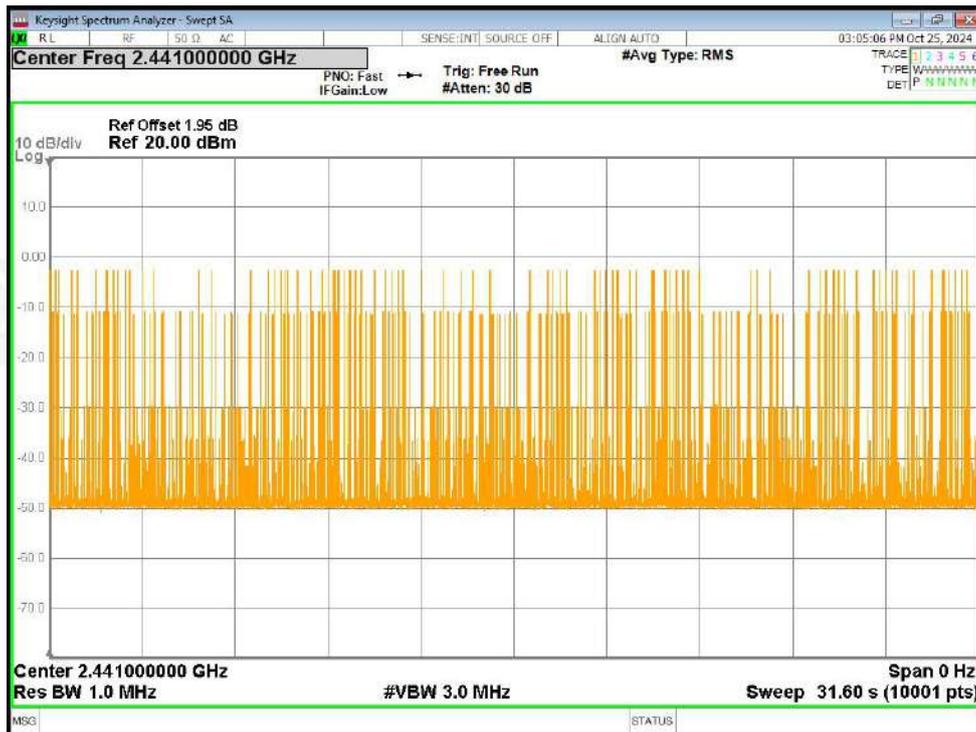


Dwell NVNT 1-DH5 2441MHz Ant1 Accumulated

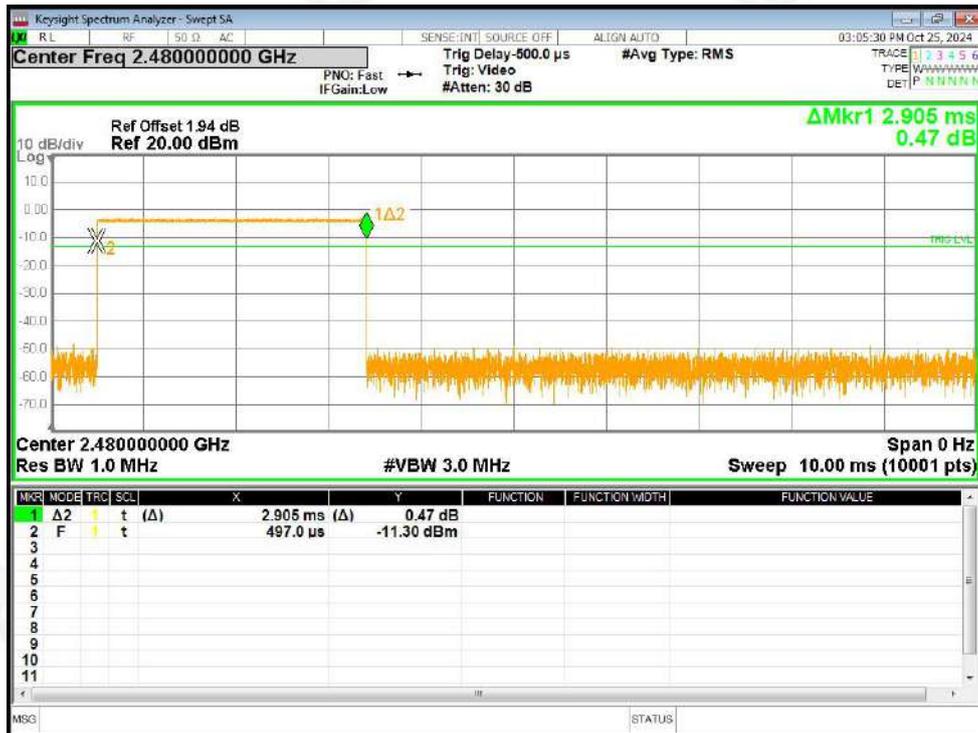


Dwell NVNT 1-DH5 2480MHz Ant1 One Burst




Dwell NVNT 1-DH5 2480MHz Ant1 Accumulated

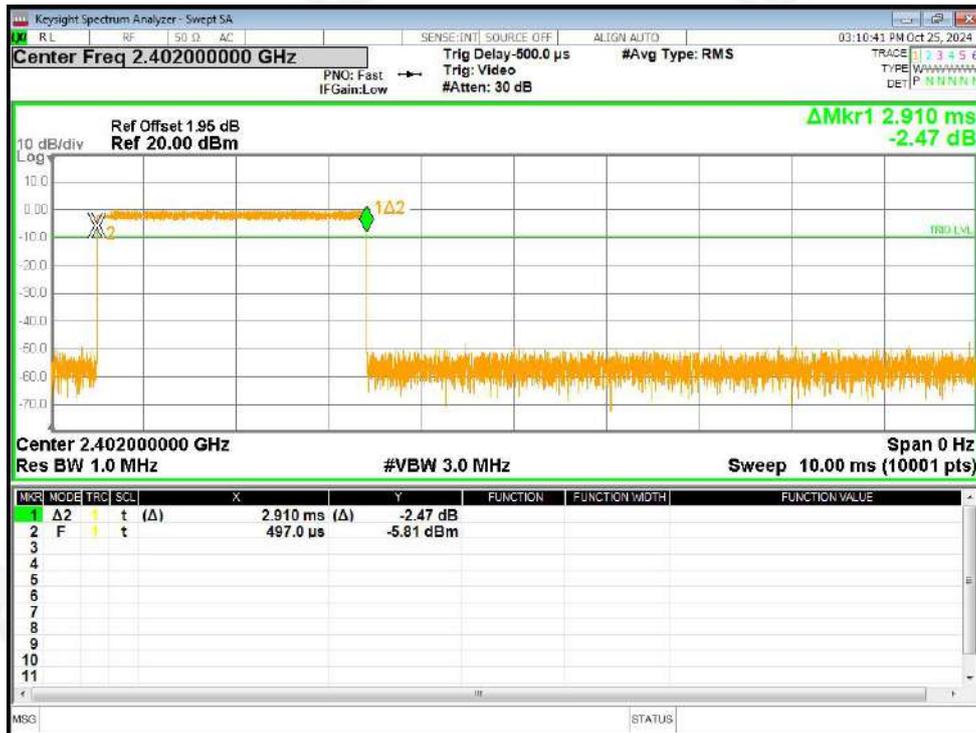


Dwell NVNT 2-DH5 2402MHz Ant1 One Burst

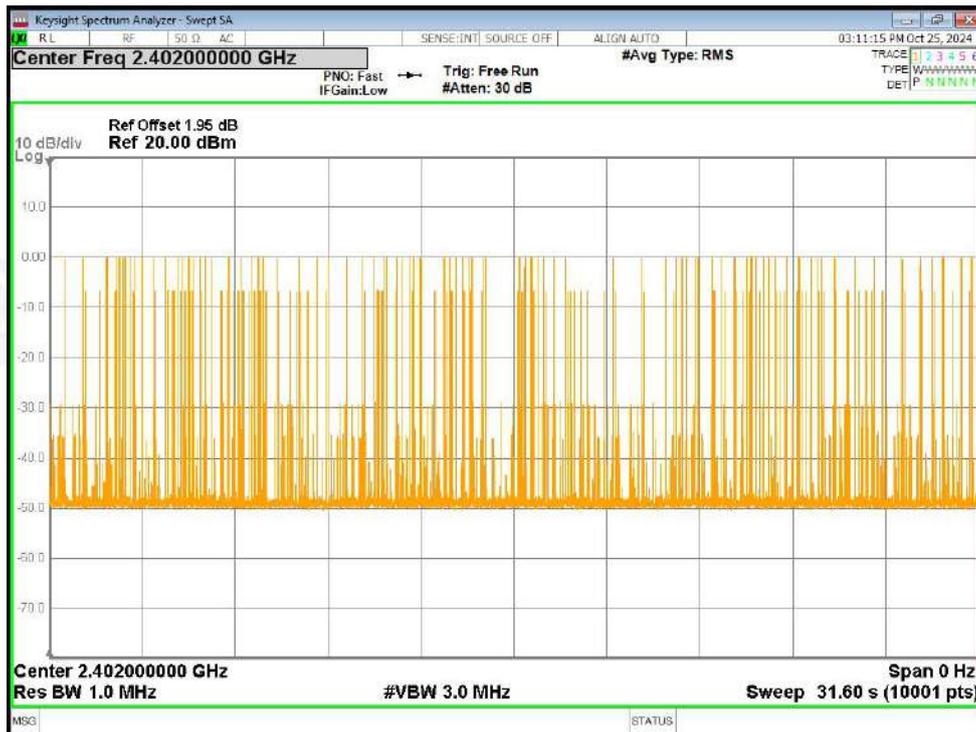


Dwell NVNT 2-DH5 2402MHz Ant1 Accumulated

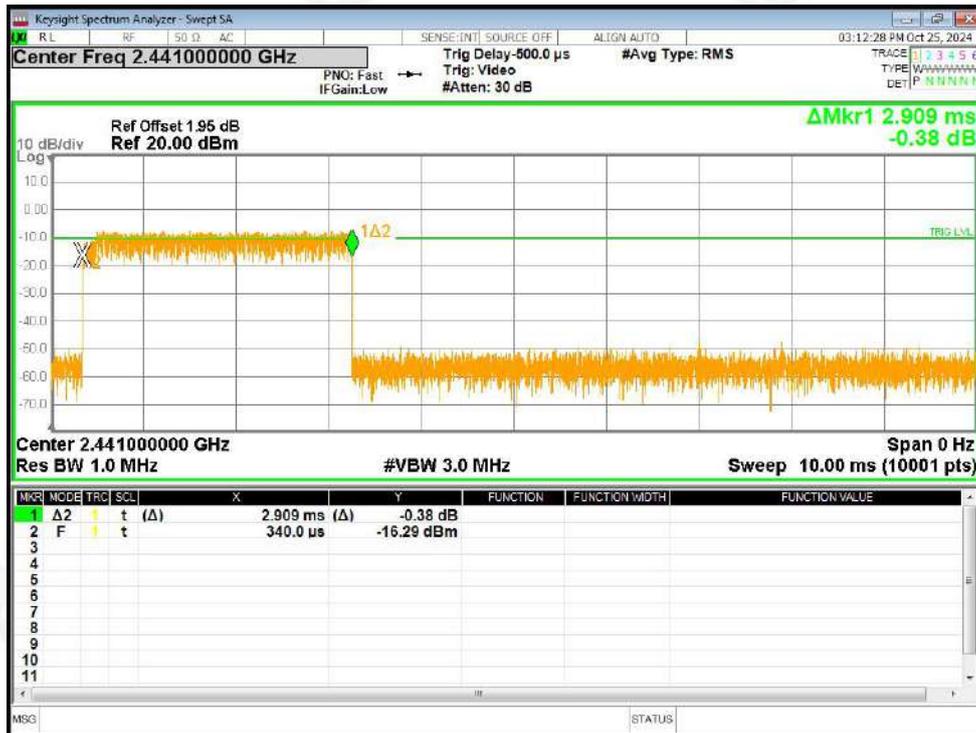

Dwell NVNT 2-DH5 2441MHz Ant1 One Burst

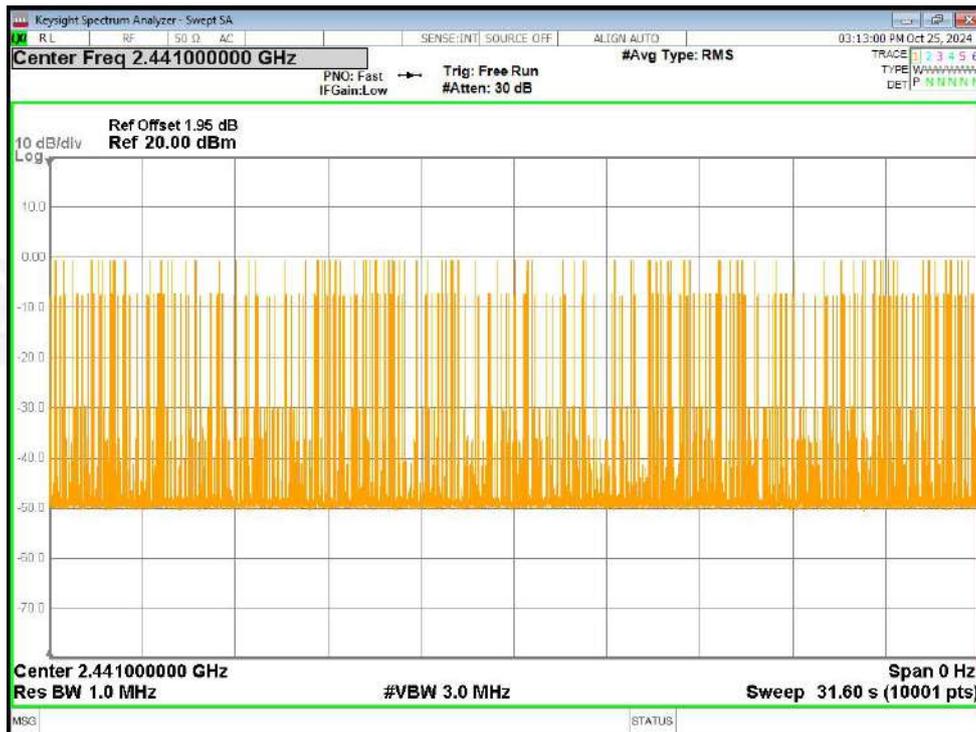


Dwell NVNT 2-DH5 2441MHz Ant1 Accumulated

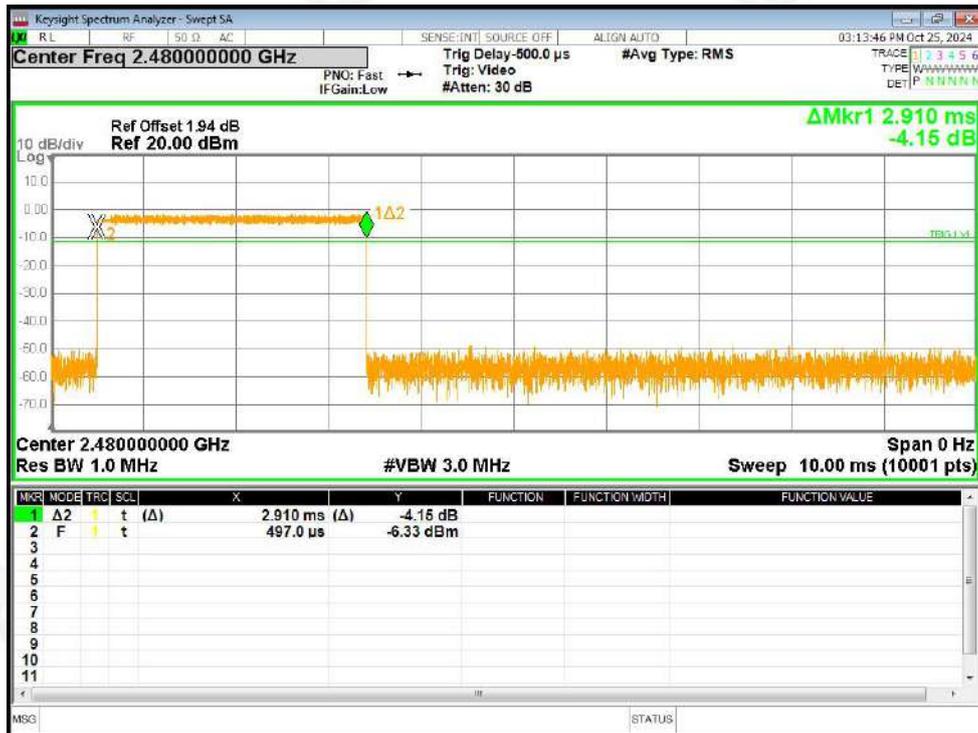

Dwell NVNT 2-DH5 2480MHz Ant1 One Burst




Dwell NVNT 2-DH5 2480MHz Ant1 Accumulated

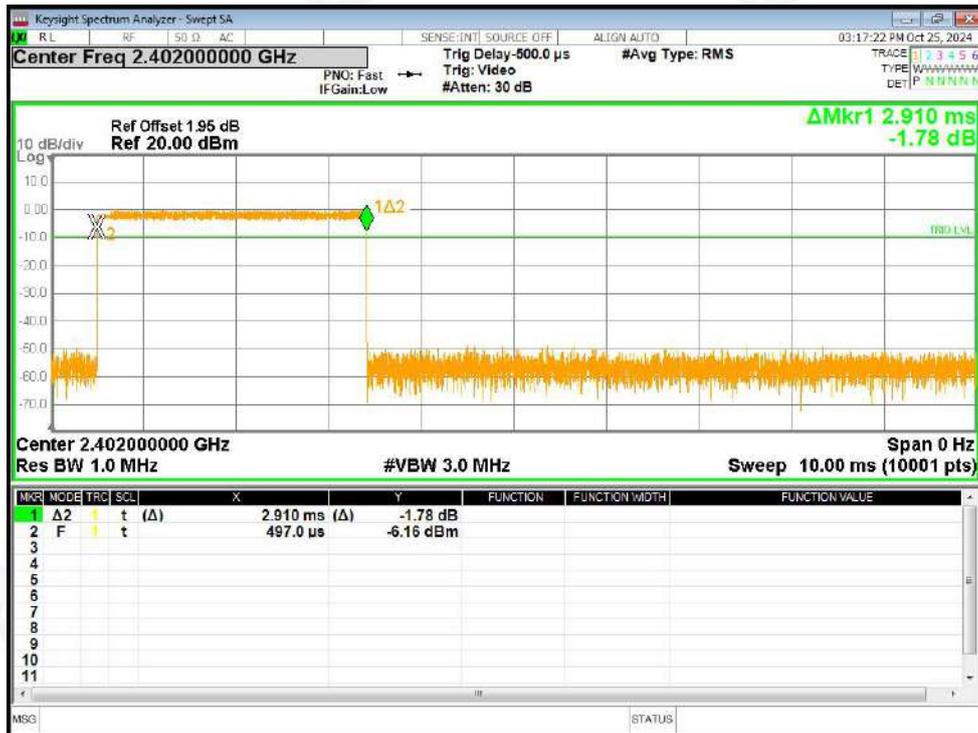

Dwell NVNT 3-DH5 2402MHz Ant1 One Burst




Dwell NVNT 3-DH5 2402MHz Ant1 Accumulated

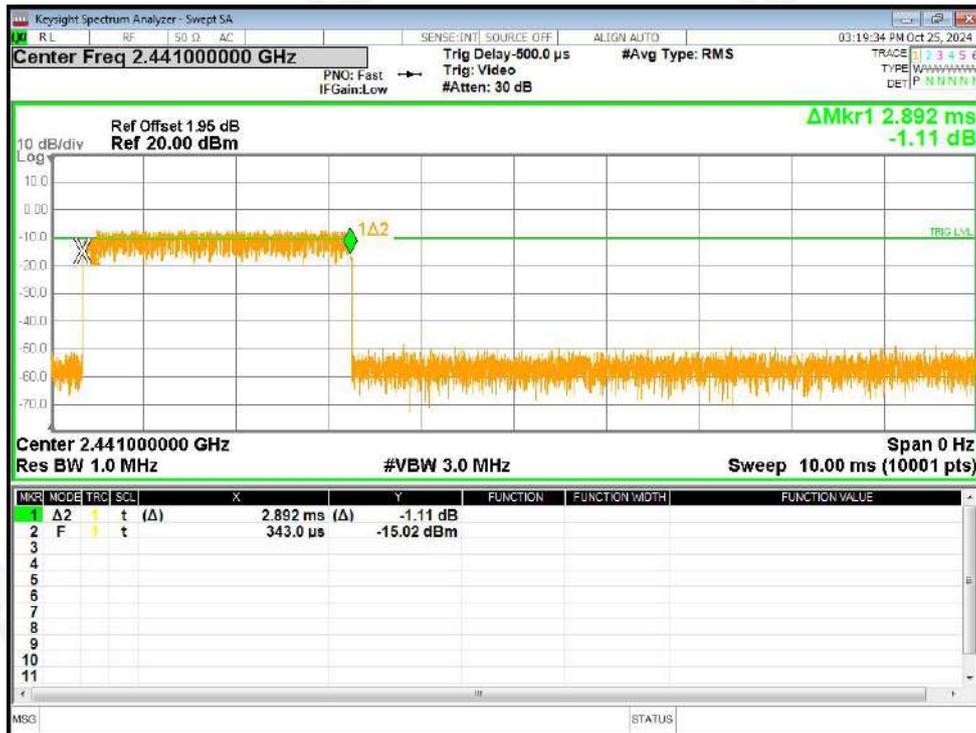


Dwell NVNT 3-DH5 2441MHz Ant1 One Burst



Dwell NVNT 3-DH5 2441MHz Ant1 Accumulated

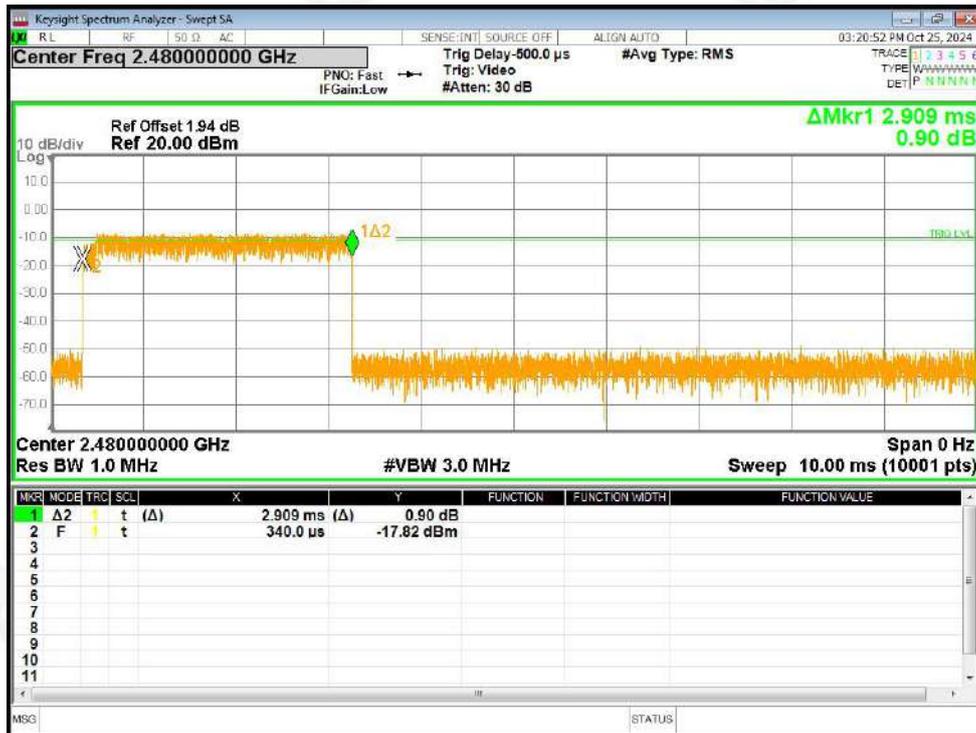

Dwell NVNT 3-DH5 2480MHz Ant1 One Burst

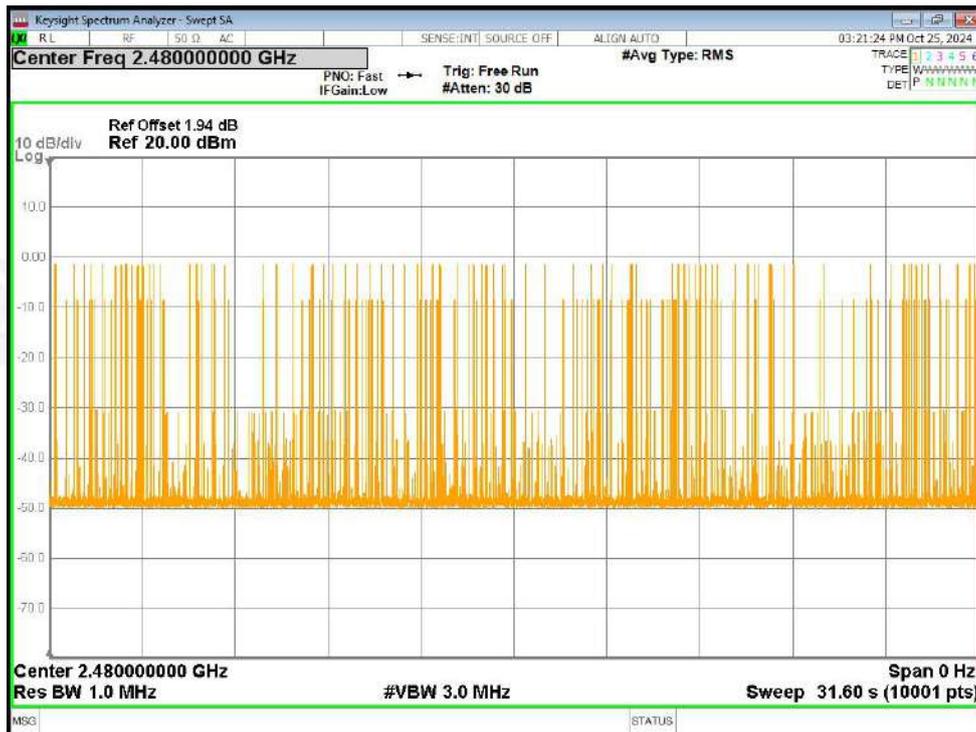

Dwell NVNT 3-DH5 2480MHz Ant1 Accumulated



12. Antenna Requirement

Standard requirement:	RSS-Gen Section 6.8
<p>When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer. For transmitters of RF output power of 10 milliwatts or less, only the portion of the antenna gain that is in excess of 6 dBi (6 dB above isotropic gain) shall be added to the measured RF output power to demonstrate compliance with the radiated power limits specified in the applicable standard. For transmitters of output power greater than 10 milliwatts, the total antenna gain shall be added to the measured RF output power to demonstrate compliance to the specified radiated power</p>	
<p>RSS-Gen requirement: According to the RSS-Gen Section 6.8, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.</p>	
<p>EUT Antenna:</p>	
<p>The antenna is Glue stick antenna(External detachable), the best case gain of the antennas is 2.22dBi, reference to the appendix II for details</p>	



13. Test Setup Photo

Reference to the appendix I for details.

14. EUT Constructional Details

Reference to the appendix II for details.

***** END OF REPORT *****