

Test Report for Antenna Specifications for Model- H97N6S

Table of Contents

<i>Test Report for Antenna Specifications for Model- H97N6S</i>	1
<i>Frequency range and operation</i>	2
<i>Antenna type</i>	2
<i>Antenna Gain</i>	2
<i>Measurement Test method</i>	2
<i>Test Equipment used:</i>	2
Test Equipment calibration information:	2
Test Location:	3
<i>Test set up</i>	3
<i>2D RADIATION PATTERN</i>	4
WiFi Antenna	4
BT Antenna	5

Frequency range and operation

WiFi Antenna: 2.412 to 2.472 GHz and 5.150 to 5.825 GHz

Bluetooth Antenna: 2.402 to 2.484 GHz

Antenna type

WiFi Antenna , Bluetooth Antenna: PCB Inv F type

Antenna Gain

Band	Peak Gain (dBi)	
	Wi-Fi ANT	BT ANT
2.4GHz	4.0 dBi	2.1 dBi
5GHz Band I (5150-5250MHz)	5.2 dBi	
5GHz Band II (5250-5350MHz)	5.5 dBi	
5GHz Band III (5470-5725MHz)	4.7 dBi	
5GHz Band IV (5725-5850MHz)	4.8 dBi	

Measurement Test method

Solder pigtailed on feeding point of antennas and measure passive antenna performance by VNA and OTA chamber system. And the measurement was done in devices level.

Test Equipment used:

1. VNA: ROHDE&SCHWARZ_ZNB 8
2. OTA chamber: ROHDE&SCHWARZ _TS8991 Antenna Measurement System

Test Equipment calibration information:

ZNB8

Cal Date: 2022.8.1

Due Date: 2023.7.31

Cal by CCIC (Shenzhen) Co.Ltd

Test Location:

TUV Rheinland,


No. 362, Huanguan Middle Road, Guanhu Street, Longhua District, Shenzhen, China

Test Engineer: Carl Liu

Test set up

Refer to document – ‘H97N6S_AntennaReport_Photos’.


FII CHAMBER AXIS

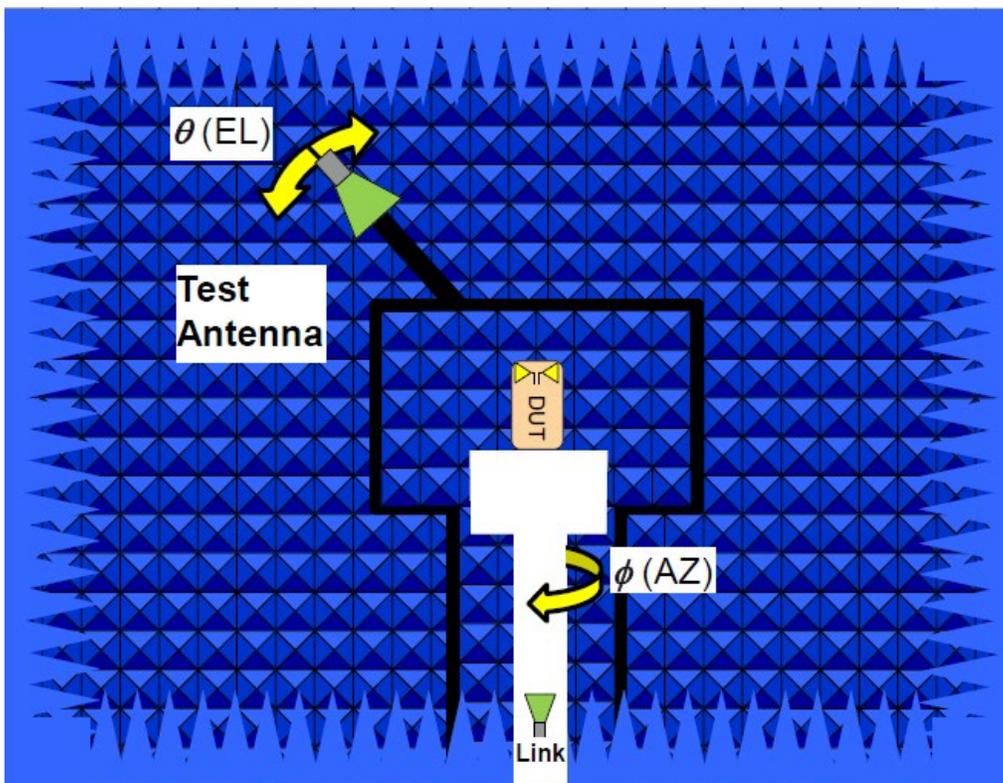


2D RADIATION PATTERN

WiFi Antenna


XY Plane

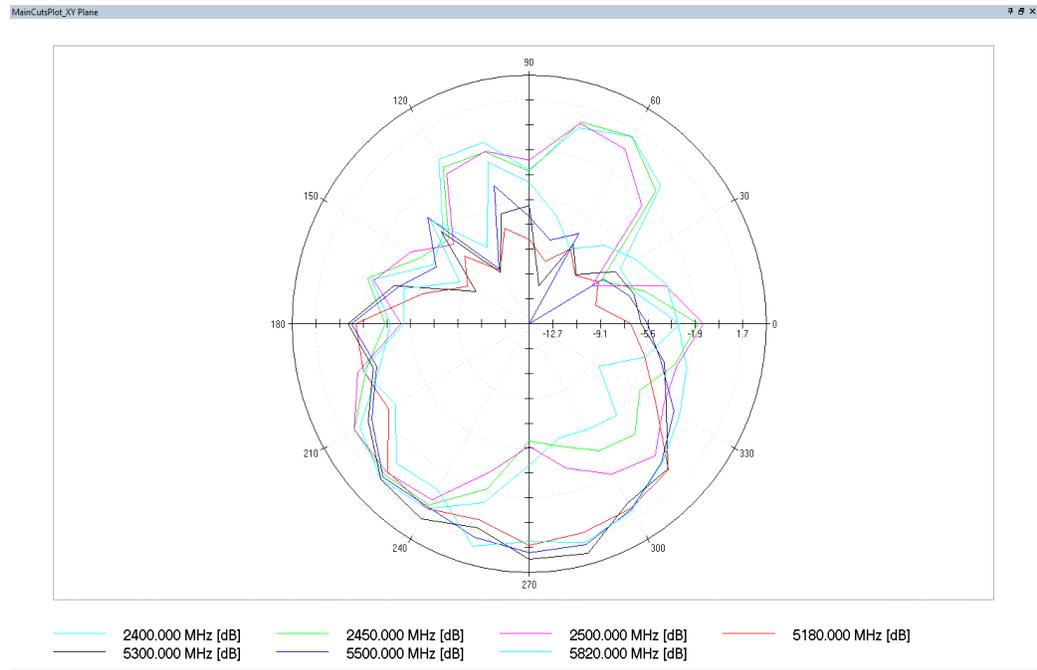

XZ Plane

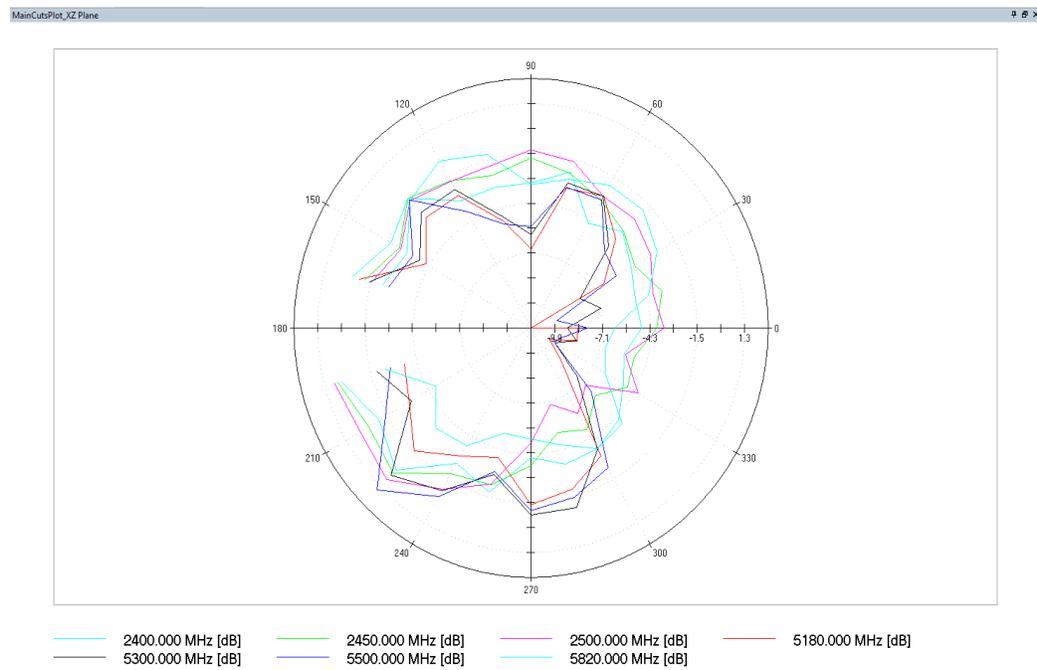


YZ Plane

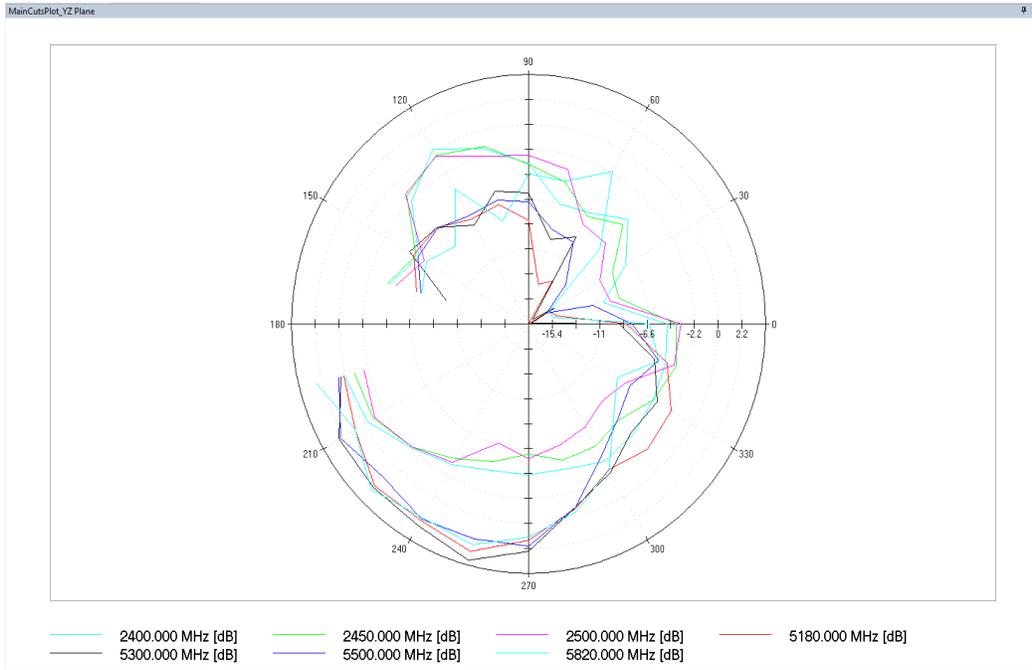


BT Antenna


Phi=0

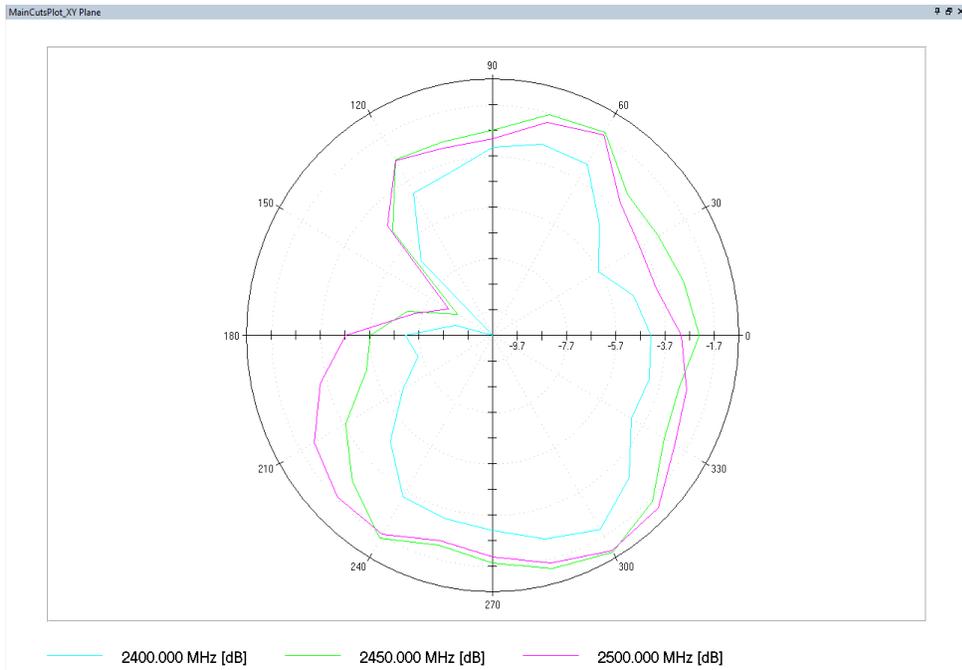

Phi=90

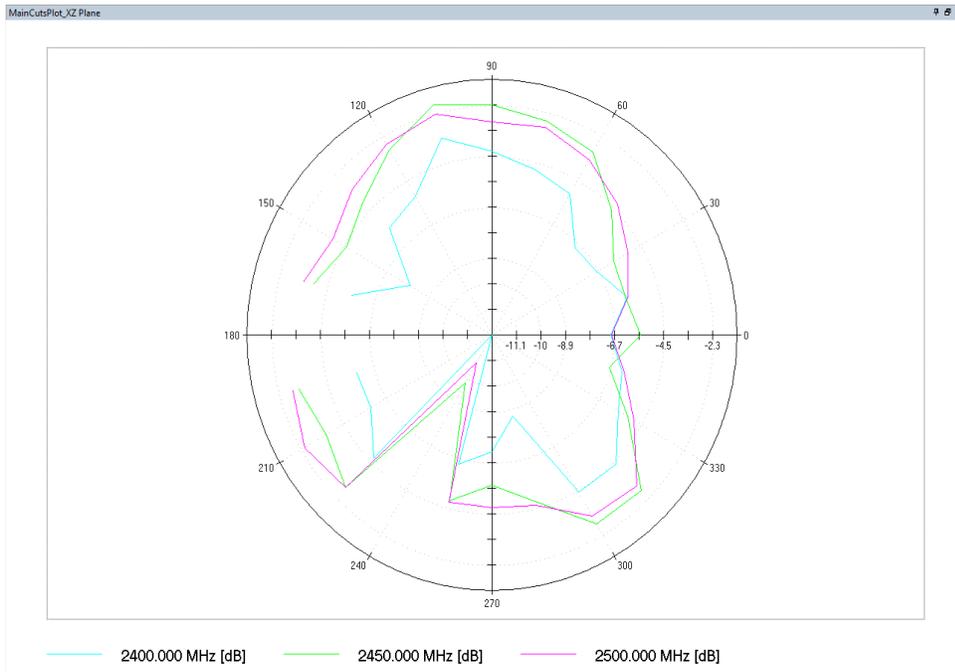

Theta 90

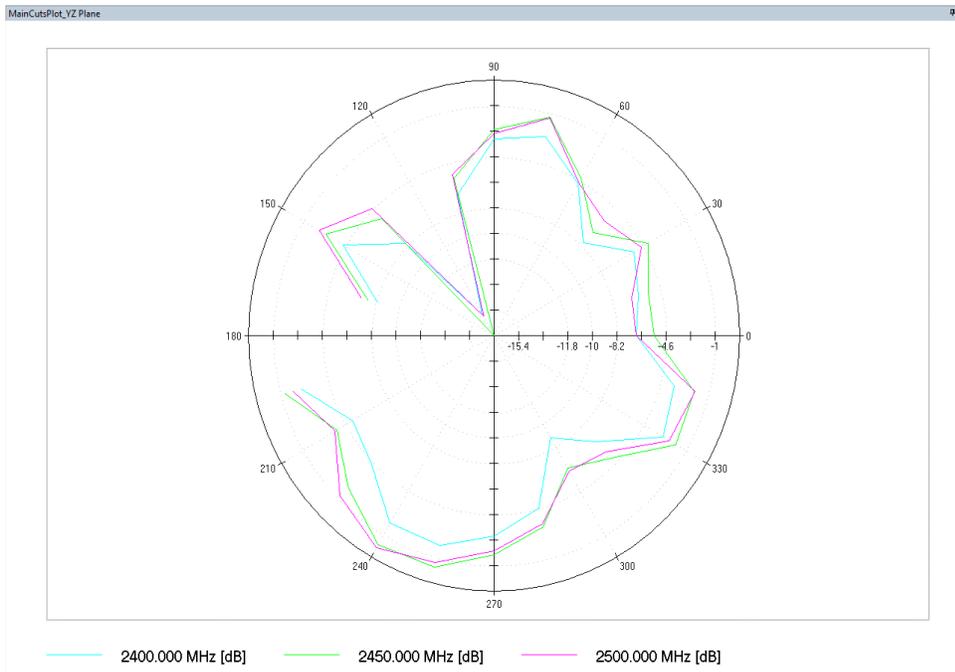



FCC RF Test Report

APPLICANT : Amazon.com Services LLC
EQUIPMENT : Digital Media Receiver
MODEL NAME : H97N6S
FCC ID : 2A4DH-1022
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure
TEST DATE(S) : Sep. 29, 2022 ~ Dec. 03, 2022

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Product Feature of Equipment Under Test..... 5

 1.3 Product Specification of Equipment Under Test..... 5

 1.4 Modification of EUT 6

 1.5 Testing Location 6

 1.6 Test Software..... 7

 1.7 Applicable Standards..... 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

 2.1 Carrier Frequency and Channel 8

 2.2 Test Mode 9

 2.3 Connection Diagram of Test System..... 11

 2.4 Support Unit used in test configuration and system 12

 2.5 EUT Operation Test Setup 12

 2.6 Measurement Results Explanation Example..... 12

3 TEST RESULT..... 13

 3.1 6dB & 26dB & 99% Occupied Bandwidth Measurement..... 13

 3.2 Maximum Conducted Output Power Measurement 19

 3.3 Power Spectral Density Measurement 21

 3.4 Unwanted Emissions Measurement 24

 3.5 AC Conducted Emission Measurement..... 29

 3.6 Antenna Requirements 31

4 LIST OF MEASURING EQUIPMENT 32

5 UNCERTAINTY OF EVALUATION 33

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. RADIATED SPURIOUS EMISSION PLOTS

APPENDIX E. DUTY CYCLE PLOTS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result
3.1	2.1049 & 15.403(i)	26dB & 99% Bandwidth	-	Report only
3.1	15.403(i)	6dB Bandwidth for straddle channels	> 500kHz	Pass
3.2	15.407(a)	Maximum Conducted Output Power	≤ 24 dBm	Pass
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm/MHz	Pass
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	Pass
3.5	15.207	AC Conducted Emission	15.207(a)	Pass
3.6	15.203 & 15.407(a)	Antenna Requirement	15.203 & 15.407(a)	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Amazon.com Services LLC
410 Terry Avenue N Seattle, WA 98109-5210 United States

1.2 Product Feature of Equipment Under Test

Product Feature	
Equipment	Digital Media Receiver
Model Name	H97N6S
FCC ID	2A4DH-1022
SN Code	Conducted: POB2RQ0121740AE3 Conduction: G092360523870021 Radiation: G092370523860039

1.3 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5720 MHz
Maximum Output Power to Antenna	<p><5180 MHz ~ 5240 MHz> 802.11a : 18.37 dBm / 0.0687 W 802.11n HT20 : 16.50 dBm / 0.0447 W 802.11n HT40 : 16.43 dBm / 0.0440 W 802.11ac VHT20 : 16.42 dBm / 0.0439 W 802.11ac VHT40 : 16.35 dBm / 0.0432 W 802.11ac VHT80 : 16.27 dBm / 0.0424 W</p> <p><5260 MHz ~ 5320 MHz> 802.11a : 17.88 dBm / 0.0614 W 802.11n HT20 : 15.99 dBm / 0.0397 W 802.11n HT40 : 15.91 dBm / 0.0390 W 802.11ac VHT20 : 15.96 dBm / 0.0394 W 802.11ac VHT40 : 15.81 dBm / 0.0381 W 802.11ac VHT80 : 15.80 dBm / 0.0380 W</p> <p><5500 MHz ~ 5720 MHz > 802.11a : 18.18 dBm / 0.0658 W 802.11n HT20 : 16.15 dBm / 0.0412 W 802.11n HT40 : 16.16 dBm / 0.0413 W 802.11ac VHT20 : 16.11 dBm / 0.0408 W 802.11ac VHT40 : 16.11 dBm / 0.0408 W 802.11ac VHT80 : 16.14 dBm / 0.0411 W</p>
99% Occupied Bandwidth	<p><5180 MHz ~ 5240 MHz> 802.11a : 16.93 MHz 802.11n HT20 : 17.73 MHz 802.11n HT40 : 36.16 MHz 802.11ac VHT80 : 75.40 MHz</p> <p><5260 MHz ~ 5320 MHz> 802.11a : 16.88 MHz 802.11n HT20 : 17.73 MHz</p>



	802.11n HT40 : 36.26 MHz 802.11ac VHT80 : 75.52 MHz <5500 MHz ~ 5700 MHz > 802.11a : 16.88 MHz 802.11n HT20 : 17.73 MHz 802.11n HT40 : 36.26 MHz 802.11ac VHT80 : 75.52 MHz
Antenna Type / Gain	<5180 MHz ~ 5240 MHz> IFA Antenna with gain 5.2 dBi <5260 MHz ~ 5320 MHz> IFA Antenna with gain 5.5 dBi <5500 MHz ~ 5720 MHz> IFA Antenna with gain 4.7 dBi
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)

Note: For 802.11n HT20 / ac VHT20 and 802.11n HT40 / ac VHT40 mode, the whole testing have assessed only 802.11n HT20/HT40 by referring to their maximum conducted power.

1.4 Modification of EUT

No modifications are made to the EUT during all test items.

1.5 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO02-SZ 03CH02-SZ	CN1256	421272



1.6 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH02-SZ	AUDIX	E3	6.2009-8-24a
2.	CO02-SZ	Rohde&Schwarz	EMC32	10.60.0.0

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5180-5240 MHz U-NII-1	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 [#]	5210		

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5260-5320 MHz U-NII-2A	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 [#]	5290		

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5500- 5720 MHz U-NII-2C	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106 [#]	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700



Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122 [#]	5610	128	5640

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
Straddle Channel	138 [#]	5690	144	5720
	142*	5710		

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "[#]" were 802.11ac VHT80.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT80	MCS0

Simultaneous transmission
802.11ac VHT80 CH42 Tx + Bluetooth LE(2Mbps) CH39 Tx

Test Cases	
AC Conducted Emission	Mode 1 : All Stress + Bluetooth Link + WLAN Link(5G) + Adapter(PA27NA)
Remark: 1. For Radiated Test Cases, The tests were performed with Adapter. 2. RSE Co-location modes are combination from the worst WLAN TX mode and BT Link mode.	



Ch. #		U-NII-1 : 5180-5240 MHz	U-NII-2A : 5260-5320 MHz	U-NII-2C:5500- 5720 MHz
		802.11a	802.11a	802.11a
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140
Straddle		-	-	144

Ch. #		U-NII-1 : 5180-5240 MHz	U-NII-2A : 5260-5320 MHz	U-NII-2C:5500- 5720 MHz
		802.11n HT20	802.11n HT20	802.11n HT20
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140
Straddle		-	-	144


Ch. #		U-NII-1 : 5180-5240 MHz	U-NII-2A : 5260-5320 MHz	U-NII-2C:5500- 5720 MHz
		802.11n HT40	802.11n HT40	802.11n HT40
L	Low	38	54	102
M	Middle	-	-	110
H	High	46	62	134
Straddle		-	-	142

Ch. #		U-NII-1 : 5180-5240 MHz	U-NII-2A : 5260-5320 MHz	U-NII-2C:5500- 5720 MHz
		802.11ac VHT80	802.11ac VHT80	802.11ac VHT80
L	Low	-	-	106
M	Middle	42	58	-
H	High	-	-	122
Straddle		-	-	138


Remark: For radiation spurious emission, the final modulation and the worst data rate was reference the max RF conducted power.

2.3 Connection Diagram of Test System

For AC Conducted Emission:

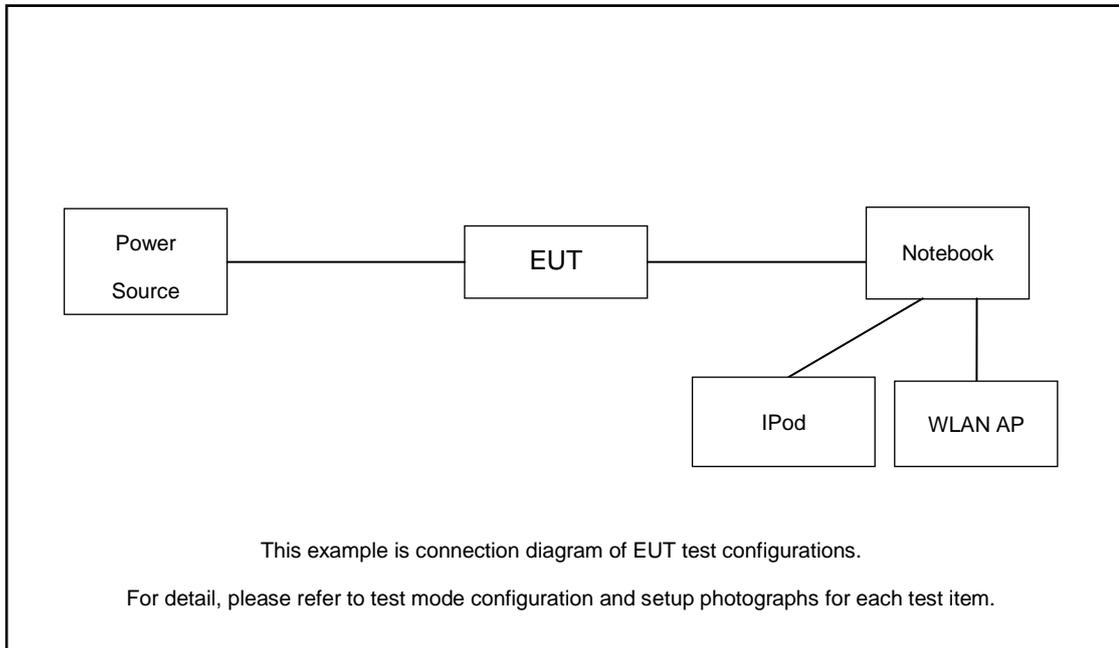

For Radiated Emission:

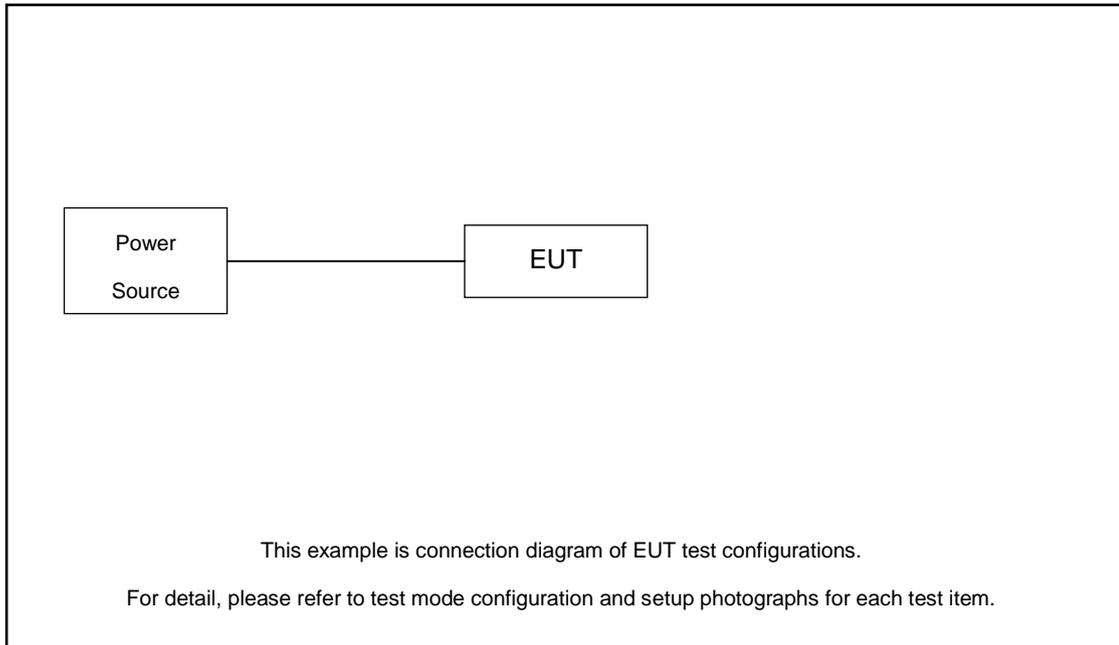



2.4 Support Unit used in test configuration and system

Item	Equipment	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	RT-AC66U	Fcc DoC	N/A	Shielded, 1.0m
2.	Notebook	Inspiron 15-7570	Fcc DoC	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
3.	iPod	MC525 ZP/A	Fcc DoC	Shielded, 1.0m	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to Tx mode for continuous transmit.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 2.8 dB and 10dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 2.8 + 10 = 12.8 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 6dB & 26dB & 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB & 26dB & 99% Occupied Bandwidth

The minimum 6 dB bandwidth for straddle channels located in UNII-3 shall be at least 500 kHz.
26dB and 99% Occupied bandwidth are reporting only.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth for the band 5.725-5.85GHz
2. For 6dB BW, Set RBW = 100kHz.
For 26dB BW, Set RBW = approximately 1% of the emission bandwidth.
For 99% OBW, Set RBW = 1% to 5% of the OBW.
3. For 26dB BW, Set the VBW > RBW.
For 6dB BW & 99% OBW, Set the VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.



3.1.4 Test Setup









3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.

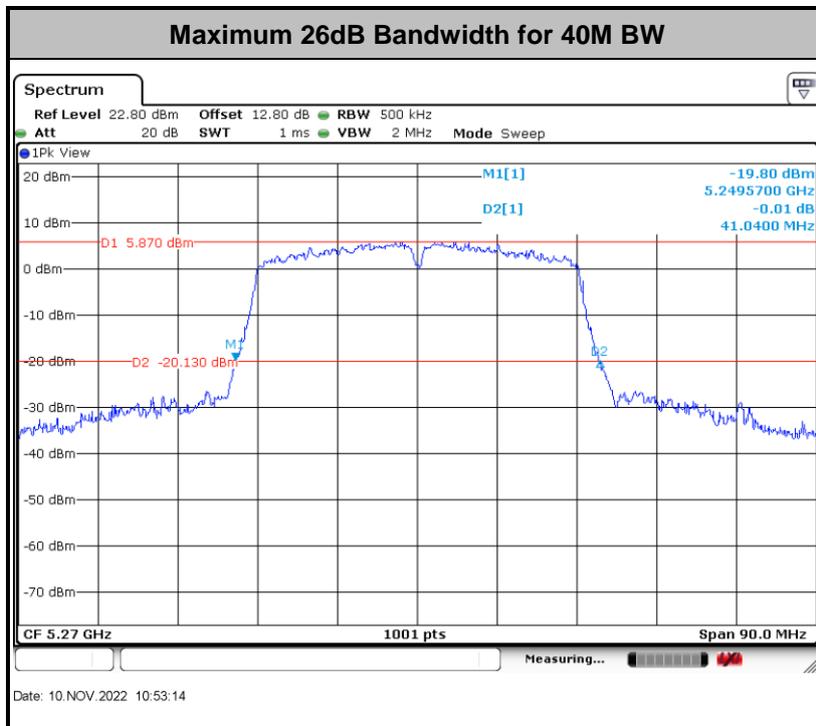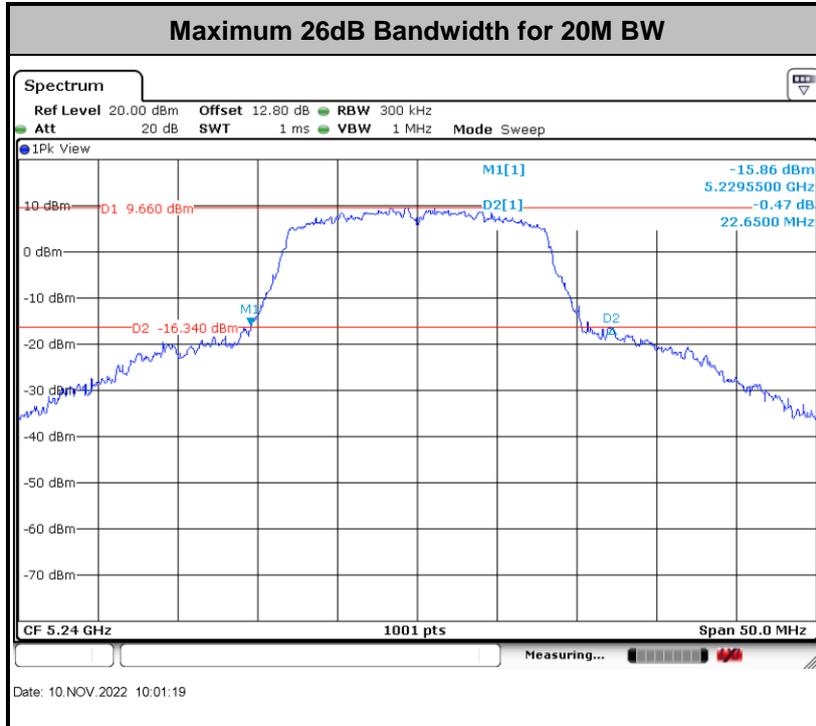

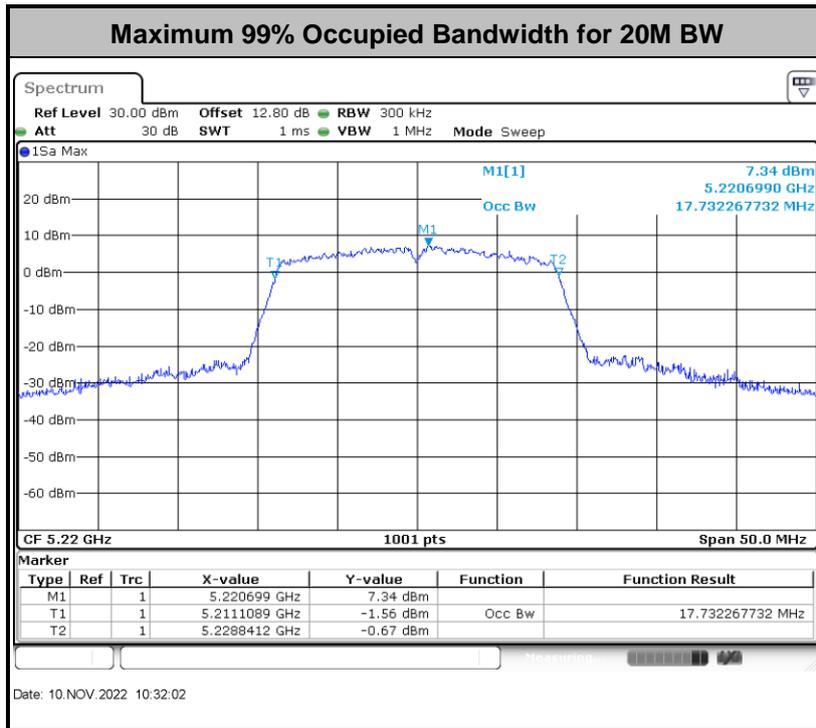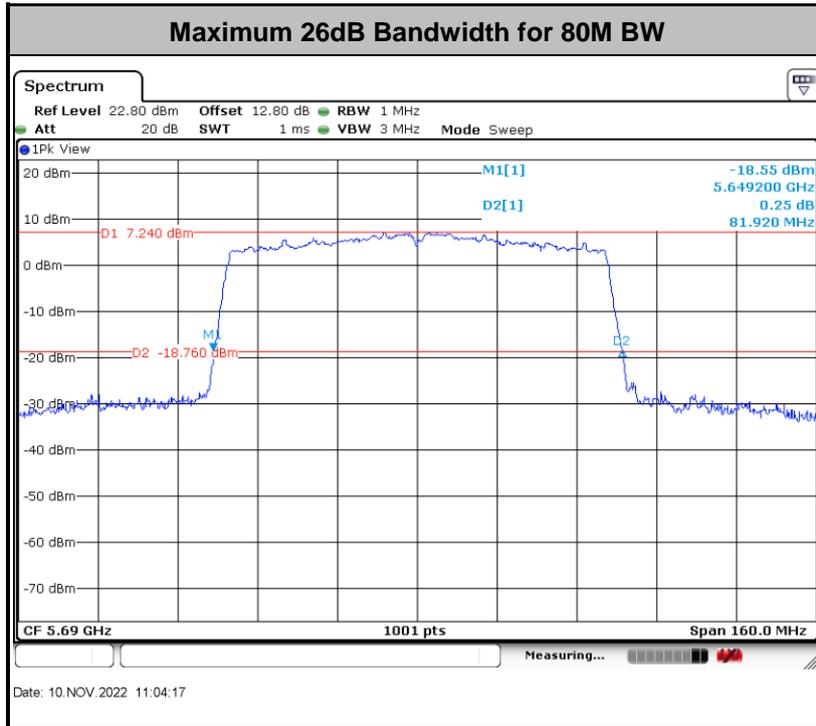

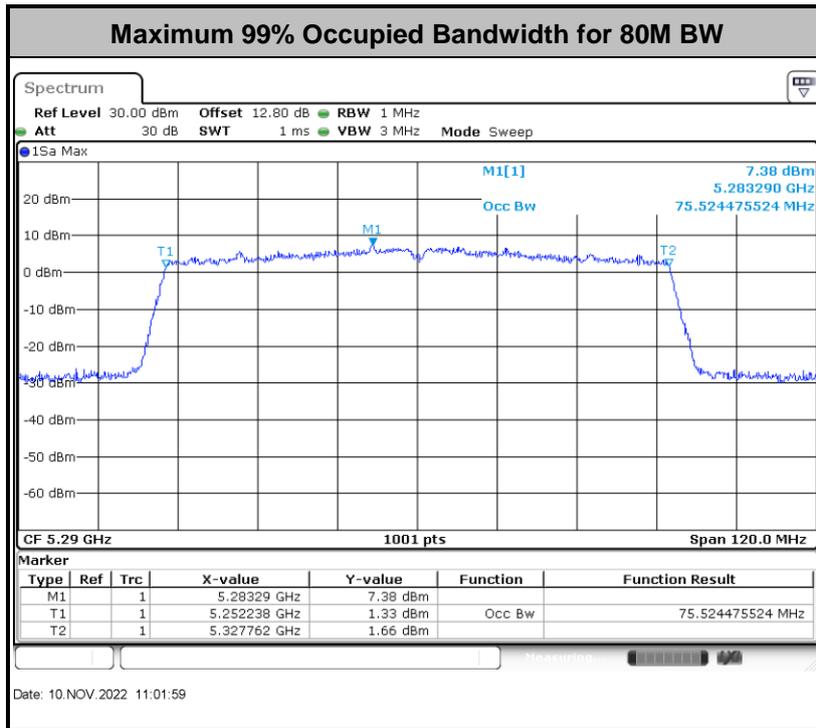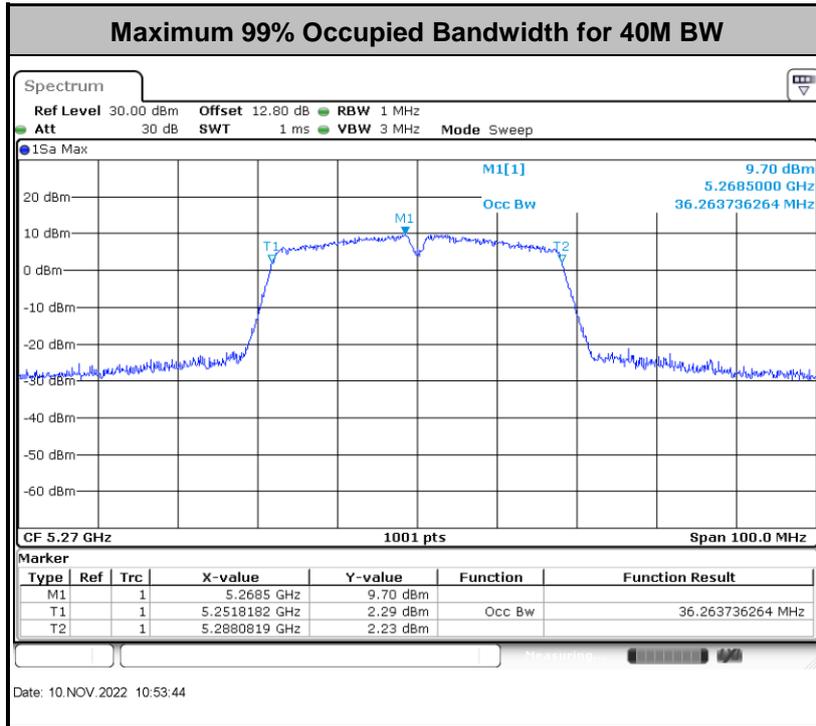




Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



3.1.6 Test Result of 6dB Bandwidth for Straddle Channels

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
					Ant 1	Ant 1	
11a	6Mbps	1	144	5720	2.55	0.5	Pass
HT20	MCS0	1	144	5720	2.55	0.5	Pass
HT40	MCS0	1	142	5710	2.55	0.5	Pass
VHT80	MCS0	1	138	5690	2.56	0.5	Pass

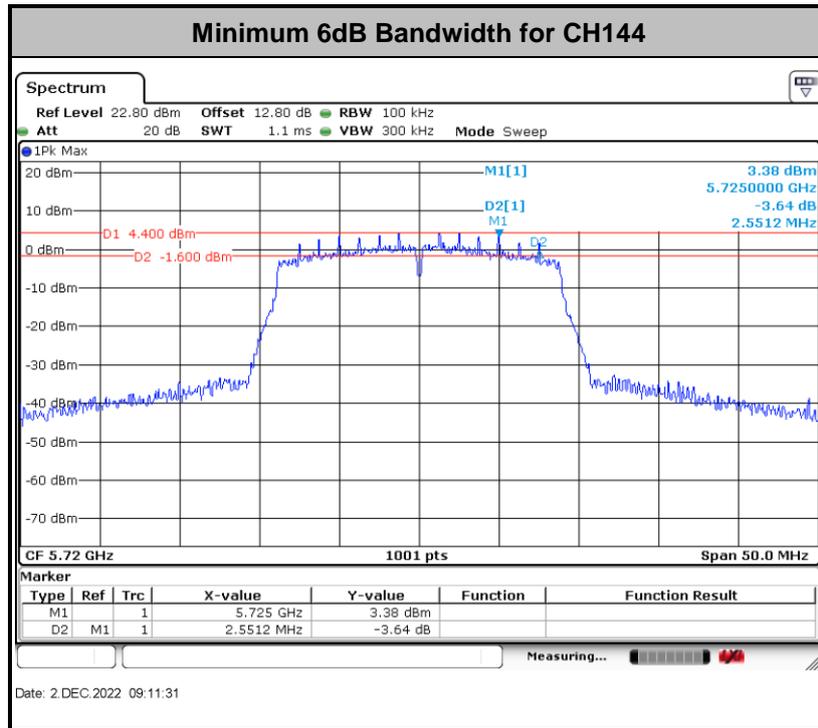

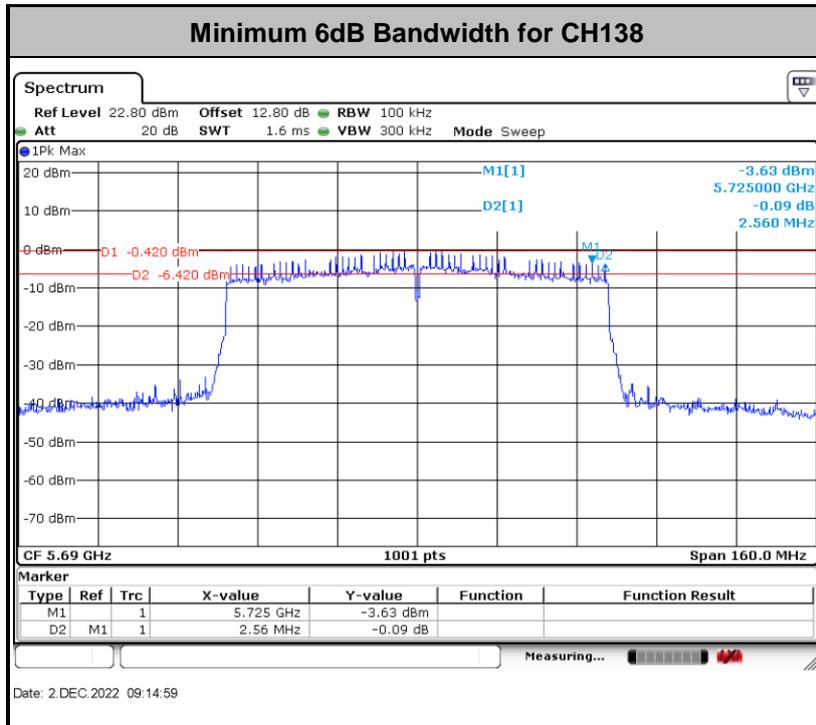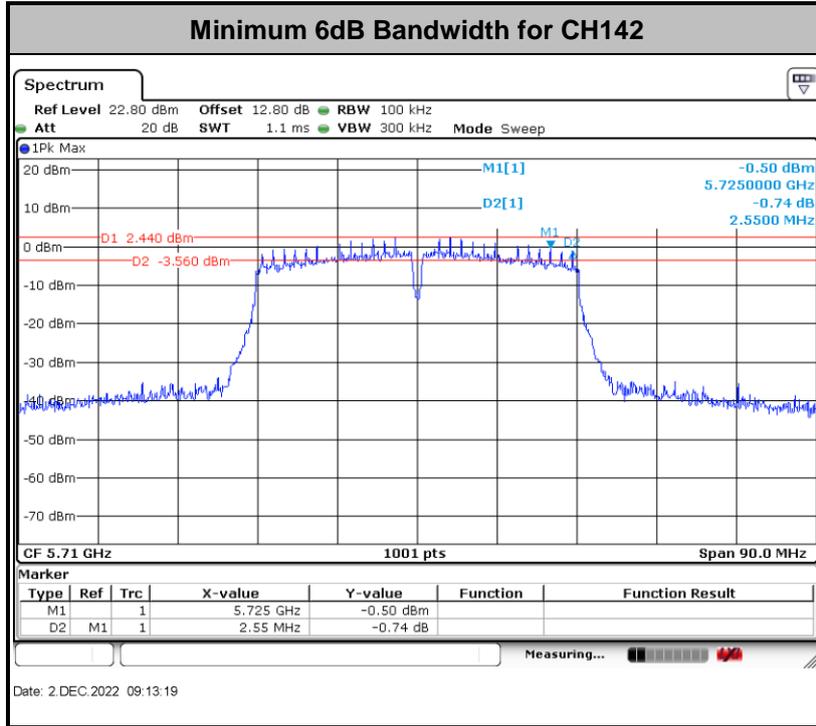



3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log_{10} B$, where B is the 26 dB emission bandwidth in megahertz.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures


The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

3.2.4 Test Setup

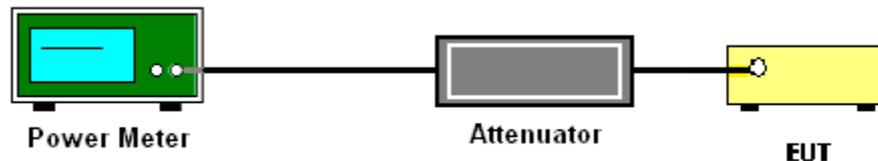

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures


The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW \geq 3 MHz.
 - Number of points in sweep \geq 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup

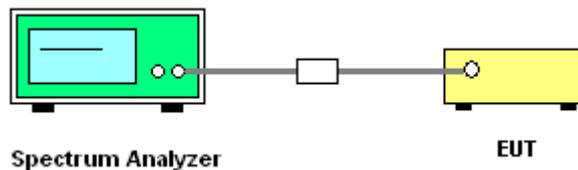

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

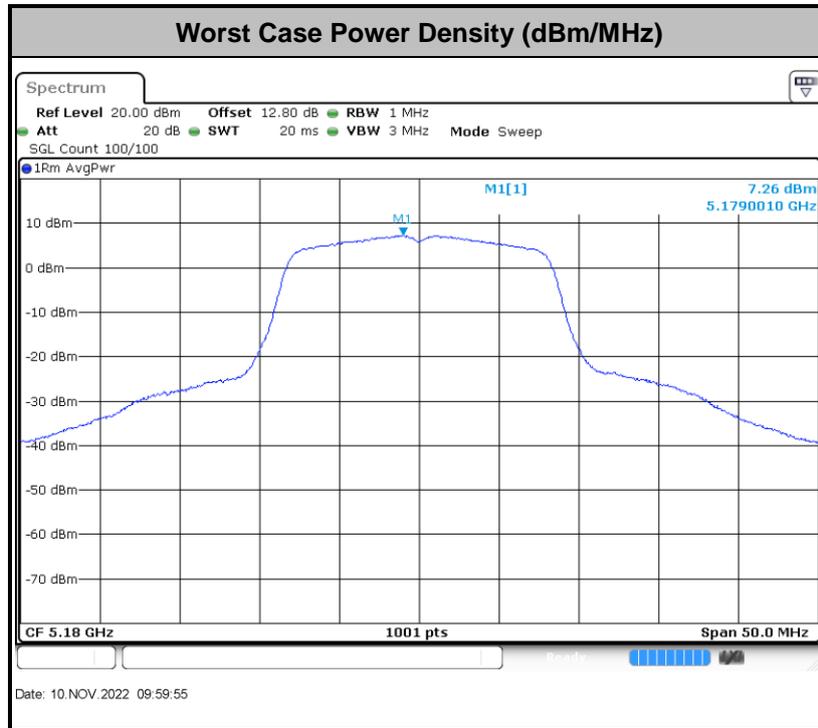

Note: Average Power Density (dB) = Measured value+ Duty Factor



3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5725 MHz band: all emissions outside of the 5470-5725 MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3



EIRP (dBm)	Field Strength at 3m (dBµV/m)
- 27	68.3

Note: The following formula is used to convert the EIRP to field strength.

$$EIRP = E_{Meas} + 20\log (d_{Meas}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBµV/m

d_{Meas} is the measurement distance, in m

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW \geq 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

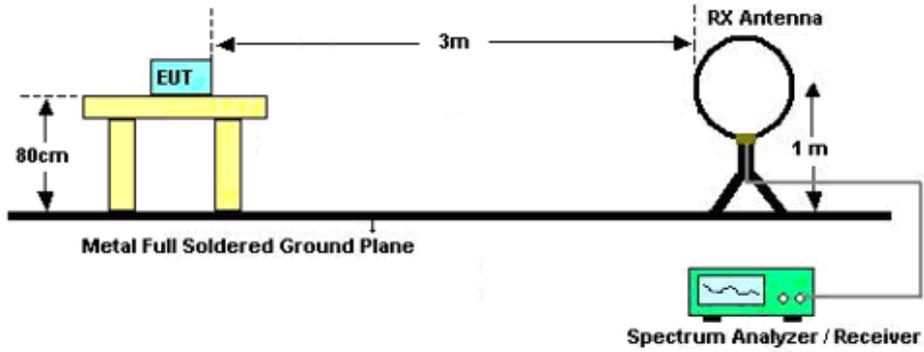

For radiated emissions from 30MHz to 1GHz

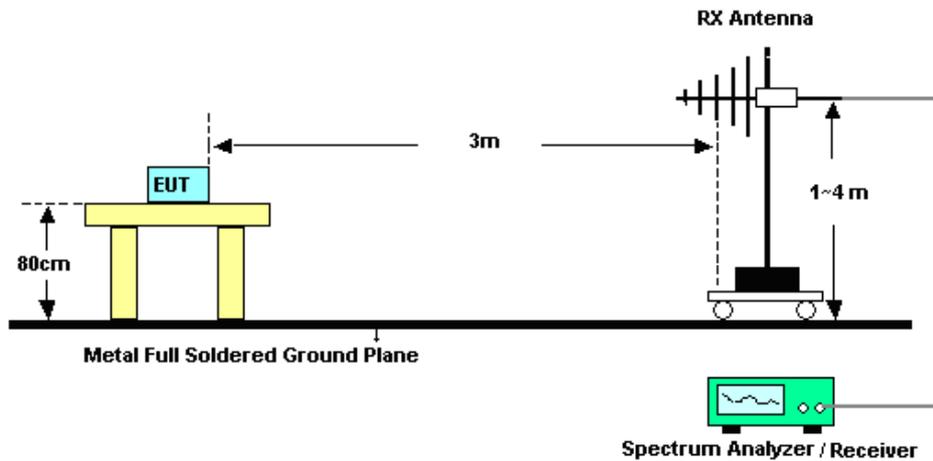

For radiated emissions above 1GHz

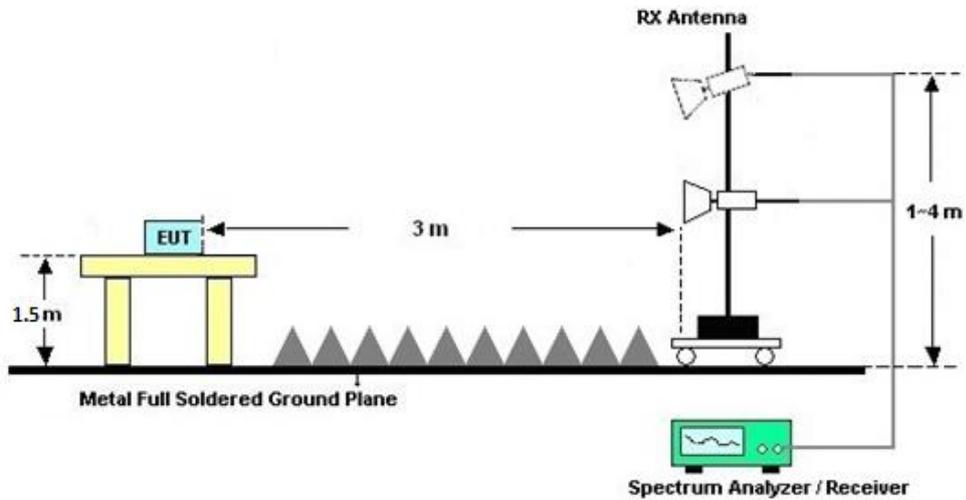

3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C&D.

3.4.7 Duty Cycle

Please refer to Appendix E.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C&D.



3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

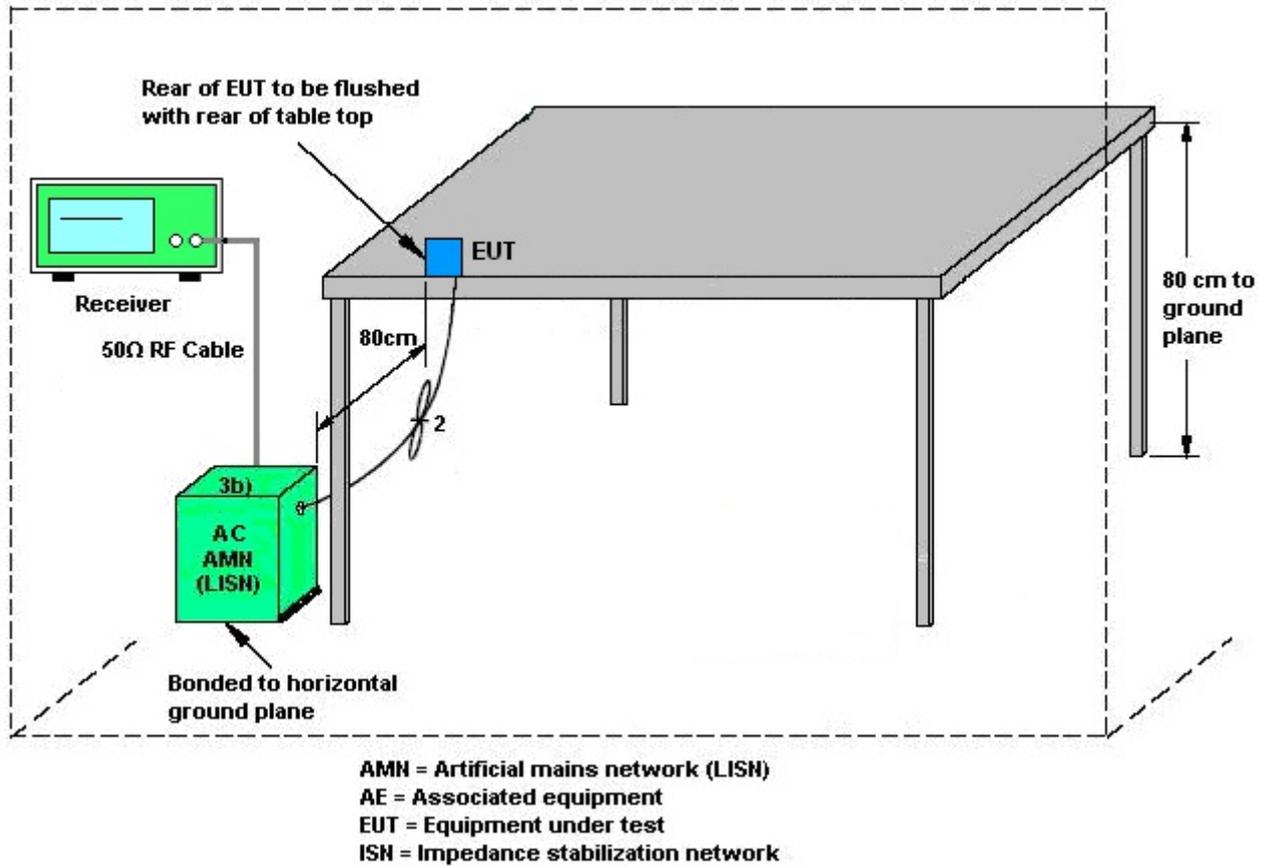

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 07, 2022	Nov. 10, 2022~ Dec. 02, 2022	Apr. 06, 2023	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 28, 2021	Nov. 10, 2022~ Dec. 02, 2022	Dec. 27, 2022	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1542004	50MHz Bandwidth	Dec. 28, 2021	Nov. 10, 2022~ Dec. 02, 2022	Dec. 27, 2022	Conducted (TH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY551502 13	10Hz~44GHz	Jul. 07, 2022	Sep. 29, 2022~ Nov. 15, 2022	Jul. 06, 2023	Radiation (03CH02-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jul. 28, 2022	Sep. 29, 2022~ Nov. 15, 2022	Jul. 27, 2023	Radiation (03CH02-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Sep. 28, 2022	Sep. 29, 2022~ Nov. 15, 2022	Sep. 27, 2023	Radiation (03CH02-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 07, 2022	Sep. 29, 2022~ Nov. 15, 2022	Jul. 06, 2023	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 07, 2022	Sep. 29, 2022~ Nov. 15, 2022	Jul. 06, 2023	Radiation (03CH02-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz~40GHz	Apr. 10, 2022	Sep. 29, 2022~ Nov. 15, 2022	Apr. 09, 2023	Radiation (03CH02-SZ)
LF Amplifier	Burgeon	BPA-530	102211	0.01~3000Mhz	Oct. 20, 2021	Sep. 29, 2022~ Nov. 15, 2022	Oct. 19, 2022	Radiation (03CH02-SZ)
LF Amplifier	Burgeon	BPA-530	102211	0.01~3000Mhz	Oct. 19, 2022		Oct. 18, 2023	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P-R	1943528	1GHz~18GHz	Oct. 20, 2021	Sep. 29, 2022~ Nov. 15, 2022	Oct. 19, 2022	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P-R	1943528	1GHz~18GHz	Oct. 19, 2022		Oct. 18, 2023	Radiation (03CH02-SZ)
HF Amplifier	KEYSIGHT	83017A	MY532701 05	0.5GHz~26.5Ghz	Oct. 20, 2021	Sep. 29, 2022~ Nov. 15, 2022	Oct. 19, 2022	Radiation (03CH02-SZ)
HF Amplifier	KEYSIGHT	83017A	MY532701 05	0.5GHz~26.5Ghz	Oct. 19, 2022		Oct. 18, 2023	Radiation (03CH02-SZ)
AC Power Source	Chroma	61601	616010003 043	N/A	Nov. 11, 2021	Sep. 29, 2022~ Nov. 15, 2022	Nov. 10, 2022	Radiation (03CH02-SZ)
AC Power Source	Chroma	61601	616010003 043	N/A	Nov. 10, 2022		Nov. 09, 2023	Radiation (03CH02-SZ)
Turn Table	Chaintek	T-200	N/A	0~360 degree	NCR	Sep. 29, 2022~ Nov. 15, 2022	NCR	Radiation (03CH02-SZ)
Antenna Mast	Chaintek	MBS-400	N/A	1 m~4 m	NCR	Sep. 29, 2022~ Nov. 15, 2022	NCR	Radiation (03CH02-SZ)
EMI Receiver	R&S	ESR7	102297	9kHz~7GHz;	Jul. 06, 2022	Dec. 03, 2022	Jul. 05, 2023	Conduction (CO02-SZ)
AC LISN	R&S	ENV216	101499	9kHz~30MHz	Jul. 06, 2022	Dec. 03, 2022	Jul. 05, 2023	Conduction (CO02-SZ)
AC Power Source	CHROMA	61601	616010002 470	100Vac~250Vac	NCR	Dec. 03, 2022	NCR	Conduction (CO02-SZ)

NCR: No Calibration Required



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±1.34 dB
Conducted Emissions	±1.34 dB
Occupied Channel Bandwidth	±0.13 %
Conducted Power Spectral Density	±1.32 dB

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.2dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1dB
---	-------

----- THE END -----



Appendix A. Conducted Test Results

Test Engineer:	Liu Qiu Qiu	Temperature:	24~26	°C
Test Date:	2022/11/10~2022/12/2	Relative Humidity:	50~53	%

TEST RESULTS DATA
26dB and 99% OBW

U-NII-1										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)		
11a	6Mbps	1	36	5180	16.83	20.50	-	22.26		
11a	6Mbps	1	44	5220	16.93	21.00	-	22.29		
11a	6Mbps	1	48	5240	16.93	22.65	-	22.29		
HT20	MCS0	1	36	5180	17.68	20.50	-	22.48		
HT20	MCS0	1	44	5220	17.73	20.55	-	22.49		
HT20	MCS0	1	48	5240	17.73	20.65	-	22.49		
HT40	MCS0	1	38	5190	36.16	40.59	-	23.01		
HT40	MCS0	1	46	5230	36.16	40.68	-	23.01		
VHT80	MCS0	1	42	5210	75.40	81.60	-	23.01		

TEST RESULTS DATA
Average Power Table

U-NII-1										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
11a	6Mbps	1	36	5180	0.16	18.37	24.00	5.20		Pass
11a	6Mbps	1	44	5220	0.16	18.11	24.00	5.20		Pass
11a	6Mbps	1	48	5240	0.16	18.24	24.00	5.20		Pass
HT20	MCS0	1	36	5180	0.19	16.50	24.00	5.20		Pass
HT20	MCS0	1	44	5220	0.19	16.14	24.00	5.20		Pass
HT20	MCS0	1	48	5240	0.19	16.19	24.00	5.20		Pass
HT40	MCS0	1	38	5190	0.35	16.43	24.00	5.20		Pass
HT40	MCS0	1	46	5230	0.35	16.36	24.00	5.20		Pass
VHT20	MCS0	1	36	5180	0.21	16.42	24.00	5.20		Pass
VHT20	MCS0	1	44	5220	0.21	16.11	24.00	5.20		Pass
VHT20	MCS0	1	48	5240	0.21	16.16	24.00	5.20		Pass
VHT40	MCS0	1	38	5190	0.35	16.35	24.00	5.20		Pass
VHT40	MCS0	1	46	5230	0.35	16.30	24.00	5.20		Pass
VHT80	MCS0	1	42	5210	0.67	16.27	24.00	5.20		Pass

TEST RESULTS DATA
Power Spectral Density

U-NII-1										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)	-	Pass/Fail
11a	6Mbps	1	36	5180	0.16	7.42	11.00	5.20		Pass
11a	6Mbps	1	44	5220	0.16	7.04	11.00	5.20		Pass
11a	6Mbps	1	48	5240	0.16	7.35	11.00	5.20		Pass
HT20	MCS0	1	36	5180	0.19	5.26	11.00	5.20		Pass
HT20	MCS0	1	44	5220	0.19	5.03	11.00	5.20		Pass
HT20	MCS0	1	48	5240	0.19	4.70	11.00	5.20		Pass
HT40	MCS0	1	38	5190	0.35	2.44	11.00	5.20		Pass
HT40	MCS0	1	46	5230	0.35	2.06	11.00	5.20		Pass
VHT80	MCS0	1	42	5210	0.67	-0.69	11.00	5.20		Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2A										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)	FCC 26dB Bandwidth Power Limit (dBm)	Note
11a	6M bps	1	52	5260	16.88	20.50	23.27	29.27	23.98	
11a	6M bps	1	60	5300	16.88	20.60	23.27	29.27	23.98	
11a	6M bps	1	64	5320	16.88	20.55	23.27	29.27	23.98	
HT20	MCS 0	1	52	5260	17.73	20.55	23.49	29.49	23.98	
HT20	MCS 0	1	60	5300	17.73	20.60	23.49	29.49	23.98	
HT20	MCS 0	1	64	5320	17.73	20.55	23.49	29.49	23.98	
HT40	MCS 0	1	54	5270	36.26	41.04	23.98	30.00	23.98	
HT40	MCS 0	1	62	5310	36.16	40.59	23.98	30.00	23.98	
VHT80	MCS 0	1	58	5290	75.52	81.44	23.98	30.00	23.98	

TEST RESULTS DATA
Average Power Table

U-NII-2A										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail
11a	6M bps	1	52	5260	0.16	17.78	23.98	5.50	26.99	Pass
11a	6M bps	1	60	5300	0.16	17.82	23.98	5.50	26.99	Pass
11a	6M bps	1	64	5320	0.16	17.88	23.98	5.50	26.99	Pass
HT20	MCS 0	1	52	5260	0.19	15.85	23.98	5.50	26.99	Pass
HT20	MCS 0	1	60	5300	0.19	15.71	23.98	5.50	26.99	Pass
HT20	MCS 0	1	64	5320	0.19	15.99	23.98	5.50	26.99	Pass
HT40	MCS 0	1	54	5270	0.35	15.86	23.98	5.50	26.99	Pass
HT40	MCS 0	1	62	5310	0.35	15.91	23.98	5.50	26.99	Pass
VHT20	MCS 0	1	52	5260	0.21	15.81	23.98	5.50	26.99	Pass
VHT20	MCS 0	1	60	5300	0.21	15.63	23.98	5.50	26.99	Pass
VHT20	MCS 0	1	64	5320	0.21	15.96	23.98	5.50	26.99	Pass
VHT40	MCS 0	1	54	5270	0.35	15.80	23.98	5.50	26.99	Pass
VHT40	MCS 0	1	62	5310	0.35	15.81	23.98	5.50	26.99	Pass
VHT80	MCS 0	1	58	5290	0.67	15.80	23.98	5.50	26.99	Pass

TEST RESULTS DATA
Power Spectral Density

U-NII-2A										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass/Fail
11a	6M bps	1	52	5260	0.16	6.79	11.00	5.50		Pass
11a	6M bps	1	60	5300	0.16	6.79	11.00	5.50		Pass
11a	6M bps	1	64	5320	0.16	6.87	11.00	5.50		Pass
HT20	MCS 0	1	52	5260	0.19	4.59	11.00	5.50		Pass
HT20	MCS 0	1	60	5300	0.19	4.60	11.00	5.50		Pass
HT20	MCS 0	1	64	5320	0.19	4.77	11.00	5.50		Pass
HT40	MCS 0	1	54	5270	0.35	1.76	11.00	5.50		Pass
HT40	MCS 0	1	62	5310	0.35	1.86	11.00	5.50		Pass
VHT80	MCS 0	1	58	5290	0.67	-1.30	11.00	5.50		Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2C										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)	FCC 26dB Bandwidth Power Limit (dBm)	Note
11a	6M bps	1	100	5500	16.88	20.50	23.27	29.27	23.98	
11a	6M bps	1	116	5580	16.88	20.55	23.27	29.27	23.98	
11a	6M bps	1	140	5700	16.83	20.40	23.26	29.26	23.98	
11a	6Mbps	1	144	5720	16.83	20.40	23.26	29.26	23.98	
HT20	MCS 0	1	100	5500	17.68	20.50	23.48	29.48	23.98	
HT20	MCS 0	1	116	5580	17.73	20.55	23.49	29.49	23.98	
HT20	MCS 0	1	140	5700	17.73	20.50	23.49	29.49	23.98	
HT20	MCS0	1	144	5720	17.73	20.50	23.49	29.49	23.98	
HT40	MCS 0	1	102	5510	36.16	40.77	23.98	30.00	23.98	
HT40	MCS 0	1	110	5550	36.26	40.95	23.98	30.00	23.98	
HT40	MCS 0	1	134	5670	36.16	40.95	23.98	30.00	23.98	
HT40	MCS0	1	142	5710	36.26	40.86	23.98	30.00	23.98	
VHT80	MCS 0	1	106	5530	75.40	81.76	23.98	30.00	23.98	
VHT80	MCS 0	1	122	5610	75.52	81.76	23.98	30.00	23.98	
VHT80	MCS0	1	138	5690	75.52	81.92	23.98	30.00	23.98	

TEST RESULTS DATA
Average Power Table

U-NII-2C										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail
11a	6M bps	1	100	5500	0.16	18.18	23.98	4.70	26.99	Pass
11a	6M bps	1	116	5580	0.16	17.66	23.98	4.70	26.99	Pass
11a	6M bps	1	140	5700	0.16	17.68	23.98	4.70	26.99	Pass
11a	6M bps	1	144	5720	0.16	17.61	23.98	4.70	26.99	Pass
HT20	MCS 0	1	100	5500	0.19	16.15	23.98	4.70	26.99	Pass
HT20	MCS 0	1	116	5580	0.19	15.62	23.98	4.70	26.99	Pass
HT20	MCS 0	1	140	5700	0.19	15.65	23.98	4.70	26.99	Pass
HT20	MCS 0	1	144	5720	0.19	15.52	23.98	4.70	26.99	Pass
HT40	MCS 0	1	102	5510	0.35	16.16	23.98	4.70	26.99	Pass
HT40	MCS 0	1	110	5550	0.35	15.73	23.98	4.70	26.99	Pass
HT40	MCS 0	1	134	5670	0.35	15.77	23.98	4.70	26.99	Pass
HT40	MCS 0	1	142	5710	0.35	15.65	23.98	4.70	26.99	Pass
VHT20	MCS 0	1	100	5500	0.21	16.11	23.98	4.70	26.99	Pass
VHT20	MCS 0	1	116	5580	0.21	15.60	23.98	4.70	26.99	Pass
VHT20	MCS 0	1	140	5700	0.21	15.62	23.98	4.70	26.99	Pass
VHT20	MCS 0	1	144	5720	0.21	15.44	23.98	4.70	26.99	Pass
VHT40	MCS 0	1	102	5510	0.35	16.11	23.98	4.70	26.99	Pass
VHT40	MCS 0	1	110	5550	0.35	15.63	23.98	4.70	26.99	Pass
VHT40	MCS 0	1	134	5670	0.35	15.67	23.98	4.70	26.99	Pass
VHT40	MCS 0	1	142	5710	0.35	15.59	23.98	4.70	26.99	Pass
VHT80	MCS 0	1	106	5530	0.67	15.91	23.98	4.70	26.99	Pass
VHT80	MCS 0	1	122	5610	0.67	16.14	23.98	4.70	26.99	Pass
VHT80	MCS 0	1	138	5690	0.67	15.52	23.98	4.70	26.99	Pass

TEST RESULTS DATA
Power Spectral Density


U-NII-2C										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass/Fail
11a	6M bps	1	100	5500	0.16	7.24	11.00	4.70		Pass
11a	6M bps	1	116	5580	0.16	7.19	11.00	4.70		Pass
11a	6M bps	1	140	5700	0.16	6.76	11.00	4.70		Pass
11a	6Mbps	1	144	5720	0.16	6.71	11.00	4.70		Pass
HT20	MCS 0	1	100	5500	0.19	5.28	11.00	4.70		Pass
HT20	MCS 0	1	116	5580	0.19	5.12	11.00	4.70		Pass
HT20	MCS 0	1	140	5700	0.19	4.50	11.00	4.70		Pass
HT20	MCS0	1	144	5720	0.19	4.54	11.00	4.70		Pass
HT40	MCS 0	1	102	5510	0.35	2.30	11.00	4.70		Pass
HT40	MCS 0	1	110	5550	0.35	2.42	11.00	4.70		Pass
HT40	MCS 0	1	134	5670	0.35	1.61	11.00	4.70		Pass
HT40	MCS0	1	142	5710	0.35	1.84	11.00	4.70		Pass
VHT80	MCS 0	1	106	5530	0.67	-0.62	11.00	4.70		Pass
VHT80	MCS 0	1	122	5610	0.67	-0.83	11.00	4.70		Pass
VHT80	MCS0	1	138	5690	0.67	-1.14	11.00	4.70		Pass



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Zhang Tao	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

Full Spectrum

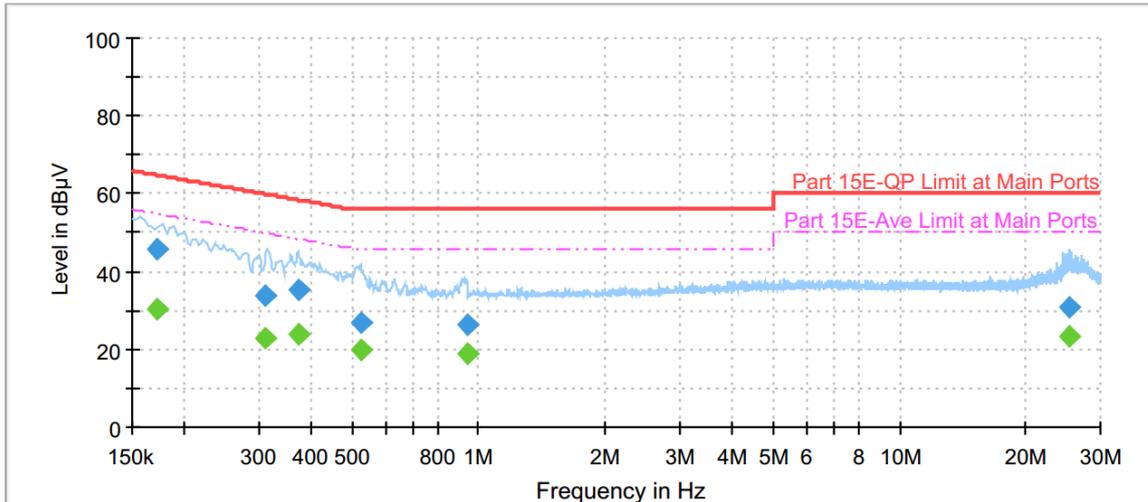


Final_Result

Frequency (MHz)	Quasi Peak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.172500	45.56	---	64.84	19.28	L1	OFF	19.7
0.172500	---	30.55	54.84	24.29	L1	OFF	19.7
0.309750	33.74	---	59.98	26.23	L1	OFF	19.7
0.309750	---	23.03	49.98	26.95	L1	OFF	19.7
0.371850	35.25	---	58.46	23.21	L1	OFF	19.7
0.371850	---	24.10	48.46	24.36	L1	OFF	19.7
0.528000	26.90	---	56.00	29.10	L1	OFF	19.7
0.528000	---	19.69	46.00	26.31	L1	OFF	19.7
0.937500	26.17	---	56.00	29.83	L1	OFF	19.8
0.937500	---	19.15	46.00	26.85	L1	OFF	19.8
25.280250	30.69	---	60.00	29.31	L1	OFF	20.5
25.280250	---	23.60	50.00	26.40	L1	OFF	20.5



Test Engineer :	Zhang Tao	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

Full Spectrum

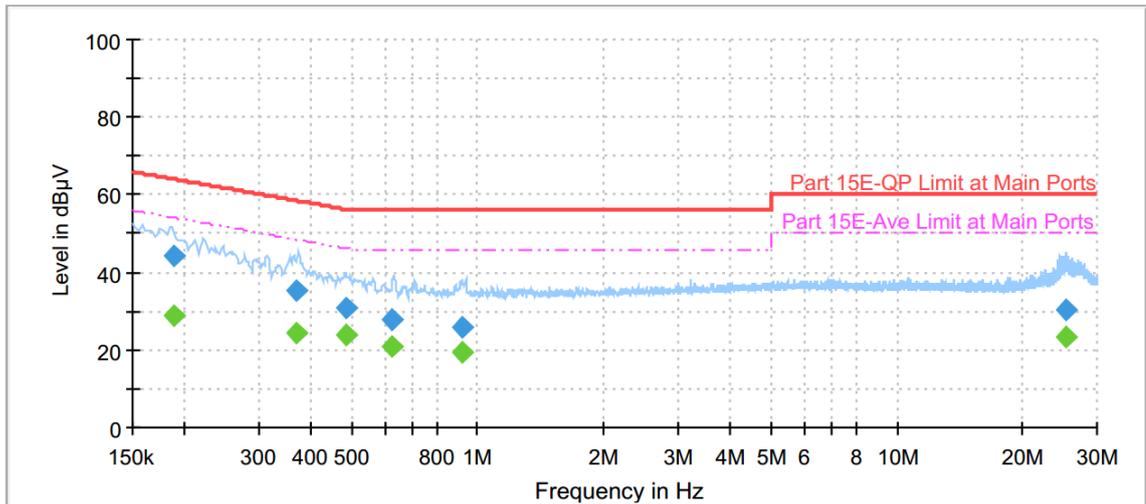

Final Result

Frequency (MHz)	Quasi Peak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.188250	44.04	---	64.11	20.07	N	OFF	19.7
0.188250	---	28.83	54.11	25.28	N	OFF	19.7
0.370500	35.56	---	58.49	22.93	N	OFF	19.7
0.370500	---	24.41	48.49	24.08	N	OFF	19.7
0.487500	31.08	---	56.21	25.13	N	OFF	19.7
0.487500	---	23.76	46.21	22.45	N	OFF	19.7
0.624750	27.64	---	56.00	28.36	N	OFF	19.7
0.624750	---	20.93	46.00	25.07	N	OFF	19.7
0.917340	26.10	---	56.00	29.90	N	OFF	19.7
0.917340	---	19.22	46.00	26.78	N	OFF	19.7
25.289250	30.38	---	60.00	29.62	N	OFF	20.5
25.289250	---	23.33	50.00	26.67	N	OFF	20.5



Appendix C. Radiated Spurious Emission

U-NII-1 - 5150~5250MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 36 5180MHz		5145.6	58.18	-15.82	74	44.52	34.42	9.74	30.5	100	262	P	H
		5149.76	48.8	-5.2	54	35.14	34.42	9.74	30.5	100	262	A	H
	*	5180	110.4	-	-	96.67	34.45	9.78	30.5	100	262	P	H
	*	5180	102.99	-	-	89.26	34.45	9.78	30.5	100	262	A	H
		5149.24	53.26	-20.74	74	39.6	34.42	9.74	30.5	100	262	P	V
		5149.76	44.98	-9.02	54	31.32	34.42	9.74	30.5	100	262	A	V
	*	5180	105.87	-	-	92.14	34.45	9.78	30.5	100	262	P	V
	*	5180	98.99	-	-	85.26	34.45	9.78	30.5	100	262	A	V
802.11a CH 44 5220MHz		5111.02	54.57	-19.43	74	40.98	34.39	9.7	30.5	100	256	P	H
		5147.16	44.22	-9.78	54	30.56	34.42	9.74	30.5	100	256	A	H
	*	5220	110.55	-	-	96.76	34.47	9.82	30.5	100	256	P	H
	*	5220	103.05	-	-	89.26	34.47	9.82	30.5	100	256	A	H
		5353.2	51.94	-22.06	74	38.02	34.58	9.84	30.5	100	256	P	H
		5382	42.06	-11.94	54	28.11	34.61	9.84	30.5	100	256	A	H
		5142.22	52.69	-21.31	74	39.03	34.42	9.74	30.5	100	275	P	V
		5141.44	43.02	-10.98	54	29.36	34.42	9.74	30.5	100	275	A	V
	*	5220	108.06	-	-	94.27	34.47	9.82	30.5	100	275	P	V
	*	5220	101.02	-	-	87.23	34.47	9.82	30.5	100	275	A	V
		5451.6	52.97	-21.03	74	38.93	34.66	9.88	30.5	100	275	P	V
		5381.28	41.74	-12.26	54	27.79	34.61	9.84	30.5	100	275	A	V



802.11a CH 48 5240MHz		5132.34	52.72	-21.28	74	39.07	34.41	9.74	30.5	100	262	P	H
		5119.86	43.57	-10.43	54	29.94	34.39	9.74	30.5	100	262	A	H
	*	5240	110.22	-	-	96.41	34.49	9.82	30.5	100	262	P	H
	*	5240	103.07	-	-	89.26	34.49	9.82	30.5	100	262	A	H
		5373.6	51.61	-22.39	74	37.68	34.59	9.84	30.5	100	262	P	H
		5359.92	41.98	-12.02	54	28.06	34.58	9.84	30.5	100	262	A	H
		5085.28	52.42	-21.58	74	38.85	34.37	9.7	30.5	100	260	P	V
		5134.94	42.54	-11.46	54	28.89	34.41	9.74	30.5	100	260	A	V
	*	5240	106.7	-	-	92.89	34.49	9.82	30.5	100	260	P	V
	*	5240	99.43	-	-	85.62	34.49	9.82	30.5	100	260	A	V
		5397.12	52	-22	74	38.04	34.62	9.84	30.5	100	260	P	V
		5360.16	41.5	-12.5	54	27.58	34.58	9.84	30.5	100	260	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII-1 5150~5250MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 36 5180MHz		10360	48.3	-20	68.3	57.52	37.22	13.91	60.35	-	-	P	H
		15540	50.79	-23.21	74	53.19	40.13	16.04	58.57	-	-	P	H
		10360	48.59	-19.71	68.3	57.81	37.22	13.91	60.35	-	-	P	V
		15540	50.36	-23.64	74	52.76	40.13	16.04	58.57	-	-	P	V
802.11a CH 44 5220MHz		10440	47.4	-20.9	68.3	56.6	37.66	13.51	60.37	-	-	P	H
		15660	50.48	-23.52	74	53.13	40.6	15.56	58.81	-	-	P	H
		10440	47.58	-20.72	68.3	56.78	37.66	13.51	60.37	-	-	P	V
		15660	50.95	-23.05	74	53.6	40.6	15.56	58.81	-	-	P	V
802.11a CH 48 5240MHz		10480	46.06	-22.24	68.3	55.23	37.69	13.53	60.39	-	-	P	H
		15720	50.35	-23.65	74	53.11	40.62	15.57	58.95	-	-	P	H
		10480	46.35	-21.95	68.3	55.52	37.69	13.53	60.39	-	-	P	V
		15720	50.22	-23.78	74	52.98	40.62	15.57	58.95	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII-1 5150~5250MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Margin (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test data for 802.11n HT20 CH 36 (5180MHz) and CH 44 (5220MHz).



802.11n HT20 CH 48 5240MHz		5140.4	53.28	-20.72	74	39.62	34.42	9.74	30.5	100	252	P	H
		5119.86	43.46	-10.54	54	29.83	34.39	9.74	30.5	100	252	A	H
	*	5240	107.93	-	-	94.12	34.49	9.82	30.5	100	252	P	H
	*	5240	101.04	-	-	87.23	34.49	9.82	30.5	100	252	A	H
		5372.64	52.02	-21.98	74	38.09	34.59	9.84	30.5	100	252	P	H
		5359.92	41.84	-12.16	54	27.92	34.58	9.84	30.5	100	252	A	H
		5120.38	52.89	-21.11	74	39.26	34.39	9.74	30.5	100	277	P	V
		5132.08	42.59	-11.41	54	28.94	34.41	9.74	30.5	100	277	A	V
	*	5240	104.37	-	-	90.56	34.49	9.82	30.5	100	277	P	V
	*	5240	97.07	-	-	83.26	34.49	9.82	30.5	100	277	A	V
		5414.88	50.99	-23.01	74	37.02	34.63	9.84	30.5	100	277	P	V
		5359.92	41.53	-12.47	54	27.61	34.58	9.84	30.5	100	277	A	V
Remark	<p>1. No other spurious found.</p> <p>2. All results are PASS against Peak and Average limit line.</p>												



**U-NII-1 5150~5250MHz
WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 36		10360	46.53	-21.77	68.3	55.78	37.62	13.48	60.35	-	-	P	H
		15540	50.76	-23.24	74	53.23	40.56	15.54	58.57	-	-	P	H
5180MHz		10360	46.51	-21.79	68.3	55.76	37.62	13.48	60.35	-	-	P	V
		15540	50.47	-23.53	74	52.94	40.56	15.54	58.57	-	-	P	V
802.11n HT20 CH 44		10440	47.21	-21.09	68.3	56.41	37.66	13.51	60.37	-	-	P	H
		15660	50.66	-23.34	74	53.31	40.6	15.56	58.81	-	-	P	H
		10440	47.66	-20.64	68.3	56.86	37.66	13.51	60.37	-	-	P	V
		15660	50.12	-23.88	74	52.77	40.6	15.56	58.81	-	-	P	V
802.11n HT20 CH 48		10480	47.7	-20.6	68.3	56.87	37.69	13.53	60.39	-	-	P	H
		15720	50.38	-23.62	74	53.14	40.62	15.57	58.95	-	-	P	H
		10480	47.28	-21.02	68.3	56.45	37.69	13.53	60.39	-	-	P	V
		15720	49.93	-24.07	74	52.69	40.62	15.57	58.95	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**U-NII-1 5150~5250MHz
WIFI 802.11n HT40 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 38 5190MHz		5145.86	56.31	-17.69	74	42.65	34.42	9.74	30.5	100	252	P	H
		5149.5	47.47	-6.53	54	33.81	34.42	9.74	30.5	100	252	A	H
	*	5190	104.26	-	-	90.53	34.45	9.78	30.5	100	252	P	H
	*	5190	96.98	-	-	83.25	34.45	9.78	30.5	100	252	A	H
		5376.56	50.26	-23.74	74	36.33	34.59	9.84	30.5	100	252	P	H
		5354.44	41.43	-12.57	54	27.51	34.58	9.84	30.5	100	252	A	H
		5126.1	54.44	-19.56	74	40.79	34.41	9.74	30.5	100	278	P	V
		5149.76	44.52	-9.48	54	30.86	34.42	9.74	30.5	100	278	A	V
	*	5190	101.2	-	-	87.47	34.45	9.78	30.5	100	278	P	V
	*	5190	93.99	-	-	80.26	34.45	9.78	30.5	100	278	A	V
		5439.56	50.45	-23.55	74	36.42	34.65	9.88	30.5	100	278	P	V
		5460	41.41	-12.59	54	27.37	34.66	9.88	30.5	100	278	A	V
802.11n HT40 CH 46 5230MHz		5084.76	53.07	-20.93	74	39.5	34.37	9.7	30.5	100	260	P	H
		5148.98	43.5	-10.5	54	29.84	34.42	9.74	30.5	100	260	A	H
	*	5230	105.04	-	-	91.23	34.49	9.82	30.5	100	260	P	H
	*	5230	98.04	-	-	84.23	34.49	9.82	30.5	100	260	A	H
		5400.48	51.09	-22.91	74	37.13	34.62	9.84	30.5	100	260	P	H
		5350.08	41.69	-12.31	54	27.77	34.58	9.84	30.5	100	260	A	H
		5094.9	53.14	-20.86	74	39.56	34.38	9.7	30.5	100	273	P	V
		5145.6	42.64	-11.36	54	28.98	34.42	9.74	30.5	100	273	A	V
	*	5230	101.47	-	-	87.66	34.49	9.82	30.5	100	273	P	V
	*	5230	94.04	-	-	80.23	34.49	9.82	30.5	100	273	A	V
	5440.56	51.49	-22.51	74	37.46	34.65	9.88	30.5	100	273	P	V	
	5456.4	41.41	-12.59	54	27.37	34.66	9.88	30.5	100	273	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII-1 5150~5250MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Margin (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test results for 802.11n HT40 CH 38 (5190MHz) and 802.11n HT40 CH 46 (5230MHz). A Remark section at the bottom states: '1. No other spurious found. 2. All results are PASS against Peak and Average limit line.'



U-NII-1 5150~5250MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Margin (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include frequencies like 5148.98, 5149.76, 5210, 5416.08, 5350.08, 5149.76, 5150, 5210, 5210, 5358.96, 5350.32.

U-NII-1 5150~5250MHz
WIFI 802.11ac VHT80 (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Margin (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include frequencies 10420 and 15630.



U-NII-2A - 5250~5350MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 52 5260MHz		5066.04	52.56	-21.44	74	39.05	34.35	9.66	30.5	100	263	P	H
		5139.88	43.48	-10.52	54	29.82	34.42	9.74	30.5	100	263	A	H
	*	5260	109.24	-	-	95.41	34.51	9.82	30.5	100	263	P	H
	*	5260	102.05	-	-	88.22	34.51	9.82	30.5	100	263	A	H
		5418.96	51.73	-22.27	74	37.76	34.63	9.84	30.5	100	263	P	H
		5351.76	42.39	-11.61	54	28.47	34.58	9.84	30.5	100	263	A	H
		5023.14	52.67	-21.33	74	39.22	34.33	9.62	30.5	100	278	P	V
		5139.88	42.68	-11.32	54	29.02	34.42	9.74	30.5	100	278	A	V
	*	5260	106.29	-	-	92.46	34.51	9.82	30.5	100	278	P	V
	*	5260	99.1	-	-	85.27	34.51	9.82	30.5	100	278	A	V
		5392.08	51.48	-22.52	74	37.53	34.61	9.84	30.5	100	278	P	V
		5357.76	41.83	-12.17	54	27.91	34.58	9.84	30.5	100	278	A	V
802.11a CH 60 5300MHz		5079.45	52.42	-21.58	74	38.85	34.37	9.7	30.5	100	254	P	H
		5140.7	43.15	-10.85	54	29.49	34.42	9.74	30.5	100	254	A	H
	*	5300	109.82	-	-	95.95	34.54	9.83	30.5	100	254	P	H
	*	5300	102.08	-	-	88.21	34.54	9.83	30.5	100	254	A	H
		5360.16	52.49	-21.51	74	38.57	34.58	9.84	30.5	100	254	P	H
		5351.76	43.32	-10.68	54	29.4	34.58	9.84	30.5	100	254	A	H
		5059.15	53.48	-20.52	74	39.97	34.35	9.66	30.5	100	272	P	V
		5099.05	42.63	-11.37	54	29.05	34.38	9.7	30.5	100	272	A	V
	*	5300	105.19	-	-	91.32	34.54	9.83	30.5	100	272	P	V
	*	5300	98.13	-	-	84.26	34.54	9.83	30.5	100	272	A	V
		5374.08	52.7	-21.3	74	38.77	34.59	9.84	30.5	100	272	P	V
		5359.44	42.18	-11.82	54	28.26	34.58	9.84	30.5	100	272	A	V



802.11a CH 64 5320MHz	*	5320	109.05	-	-	95.17	34.55	9.83	30.5	100	273	P	H
	*	5320	102.1	-	-	88.22	34.55	9.83	30.5	100	273	A	H
		5356.64	52.62	-21.38	74	38.7	34.58	9.84	30.5	100	273	P	H
		5350.08	45.75	-8.25	54	31.83	34.58	9.84	30.5	100	273	A	H
	*	5320	105.94	-	-	92.06	34.55	9.83	30.5	100	276	P	V
	*	5320	99.13	-	-	85.25	34.55	9.83	30.5	100	276	A	V
		5350.4	52.43	-21.57	74	38.51	34.58	9.84	30.5	100	276	P	V
		5350.08	44.33	-9.67	54	30.41	34.58	9.84	30.5	100	276	A	V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. 												



**U-NII-2A 5250~5350MHz
WIFI 802.11a (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 52 5260MHz		10520	47.68	-20.62	68.3	56.74	37.71	13.55	60.32	-	-	P	H
		15780	50.86	-23.14	74	53.69	40.63	15.59	59.05	-	-	P	H
		10520	47.29	-21.01	68.3	56.35	37.71	13.55	60.32	-	-	P	V
		15780	50.34	-23.66	74	53.17	40.63	15.59	59.05	-	-	P	V
802.11a CH 60 5300MHz		10600	50.24	-23.76	74	58.64	37.42	14.12	59.94	-	-	P	H
		15900	50.67	-23.33	74	53.43	40.42	16.11	59.29	-	-	P	H
		10600	52.83	-21.17	74	61.23	37.42	14.12	59.94	100	290	P	V
		10600	44.86	-9.14	54	53.26	37.42	14.12	59.94	100	290	A	V
802.11a CH 64 5320MHz		10640	48.55	-25.45	74	56.93	37.81	13.6	59.79	-	-	P	H
		15960	50.39	-23.61	74	53.5	40.69	15.63	59.43	-	-	P	H
		10640	49.62	-24.38	74	58	37.81	13.6	59.79	-	-	P	V
		15960	49.93	-24.07	74	53.04	40.69	15.63	59.43	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII-2A 5250~5350MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Margin (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for 802.11n HT20 CH 52 (5260MHz) and 802.11n HT20 CH 60 (5300MHz).



802.11n HT20 CH 64 5320MHz	*	5320	108.05	-	-	94.17	34.55	9.83	30.5	100	257	P	H
	*	5320	101.25	-	-	87.37	34.55	9.83	30.5	100	257	A	H
		5357.28	52.9	-21.1	74	38.98	34.58	9.84	30.5	100	257	P	H
		5359.84	44.78	-9.22	54	30.86	34.58	9.84	30.5	100	257	A	H
	*	5320	104.04	-	-	90.16	34.55	9.83	30.5	100	274	P	V
	*	5320	97.35	-	-	83.47	34.55	9.83	30.5	100	274	A	V
		5367.36	51.69	-22.31	74	37.76	34.59	9.84	30.5	100	274	P	V
		5360	42.61	-11.39	54	28.69	34.58	9.84	30.5	100	274	A	V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. 												



U-NII-2A 5250~5350MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20		10520	48.21	-20.09	68.3	57.27	37.71	13.55	60.32	-	-	P	H
		15780	50.11	-23.89	74	52.94	40.63	15.59	59.05	-	-	P	H
CH 52 5260MHz		10520	49.11	-19.19	68.3	58.17	37.71	13.55	60.32	-	-	P	V
		15780	50.25	-23.75	74	53.08	40.63	15.59	59.05	-	-	P	V
802.11n HT20 CH 60 5300MHz		10600	47.9	-26.1	74	56.48	37.78	13.58	59.94	-	-	P	H
		15900	48.53	-25.47	74	51.54	40.67	15.61	59.29	-	-	P	H
		10600	47.89	-26.11	74	56.47	37.78	13.58	59.94	-	-	P	V
		15900	50.46	-23.54	74	53.47	40.67	15.61	59.29	-	-	P	V
802.11n HT20 CH 64 5320MHz		10640	47.22	-26.78	74	55.6	37.81	13.6	59.79	-	-	P	H
		15960	49.8	-24.2	74	52.91	40.69	15.63	59.43	-	-	P	H
		10640	47.82	-26.18	74	56.2	37.81	13.6	59.79	-	-	P	V
		15960	48.67	-25.33	74	51.78	40.69	15.63	59.43	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**U-NII-2A 5250~5350MHz
WIFI 802.11n HT40 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 54 5270MHz		5130.55	52.72	-21.28	74	39.07	34.41	9.74	30.5	100	263	P	H
		5149.8	43.2	-10.8	54	29.54	34.42	9.74	30.5	100	263	A	H
	*	5270	104.88	-	-	91.05	34.51	9.82	30.5	100	263	P	H
	*	5270	98.05	-	-	84.22	34.51	9.82	30.5	100	263	A	H
		5360.88	52.42	-21.58	74	38.49	34.59	9.84	30.5	100	263	P	H
		5352.24	42.54	-11.46	54	28.62	34.58	9.84	30.5	100	263	A	H
		5029.4	51.98	-22.02	74	38.53	34.33	9.62	30.5	100	273	P	V
		5104.3	42.74	-11.26	54	29.16	34.38	9.7	30.5	100	273	A	V
	*	5270	101.81	-	-	87.98	34.51	9.82	30.5	100	273	P	V
	*	5270	94.07	-	-	80.24	34.51	9.82	30.5	100	273	A	V
		5434.08	52.58	-21.42	74	38.55	34.65	9.88	30.5	100	273	P	V
		5360.88	41.77	-12.23	54	27.84	34.59	9.84	30.5	100	273	A	V
802.11n HT40 CH 62 5310MHz		5099.05	52.62	-21.38	74	39.04	34.38	9.7	30.5	100	254	P	H
		5147.35	42.89	-11.11	54	29.23	34.42	9.74	30.5	100	254	A	H
	*	5310	104.4	-	-	90.52	34.55	9.83	30.5	100	254	P	H
	*	5310	97.15	-	-	83.27	34.55	9.83	30.5	100	254	A	H
		5356.56	54.98	-19.02	74	41.06	34.58	9.84	30.5	100	254	P	H
		5350.32	44.76	-9.24	54	30.84	34.58	9.84	30.5	100	254	A	H
		5098	51.31	-22.69	74	37.73	34.38	9.7	30.5	100	262	P	V
		5076.65	42.63	-11.37	54	29.06	34.37	9.7	30.5	100	262	A	V
	*	5310	101.51	-	-	87.63	34.55	9.83	30.5	100	262	P	V
	*	5310	94.15	-	-	80.27	34.55	9.83	30.5	100	262	A	V
	5350.8	52.81	-21.19	74	38.89	34.58	9.84	30.5	100	262	P	V	
	5350.08	43.22	-10.78	54	29.3	34.58	9.84	30.5	100	262	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII-2A 5250~5350MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Margin (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test results for 802.11n HT40 CH 54 at 5270MHz and 802.11n HT40 CH 62 at 5310MHz. A Remark section at the bottom states: '1. No other spurious found. 2. All results are PASS against Peak and Average limit line.'



**U-NII-2A 5250~5350MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 58 5290MHz		5148.05	52.85	-21.15	74	39.19	34.42	9.74	30.5	100	255	P	H
		5149.1	42.83	-11.17	54	29.17	34.42	9.74	30.5	100	255	A	H
	*	5290	101.4	-	-	87.54	34.53	9.83	30.5	100	255	P	H
	*	5290	94.08	-	-	80.22	34.53	9.83	30.5	100	255	A	H
		5350.8	55.17	-18.83	74	41.25	34.58	9.84	30.5	100	255	P	H
		5350.32	47.74	-6.26	54	33.82	34.58	9.84	30.5	100	255	A	H
		5131.25	53.01	-20.99	74	39.36	34.41	9.74	30.5	100	273	P	V
		5134.75	42.29	-11.71	54	28.64	34.41	9.74	30.5	100	273	A	V
	*	5290	98.2	-	-	84.34	34.53	9.83	30.5	100	273	P	V
	*	5290	91.08	-	-	77.22	34.53	9.83	30.5	100	273	A	V
		5350.8	54.95	-19.05	74	41.03	34.58	9.84	30.5	100	273	P	V
	5350.08	46.66	-7.34	54	32.74	34.58	9.84	30.5	100	273	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**U-NII-2A 5250~5350MHz
WIFI 802.11ac VHT80 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 58 5290MHz		10580	47.67	-20.63	68.3	56.34	37.77	13.58	60.02	-	-	P	H
		15870	49.23	-24.77	74	52.22	40.66	15.61	59.26	-	-	P	H
		10580	48.38	-19.92	68.3	57.05	37.77	13.58	60.02	-	-	P	V
		15870	48.84	-25.16	74	51.83	40.66	15.61	59.26	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII-2C - 5470~5725MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 100 5500MHz		5435.92	53.15	-20.85	74	39.12	34.65	9.88	30.5	100	275	P	H
		5468.4	55.4	-12.9	68.3	41.31	34.67	9.92	30.5	100	275	P	H
		5459.92	44.62	-9.38	54	30.58	34.66	9.88	30.5	100	275	A	H
	*	5500	109.28	-	-	95.16	34.7	9.92	30.5	100	275	P	H
	*	5500	102.38	-	-	88.26	34.7	9.92	30.5	100	275	A	H
		5439.12	52.47	-21.53	74	38.44	34.65	9.88	30.5	111	262	P	V
		5466	53.88	-14.42	68.3	39.79	34.67	9.92	30.5	111	262	P	V
		5459.92	44.14	-9.86	54	30.1	34.66	9.88	30.5	111	262	A	V
	*	5500	106.66	-	-	92.54	34.7	9.92	30.5	111	262	P	V
	*	5500	99.35	-	-	85.23	34.7	9.92	30.5	111	262	A	V
802.11a CH 116 5580MHz		5398.24	52.2	-21.8	74	38.24	34.62	9.84	30.5	100	273	P	H
		5469.04	51.76	-16.54	68.3	37.67	34.67	9.92	30.5	100	273	P	H
		5459.92	42.83	-11.17	54	28.79	34.66	9.88	30.5	100	273	A	H
	*	5580	109.02	-	-	94.73	34.81	10.01	30.53	100	273	P	H
	*	5580	101.91	-	-	87.62	34.81	10.01	30.53	100	273	A	H
		5735.39	52.24	-16.06	68.3	37.62	35.09	10.12	30.59	100	273	P	H
		5372.8	50.77	-23.23	74	36.84	34.59	9.84	30.5	100	205	P	V
		5460	51.43	-16.87	68.3	37.39	34.66	9.88	30.5	100	205	P	V
		5459.92	42.08	-11.92	54	28.04	34.66	9.88	30.5	100	205	A	V
	*	5580	106.71	-	-	92.42	34.81	10.01	30.53	100	205	P	V
	*	5580	99.55	-	-	85.26	34.81	10.01	30.53	100	205	A	V
	5731.295	51.35	-16.95	68.3	36.76	35.06	10.12	30.59	100	205	P	V	



802.11a CH 140 5700MHz	*	5700	109.3	-	-	94.76	35	10.12	30.58	100	276	P	H
	*	5700	101.8	-	-	87.26	35	10.12	30.58	100	276	A	H
		5725	61.68	-6.62	68.3	47.09	35.06	10.12	30.59	100	276	P	H
	*	5700	105.8	-	-	91.26	35	10.12	30.58	100	262	P	V
	*	5700	98.8	-	-	84.26	35	10.12	30.58	100	262	A	V
		5727	58.73	-9.57	68.3	44.14	35.06	10.12	30.59	100	262	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII-2C - 5470~5725MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 100 5500MHz		11000	54.61	-19.39	74	60.44	37.9	14.47	58.2	202	204	P	H
		11000	46.89	-7.11	54	52.72	37.9	14.47	58.2	202	204	A	H
		16500	50.01	-18.29	68.3	49.34	41.57	16.6	57.5	-	-	P	H
		11000	55.4	-18.6	74	61.23	37.9	14.47	58.2	232	151	P	V
		11000	47.03	-6.97	54	52.86	37.9	14.47	58.2	232	151	A	V
		16500	50.27	-18.03	68.3	49.6	41.57	16.6	57.5	-	-	P	V
802.11a CH 116 5580MHz		11160	50.24	-23.76	74	56.33	38.27	13.74	58.1	-	-	P	H
		16740	50.14	-18.16	68.3	49.78	41.07	16.36	57.07	-	-	P	H
		11160	50.17	-23.83	74	56.26	38.27	13.74	58.1	-	-	P	V
		16740	50.05	-18.25	68.3	49.69	41.07	16.36	57.07	-	-	P	V
802.11a CH 140 5700MHz		11400	48.96	-25.04	74	54.71	38.5	13.71	57.96	-	-	P	H
		17100	50.72	-17.58	68.3	49.62	41.24	16.56	56.7	-	-	P	H
		11400	49.19	-24.81	74	54.94	38.5	13.71	57.96	-	-	P	V
		17100	50.11	-18.19	68.3	49.01	41.24	16.56	56.7	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII-2C - 5470~5725MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Margin (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test data for 802.11n HT20 CH 100 (5500MHz) and CH 116 (5580MHz).



802.11n	*	5700	106.51	-	-	91.97	35	10.12	30.58	108	238	P	H
	*	5700	99.16	-	-	84.62	35	10.12	30.58	108	238	A	H
HT20		5725.24	58.58	-9.72	68.3	43.99	35.06	10.12	30.59	108	238	P	H
CH 140	*	5700	105.46	-	-	90.92	35	10.12	30.58	101	267	P	V
5700MHz	*	5700	98.03	-	-	83.49	35	10.12	30.58	101	267	A	V
		5727	55.13	-13.17	68.3	40.54	35.06	10.12	30.59	101	267	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII-2C - 5470~5725MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20		11000	49.11	-24.89	74	55.45	38.1	13.76	58.2	-	-	P	H
		16500	50.18	-18.12	68.3	50.63	40.95	16.1	57.5	-	-	P	H
CH 100 5500MHz		11000	49.62	-24.38	74	55.96	38.1	13.76	58.2	-	-	P	V
		16500	50.27	-18.03	68.3	50.72	40.95	16.1	57.5	-	-	P	V
802.11n HT20 CH 116 5580MHz		11160	49.46	-24.54	74	55.55	38.27	13.74	58.1	-	-	P	H
		16740	50.73	-17.57	68.3	50.37	41.07	16.36	57.07	-	-	P	H
		11160	49.47	-24.53	74	55.56	38.27	13.74	58.1	-	-	P	V
		16740	50.59	-17.71	68.3	50.23	41.07	16.36	57.07	-	-	P	V
802.11n HT20 CH 140 5700MHz		11400	49.44	-24.56	74	55.19	38.5	13.71	57.96	-	-	P	H
		17100	50.53	-17.77	68.3	49.43	41.24	16.56	56.7	-	-	P	H
		11400	48.86	-25.14	74	54.61	38.5	13.71	57.96	-	-	P	V
		17100	50.36	-17.94	68.3	49.26	41.24	16.56	56.7	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**U-NII-2C - 5470~5725MHz
WIFI 802.11n HT40 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 102 5510MHz		5452.48	52.99	-21.01	74	38.95	34.66	9.88	30.5	100	274	P	H
		5462.32	52.66	-15.64	68.3	38.62	34.66	9.88	30.5	100	274	P	H
		5459.68	43.63	-10.37	54	29.59	34.66	9.88	30.5	100	274	A	H
	*	5510	104.51	-	-	90.35	34.7	9.97	30.51	100	274	P	H
	*	5510	97.42	-	-	83.26	34.7	9.97	30.51	100	274	A	H
		5728.145	51.02	-17.28	68.3	36.43	35.06	10.12	30.59	100	274	P	H
		5450.56	51.63	-22.37	74	37.59	34.66	9.88	30.5	100	271	P	V
		5468.32	52.18	-16.12	68.3	38.09	34.67	9.92	30.5	100	271	P	V
		5459.92	42.7	-11.3	54	28.66	34.66	9.88	30.5	100	271	A	V
	*	5510	101.86	-	-	87.7	34.7	9.97	30.51	100	271	P	V
	*	5510	94.39	-	-	80.23	34.7	9.97	30.51	100	271	A	V
		5741.69	51.22	-17.08	68.3	36.59	35.09	10.14	30.6	100	271	P	V
802.11n HT40 CH 110 5550MHz		5412.4	50.74	-23.26	74	36.77	34.63	9.84	30.5	100	275	P	H
		5461.12	50.37	-17.93	68.3	36.33	34.66	9.88	30.5	100	275	P	H
		5457.04	42.22	-11.78	54	28.18	34.66	9.88	30.5	100	275	A	H
	*	5550	103.73	-	-	89.46	34.78	10.01	30.52	100	275	P	H
	*	5550	94.53	-	-	80.26	34.78	10.01	30.52	100	275	A	H
		5725.31	52.93	-15.37	68.3	38.34	35.06	10.12	30.59	100	275	P	H
		5448.16	51.3	-22.7	74	37.26	34.66	9.88	30.5	100	276	P	V
		5460.4	49.88	-18.42	68.3	35.84	34.66	9.88	30.5	100	276	P	V
		5459.68	42.08	-11.92	54	28.04	34.66	9.88	30.5	100	276	A	V
	*	5550	101.69	-	-	87.42	34.78	10.01	30.52	100	276	P	V
	*	5550	94.48	-	-	80.21	34.78	10.01	30.52	100	276	A	V
		5750.51	51.27	-17.03	68.3	36.64	35.09	10.14	30.6	100	276	P	V



802.11n HT40 CH 134 5670MHz		5424.9	51.12	-22.88	74	37.15	34.63	9.84	30.5	100	235	P	H
		5464.45	49.57	-18.73	68.3	35.52	34.67	9.88	30.5	100	235	P	H
		5459.9	41.41	-12.59	54	27.37	34.66	9.88	30.5	100	235	A	H
	*	5670	103.14	-	-	88.64	34.98	10.09	30.57	100	235	P	H
	*	5670	95.75	-	-	81.25	34.98	10.09	30.57	100	235	A	H
		5736.475	52.77	-15.53	68.3	38.15	35.09	10.12	30.59	100	235	P	H
		5443.45	50.71	-23.29	74	36.68	34.65	9.88	30.5	100	275	P	V
		5466.2	50.1	-18.2	68.3	36.01	34.67	9.92	30.5	100	275	P	V
		5459.9	41.4	-12.6	54	27.36	34.66	9.88	30.5	100	275	A	V
	*	5670	100.68	-	-	86.18	34.98	10.09	30.57	100	275	P	V
	*	5670	93.73	-	-	79.23	34.98	10.09	30.57	100	275	A	V
		5755.025	52.7	-15.6	68.3	38.05	35.11	10.14	30.6	100	275	P	V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. 												



U-NII-2C - 5470~5725MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Margin (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test results for channels 102, 110, and 134 at various frequencies.

Remark

- 1. No other spurious found.
2. All results are PASS against Peak and Average limit line.



**U-NII-2C - 5470~5725MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 106 5530MHz		5453.68	56.8	-17.2	74	42.76	34.66	9.88	30.5	100	256	P	H
		5465.68	57.68	-10.62	68.3	43.59	34.67	9.92	30.5	100	256	P	H
		5457.76	47.09	-6.91	54	33.05	34.66	9.88	30.5	100	256	A	H
	*	5530	100.72	-	-	86.53	34.73	9.97	30.51	100	256	P	H
	*	5530	93.41	-	-	79.22	34.73	9.97	30.51	100	256	A	H
		5734.76	52.51	-15.79	68.3	37.89	35.09	10.12	30.59	100	256	P	H
		5448.16	56.2	-17.8	74	42.16	34.66	9.88	30.5	100	278	P	V
		5469.28	58.1	-10.2	68.3	44.01	34.67	9.92	30.5	100	278	P	V
		5457.76	46.19	-7.81	54	32.15	34.66	9.88	30.5	100	278	A	V
	*	5530	99.84	-	-	85.65	34.73	9.97	30.51	100	278	P	V
	*	5530	92.39	-	-	78.2	34.73	9.97	30.51	100	278	A	V
	5736.65	52.15	-16.15	68.3	37.53	35.09	10.12	30.59	100	278	P	V	
802.11ac VHT80 CH 122 5610MHz		5383.12	51.24	-22.76	74	37.29	34.61	9.84	30.5	100	235	P	H
		5463.76	51.14	-17.16	68.3	37.09	34.67	9.88	30.5	100	235	P	H
		5458	41.71	-12.29	54	27.67	34.66	9.88	30.5	100	235	A	H
	*	5610	101	-	-	86.63	34.87	10.05	30.55	100	235	P	H
	*	5610	93.6	-	-	79.23	34.87	10.05	30.55	100	235	A	H
		5726.675	52.38	-15.92	68.3	37.79	35.06	10.12	30.59	100	235	P	H
		5432.32	51.48	-22.52	74	37.45	34.65	9.88	30.5	100	278	P	V
		5467.6	52.87	-15.43	68.3	38.78	34.67	9.92	30.5	100	278	P	V
		5459.92	41.73	-12.27	54	27.69	34.66	9.88	30.5	100	278	A	V
	*	5610	98.71	-	-	84.34	34.87	10.05	30.55	100	278	P	V
	*	5610	90.6	-	-	76.23	34.87	10.05	30.55	100	278	A	V
	5726.15	52.75	-15.55	68.3	38.16	35.06	10.12	30.59	100	278	P	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII-2C 5470~5725MHz
WIFI 802.11ac VHT80 (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Margin (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test results for 802.11ac VHT80 CH 106 (5530MHz) and CH 122 (5610MHz). A Remark section at the bottom states: 1. No other spurious found. 2. All results are PASS against Peak and Average limit line.



U-NII-2C 5470~5725MHz
U-NII-2C - Straddle Channel
WIFI 802.11a (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 144 5720MHz		5411.05	50.81	-23.19	74	36.85	34.62	9.84	30.5	100	270	P	H
		5459.45	41.58	-12.42	54	27.54	34.66	9.88	30.5	100	270	A	H
		5468.25	49.91	-18.39	68.3	35.82	34.67	9.92	30.5	100	270	P	H
	*	5720	105.54	-	-	90.95	35.06	10.12	30.59	100	270	P	H
	*	5720.7	98.92	-	-	84.33	35.06	10.12	30.59	100	270	A	H
		5867	52.54	-15.76	68.3	37.69	35.28	10.21	30.64	100	270	P	H
		5401.7	50.14	-23.86	74	36.18	34.62	9.84	30.5	100	286	P	V
		5460	41.47	-12.53	54	27.43	34.66	9.88	30.5	100	286	A	V
		5460	48.93	-19.37	68.3	34.89	34.66	9.88	30.5	100	286	P	V
	*	5720	103.5	-	-	88.91	35.06	10.12	30.59	100	286	P	V
	*	5720	96.75	-	-	82.16	35.06	10.12	30.59	100	286	A	V
		5890.65	52.17	-16.13	68.3	37.28	35.33	10.21	30.65	100	286	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

U-NII-2C - Straddle Channel
WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 144 5720MHz		11440	49.91	-24.09	74	55.61	38.53	13.71	57.94	-	-	P	H
		17160	50.25	-18.05	68.3	49.2	41.27	16.55	56.77	-	-	P	H
		11440	49.57	-24.43	74	55.27	38.53	13.71	57.94	-	-	P	V
		17160	50.47	-17.83	68.3	49.42	41.27	16.55	56.77	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII-2C - Straddle Channel
WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 144 5720MHz		5362.65	50.24	-23.76	74	36.31	34.59	9.84	30.5	100	242	P	H
		5460	41.56	-12.44	54	27.52	34.66	9.88	30.5	100	242	A	H
		5467.15	51.17	-17.13	68.3	37.08	34.67	9.92	30.5	100	242	P	H
	*	5720	103.77	-	-	89.18	35.06	10.12	30.59	100	242	P	H
	*	5720	96.78	-	-	82.19	35.06	10.12	30.59	100	242	A	H
		5852.7	53.9	-14.4	68.3	39.1	35.25	10.19	30.64	100	242	P	H
		5392.9	50.94	-23.06	74	36.99	34.61	9.84	30.5	100	287	P	V
		5460	41.45	-12.55	54	27.41	34.66	9.88	30.5	100	287	A	V
		5468.8	50.26	-18.04	68.3	36.17	34.67	9.92	30.5	100	287	P	V
	*	5720	101.62	-	-	87.03	35.06	10.12	30.59	100	287	P	V
	*	5720	94.78	-	-	80.19	35.06	10.12	30.59	100	287	A	V
	5867	53.22	-15.08	68.3	38.37	35.28	10.21	30.64	100	287	P	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

U-NII-2C - Straddle Channel
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 144 5720MHz		11440	48.62	-25.38	74	54.32	38.53	13.71	57.94	-	-	P	H
		17160	50.79	-17.51	68.3	49.74	41.27	16.55	56.77	-	-	P	H
		11440	49.34	-24.66	74	55.04	38.53	13.71	57.94	-	-	P	V
		17160	49.82	-18.48	68.3	48.77	41.27	16.55	56.77	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII-2C - Straddle Channel
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 142 5710MHz		5456.7	50.88	-23.12	74	36.84	34.66	9.88	30.5	100	239	P	H
		5459.45	41.59	-12.41	54	27.55	34.66	9.88	30.5	100	239	A	H
		5464.95	49.97	-18.33	68.3	35.92	34.67	9.88	30.5	100	239	P	H
	*	5710	101.36	-	-	86.79	35.03	10.12	30.58	100	239	P	H
	*	5710	94.3	-	-	79.73	35.03	10.12	30.58	100	239	A	H
		5882.95	52.07	-16.23	68.3	37.2	35.31	10.21	30.65	100	239	P	H
		5438.55	50.98	-23.02	74	36.95	34.65	9.88	30.5	100	271	P	V
		5459.45	41.51	-12.49	54	27.47	34.66	9.88	30.5	100	271	A	V
		5462.2	50.53	-17.77	68.3	36.49	34.66	9.88	30.5	100	271	P	V
	*	5710	99.81	-	-	85.24	35.03	10.12	30.58	100	271	P	V
	*	5710	93.02	-	-	78.45	35.03	10.12	30.58	100	271	A	V
	5872.5	52.04	-16.26	68.3	37.17	35.31	10.21	30.65	100	271	P	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

U-NII-2C - Straddle Channel
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 142 5710MHz		11420	48.96	-25.04	74	54.68	38.52	13.71	57.95	-	-	P	H
		17130	50.31	-17.99	68.3	49.24	41.25	16.55	56.73	-	-	P	H
		11420	49.23	-24.77	74	54.95	38.52	13.71	57.95	-	-	P	V
		17130	50.44	-17.86	68.3	49.37	41.25	16.55	56.73	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII-2C - Straddle Channel
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 138 5690MHz		5354.4	50.03	-23.97	74	36.11	34.58	9.84	30.5	100	239	P	H
		5460	41.55	-12.45	54	27.51	34.66	9.88	30.5	100	239	A	H
		5464.4	51.5	-16.8	68.3	37.45	34.67	9.88	30.5	100	239	P	H
	*	5690	98.32	-	-	83.81	35	10.09	30.58	100	239	P	H
	*	5690	90.52	-	-	76.01	35	10.09	30.58	100	239	A	H
		5867.55	51.93	-16.37	68.3	37.08	35.28	10.21	30.64	100	239	P	H
		5358.25	50.85	-23.15	74	36.93	34.58	9.84	30.5	100	265	P	V
		5458.9	41.48	-12.52	54	27.44	34.66	9.88	30.5	100	265	A	V
		5460.55	48.87	-19.43	68.3	34.83	34.66	9.88	30.5	100	265	P	V
	*	5690	96.73	-	-	82.22	35	10.09	30.58	100	265	P	V
	*	5690	89.67	-	-	75.16	35	10.09	30.58	100	265	A	V
	5865.9	51.58	-16.72	68.3	36.73	35.28	10.21	30.64	100	265	P	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

U-NII-2C - Straddle Channel
WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 138 5690MHz		11380	49.59	-24.41	74	55.36	38.48	13.72	57.97	-	-	P	H
		17070	50.06	-18.24	68.3	48.93	41.23	16.57	56.67	-	-	P	H
		11380	48.76	-25.24	74	54.53	38.48	13.72	57.97	-	-	P	V
		17070	50.49	-17.81	68.3	49.36	41.23	16.57	56.67	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz
5GHz WIFI 802.11ac VHT80 (LF)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Margin (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include frequency data for 5GHz and a Remark section.



Co-location:

802.11ac VHT80 CH42 5210MHz+BLE CH39 2480 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ac VHT80 CH42 5210MHz		5136.24	61.09	-12.91	74	47.44	34.41	9.74	30.5	100	253	P	H
		5149.76	49.58	-4.42	54	35.92	34.42	9.74	30.5	100	253	A	H
	*	5210	101.12	-	-	87.33	34.47	9.82	30.5	100	253	P	H
	*	5210	93.91	-	-	80.12	34.47	9.82	30.5	100	253	A	H
		5440.56	51.6	-22.4	74	37.57	34.65	9.88	30.5	100	253	P	H
		5352.24	41.86	-12.14	54	27.94	34.58	9.84	30.5	100	253	A	H
		5137.02	55.1	-18.9	74	41.45	34.41	9.74	30.5	100	273	P	V
		5149.76	46.14	-7.86	54	32.48	34.42	9.74	30.5	100	273	A	V
	*	5210	97.59	-	-	83.8	34.47	9.82	30.5	100	273	P	V
	*	5210	90.02	-	-	76.23	34.47	9.82	30.5	100	273	A	V
		5450.64	52.23	-21.77	74	38.19	34.66	9.88	30.5	100	273	P	V
		5456.16	41.5	-12.5	54	27.46	34.66	9.88	30.5	100	273	A	V
BLE CH39 2480	*	2480	101.31	-	-	93.95	32.39	6.53	31.56	100	294	P	H
	*	2480	100.32	-	-	92.96	32.39	6.53	31.56	100	294	A	H
		2484.44	53.83	-20.17	74	46.47	32.39	6.53	31.56	100	294	P	H
		2483.56	43.54	-10.46	54	36.18	32.39	6.53	31.56	100	294	A	H
	*	2480	98.14	-	-	90.78	32.39	6.53	31.56	100	94	P	V
	*	2480	95.99	-	-	88.63	32.39	6.53	31.56	100	94	A	V
		2494.16	53.13	-20.87	74	45.7	32.4	6.53	31.5	100	94	P	V
		2483.52	43.07	-10.93	54	35.71	32.39	6.53	31.56	100	94	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



802.11ac VHT80 CH42 5210MHz+BLE CH39 2480 (Harmonic @ 3m)

WiFi Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH42 5210MHz+BLE CH39 2480		4960	50.21	-23.79	74	36.82	34.32	9.59	30.52	-	-	P	H
		7440	43.03	-30.97	74	55.66	35.94	11.29	59.86	-	-	P	H
		10420	46.95	-21.35	68.3	56.16	37.65	13.51	60.37	-	-	P	H
		15630	50.31	-23.69	74	52.94	40.59	15.56	58.78	-	-	P	H
		4960	49.78	-24.22	74	36.39	34.32	9.59	30.52	-	-	P	V
		7440	44.6	-29.4	74	57.23	35.94	11.29	59.86	-	-	P	V
		10420	46.91	-21.39	68.3	56.12	37.65	13.51	60.37	-	-	P	V
		15630	50.78	-23.22	74	53.41	40.59	15.56	58.78	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is Margin line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
(MHz)	(dBμV/m)	(dB)	Line (dBμV/m)	Level (dBμV)	Factor (dB/m)	Loss (dB)	Factor (dB)	Pos (cm)	Pos (deg)	Avg. (P/A)	(H/V)
2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Margin (dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
 = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
 = 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
 = 55.45 (dBμV/m)
2. Margin (dB)
 = Level(dBμV/m) – Limit Line(dBμV/m)
 = 55.45(dBμV/m) – 74(dBμV/m)
 = -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
 = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
 = 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
 = 43.54 (dBμV/m)
2. Margin (dB) = Level(dBμV/m) – Limit Line(dBμV/m)
 = 43.54(dBμV/m) – 54(dBμV/m)
 = -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.






Appendix D. Radiated Spurious Emission

Note symbol

-L	Low channel location
-R	High channel location






U-NII-1 - 5150~5250MHz
WIFI 802.11a (Band Edge @ 3m)

WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																																																									
ANT	802.11a CH36 5180MHz																																																																									
1	Horizontal	Fundamental																																																																								
Peak	 <p>Date: 1 Level (dBuV/m) Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 HORIZONTAL RBW 1000.000kHz VBW 3000.000kHz Project : 1D0301-03 Mode : Mode 1 SN : #20 C092376523866039 Plane : X with Accessory setting : GM power setting 1B</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5145.69</td> <td>58.18</td> <td>-15.82</td> <td>74.00</td> <td>44.52</td> <td>34.42</td> <td>9.74</td> <td>30.50</td> <td>100</td> <td>262 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5145.69	58.18	-15.82	74.00	44.52	34.42	9.74	30.50	100	262 Peak	 <p>Date: 3 Level (dBuV/m) Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 HORIZONTAL RBW 1000.000kHz VBW 3000.000kHz Project : 1D0301-03 Mode : Mode 1 SN : #20 C092376523866039 Plane : X with Accessory setting : GM power setting 1B</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>118.48</td> <td>42.10</td> <td>64.38</td> <td>96.47</td> <td>34.45</td> <td>9.78</td> <td>30.50</td> <td>100</td> <td>262 Peak</td> </tr> <tr> <td>2</td> <td>5180.00</td> <td>182.99</td> <td>.....</td> <td>89.26</td> <td>34.45</td> <td>9.78</td> <td>30.50</td> <td>100</td> <td>262 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	118.48	42.10	64.38	96.47	34.45	9.78	30.50	100	262 Peak	2	5180.00	182.99	89.26	34.45	9.78	30.50	100	262 Average
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	5145.69	58.18	-15.82	74.00	44.52	34.42	9.74	30.50	100	262 Peak																																																																
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	5180.00	118.48	42.10	64.38	96.47	34.45	9.78	30.50	100	262 Peak																																																																
2	5180.00	182.99	89.26	34.45	9.78	30.50	100	262 Average																																																																	
Avg.	 <p>Date: 3 Level (dBuV/m) Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 HORIZONTAL RBW 1000.000kHz VBW 0.0100kHz Project : 1D0301-03 Mode : Mode 1 SN : #20 C092376523866039 Plane : X with Accessory setting : GM power setting 1B</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.76</td> <td>48.80</td> <td>-5.20</td> <td>54.00</td> <td>35.14</td> <td>34.42</td> <td>9.74</td> <td>30.50</td> <td>100</td> <td>262 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5149.76	48.80	-5.20	54.00	35.14	34.42	9.74	30.50	100	262 Average																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	5149.76	48.80	-5.20	54.00	35.14	34.42	9.74	30.50	100	262 Average																																																																



WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																																																										
ANT	802.11a CH36 5180MHz																																																																										
1	Vertical	Fundamental																																																																									
Peak	<p>Date: 4 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL RSHW: 1000.000kHz VBW: 3000.000kHz Project : 1D0301-03 Mode : Mode 1 Site : #20 G092370523860039 Plane : X with Accessory setting : GM power setting 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.24</td> <td>53.26</td> <td>-20.74</td> <td>74.00</td> <td>39.68</td> <td>34.42</td> <td>9.74</td> <td>30.58</td> <td>100</td> <td>262 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5149.24	53.26	-20.74	74.00	39.68	34.42	9.74	30.58	100	262 Peak	<p>Date: 6 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL RSHW: 1000.000kHz VBW: 3000.000kHz Project : 1D0301-03 Mode : Mode 1 Site : #20 G092370523860039 Plane : X with Accessory setting : GM power setting 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>105.87</td> <td>37.57</td> <td>68.30</td> <td>92.14</td> <td>34.45</td> <td>9.78</td> <td>30.58</td> <td>100</td> <td>262 Peak</td> </tr> <tr> <td>2</td> <td>5180.00</td> <td>98.99</td> <td>.....</td> <td>85.26</td> <td>34.45</td> <td>9.78</td> <td>30.58</td> <td>100</td> <td>262</td> <td>Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	105.87	37.57	68.30	92.14	34.45	9.78	30.58	100	262 Peak	2	5180.00	98.99	85.26	34.45	9.78	30.58	100	262	Average
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	5149.24	53.26	-20.74	74.00	39.68	34.42	9.74	30.58	100	262 Peak																																																																	
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	5180.00	105.87	37.57	68.30	92.14	34.45	9.78	30.58	100	262 Peak																																																																	
2	5180.00	98.99	85.26	34.45	9.78	30.58	100	262	Average																																																																	
Avg.	<p>Date: 5 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 VERTICAL RSHW: 1000.000kHz VBW: 3.0100kHz Project : 1D0301-03 Mode : Mode 1 Site : #20 G092370523860039 Plane : X with Accessory setting : GM power setting 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.76</td> <td>44.98</td> <td>-9.82</td> <td>54.00</td> <td>31.32</td> <td>34.42</td> <td>9.74</td> <td>30.58</td> <td>100</td> <td>262 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5149.76	44.98	-9.82	54.00	31.32	34.42	9.74	30.58	100	262 Average	-																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	5149.76	44.98	-9.82	54.00	31.32	34.42	9.74	30.58	100	262 Average																																																																	



WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																																																										
ANT	802.11a CH44 5220MHz - L																																																																										
1	Horizontal	Fundamental																																																																									
Peak	 <p>Date: 1 Level (dBuV/m)</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 HORIZONTAL RSW: 1000.000kHz VBW: 3000.000kHz Project : 1D0301-03 Mode : Mode 2 Site : #20 G092310523860039 Plane : X with Accessory setting : GM power setting 18</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5111.02</td> <td>54.57</td> <td>-19.43</td> <td>74.00</td> <td>49.98</td> <td>34.39</td> <td>9.78</td> <td>30.58</td> <td>100</td> <td>256 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5111.02	54.57	-19.43	74.00	49.98	34.39	9.78	30.58	100	256 Peak	 <p>Date: 3 Level (dBuV/m)</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 HORIZONTAL RSW: 1000.000kHz VBW: 3000.000kHz Project : 1D0301-03 Mode : Mode 2 Site : #20 G092310523860039 Plane : X with Accessory setting : GM power setting 18</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5220.00</td> <td>118.55</td> <td>42.25</td> <td>68.30</td> <td>96.76</td> <td>34.47</td> <td>9.82</td> <td>30.58</td> <td>100</td> <td>256 Peak</td> </tr> <tr> <td>2</td> <td>5220.00</td> <td>183.85</td> <td>.....</td> <td>89.26</td> <td>34.47</td> <td>9.82</td> <td>30.58</td> <td>100</td> <td>256</td> <td>Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	118.55	42.25	68.30	96.76	34.47	9.82	30.58	100	256 Peak	2	5220.00	183.85	89.26	34.47	9.82	30.58	100	256	Average
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	5111.02	54.57	-19.43	74.00	49.98	34.39	9.78	30.58	100	256 Peak																																																																	
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	5220.00	118.55	42.25	68.30	96.76	34.47	9.82	30.58	100	256 Peak																																																																	
2	5220.00	183.85	89.26	34.47	9.82	30.58	100	256	Average																																																																	
Avg.	 <p>Date: 2 Level (dBuV/m)</p> <p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 HORIZONTAL RSW: 1000.000kHz VBW: 3.0100kHz Project : 1D0301-03 Mode : Mode 2 Site : #20 G092310523860039 Plane : X with Accessory setting : GM power setting 18</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5147.16</td> <td>44.22</td> <td>-9.78</td> <td>54.00</td> <td>38.56</td> <td>34.42</td> <td>9.74</td> <td>30.58</td> <td>100</td> <td>256 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5147.16	44.22	-9.78	54.00	38.56	34.42	9.74	30.58	100	256 Average	-																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	5147.16	44.22	-9.78	54.00	38.56	34.42	9.74	30.58	100	256 Average																																																																	



WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																
ANT	802.11a CH44 5220MHz - R																																
1	Horizontal	Fundamental																															
Peak	<p>Date: 4 Date: 2022-11-10</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 HORIZONTAL RSBW: 1000.000kHz VBW: 3000.000kHz Project : 100301-03 Mode : Mode 2 Site : 420 0492370523860039 Plane : X with Accessory setting : GM power setting 10</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5353.20</td> <td>51.04</td> <td>-22.06</td> <td>74.00</td> <td>30.02</td> <td>34.58</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>256 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	ca	deg		1	5353.20	51.04	-22.06	74.00	30.02	34.58	9.84	30.50	100	256 Peak	-
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	ca	deg																									
1	5353.20	51.04	-22.06	74.00	30.02	34.58	9.84	30.50	100	256 Peak																							
Avg.	<p>Date: 5 Date: 2022-11-10</p> <p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 HORIZONTAL RSBW: 1000.000kHz VBW: 3.010kHz Project : 100301-03 Mode : Mode 2 Site : 420 0492370523860039 Plane : X with Accessory setting : GM power setting 10</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5352.00</td> <td>42.06</td> <td>-11.94</td> <td>54.00</td> <td>28.11</td> <td>34.01</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>256 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	ca	deg		1	5352.00	42.06	-11.94	54.00	28.11	34.01	9.84	30.50	100	256 Average	-
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	ca	deg																									
1	5352.00	42.06	-11.94	54.00	28.11	34.01	9.84	30.50	100	256 Average																							






WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																																																										
ANT	802.11a CH44 5220MHz - L																																																																										
1	Vertical	Fundamental																																																																									
Peak	<p>Date: 6 Level (dBuV/m)</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL RSHW: 1000.000kHz VBW: 3000.000kHz Project : 1D0301-03 Mode : Mode 2 Site : #20 G092370523860039 Plane : X with Accessory setting : GM power setting 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5142.22</td> <td>52.69</td> <td>-21.31</td> <td>74.00</td> <td>39.83</td> <td>34.42</td> <td>9.74</td> <td>30.58</td> <td>100</td> <td>275 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5142.22	52.69	-21.31	74.00	39.83	34.42	9.74	30.58	100	275 Peak	<p>Date: 8 Level (dBuV/m)</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL RSHW: 1000.000kHz VBW: 3000.000kHz Project : 1D0301-03 Mode : Mode 2 Site : #20 G092370523860039 Plane : X with Accessory setting : GM power setting 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5220.00</td> <td>140.86</td> <td>39.76</td> <td>68.38</td> <td>94.27</td> <td>34.47</td> <td>9.82</td> <td>30.58</td> <td>100</td> <td>275 Peak</td> </tr> <tr> <td>2</td> <td>5220.00</td> <td>101.82</td> <td>.....</td> <td>87.23</td> <td>34.47</td> <td>9.82</td> <td>30.58</td> <td>100</td> <td>275</td> <td>Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	140.86	39.76	68.38	94.27	34.47	9.82	30.58	100	275 Peak	2	5220.00	101.82	87.23	34.47	9.82	30.58	100	275	Average
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	5142.22	52.69	-21.31	74.00	39.83	34.42	9.74	30.58	100	275 Peak																																																																	
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	5220.00	140.86	39.76	68.38	94.27	34.47	9.82	30.58	100	275 Peak																																																																	
2	5220.00	101.82	87.23	34.47	9.82	30.58	100	275	Average																																																																	
Avg.	<p>Date: 7 Level (dBuV/m)</p> <p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 VERTICAL RSHW: 1000.000kHz VBW: 3.0100kHz Project : 1D0301-03 Mode : Mode 2 Site : #20 G092370523860039 Plane : X with Accessory setting : GM power setting 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5141.44</td> <td>43.82</td> <td>-18.98</td> <td>54.00</td> <td>29.36</td> <td>34.42</td> <td>9.74</td> <td>30.58</td> <td>100</td> <td>275 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5141.44	43.82	-18.98	54.00	29.36	34.42	9.74	30.58	100	275 Average	-																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	5141.44	43.82	-18.98	54.00	29.36	34.42	9.74	30.58	100	275 Average																																																																	



WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																
ANT	802.11a CH44 5220MHz - R																																
1	Vertical	Fundamental																															
Peak	<p>Date: 9 Date: 2022-11-10</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL RSBW: 1000.000kHz VBW: 3000.000kHz Project : 100301-03 Mode : Mode 2 Site : 420 0492370523860039 Plane : X with Accessory setting : GM power setting 10</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5451.69</td> <td>52.07</td> <td>-21.83</td> <td>74.00</td> <td>38.93</td> <td>34.66</td> <td>9.88</td> <td>30.50</td> <td>100</td> <td>275 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	ca	deg	1	5451.69	52.07	-21.83	74.00	38.93	34.66	9.88	30.50	100	275 Peak	-
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	ca	deg																								
1	5451.69	52.07	-21.83	74.00	38.93	34.66	9.88	30.50	100	275 Peak																							
Avg.	<p>Date: 10 Date: 2022-11-10</p> <p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 VERTICAL RSBW: 1000.000kHz VBW: 3.010kHz Project : 100301-03 Mode : Mode 2 Site : 420 0492370523860039 Plane : X with Accessory setting : GM power setting 10</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5381.28</td> <td>41.74</td> <td>-12.26</td> <td>54.00</td> <td>27.79</td> <td>34.61</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>275 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	ca	deg	1	5381.28	41.74	-12.26	54.00	27.79	34.61	9.84	30.50	100	275 Average	-
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	ca	deg																								
1	5381.28	41.74	-12.26	54.00	27.79	34.61	9.84	30.50	100	275 Average																							



WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																																																									
ANT	802.11a CH48 5240MHz - L																																																																									
1	Horizontal	Fundamental																																																																								
Peak	 <p>Date: 1 Level (dBuV/m)</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 HORIZONTAL RSW: 1000.000kHz VBW: 3000.000kHz Project : 1D0301-03 Mode : Mode 3 Site : #20 G092370523860039 Plane : X with Accessory setting : GM power setting 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5132.34</td> <td>52.72</td> <td>-11.28</td> <td>74.00</td> <td>39.07</td> <td>34.41</td> <td>9.74</td> <td>30.50</td> <td>100</td> <td>262 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5132.34	52.72	-11.28	74.00	39.07	34.41	9.74	30.50	100	262 Peak	 <p>Date: 3 Level (dBuV/m)</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 HORIZONTAL RSW: 1000.000kHz VBW: 3000.000kHz Project : 1D0301-03 Mode : Mode 3 Site : #20 G092370523860039 Plane : X with Accessory setting : GM power setting 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5240.00</td> <td>110.22</td> <td>41.92</td> <td>68.30</td> <td>96.41</td> <td>34.49</td> <td>9.82</td> <td>30.50</td> <td>100</td> <td>262 Peak</td> </tr> <tr> <td>2</td> <td>5240.00</td> <td>103.07</td> <td>.....</td> <td>89.26</td> <td>34.49</td> <td>9.82</td> <td>30.50</td> <td>100</td> <td>262 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	110.22	41.92	68.30	96.41	34.49	9.82	30.50	100	262 Peak	2	5240.00	103.07	89.26	34.49	9.82	30.50	100	262 Average
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	5132.34	52.72	-11.28	74.00	39.07	34.41	9.74	30.50	100	262 Peak																																																																
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	5240.00	110.22	41.92	68.30	96.41	34.49	9.82	30.50	100	262 Peak																																																																
2	5240.00	103.07	89.26	34.49	9.82	30.50	100	262 Average																																																																	
Avg.	 <p>Date: 2 Level (dBuV/m)</p> <p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 HORIZONTAL RSW: 1000.000kHz VBW: 3.0100kHz Project : 1D0301-03 Mode : Mode 3 Site : #20 G092370523860039 Plane : X with Accessory setting : GM power setting 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5119.06</td> <td>43.57</td> <td>-10.43</td> <td>54.00</td> <td>29.94</td> <td>34.39</td> <td>9.74</td> <td>30.50</td> <td>100</td> <td>262 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5119.06	43.57	-10.43	54.00	29.94	34.39	9.74	30.50	100	262 Average	-																																									
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	5119.06	43.57	-10.43	54.00	29.94	34.39	9.74	30.50	100	262 Average																																																																



WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																
ANT	802.11a CH48 5240MHz - R																																
1	Horizontal	Fundamental																															
Peak	<p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 HORIZONTAL : RBW: 1000.000kHz VBW: 3000.000kHz Project : 100301-03 Mode : Mode 3 SW : 920 G692370523860039 Plane : X with Accessory setting : GM power setting 10</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5373.09</td> <td>51.41</td> <td>-22.39</td> <td>74.00</td> <td>37.68</td> <td>34.59</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>262 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	ca	deg		1	5373.09	51.41	-22.39	74.00	37.68	34.59	9.84	30.50	100	262 Peak	-
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	ca	deg																									
1	5373.09	51.41	-22.39	74.00	37.68	34.59	9.84	30.50	100	262 Peak																							
Avg.	<p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 HORIZONTAL : RBW: 1000.000kHz VBW: 3.0100kHz Project : 100301-03 Mode : Mode 3 SW : 920 G692370523860039 Plane : X with Accessory setting : GM power setting 10</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5559.92</td> <td>41.96</td> <td>-12.02</td> <td>54.00</td> <td>28.06</td> <td>34.58</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>262 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	ca	deg		1	5559.92	41.96	-12.02	54.00	28.06	34.58	9.84	30.50	100	262 Average	-
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	ca	deg																									
1	5559.92	41.96	-12.02	54.00	28.06	34.58	9.84	30.50	100	262 Average																							






WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																																																										
ANT	802.11a CH48 5240MHz - L																																																																										
1	Vertical	Fundamental																																																																									
Peak	<p>Date: 6 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL RSHW: 1000.000kHz VBW: 3000.000kHz Project : 1D0301-03 Mode : Mode 3 Site : #20 G092370523860039 Plane : X with Accessory setting : GM power setting 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1085.28</td> <td>52.42</td> <td>-11.58</td> <td>74.00</td> <td>38.85</td> <td>34.37</td> <td>9.78</td> <td>30.58</td> <td>100</td> <td>268 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	dB	ca	deg	1	1085.28	52.42	-11.58	74.00	38.85	34.37	9.78	30.58	100	268 Peak	<p>Date: 8 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL RSHW: 1000.000kHz VBW: 3000.000kHz Project : 1D0301-03 Mode : Mode 3 Site : #20 G092370523860039 Plane : X with Accessory setting : GM power setting 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5240.00</td> <td>146.78</td> <td>38.40</td> <td>68.38</td> <td>92.89</td> <td>34.49</td> <td>9.82</td> <td>30.58</td> <td>100</td> <td>268 Peak</td> </tr> <tr> <td>2</td> <td>5240.00</td> <td>99.43</td> <td>.....</td> <td>85.62</td> <td>34.49</td> <td>9.82</td> <td>30.58</td> <td>100</td> <td>268</td> <td>Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	dB	ca	deg	1	5240.00	146.78	38.40	68.38	92.89	34.49	9.82	30.58	100	268 Peak	2	5240.00	99.43	85.62	34.49	9.82	30.58	100	268	Average
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	dB	ca	deg																																																																		
1	1085.28	52.42	-11.58	74.00	38.85	34.37	9.78	30.58	100	268 Peak																																																																	
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	dB	ca	deg																																																																		
1	5240.00	146.78	38.40	68.38	92.89	34.49	9.82	30.58	100	268 Peak																																																																	
2	5240.00	99.43	85.62	34.49	9.82	30.58	100	268	Average																																																																	
Avg.	<p>Date: 7 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 VERTICAL RSHW: 1000.000kHz VBW: 3.0100kHz Project : 1D0301-03 Mode : Mode 3 Site : #20 G092370523860039 Plane : X with Accessory setting : GM power setting 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5154.94</td> <td>42.34</td> <td>-11.46</td> <td>54.00</td> <td>28.89</td> <td>34.41</td> <td>9.74</td> <td>30.58</td> <td>100</td> <td>268 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	dB	ca	deg	1	5154.94	42.34	-11.46	54.00	28.89	34.41	9.74	30.58	100	268 Average	-																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	dB	ca	deg																																																																		
1	5154.94	42.34	-11.46	54.00	28.89	34.41	9.74	30.58	100	268 Average																																																																	



WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																
ANT	802.11a CH48 5240MHz - R																																
1	Vertical	Fundamental																															
Peak	<p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL : RBW: 1000.000kHz VBW: 3000.000kHz Project : 100301-03 Mode : Mode 3 Site : 420 G092310523860039 Plane : X with Accessory setting : GM power setting 18</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5397.12</td> <td>52.00</td> <td>-22.00</td> <td>74.00</td> <td>38.04</td> <td>34.42</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>200 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	ca	deg		1	5397.12	52.00	-22.00	74.00	38.04	34.42	9.84	30.50	100	200 Peak	-
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	ca	deg																									
1	5397.12	52.00	-22.00	74.00	38.04	34.42	9.84	30.50	100	200 Peak																							
Avg.	<p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 VERTICAL : RBW: 1000.000kHz VBW: 3.0100kHz Project : 100301-03 Mode : Mode 3 Site : 420 G092310523860039 Plane : X with Accessory setting : GM power setting 18</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5508.16</td> <td>41.50</td> <td>-12.50</td> <td>54.00</td> <td>27.50</td> <td>34.50</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>200 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	ca	deg		1	5508.16	41.50	-12.50	54.00	27.50	34.50	9.84	30.50	100	200 Average	-
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	ca	deg																									
1	5508.16	41.50	-12.50	54.00	27.50	34.50	9.84	30.50	100	200 Average																							






**U-NII-1 5150~5250MHz
WIFI 802.11n HT20 (Band Edge @ 3m)**

WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																																																									
ANT	802.11n HT20 CH36 5180MHz																																																																									
1	Horizontal	Fundamental																																																																								
Peak	 <p>Date: 2022-09-29</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 HORIZONTAL REW: 1000.000KHz VEW: 3000.000KHz Project : 10030143 Mode : Mode 10 SN : #22 C89236523870021 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5184.26</td> <td>53.81</td> <td>-20.19</td> <td>74.00</td> <td>49.27</td> <td>33.90</td> <td>18.28</td> <td>30.66</td> <td>182</td> <td>319 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5184.26	53.81	-20.19	74.00	49.27	33.90	18.28	30.66	182	319 Peak	 <p>Date: 2022-09-29</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 HORIZONTAL REW: 1000.000KHz VEW: 3000.000KHz Project : 10030143 Mode : Mode 10 SN : #22 C89236523870021 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>56.53</td> <td>36.27</td> <td>68.30</td> <td>92.88</td> <td>34.00</td> <td>18.28</td> <td>30.66</td> <td>182</td> <td>319 Peak</td> </tr> <tr> <td>2</td> <td>5180.00</td> <td>58.91</td> <td>.....</td> <td>85.32</td> <td>34.00</td> <td>18.28</td> <td>30.69</td> <td>182</td> <td>319 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	56.53	36.27	68.30	92.88	34.00	18.28	30.66	182	319 Peak	2	5180.00	58.91	85.32	34.00	18.28	30.69	182	319 Average
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	5184.26	53.81	-20.19	74.00	49.27	33.90	18.28	30.66	182	319 Peak																																																																
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	5180.00	56.53	36.27	68.30	92.88	34.00	18.28	30.66	182	319 Peak																																																																
2	5180.00	58.91	85.32	34.00	18.28	30.69	182	319 Average																																																																	
Avg.	 <p>Date: 2022-09-29</p> <p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 HORIZONTAL REW: 1000.000KHz VEW: 3000.000KHz Project : 10030143 Mode : Mode 10 SN : #22 C89236523870021 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5139.88</td> <td>43.68</td> <td>-18.48</td> <td>54.00</td> <td>29.96</td> <td>34.00</td> <td>18.24</td> <td>30.68</td> <td>182</td> <td>319 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5139.88	43.68	-18.48	54.00	29.96	34.00	18.24	30.68	182	319 Average	-																																									
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	5139.88	43.68	-18.48	54.00	29.96	34.00	18.24	30.68	182	319 Average																																																																





WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																																																									
ANT	802.11n HT20 CH36 5180MHz																																																																									
1	Vertical	Fundamental																																																																								
Peak	<p>Site : 03CH02-SZ Condition : PART 15.407 3m HF_ANT_3117_0107 VERTICAL Project : RBW:1000.000kHz VEW:3000.000kHz Mode : 10000143 Mode : Mode 10 SN : #22 G892360523870021 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5182.78</td> <td>52.81</td> <td>-21.19</td> <td>74.00</td> <td>39.27</td> <td>35.90</td> <td>18.28</td> <td>30.56</td> <td>189</td> <td>321 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5182.78	52.81	-21.19	74.00	39.27	35.90	18.28	30.56	189	321 Peak	<p>Site : 03CH02-SZ Condition : PART 15.407 3m HF_ANT_3117_0107 VERTICAL Project : RBW:1000.000kHz VEW:3000.000kHz Mode : 10000143 Mode : Mode 10 SN : #22 G892360523870021 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>186.28</td> <td>37.98</td> <td>68.30</td> <td>92.69</td> <td>34.80</td> <td>18.28</td> <td>30.69</td> <td>189</td> <td>321 Peak</td> </tr> <tr> <td>2</td> <td>5180.00</td> <td>90.95</td> <td>-</td> <td>85.36</td> <td>34.98</td> <td>18.28</td> <td>30.69</td> <td>189</td> <td>321 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	186.28	37.98	68.30	92.69	34.80	18.28	30.69	189	321 Peak	2	5180.00	90.95	-	85.36	34.98	18.28	30.69	189	321 Average
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	5182.78	52.81	-21.19	74.00	39.27	35.90	18.28	30.56	189	321 Peak																																																																
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	5180.00	186.28	37.98	68.30	92.69	34.80	18.28	30.69	189	321 Peak																																																																
2	5180.00	90.95	-	85.36	34.98	18.28	30.69	189	321 Average																																																																	
Avg.	<p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF_ANT_3117_0107 VERTICAL Project : RBW:1000.000kHz VEW:0.0100kHz Mode : 10000143 Mode : Mode 10 SN : #22 G892360523870021 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5159.00</td> <td>44.12</td> <td>-9.78</td> <td>54.00</td> <td>38.63</td> <td>34.00</td> <td>18.24</td> <td>30.65</td> <td>189</td> <td>321 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5159.00	44.12	-9.78	54.00	38.63	34.00	18.24	30.65	189	321 Average	-																																									
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	5159.00	44.12	-9.78	54.00	38.63	34.00	18.24	30.65	189	321 Average																																																																



WIFI	U-NII-1 5150-5250MHz Band Edge @ 3m																																																																										
ANT	802.11n HT20 CH44 5220MHz - L																																																																										
1	Horizontal	Fundamental																																																																									
<p>Peak</p>	 <p>Date: 1 Date: 2022-11-10</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT 3117_0107 HORIZONTAL RSBW: 1000.000kHz VBW: 3000.000kHz Project : 1D0301-03 Mode : Mode 11 SN : #20 G992370523866039 Plane : X with Accessory setting : MCSO power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5147.68</td> <td>53.22</td> <td>-20.78</td> <td>74.00</td> <td>39.56</td> <td>34.42</td> <td>9.74</td> <td>30.50</td> <td>100</td> <td>256 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg		1	5147.68	53.22	-20.78	74.00	39.56	34.42	9.74	30.50	100	256 Peak	 <p>Date: 3 Date: 2022-11-10</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT 3117_0107 HORIZONTAL RSBW: 1000.000kHz VBW: 3000.000kHz Project : 1D0301-03 Mode : Mode 11 SN : #20 G992370523866039 Plane : X with Accessory setting : MCSO power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5220.00</td> <td>187.82</td> <td>39.52</td> <td>68.30</td> <td>94.83</td> <td>34.47</td> <td>9.82</td> <td>30.50</td> <td>100</td> <td>256 Peak</td> </tr> <tr> <td>2</td> <td>5220.00</td> <td>181.82</td> <td>.....</td> <td>.....</td> <td>87.23</td> <td>34.47</td> <td>9.82</td> <td>30.50</td> <td>100</td> <td>256 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg		1	5220.00	187.82	39.52	68.30	94.83	34.47	9.82	30.50	100	256 Peak	2	5220.00	181.82	87.23	34.47	9.82	30.50	100	256 Average
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg																																																																			
1	5147.68	53.22	-20.78	74.00	39.56	34.42	9.74	30.50	100	256 Peak																																																																	
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg																																																																			
1	5220.00	187.82	39.52	68.30	94.83	34.47	9.82	30.50	100	256 Peak																																																																	
2	5220.00	181.82	87.23	34.47	9.82	30.50	100	256 Average																																																																	
<p>Avg.</p>	 <p>Date: 2 Date: 2022-11-10</p> <p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT 3117_0107 HORIZONTAL RSBW: 1000.000kHz VBW: 3.0100kHz Project : 1D0301-03 Mode : Mode 11 SN : #20 G992370523866039 Plane : X with Accessory setting : MCSO power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.46</td> <td>43.38</td> <td>-18.62</td> <td>54.00</td> <td>29.72</td> <td>34.42</td> <td>9.74</td> <td>30.50</td> <td>100</td> <td>256 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg		1	5148.46	43.38	-18.62	54.00	29.72	34.42	9.74	30.50	100	256 Average	<p>-</p>																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg																																																																			
1	5148.46	43.38	-18.62	54.00	29.72	34.42	9.74	30.50	100	256 Average																																																																	



WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																
ANT	802.11n HT20 CH44 5220MHz - R																																
1	Horizontal	Fundamental																															
<p>Peak</p>	 <p>Date: 4 Date: 2022-11-10</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 HORIZONTAL RSBW: 1000.000kHz VBW: 3000.000kHz Project : 100301-03 Mode : Mode 11 Site : 420 G092310523860039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5497.68</td> <td>51.21</td> <td>-22.79</td> <td>74.00</td> <td>37.25</td> <td>34.42</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>256 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	ca	deg		1	5497.68	51.21	-22.79	74.00	37.25	34.42	9.84	30.50	100	256 Peak	<p>-</p>
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	ca	deg																									
1	5497.68	51.21	-22.79	74.00	37.25	34.42	9.84	30.50	100	256 Peak																							
<p>Avg.</p>	 <p>Date: 5 Date: 2022-11-10</p> <p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 HORIZONTAL RSBW: 1000.000kHz VBW: 3.010kHz Project : 100301-03 Mode : Mode 11 Site : 420 G092310523860039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5579.36</td> <td>41.56</td> <td>-12.44</td> <td>54.00</td> <td>27.61</td> <td>34.61</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>256 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	ca	deg		1	5579.36	41.56	-12.44	54.00	27.61	34.61	9.84	30.50	100	256 Average	<p>-</p>
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	ca	deg																									
1	5579.36	41.56	-12.44	54.00	27.61	34.61	9.84	30.50	100	256 Average																							



WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																																																										
ANT	802.11n HT20 CH44 5220MHz - L																																																																										
1	Vertical	Fundamental																																																																									
Peak	<p>Date: 6 Level (dBuV/m)</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL RSHW: 1000.000kHz VBW: 3000.000kHz Project : 1D0301-03 Mode : Mode 11 Site : #20 0292370523860039 Plane : X with Accessory setting : MCSO power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level Factor</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5142.22</td> <td>52.85</td> <td>-21.15</td> <td>74.00</td> <td>39.19</td> <td>34.42</td> <td>9.74</td> <td>30.50</td> <td>100</td> <td>276 Peak</td> </tr> </tbody> </table>	Freq	Level	Line	Level Factor	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5142.22	52.85	-21.15	74.00	39.19	34.42	9.74	30.50	100	276 Peak	<p>Date: 8 Level (dBuV/m)</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL RSHW: 1000.000kHz VBW: 3000.000kHz Project : 1D0301-03 Mode : Mode 11 Site : #20 0292370523860039 Plane : X with Accessory setting : MCSO power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level Factor</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5220.00</td> <td>145.11</td> <td>36.81</td> <td>68.30</td> <td>91.32</td> <td>34.47</td> <td>9.82</td> <td>30.50</td> <td>100</td> <td>276 Peak</td> </tr> <tr> <td>2</td> <td>5220.00</td> <td>98.82</td> <td>.....</td> <td>84.23</td> <td>34.47</td> <td>9.82</td> <td>30.50</td> <td>100</td> <td>276</td> <td>Average</td> </tr> </tbody> </table>	Freq	Level	Line	Level Factor	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	145.11	36.81	68.30	91.32	34.47	9.82	30.50	100	276 Peak	2	5220.00	98.82	84.23	34.47	9.82	30.50	100	276	Average
Freq	Level	Line	Level Factor	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	5142.22	52.85	-21.15	74.00	39.19	34.42	9.74	30.50	100	276 Peak																																																																	
Freq	Level	Line	Level Factor	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	5220.00	145.11	36.81	68.30	91.32	34.47	9.82	30.50	100	276 Peak																																																																	
2	5220.00	98.82	84.23	34.47	9.82	30.50	100	276	Average																																																																	
Avg.	<p>Date: 7 Level (dBuV/m)</p> <p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 VERTICAL RSHW: 1000.000kHz VBW: 3.0100kHz Project : 1D0301-03 Mode : Mode 11 Site : #20 0292370523860039 Plane : X with Accessory setting : MCSO power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level Factor</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5141.18</td> <td>42.64</td> <td>-11.36</td> <td>54.00</td> <td>28.98</td> <td>34.42</td> <td>9.74</td> <td>30.50</td> <td>100</td> <td>276 Average</td> </tr> </tbody> </table>	Freq	Level	Line	Level Factor	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5141.18	42.64	-11.36	54.00	28.98	34.42	9.74	30.50	100	276 Average	-																																										
Freq	Level	Line	Level Factor	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	5141.18	42.64	-11.36	54.00	28.98	34.42	9.74	30.50	100	276 Average																																																																	



WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																
ANT	802.11n HT20 CH44 5220MHz - R																																
1	Vertical	Fundamental																															
Peak	<p> Date: 9 Date: 2022-11-10 Level (dBuV/m) Frequency (MHz) </p> <p> Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL : RBW: 1000.000kHz VBW: 3000.000kHz Project : 100301-03 Mode : Mode 11 Site : 920 G092310523860039 Plane : X with Accessory setting : MCS0 power setting 16 </p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5379.24</td> <td>51.15</td> <td>-22.85</td> <td>74.00</td> <td>37.22</td> <td>34.59</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>276 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	ca	deg	1	5379.24	51.15	-22.85	74.00	37.22	34.59	9.84	30.50	100	276 Peak	-
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	ca	deg																								
1	5379.24	51.15	-22.85	74.00	37.22	34.59	9.84	30.50	100	276 Peak																							
Avg.	<p> Date: 10 Date: 2022-11-10 Level (dBuV/m) Frequency (MHz) </p> <p> Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 VERTICAL : RBW: 1000.000kHz VBW: 3.0100kHz Project : 100301-03 Mode : Mode 11 Site : 920 G092310523860039 Plane : X with Accessory setting : MCS0 power setting 16 </p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5381.52</td> <td>41.40</td> <td>-12.60</td> <td>54.00</td> <td>27.45</td> <td>34.61</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>276 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	ca	deg	1	5381.52	41.40	-12.60	54.00	27.45	34.61	9.84	30.50	100	276 Average	-
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	ca	deg																								
1	5381.52	41.40	-12.60	54.00	27.45	34.61	9.84	30.50	100	276 Average																							



WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																																																														
ANT	802.11n HT20 CH48 5240MHz - L																																																																														
1	Horizontal	Fundamental																																																																													
Peak	<p>Date: 1 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 HORIZONTAL RSHW: 1000.000kHz VBW: 3000.000kHz Project : 1D0301-03 Mode : Mode 12 Site : #20 092310523860039 Plane : X with Accessory setting : MCSO power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.48</td> <td>53.28</td> <td>-28.72</td> <td>74.00</td> <td>39.62</td> <td>34.42</td> <td>9.74</td> <td>30.58</td> <td>100</td> <td>252 Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	dB	ca	deg		1	5149.48	53.28	-28.72	74.00	39.62	34.42	9.74	30.58	100	252 Peak	<p>Date: 3 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 HORIZONTAL RSHW: 1000.000kHz VBW: 3000.000kHz Project : 1D0301-03 Mode : Mode 12 Site : #20 092310523860039 Plane : X with Accessory setting : MCSO power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5240.00</td> <td>187.93</td> <td>39.63</td> <td>68.30</td> <td>94.12</td> <td>34.49</td> <td>9.82</td> <td>30.58</td> <td>100</td> <td>252 Peak</td> </tr> <tr> <td>2</td> <td>5240.00</td> <td>181.84</td> <td>.....</td> <td>87.23</td> <td>34.49</td> <td>9.82</td> <td>30.58</td> <td>100</td> <td>252</td> <td>Average</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	dB	ca	deg		1	5240.00	187.93	39.63	68.30	94.12	34.49	9.82	30.58	100	252 Peak	2	5240.00	181.84	87.23	34.49	9.82	30.58	100	252	Average
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark																																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	dB	ca	deg																																																																						
1	5149.48	53.28	-28.72	74.00	39.62	34.42	9.74	30.58	100	252 Peak																																																																					
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark																																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	dB	ca	deg																																																																						
1	5240.00	187.93	39.63	68.30	94.12	34.49	9.82	30.58	100	252 Peak																																																																					
2	5240.00	181.84	87.23	34.49	9.82	30.58	100	252	Average																																																																					
Avg.	<p>Date: 2 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 HORIZONTAL RSHW: 1000.000kHz VBW: 3.0100kHz Project : 1D0301-03 Mode : Mode 12 Site : #20 092310523860039 Plane : X with Accessory setting : MCSO power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5159.86</td> <td>43.46</td> <td>-18.54</td> <td>54.00</td> <td>29.83</td> <td>34.39</td> <td>9.74</td> <td>30.58</td> <td>100</td> <td>252 Average</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	dB	ca	deg		1	5159.86	43.46	-18.54	54.00	29.83	34.39	9.74	30.58	100	252 Average	-																																												
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark																																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	dB	ca	deg																																																																						
1	5159.86	43.46	-18.54	54.00	29.83	34.39	9.74	30.58	100	252 Average																																																																					



WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																
ANT	802.11n HT20 CH48 5240MHz - R																																
1	Horizontal	Fundamental																															
Peak	<p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 HORIZONTAL : RBW: 1000.000kHz VBW: 3000.000kHz Project : 100301-03 Mode : Mode 12 Site : 420 G092310523860039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5372.64</td> <td>52.02</td> <td>-11.98</td> <td>74.00</td> <td>38.00</td> <td>34.50</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>252 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	ca	deg	1	5372.64	52.02	-11.98	74.00	38.00	34.50	9.84	30.50	100	252 Peak	-
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	ca	deg																								
1	5372.64	52.02	-11.98	74.00	38.00	34.50	9.84	30.50	100	252 Peak																							
Avg.	<p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 HORIZONTAL : RBW: 1000.000kHz VBW: 3.0100kHz Project : 100301-03 Mode : Mode 12 Site : 420 G092310523860039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5372.64</td> <td>52.02</td> <td>-11.98</td> <td>74.00</td> <td>38.00</td> <td>34.50</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>252 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	ca	deg	1	5372.64	52.02	-11.98	74.00	38.00	34.50	9.84	30.50	100	252 Average	-
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	ca	deg																								
1	5372.64	52.02	-11.98	74.00	38.00	34.50	9.84	30.50	100	252 Average																							






WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																																																										
ANT	802.11n HT20 CH48 5240MHz - L																																																																										
1	Vertical	Fundamental																																																																									
Peak	<p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL RSW: 1000.000kHz VBW:3000.000kHz Project : 1D0301-03 Mode : Mode 12 Site : #20 092310523866039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5120.38</td> <td>52.89</td> <td>-11.11</td> <td>74.00</td> <td>39.26</td> <td>34.39</td> <td>9.74</td> <td>30.58</td> <td>100</td> <td>277 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5120.38	52.89	-11.11	74.00	39.26	34.39	9.74	30.58	100	277 Peak	<p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL RSW: 1000.000kHz VBW:3000.000kHz Project : 1D0301-03 Mode : Mode 12 Site : #20 092310523866039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5240.00</td> <td>104.37</td> <td>36.07</td> <td>68.30</td> <td>90.56</td> <td>34.49</td> <td>9.82</td> <td>30.58</td> <td>100</td> <td>277 Peak</td> </tr> <tr> <td>2</td> <td>5240.00</td> <td>97.87</td> <td>.....</td> <td>83.26</td> <td>34.49</td> <td>9.82</td> <td>30.58</td> <td>100</td> <td>277</td> <td>Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	104.37	36.07	68.30	90.56	34.49	9.82	30.58	100	277 Peak	2	5240.00	97.87	83.26	34.49	9.82	30.58	100	277	Average
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	5120.38	52.89	-11.11	74.00	39.26	34.39	9.74	30.58	100	277 Peak																																																																	
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	5240.00	104.37	36.07	68.30	90.56	34.49	9.82	30.58	100	277 Peak																																																																	
2	5240.00	97.87	83.26	34.49	9.82	30.58	100	277	Average																																																																	
Avg.	<p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 VERTICAL RSW: 1000.000kHz VBW:3.0100kHz Project : 1D0301-03 Mode : Mode 12 Site : #20 092310523866039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5132.00</td> <td>42.59</td> <td>-11.41</td> <td>54.00</td> <td>28.94</td> <td>34.41</td> <td>9.74</td> <td>30.58</td> <td>100</td> <td>277 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5132.00	42.59	-11.41	54.00	28.94	34.41	9.74	30.58	100	277 Average	-																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	5132.00	42.59	-11.41	54.00	28.94	34.41	9.74	30.58	100	277 Average																																																																	



WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																
ANT	802.11n HT20 CH48 5240MHz - R																																
1	Vertical	Fundamental																															
Peak	<p>Date: 9 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL RSBW: 1000.000kHz VBW: 3000.000kHz Project : 100301-03 Mode : Mode 12 Site : 920 G092310523860039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5414.88</td> <td>59.99</td> <td>-23.81</td> <td>74.00</td> <td>37.02</td> <td>34.43</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>277 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBm	dB	dBm	dBm	dB	dB	ca	deg		1	5414.88	59.99	-23.81	74.00	37.02	34.43	9.84	30.50	100	277 Peak	-
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBm	dB	dBm	dBm	dB	dB	ca	deg																									
1	5414.88	59.99	-23.81	74.00	37.02	34.43	9.84	30.50	100	277 Peak																							
Avg.	<p>Date: 10 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 VERTICAL RSBW: 1000.000kHz VBW: 3.0100kHz Project : 100301-03 Mode : Mode 12 Site : 920 G092310523860039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5559.92</td> <td>41.55</td> <td>-12.47</td> <td>54.00</td> <td>27.61</td> <td>34.58</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>277 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBm	dB	dBm	dBm	dB	dB	ca	deg		1	5559.92	41.55	-12.47	54.00	27.61	34.58	9.84	30.50	100	277 Average	-
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBm	dB	dBm	dBm	dB	dB	ca	deg																									
1	5559.92	41.55	-12.47	54.00	27.61	34.58	9.84	30.50	100	277 Average																							






**U-NII-1 5150~5250MHz
WIFI 802.11n HT40 (Band Edge @ 3m)**

WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																																																																					
ANT	802.11n HT40 CH38 5190MHz - L																																																																																					
1	Horizontal	Fundamental																																																																																				
Peak	 <p>Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT 3117 0107 HORIZONTAL : RBW 1000.000kHz VEW 3000.000kHz Project : FD0301-03 Mode : Mode 19 SN : #00 C892370523860039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5145.86</td> <td>56.31</td> <td>-17.69</td> <td>74.00</td> <td>42.65</td> <td>34.42</td> <td>9.74</td> <td>30.50</td> <td>100</td> <td></td> <td>252 Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level	Factor	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	dB	cm	deg		1	5145.86	56.31	-17.69	74.00	42.65	34.42	9.74	30.50	100		252 Peak	 <p>Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT 3117 0107 HORIZONTAL : RBW 1000.000kHz VEW 3000.000kHz Project : FD0301-03 Mode : Mode 19 SN : #00 C892370523860039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>54.26</td> <td>35.96</td> <td>68.30</td> <td>60.53</td> <td>34.45</td> <td>9.78</td> <td>30.50</td> <td>100</td> <td></td> <td>252 Peak</td> </tr> <tr> <td>2</td> <td>5190.00</td> <td>56.38</td> <td>.....</td> <td>63.25</td> <td>34.45</td> <td>9.78</td> <td>30.50</td> <td>100</td> <td></td> <td></td> <td>252 Average</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level	Factor	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	dB	cm	deg		1	5190.00	54.26	35.96	68.30	60.53	34.45	9.78	30.50	100		252 Peak	2	5190.00	56.38	63.25	34.45	9.78	30.50	100			252 Average
Freq	Level	Limit	Line	Level	Factor	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																											
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	5145.86	56.31	-17.69	74.00	42.65	34.42	9.74	30.50	100		252 Peak																																																																											
Freq	Level	Limit	Line	Level	Factor	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																											
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	5190.00	54.26	35.96	68.30	60.53	34.45	9.78	30.50	100		252 Peak																																																																											
2	5190.00	56.38	63.25	34.45	9.78	30.50	100			252 Average																																																																											
Avg.	 <p>Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT 3117 0107 HORIZONTAL : RBW 1000.000kHz VEW 3000.000kHz Project : FD0301-03 Mode : Mode 19 SN : #00 C892370523860039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.58</td> <td>47.47</td> <td>-6.53</td> <td>54.00</td> <td>33.81</td> <td>34.42</td> <td>9.74</td> <td>30.50</td> <td>100</td> <td></td> <td>252 Average</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level	Factor	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	dB	cm	deg		1	5149.58	47.47	-6.53	54.00	33.81	34.42	9.74	30.50	100		252 Average																																																	
Freq	Level	Limit	Line	Level	Factor	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																											
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	5149.58	47.47	-6.53	54.00	33.81	34.42	9.74	30.50	100		252 Average																																																																											



WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																
ANT	802.11n HT40 CH38 5190MHz - R																																
1	Horizontal	Fundamental																															
Peak	<p>Date: 4 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 HORIZONTAL RSBW: 1000.000kHz VBW: 3000.000kHz Project : 100301-03 Mode : Mode 19 Site : 420 G092310523860039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5376.56</td> <td>59.26</td> <td>-23.74</td> <td>74.00</td> <td>36.33</td> <td>34.59</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>252 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg		1	5376.56	59.26	-23.74	74.00	36.33	34.59	9.84	30.50	100	252 Peak	-
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg																									
1	5376.56	59.26	-23.74	74.00	36.33	34.59	9.84	30.50	100	252 Peak																							
Avg.	<p>Date: 5 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 HORIZONTAL RSBW: 1000.000kHz VBW: 3.010kHz Project : 100301-03 Mode : Mode 19 Site : 420 G092310523860039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5376.56</td> <td>41.45</td> <td>-12.57</td> <td>54.00</td> <td>27.51</td> <td>34.50</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>252 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg		1	5376.56	41.45	-12.57	54.00	27.51	34.50	9.84	30.50	100	252 Average	-
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg																									
1	5376.56	41.45	-12.57	54.00	27.51	34.50	9.84	30.50	100	252 Average																							



WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																																																										
ANT	802.11n HT40 CH38 5190MHz - L																																																																										
1	Vertical	Fundamental																																																																									
Peak	 <p>Date: 6 Level (dBuV/m)</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL RSHW: 1000.000kHz VBW: 3000.000kHz Project : 1D0301-03 Mode : Mode 19 Site : #20 092310523866039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5126.10</td> <td>54.44</td> <td>-19.56</td> <td>74.00</td> <td>49.79</td> <td>34.41</td> <td>9.74</td> <td>30.50</td> <td>100</td> <td>278 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5126.10	54.44	-19.56	74.00	49.79	34.41	9.74	30.50	100	278 Peak	 <p>Date: 8 Level (dBuV/m)</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL RSHW: 1000.000kHz VBW: 3000.000kHz Project : 1D0301-03 Mode : Mode 19 Site : #20 092310523866039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>181.28</td> <td>32.90</td> <td>68.38</td> <td>87.47</td> <td>34.45</td> <td>9.78</td> <td>30.50</td> <td>100</td> <td>278 Peak</td> </tr> <tr> <td>2</td> <td>5190.00</td> <td>93.99</td> <td>.....</td> <td>80.26</td> <td>34.45</td> <td>9.78</td> <td>30.50</td> <td>100</td> <td>278</td> <td>Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	181.28	32.90	68.38	87.47	34.45	9.78	30.50	100	278 Peak	2	5190.00	93.99	80.26	34.45	9.78	30.50	100	278	Average
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	5126.10	54.44	-19.56	74.00	49.79	34.41	9.74	30.50	100	278 Peak																																																																	
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	5190.00	181.28	32.90	68.38	87.47	34.45	9.78	30.50	100	278 Peak																																																																	
2	5190.00	93.99	80.26	34.45	9.78	30.50	100	278	Average																																																																	
Avg.	 <p>Date: 7 Level (dBuV/m)</p> <p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 VERTICAL RSHW: 1000.000kHz VBW: 3.0100kHz Project : 1D0301-03 Mode : Mode 19 Site : #20 092310523866039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.76</td> <td>44.52</td> <td>-9.48</td> <td>54.00</td> <td>30.86</td> <td>34.42</td> <td>9.74</td> <td>30.50</td> <td>100</td> <td>278 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5149.76	44.52	-9.48	54.00	30.86	34.42	9.74	30.50	100	278 Average	-																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	5149.76	44.52	-9.48	54.00	30.86	34.42	9.74	30.50	100	278 Average																																																																	



WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																
ANT	802.11n HT40 CH38 5190MHz - R																																
1	Vertical	Fundamental																															
Peak	<p>Date: 9 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL RSBW: 1000.000kHz VBW: 3000.000kHz Project : 100301-03 Mode : Mode 19 Site : 420 G092310523860039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5439.56</td> <td>59.45</td> <td>-23.55</td> <td>74.00</td> <td>36.42</td> <td>34.65</td> <td>9.88</td> <td>30.50</td> <td>100</td> <td>278 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg		1	5439.56	59.45	-23.55	74.00	36.42	34.65	9.88	30.50	100	278 Peak	-
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg																									
1	5439.56	59.45	-23.55	74.00	36.42	34.65	9.88	30.50	100	278 Peak																							
Avg.	<p>Date: 10 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 VERTICAL RSBW: 1000.000kHz VBW: 3.0100kHz Project : 100301-03 Mode : Mode 19 Site : 420 G092310523860039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5440.00</td> <td>41.41</td> <td>-12.59</td> <td>54.00</td> <td>27.37</td> <td>34.66</td> <td>9.88</td> <td>30.50</td> <td>100</td> <td>278 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg		1	5440.00	41.41	-12.59	54.00	27.37	34.66	9.88	30.50	100	278 Average	-
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg																									
1	5440.00	41.41	-12.59	54.00	27.37	34.66	9.88	30.50	100	278 Average																							



WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																																																									
ANT	802.11n HT40 CH46 5230MHz - L																																																																									
1	Horizontal	Fundamental																																																																								
Peak	<p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 HORIZONTAL RSNW 1000.000kHz VBW 3000.000kHz Project : 1D0301-03 Mode : Mode 20 Site : #20 092370523860039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1084.76</td> <td>53.07</td> <td>-20.93</td> <td>74.00</td> <td>39.58</td> <td>34.37</td> <td>9.78</td> <td>30.58</td> <td>100</td> <td>268 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	1084.76	53.07	-20.93	74.00	39.58	34.37	9.78	30.58	100	268 Peak	<p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 HORIZONTAL RSNW 1000.000kHz VBW 3000.000kHz Project : 1D0301-03 Mode : Mode 20 Site : #20 092370523860039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>185.84</td> <td>36.74</td> <td>68.38</td> <td>91.23</td> <td>34.49</td> <td>9.82</td> <td>30.58</td> <td>100</td> <td>268 Peak</td> </tr> <tr> <td>2</td> <td>5230.00</td> <td>98.84</td> <td>.....</td> <td>84.23</td> <td>34.49</td> <td>9.82</td> <td>30.58</td> <td>100</td> <td>268 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5230.00	185.84	36.74	68.38	91.23	34.49	9.82	30.58	100	268 Peak	2	5230.00	98.84	84.23	34.49	9.82	30.58	100	268 Average
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	1084.76	53.07	-20.93	74.00	39.58	34.37	9.78	30.58	100	268 Peak																																																																
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	5230.00	185.84	36.74	68.38	91.23	34.49	9.82	30.58	100	268 Peak																																																																
2	5230.00	98.84	84.23	34.49	9.82	30.58	100	268 Average																																																																	
Avg.	<p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 HORIZONTAL RSNW 1000.000kHz VBW 3.0100kHz Project : 1D0301-03 Mode : Mode 20 Site : #20 092370523860039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.98</td> <td>43.58</td> <td>-18.58</td> <td>54.00</td> <td>29.84</td> <td>34.42</td> <td>9.74</td> <td>30.58</td> <td>100</td> <td>268 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5148.98	43.58	-18.58	54.00	29.84	34.42	9.74	30.58	100	268 Average																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	5148.98	43.58	-18.58	54.00	29.84	34.42	9.74	30.58	100	268 Average																																																																



WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																
ANT	802.11n HT40 CH46 5230MHz - R																																
1	Horizontal	Fundamental																															
Peak	<p>Date: 4 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 HORIZONTAL RSBW: 1000.000kHz VBW: 3000.000kHz Project : 100301-03 Mode : Mode 20 Site : 420 0092310523860039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5406.48</td> <td>51.89</td> <td>-22.91</td> <td>74.00</td> <td>37.13</td> <td>34.42</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>200 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg		1	5406.48	51.89	-22.91	74.00	37.13	34.42	9.84	30.50	100	200 Peak	-
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg																									
1	5406.48	51.89	-22.91	74.00	37.13	34.42	9.84	30.50	100	200 Peak																							
Avg.	<p>Date: 5 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 HORIZONTAL RSBW: 1000.000kHz VBW: 3.010kHz Project : 100301-03 Mode : Mode 20 Site : 420 0092310523860039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5596.88</td> <td>41.69</td> <td>-12.31</td> <td>54.00</td> <td>27.77</td> <td>34.58</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>200 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg		1	5596.88	41.69	-12.31	54.00	27.77	34.58	9.84	30.50	100	200 Average	-
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg																									
1	5596.88	41.69	-12.31	54.00	27.77	34.58	9.84	30.50	100	200 Average																							



WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																																																									
ANT	802.11n HT40 CH46 5230MHz - L																																																																									
1	Vertical	Fundamental																																																																								
Peak	<p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL RSNW: 1000.000kHz VBW: 3000.000kHz Project : 1D0301-03 Mode : Mode 20 Site : #20 092370523866039 Plane : X with Accessory setting : MCSO power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1094.98</td> <td>53.14</td> <td>-20.86</td> <td>74.00</td> <td>39.56</td> <td>34.38</td> <td>9.78</td> <td>30.58</td> <td>100</td> <td>273 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	1094.98	53.14	-20.86	74.00	39.56	34.38	9.78	30.58	100	273 Peak	<p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL RSNW: 1000.000kHz VBW: 3000.000kHz Project : 1D0301-03 Mode : Mode 20 Site : #20 092370523866039 Plane : X with Accessory setting : MCSO power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>101.47</td> <td>33.17</td> <td>68.30</td> <td>87.66</td> <td>34.49</td> <td>9.82</td> <td>30.58</td> <td>100</td> <td>273 Peak</td> </tr> <tr> <td>2</td> <td>5230.00</td> <td>94.06</td> <td>.....</td> <td>80.23</td> <td>34.49</td> <td>9.82</td> <td>30.58</td> <td>100</td> <td>273 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5230.00	101.47	33.17	68.30	87.66	34.49	9.82	30.58	100	273 Peak	2	5230.00	94.06	80.23	34.49	9.82	30.58	100	273 Average
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	1094.98	53.14	-20.86	74.00	39.56	34.38	9.78	30.58	100	273 Peak																																																																
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	5230.00	101.47	33.17	68.30	87.66	34.49	9.82	30.58	100	273 Peak																																																																
2	5230.00	94.06	80.23	34.49	9.82	30.58	100	273 Average																																																																	
Avg.	<p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 VERTICAL RSNW: 1000.000kHz VBW: 3.0100kHz Project : 1D0301-03 Mode : Mode 20 Site : #20 092370523866039 Plane : X with Accessory setting : MCSO power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5145.00</td> <td>42.04</td> <td>-11.36</td> <td>54.00</td> <td>28.98</td> <td>34.42</td> <td>9.74</td> <td>30.58</td> <td>100</td> <td>273 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5145.00	42.04	-11.36	54.00	28.98	34.42	9.74	30.58	100	273 Average	-																																									
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	5145.00	42.04	-11.36	54.00	28.98	34.42	9.74	30.58	100	273 Average																																																																



WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																
ANT	802.11n HT40 CH46 5230MHz - R																																
1	Vertical	Fundamental																															
Peak	<p>Date: 9 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL RSBW: 1000.000kHz VBW: 3000.000kHz Project : 100301-03 Mode : Mode 20 Site : 420 0302210523860039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5449.56</td> <td>51.49</td> <td>-22.51</td> <td>74.00</td> <td>37.46</td> <td>34.65</td> <td>9.88</td> <td>30.50</td> <td>100</td> <td>273 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	ca	deg		1	5449.56	51.49	-22.51	74.00	37.46	34.65	9.88	30.50	100	273 Peak	-
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	ca	deg																									
1	5449.56	51.49	-22.51	74.00	37.46	34.65	9.88	30.50	100	273 Peak																							
Avg.	<p>Date: 10 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 VERTICAL RSBW: 1000.000kHz VBW: 3.010kHz Project : 100301-03 Mode : Mode 20 Site : 420 0302210523860039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5449.48</td> <td>41.41</td> <td>-12.59</td> <td>54.00</td> <td>27.37</td> <td>34.66</td> <td>9.88</td> <td>30.50</td> <td>100</td> <td>273 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	ca	deg		1	5449.48	41.41	-12.59	54.00	27.37	34.66	9.88	30.50	100	273 Average	-
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	ca	deg																									
1	5449.48	41.41	-12.59	54.00	27.37	34.66	9.88	30.50	100	273 Average																							






**U-NII-1 5150~5250MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)**

WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																																																														
ANT	802.11ac VHT80 CH42 5210MHz - L																																																																														
1	Horizontal	Fundamental																																																																													
Peak	<p>Date: 1 Date: 2022-11-10</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HP_ANT_3117_0107 HORIZONTAL : RBW 1000.000kHz VBW 3000.000kHz Project : FD0301-03 Mode : Mode 25 SN : #03 G092370523860039 Plane : X with Accessory Plane setting : MCS0 power setting 15.5</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Line</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.98</td> <td>59.14</td> <td>-14.86</td> <td>74.00</td> <td>45.48</td> <td>34.42</td> <td>9.74</td> <td>30.50</td> <td>100</td> <td>243 Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	5148.98	59.14	-14.86	74.00	45.48	34.42	9.74	30.50	100	243 Peak	<p>Date: 3 Date: 2022-11-10</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HP_ANT_3117_0107 HORIZONTAL : RBW 1000.000kHz VBW 3000.000kHz Project : FD0301-03 Mode : Mode 25 SN : #03 G092370523860039 Plane : X with Accessory Plane setting : MCS0 power setting 15.5</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Line</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>100.73</td> <td>32.43</td> <td>68.30</td> <td>86.86</td> <td>34.47</td> <td>9.82</td> <td>30.50</td> <td>100</td> <td>243 Peak</td> </tr> <tr> <td>2</td> <td>5210.00</td> <td>103.05</td> <td>.....</td> <td>79.26</td> <td>34.47</td> <td>9.82</td> <td>30.50</td> <td>100</td> <td>243 Average</td> <td></td> </tr> </tbody> </table>	Freq	Level	Limit	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	5210.00	100.73	32.43	68.30	86.86	34.47	9.82	30.50	100	243 Peak	2	5210.00	103.05	79.26	34.47	9.82	30.50	100	243 Average	
Freq	Level	Limit	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	5148.98	59.14	-14.86	74.00	45.48	34.42	9.74	30.50	100	243 Peak																																																																					
Freq	Level	Limit	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	5210.00	100.73	32.43	68.30	86.86	34.47	9.82	30.50	100	243 Peak																																																																					
2	5210.00	103.05	79.26	34.47	9.82	30.50	100	243 Average																																																																						
Avg.	<p>Date: 2 Date: 2022-11-10</p> <p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HP_ANT_3117_0107 HORIZONTAL : RBW 1000.000kHz VBW 3000.000kHz Project : FD0301-03 Mode : Mode 25 SN : #03 G092370523860039 Plane : X with Accessory Plane setting : MCS0 power setting 15.5</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Line</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.76</td> <td>49.71</td> <td>-4.29</td> <td>54.00</td> <td>36.85</td> <td>34.42</td> <td>9.74</td> <td>30.50</td> <td>100</td> <td>243 Average</td> </tr> </tbody> </table>	Freq	Level	Limit	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	5149.76	49.71	-4.29	54.00	36.85	34.42	9.74	30.50	100	243 Average	-																																												
Freq	Level	Limit	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	5149.76	49.71	-4.29	54.00	36.85	34.42	9.74	30.50	100	243 Average																																																																					



WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																
ANT	802.11ac VHT80 CH42 5210MHz - R																																
1	Horizontal	Fundamental																															
Peak	<p>Date: 4 Date: 2022-11-10</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 HORIZONTAL RSBW: 1000.000kHz VBW: 3000.000kHz Project : 100301-03 Mode : Mode 06 Site : 420 C092310523860039 Plane : X with Accessory setting : MCS0 power setting 15.5</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5416.08</td> <td>51.04</td> <td>-22.06</td> <td>74.00</td> <td>37.97</td> <td>34.43</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>243 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	ca	deg		1	5416.08	51.04	-22.06	74.00	37.97	34.43	9.84	30.50	100	243 Peak	-
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	ca	deg																									
1	5416.08	51.04	-22.06	74.00	37.97	34.43	9.84	30.50	100	243 Peak																							
Avg.	<p>Date: 5 Date: 2022-11-10</p> <p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 HORIZONTAL RSBW: 1000.000kHz VBW: 3.010kHz Project : 100301-03 Mode : Mode 06 Site : 420 C092310523860039 Plane : X with Accessory setting : MCS0 power setting 15.5</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5598.08</td> <td>41.42</td> <td>-12.58</td> <td>54.00</td> <td>27.50</td> <td>34.50</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>243 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	ca	deg		1	5598.08	41.42	-12.58	54.00	27.50	34.50	9.84	30.50	100	243 Average	-
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	ca	deg																									
1	5598.08	41.42	-12.58	54.00	27.50	34.50	9.84	30.50	100	243 Average																							



WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																																																									
ANT	802.11ac VHT80 CH42 5210MHz - L																																																																									
1	Vertical	Fundamental																																																																								
Peak	 <p>Date: 6 Level (dBuV/m) Date: 2022-11-10</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL RSHW: 1000.000kHz VBW: 3000.000kHz Project : 1D0301-03 Mode : Mode 26 Site : #20 092310523860039 Plane : X with Accessory setting : MCS0 power setting 15.5</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Line</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.76</td> <td>56.17</td> <td>-17.83</td> <td>74.00</td> <td>42.51</td> <td>34.42</td> <td>9.74</td> <td>30.58</td> <td>100</td> <td>276 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	ca	deg		1	5149.76	56.17	-17.83	74.00	42.51	34.42	9.74	30.58	100	276 Peak	 <p>Date: 8 Level (dBuV/m) Date: 2022-11-10</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL RSHW: 1000.000kHz VBW: 3000.000kHz Project : 1D0301-03 Mode : Mode 26 Site : #20 092310523860039 Plane : X with Accessory setting : MCS0 power setting 15.5</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Line</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>87.87</td> <td>29.57</td> <td>68.30</td> <td>84.88</td> <td>34.47</td> <td>9.82</td> <td>30.58</td> <td>100</td> <td>276 Peak</td> </tr> <tr> <td>2</td> <td>5210.00</td> <td>91.85</td> <td>.....</td> <td>77.26</td> <td>34.47</td> <td>9.82</td> <td>30.58</td> <td>100</td> <td>276 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	ca	deg		1	5210.00	87.87	29.57	68.30	84.88	34.47	9.82	30.58	100	276 Peak	2	5210.00	91.85	77.26	34.47	9.82	30.58	100	276 Average
Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	ca	deg																																																																		
1	5149.76	56.17	-17.83	74.00	42.51	34.42	9.74	30.58	100	276 Peak																																																																
Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	ca	deg																																																																		
1	5210.00	87.87	29.57	68.30	84.88	34.47	9.82	30.58	100	276 Peak																																																																
2	5210.00	91.85	77.26	34.47	9.82	30.58	100	276 Average																																																																	
Avg.	 <p>Date: 7 Level (dBuV/m) Date: 2022-11-10</p> <p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 VERTICAL RSHW: 1000.000kHz VBW: 3.0100kHz Project : 1D0301-03 Mode : Mode 26 Site : #20 092310523860039 Plane : X with Accessory setting : MCS0 power setting 15.5</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Line</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>46.35</td> <td>-7.67</td> <td>54.00</td> <td>32.67</td> <td>34.42</td> <td>9.74</td> <td>30.58</td> <td>100</td> <td>276 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	ca	deg		1	5150.00	46.35	-7.67	54.00	32.67	34.42	9.74	30.58	100	276 Average	-																																									
Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	ca	deg																																																																		
1	5150.00	46.35	-7.67	54.00	32.67	34.42	9.74	30.58	100	276 Average																																																																



WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH42 5210MHz - R	
1	Vertical	Fundamental
Peak	<p> Date: 9 Date: 2022-11-10 140 Level (dBuV/m) 122.5 105.0 87.5 70.0 52.5 35.0 17.5 5220 5268 5316 5364 5412 5460 Frequency (MHz) </p> <p> Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL : RBW: 1000.000kHz VBW: 3000.000kHz Project : 100301-03 Mode : Mode 06 SN : 920 C092310523860039 Plane : X with Accessory setting : MCS0 power setting 15.5 ReadAntenna Cable Preamp A/Pos T/Pos Freq Level Limit Line Level Factor Loss Factor dB dBuV/m dB dBuV/m dB dBuV/m dB dBuV/m dB dBuV/m 1 5358.96 51.00 -22.28 74.00 37.08 34.58 9.84 30.50 100 276 Peak </p>	-
Avg.	<p> Date: 10 Date: 2022-11-10 140 Level (dBuV/m) 122.5 105.0 87.5 70.0 52.5 35.0 17.5 5220 5268 5316 5364 5412 5460 Frequency (MHz) </p> <p> Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 VERTICAL : RBW: 1000.000kHz VBW: 3.010kHz Project : 100301-03 Mode : Mode 06 SN : 920 C092310523860039 Plane : X with Accessory setting : MCS0 power setting 15.5 ReadAntenna Cable Preamp A/Pos T/Pos Freq Level Limit Line Level Factor Loss Factor dB dBuV/m dB dBuV/m dB dBuV/m dB dBuV/m dB dBuV/m 1 5358.32 41.31 -12.09 54.00 27.39 34.58 9.84 30.50 100 276 Average </p>	-



U-NII-1 - 5150~5250MHz
WIFI 802.11a (Harmonic @ 3m)

WIFI	U-NII-1 5150~5250MHz Harmonic @ 3m																																																																																																	
ANT	802.11a CH36 5180MHz																																																																																																	
1	Horizontal	Vertical																																																																																																
Peak Avg.	<p>Date: 17 Level (dBuV/m) Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF_ANT_3117_0107 HORIZONTAL Project : 1D0301-03D Mode : Mode 1 SN : #20 G092376523960039 Plane : X with Accessory setting : 6M power setting 18</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Line</th> <th>Level Factor</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>105.00</td> <td>48.30</td> <td>-28.80</td> <td>66.30</td> <td>57.52</td> <td>37.22</td> <td>13.93</td> <td>60.35</td> <td>...</td> <td>...</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>154.00</td> <td>58.79</td> <td>-23.25</td> <td>74.00</td> <td>53.19</td> <td>40.33</td> <td>35.40</td> <td>58.57</td> <td>...</td> <td>...</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Over	Line	Level Factor	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	dB	cm	deg		1	105.00	48.30	-28.80	66.30	57.52	37.22	13.93	60.35	Peak	2	154.00	58.79	-23.25	74.00	53.19	40.33	35.40	58.57	Peak	<p>Date: 18 Level (dBuV/m) Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF_ANT_3117_0107 VERTICAL Project : 1D0301-03D Mode : Mode 1 SN : #20 G092376523960039 Plane : X with Accessory setting : 6M power setting 18</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Line</th> <th>Level Factor</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>105.00</td> <td>48.50</td> <td>-19.71</td> <td>68.38</td> <td>57.83</td> <td>37.22</td> <td>13.93</td> <td>60.35</td> <td>...</td> <td>...</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>154.00</td> <td>58.38</td> <td>-23.64</td> <td>74.00</td> <td>52.76</td> <td>40.33</td> <td>35.40</td> <td>58.57</td> <td>...</td> <td>...</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Over	Line	Level Factor	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	dB	cm	deg		1	105.00	48.50	-19.71	68.38	57.83	37.22	13.93	60.35	Peak	2	154.00	58.38	-23.64	74.00	52.76	40.33	35.40	58.57	Peak
Freq	Level	Limit	Over	Line	Level Factor	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																								
1	105.00	48.30	-28.80	66.30	57.52	37.22	13.93	60.35	Peak																																																																																							
2	154.00	58.79	-23.25	74.00	53.19	40.33	35.40	58.57	Peak																																																																																							
Freq	Level	Limit	Over	Line	Level Factor	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																								
1	105.00	48.50	-19.71	68.38	57.83	37.22	13.93	60.35	Peak																																																																																							
2	154.00	58.38	-23.64	74.00	52.76	40.33	35.40	58.57	Peak																																																																																							



WIFI	U-NII-1 5150~5250MHz Harmonic @ 3m																																																																																									
ANT	802.11a CH44 5220MHz																																																																																									
1	Horizontal	Vertical																																																																																								
Peak Avg.	<p>Date: 19</p> <p>Date: 2022-11-10</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF_ANT_3117_0107 HORIZONTAL Project : 150301-03 Mode : Mode 2 SN : #20 G99231022980039 Plane : X with Accessory setting : GM power setting 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 18448.00</td> <td>47.48</td> <td>-29.98</td> <td>68.38</td> <td>37.66</td> <td>13.51</td> <td>68.37</td> <td>...</td> <td>...</td> <td>...</td> <td>Peak</td> </tr> <tr> <td>2 15669.00</td> <td>58.48</td> <td>-23.52</td> <td>74.00</td> <td>53.13</td> <td>48.68</td> <td>15.56</td> <td>58.81</td> <td>...</td> <td>...</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 18448.00	47.48	-29.98	68.38	37.66	13.51	68.37	Peak	2 15669.00	58.48	-23.52	74.00	53.13	48.68	15.56	58.81	Peak	<p>Date: 20</p> <p>Date: 2022-11-10</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF_ANT_3117_0107 VERTICAL Project : 150301-03 Mode : Mode 2 SN : #20 G99231022980039 Plane : X with Accessory setting : GM power setting 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 18448.00</td> <td>47.58</td> <td>-29.72</td> <td>68.38</td> <td>56.78</td> <td>37.66</td> <td>13.51</td> <td>68.37</td> <td>...</td> <td>...</td> <td>Peak</td> </tr> <tr> <td>2 15669.00</td> <td>58.95</td> <td>-23.85</td> <td>74.00</td> <td>53.48</td> <td>48.68</td> <td>15.56</td> <td>58.81</td> <td>...</td> <td>...</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 18448.00	47.58	-29.72	68.38	56.78	37.66	13.51	68.37	Peak	2 15669.00	58.95	-23.85	74.00	53.48	48.68	15.56	58.81	Peak
	Freq	Level	Over	Limit	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark																																																																															
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 18448.00	47.48	-29.98	68.38	37.66	13.51	68.37	Peak																																																																																
2 15669.00	58.48	-23.52	74.00	53.13	48.68	15.56	58.81	Peak																																																																																
Freq	Level	Over	Limit	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark																																																																																
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 18448.00	47.58	-29.72	68.38	56.78	37.66	13.51	68.37	Peak																																																																																
2 15669.00	58.95	-23.85	74.00	53.48	48.68	15.56	58.81	Peak																																																																																



WIFI	U-NII-1 5150~5250MHz Harmonic @ 3m																																																																																	
ANT	802.11a CH48 5240MHz																																																																																	
1	Horizontal	Vertical																																																																																
Peak Avg.	<p>Date: 19</p> <p>Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF_ANT_3117_0107 HORIZONTAL Project : 150301-03 Mode : Mode 3 SN : #20 G9227022960039 Plane : X with Accessory setting : GM power setting 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>46.06</td> <td>-22.24</td> <td>68.30</td> <td>55.23</td> <td>37.69</td> <td>13.53</td> <td>60.39</td> <td>... Peak</td> </tr> <tr> <td>2</td> <td>13720.00</td> <td>59.35</td> <td>-23.65</td> <td>74.00</td> <td>53.11</td> <td>40.62</td> <td>15.57</td> <td>50.95</td> <td>... Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg		1	10480.00	46.06	-22.24	68.30	55.23	37.69	13.53	60.39	... Peak	2	13720.00	59.35	-23.65	74.00	53.11	40.62	15.57	50.95	... Peak	<p>Date: 20</p> <p>Date: 2022-11-10</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF_ANT_3117_0107 VERTICAL Project : 150301-03 Mode : Mode 3 SN : #20 G9227022960039 Plane : X with Accessory setting : GM power setting 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>46.20</td> <td>-21.95</td> <td>68.30</td> <td>55.52</td> <td>37.69</td> <td>13.53</td> <td>60.39</td> <td>... Peak</td> </tr> <tr> <td>2</td> <td>13720.00</td> <td>59.21</td> <td>-23.78</td> <td>74.00</td> <td>52.38</td> <td>40.62</td> <td>15.57</td> <td>50.95</td> <td>... Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg		1	10480.00	46.20	-21.95	68.30	55.52	37.69	13.53	60.39	... Peak	2	13720.00	59.21	-23.78	74.00	52.38	40.62	15.57	50.95	... Peak
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																																										
1	10480.00	46.06	-22.24	68.30	55.23	37.69	13.53	60.39	... Peak																																																																									
2	13720.00	59.35	-23.65	74.00	53.11	40.62	15.57	50.95	... Peak																																																																									
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																									
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																																										
1	10480.00	46.20	-21.95	68.30	55.52	37.69	13.53	60.39	... Peak																																																																									
2	13720.00	59.21	-23.78	74.00	52.38	40.62	15.57	50.95	... Peak																																																																									



**U-NII-1 5150~5250MHz
WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI	U-NII-1 5150~5250MHz Harmonic @ 3m																																																																																	
ANT	802.11n HT20 CH36 5180MHz																																																																																	
1	Horizontal	Vertical																																																																																
Peak Avg.	<p>Date: 17 Date: 2022-09-29</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HP_ANT_3117_0107 HORIZONTAL Project : 100301-03 Mode : Mode 10 SN : #22 G992366523870021 Plane : X with Accessory setting : MCS9 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>10360.00</td> <td>46.53</td> <td>-21.77</td> <td>68.30</td> <td>55.78</td> <td>37.62</td> <td>13.48</td> <td>68.35</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>13540.00</td> <td>58.76</td> <td>-23.24</td> <td>74.00</td> <td>53.23</td> <td>48.56</td> <td>15.54</td> <td>58.57</td> <td>---</td> <td>--- Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	10360.00	46.53	-21.77	68.30	55.78	37.62	13.48	68.35	---	--- Peak	13540.00	58.76	-23.24	74.00	53.23	48.56	15.54	58.57	---	--- Peak	<p>Date: 18 Date: 2022-09-29</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HP_ANT_3117_0107 VERTICAL Project : 100301-03 Mode : Mode 10 SN : #22 G992366523870021 Plane : X with Accessory setting : MCS9 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>10360.00</td> <td>46.51</td> <td>-21.79</td> <td>68.30</td> <td>55.76</td> <td>37.62</td> <td>13.48</td> <td>68.35</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>13540.00</td> <td>58.47</td> <td>-23.53</td> <td>74.00</td> <td>52.94</td> <td>48.54</td> <td>15.54</td> <td>58.57</td> <td>---</td> <td>--- Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	10360.00	46.51	-21.79	68.30	55.76	37.62	13.48	68.35	---	--- Peak	13540.00	58.47	-23.53	74.00	52.94	48.54	15.54	58.57	---	--- Peak
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
10360.00	46.53	-21.77	68.30	55.78	37.62	13.48	68.35	---	--- Peak																																																																									
13540.00	58.76	-23.24	74.00	53.23	48.56	15.54	58.57	---	--- Peak																																																																									
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																									
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
10360.00	46.51	-21.79	68.30	55.76	37.62	13.48	68.35	---	--- Peak																																																																									
13540.00	58.47	-23.53	74.00	52.94	48.54	15.54	58.57	---	--- Peak																																																																									



WIFI	U-NII-1 5150~5250MHz Harmonic @ 3m																																																																																									
ANT	802.11n HT20 CH44 5220MHz																																																																																									
1	Horizontal	Vertical																																																																																								
Peak Avg.	<p>Date: 19</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF_ANT_3117_0107 HORIZONTAL Project : 150301-03 Mode : Mode 11 SN : #20 G99231622960039 Plane : X with Accessory setting : MCS0 power setting 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Line</th> <th>Level Factor</th> <th>Cable Loss Factor</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>18448.00</td> <td>47.21</td> <td>-21.89</td> <td>69.38</td> <td>56.41</td> <td>37.66</td> <td>13.51</td> <td>69.37</td> <td>...</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15669.00</td> <td>59.56</td> <td>-23.36</td> <td>74.90</td> <td>53.33</td> <td>48.69</td> <td>13.56</td> <td>59.81</td> <td>...</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Over	Line	Level Factor	Cable Loss Factor	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	18448.00	47.21	-21.89	69.38	56.41	37.66	13.51	69.37	...	Peak	2	15669.00	59.56	-23.36	74.90	53.33	48.69	13.56	59.81	...	Peak	<p>Date: 20</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF_ANT_3117_0107 VERTICAL Project : 150301-03 Mode : Mode 11 SN : #20 G99231622960039 Plane : X with Accessory setting : MCS0 power setting 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Line</th> <th>Level Factor</th> <th>Cable Loss Factor</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>18448.00</td> <td>47.60</td> <td>-20.64</td> <td>68.38</td> <td>56.86</td> <td>37.66</td> <td>13.51</td> <td>69.37</td> <td>...</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15669.00</td> <td>59.12</td> <td>-23.89</td> <td>74.00</td> <td>52.77</td> <td>48.69</td> <td>13.56</td> <td>59.81</td> <td>...</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Over	Line	Level Factor	Cable Loss Factor	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	18448.00	47.60	-20.64	68.38	56.86	37.66	13.51	69.37	...	Peak	2	15669.00	59.12	-23.89	74.00	52.77	48.69	13.56	59.81	...	Peak
	Freq	Level	Limit	Over	Line	Level Factor	Cable Loss Factor	Preamp	A/Pos	T/Pos	Remark																																																																															
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	18448.00	47.21	-21.89	69.38	56.41	37.66	13.51	69.37	...	Peak																																																																																
2	15669.00	59.56	-23.36	74.90	53.33	48.69	13.56	59.81	...	Peak																																																																																
Freq	Level	Limit	Over	Line	Level Factor	Cable Loss Factor	Preamp	A/Pos	T/Pos	Remark																																																																																
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	18448.00	47.60	-20.64	68.38	56.86	37.66	13.51	69.37	...	Peak																																																																																
2	15669.00	59.12	-23.89	74.00	52.77	48.69	13.56	59.81	...	Peak																																																																																



WIFI	U-NII-1 5150~5250MHz Harmonic @ 3m																																																																																									
ANT	802.11n HT20 CH48 5240MHz																																																																																									
1	Horizontal	Vertical																																																																																								
Peak Avg.	<p>Date: 19</p> <p>Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF_ANT_3117_0107 HORIZONTAL Project : IS0301-03 Mode : Mode 12 SN : #20 G99231622960039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Line</th> <th>Level Factor</th> <th>Cable Loss Factor</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>47.70</td> <td>-28.60</td> <td>66.30</td> <td>56.87</td> <td>37.69</td> <td>13.53</td> <td>60.39</td> <td>...</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>13720.00</td> <td>50.38</td> <td>-33.62</td> <td>74.00</td> <td>53.14</td> <td>40.62</td> <td>15.57</td> <td>58.95</td> <td>...</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Over	Line	Level Factor	Cable Loss Factor	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg			1	10480.00	47.70	-28.60	66.30	56.87	37.69	13.53	60.39	...	Peak	2	13720.00	50.38	-33.62	74.00	53.14	40.62	15.57	58.95	...	Peak	<p>Date: 20</p> <p>Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF_ANT_3117_0107 VERTICAL Project : IS0301-03 Mode : Mode 12 SN : #20 G99231622960039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Line</th> <th>Level Factor</th> <th>Cable Loss Factor</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>47.20</td> <td>-21.82</td> <td>69.38</td> <td>56.45</td> <td>37.69</td> <td>13.53</td> <td>60.39</td> <td>...</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>13720.00</td> <td>49.35</td> <td>-24.87</td> <td>74.00</td> <td>52.49</td> <td>40.62</td> <td>15.57</td> <td>58.95</td> <td>...</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Over	Line	Level Factor	Cable Loss Factor	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg			1	10480.00	47.20	-21.82	69.38	56.45	37.69	13.53	60.39	...	Peak	2	13720.00	49.35	-24.87	74.00	52.49	40.62	15.57	58.95	...	Peak
	Freq	Level	Limit	Over	Line	Level Factor	Cable Loss Factor	Preamp	A/Pos	T/Pos	Remark																																																																															
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																																		
1	10480.00	47.70	-28.60	66.30	56.87	37.69	13.53	60.39	...	Peak																																																																																
2	13720.00	50.38	-33.62	74.00	53.14	40.62	15.57	58.95	...	Peak																																																																																
Freq	Level	Limit	Over	Line	Level Factor	Cable Loss Factor	Preamp	A/Pos	T/Pos	Remark																																																																																
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																																		
1	10480.00	47.20	-21.82	69.38	56.45	37.69	13.53	60.39	...	Peak																																																																																
2	13720.00	49.35	-24.87	74.00	52.49	40.62	15.57	58.95	...	Peak																																																																																



**U-NII-1 5150~5250MHz
WIFI 802.11n HT40 (Harmonic @ 3m)**

WIFI	U-NII-1 5150~5250MHz Harmonic @ 3m																																																																																	
ANT	802.11n HT40 CH38 5190MHz																																																																																	
1	Horizontal	Vertical																																																																																
Peak Avg.	<p>Date: 19 Date: 2022-11-10</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HP_ANT_3117_0107 HORIZONTAL Project : 100301-03 Mode : Mode 19 SN : #20 G892370523860039 Plane : X with Accessory setting : MCS9 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10380.00</td> <td>46.92</td> <td>-21.38</td> <td>68.30</td> <td>56.14</td> <td>37.63</td> <td>13.58</td> <td>68.35</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>15576.00</td> <td>58.92</td> <td>-23.08</td> <td>74.00</td> <td>53.44</td> <td>48.57</td> <td>15.55</td> <td>58.64</td> <td>--- Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	10380.00	46.92	-21.38	68.30	56.14	37.63	13.58	68.35	--- Peak	2	15576.00	58.92	-23.08	74.00	53.44	48.57	15.55	58.64	--- Peak	<p>Date: 20 Date: 2022-11-10</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HP_ANT_3117_0107 VERTICAL Project : 100301-03 Mode : Mode 19 SN : #20 G892370523860039 Plane : X with Accessory setting : MCS9 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10380.00</td> <td>46.48</td> <td>-21.90</td> <td>68.30</td> <td>55.62</td> <td>37.63</td> <td>13.58</td> <td>68.35</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>15576.00</td> <td>58.00</td> <td>-23.20</td> <td>74.00</td> <td>53.32</td> <td>48.57</td> <td>15.55</td> <td>58.64</td> <td>--- Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	10380.00	46.48	-21.90	68.30	55.62	37.63	13.58	68.35	--- Peak	2	15576.00	58.00	-23.20	74.00	53.32	48.57	15.55	58.64	--- Peak
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	10380.00	46.92	-21.38	68.30	56.14	37.63	13.58	68.35	--- Peak																																																																									
2	15576.00	58.92	-23.08	74.00	53.44	48.57	15.55	58.64	--- Peak																																																																									
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																									
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	10380.00	46.48	-21.90	68.30	55.62	37.63	13.58	68.35	--- Peak																																																																									
2	15576.00	58.00	-23.20	74.00	53.32	48.57	15.55	58.64	--- Peak																																																																									



WIFI	U-NII-1 5150~5250MHz Harmonic @ 3m																																																																																									
ANT	802.11n HT40 CH46 5230MHz																																																																																									
1	Horizontal	Vertical																																																																																								
Peak Avg.	<p>Date: 19</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF_ANT_3117_0107 HORIZONTAL Project : 150301-03 Mode : Mode 20 SN : #20 G09231622960039 Plane : X with Accessory setting : MCS0 power setting 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Line</th> <th>Level Factor</th> <th>Cable Loss Factor</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>19460.00</td> <td>47.64</td> <td>-29.66</td> <td>69.38</td> <td>37.67</td> <td>13.53</td> <td>69.38</td> <td>...</td> <td>...</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15090.00</td> <td>59.35</td> <td>-33.74</td> <td>74.00</td> <td>52.96</td> <td>49.63</td> <td>15.57</td> <td>59.88</td> <td>...</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Over	Line	Level Factor	Cable Loss Factor	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	19460.00	47.64	-29.66	69.38	37.67	13.53	69.38	Peak	2	15090.00	59.35	-33.74	74.00	52.96	49.63	15.57	59.88	...	Peak	<p>Date: 20</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF_ANT_3117_0107 VERTICAL Project : 150301-03 Mode : Mode 20 SN : #20 G09231622960039 Plane : X with Accessory setting : MCS0 power setting 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Line</th> <th>Level Factor</th> <th>Cable Loss Factor</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>19460.00</td> <td>47.24</td> <td>-21.86</td> <td>69.38</td> <td>56.42</td> <td>37.67</td> <td>13.53</td> <td>69.38</td> <td>...</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15090.00</td> <td>59.95</td> <td>-33.65</td> <td>74.00</td> <td>53.45</td> <td>49.63</td> <td>15.57</td> <td>59.88</td> <td>...</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Over	Line	Level Factor	Cable Loss Factor	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	19460.00	47.24	-21.86	69.38	56.42	37.67	13.53	69.38	...	Peak	2	15090.00	59.95	-33.65	74.00	53.45	49.63	15.57	59.88	...	Peak
	Freq	Level	Limit	Over	Line	Level Factor	Cable Loss Factor	Preamp	A/Pos	T/Pos	Remark																																																																															
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	19460.00	47.64	-29.66	69.38	37.67	13.53	69.38	Peak																																																																																
2	15090.00	59.35	-33.74	74.00	52.96	49.63	15.57	59.88	...	Peak																																																																																
Freq	Level	Limit	Over	Line	Level Factor	Cable Loss Factor	Preamp	A/Pos	T/Pos	Remark																																																																																
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	19460.00	47.24	-21.86	69.38	56.42	37.67	13.53	69.38	...	Peak																																																																																
2	15090.00	59.95	-33.65	74.00	53.45	49.63	15.57	59.88	...	Peak																																																																																



**U-NII-1 5150~5250MHz
WIFI 802.11ac VHT80 (Harmonic @ 3m)**

WIFI	U-NII-1 5150~5250MHz Harmonic @ 3m																																																																																	
ANT	802.11ac VHT80 CH42 5210MHz																																																																																	
1	Horizontal	Vertical																																																																																
Peak Avg.	<p>Date: 19 Date: 2022-11-10</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HP_ANT_3117_0107 HORIZONTAL Project : 100301-03 Mode : Mode 20 SN : #20 G892370523860039 Plane : X with Accessory setting : MCS9 power setting 15.5</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10420.00</td> <td>47.47</td> <td>-20.83</td> <td>68.30</td> <td>56.68</td> <td>37.65</td> <td>13.51</td> <td>60.37</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>15630.00</td> <td>50.72</td> <td>-23.28</td> <td>74.00</td> <td>53.35</td> <td>40.59</td> <td>15.56</td> <td>58.78</td> <td>--- Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	10420.00	47.47	-20.83	68.30	56.68	37.65	13.51	60.37	--- Peak	2	15630.00	50.72	-23.28	74.00	53.35	40.59	15.56	58.78	--- Peak	<p>Date: 20 Date: 2022-11-10</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HP_ANT_3117_0107 VERTICAL Project : 100301-03 Mode : Mode 20 SN : #20 G892370523860039 Plane : X with Accessory setting : MCS9 power setting 15.5</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10420.00</td> <td>46.98</td> <td>-21.32</td> <td>68.30</td> <td>56.19</td> <td>37.65</td> <td>13.51</td> <td>60.37</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>15630.00</td> <td>50.97</td> <td>-23.03</td> <td>74.00</td> <td>53.60</td> <td>40.59</td> <td>15.56</td> <td>58.78</td> <td>--- Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	10420.00	46.98	-21.32	68.30	56.19	37.65	13.51	60.37	--- Peak	2	15630.00	50.97	-23.03	74.00	53.60	40.59	15.56	58.78	--- Peak
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	10420.00	47.47	-20.83	68.30	56.68	37.65	13.51	60.37	--- Peak																																																																									
2	15630.00	50.72	-23.28	74.00	53.35	40.59	15.56	58.78	--- Peak																																																																									
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																									
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	10420.00	46.98	-21.32	68.30	56.19	37.65	13.51	60.37	--- Peak																																																																									
2	15630.00	50.97	-23.03	74.00	53.60	40.59	15.56	58.78	--- Peak																																																																									



U-NII-2A - 5250~5350MHz
WIFI 802.11a (Band Edge @ 3m)

WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																																																									
ANT	802.11a CH52 5260MHz - L																																																																									
1	Horizontal	Fundamental																																																																								
Peak	<p>Date: 1 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF_ANT_3117_0107 HORIZONTAL Project : RBW 1000.000kHz VBW 3000.000kHz Mode : 100001-03 SN : #20 C092370523860039 Plane : X with Accessory setting : GM power setting 18</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5866.04</td> <td>52.56</td> <td>-21.44</td> <td>74.00</td> <td>39.05</td> <td>34.35</td> <td>0.66</td> <td>30.50</td> <td>100</td> <td>263 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5866.04	52.56	-21.44	74.00	39.05	34.35	0.66	30.50	100	263 Peak	<p>Date: 3 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF_ANT_3117_0107 HORIZONTAL Project : RBW 1000.000kHz VBW 3000.000kHz Mode : 100001-03 SN : #20 C092370523860039 Plane : X with Accessory setting : GM power setting 18</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5260.00</td> <td>109.24</td> <td>48.04</td> <td>68.30</td> <td>95.41</td> <td>34.51</td> <td>9.82</td> <td>30.50</td> <td>100</td> <td>263 Peak</td> </tr> <tr> <td>2</td> <td>5260.00</td> <td>102.05</td> <td>-----</td> <td>88.22</td> <td>34.51</td> <td>9.82</td> <td>30.50</td> <td>100</td> <td>263 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5260.00	109.24	48.04	68.30	95.41	34.51	9.82	30.50	100	263 Peak	2	5260.00	102.05	-----	88.22	34.51	9.82	30.50	100	263 Average
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	5866.04	52.56	-21.44	74.00	39.05	34.35	0.66	30.50	100	263 Peak																																																																
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	5260.00	109.24	48.04	68.30	95.41	34.51	9.82	30.50	100	263 Peak																																																																
2	5260.00	102.05	-----	88.22	34.51	9.82	30.50	100	263 Average																																																																	
Avg.	<p>Date: 2 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF_ANT_3117_0107 HORIZONTAL Project : RBW 1000.000kHz VBW 0.0100kHz Mode : 100001-03 SN : #20 C092370523860039 Plane : X with Accessory setting : GM power setting 18</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5139.08</td> <td>43.48</td> <td>-18.52</td> <td>54.00</td> <td>29.82</td> <td>34.42</td> <td>9.74</td> <td>30.50</td> <td>100</td> <td>263 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5139.08	43.48	-18.52	54.00	29.82	34.42	9.74	30.50	100	263 Average																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	5139.08	43.48	-18.52	54.00	29.82	34.42	9.74	30.50	100	263 Average																																																																



WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																
ANT	802.11a CH52 5260MHz - R																																
1	Horizontal	Fundamental																															
<p>Peak</p>	<p>Date: 4 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 HORIZONTAL RSBW: 1000.000kHz VBW: 3000.000kHz Project : 100301-03 Mode : Mode 4 Site : 920 0092310523860039 Plane : X with Accessory setting : GM power setting 10</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5418.96</td> <td>51.73</td> <td>-22.27</td> <td>74.00</td> <td>37.76</td> <td>34.43</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>263 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	ca	deg		1	5418.96	51.73	-22.27	74.00	37.76	34.43	9.84	30.50	100	263 Peak	<p>-</p>
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	ca	deg																									
1	5418.96	51.73	-22.27	74.00	37.76	34.43	9.84	30.50	100	263 Peak																							
<p>Avg.</p>	<p>Date: 5 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 HORIZONTAL RSBW: 1000.000kHz VBW: 3.010kHz Project : 100301-03 Mode : Mode 4 Site : 920 0092310523860039 Plane : X with Accessory setting : GM power setting 10</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5551.76</td> <td>42.39</td> <td>-11.61</td> <td>54.00</td> <td>28.47</td> <td>34.38</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>263 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	ca	deg		1	5551.76	42.39	-11.61	54.00	28.47	34.38	9.84	30.50	100	263 Average	<p>-</p>
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	ca	deg																									
1	5551.76	42.39	-11.61	54.00	28.47	34.38	9.84	30.50	100	263 Average																							



WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																																																									
ANT	802.11a CH52 5260MHz - L																																																																									
1	Vertical	Fundamental																																																																								
Peak	<p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL RSW: 1000.000kHz VBW:3000.000kHz Project : 1D0301-03 Mode : Mode 4 SN : #20 092370523860039 Plane : X with Accessory setting : GM power setting 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1023.14</td> <td>52.47</td> <td>-11.33</td> <td>74.00</td> <td>39.22</td> <td>34.33</td> <td>9.62</td> <td>30.50</td> <td>100</td> <td>278 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	1023.14	52.47	-11.33	74.00	39.22	34.33	9.62	30.50	100	278 Peak	<p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL RSW: 1000.000kHz VBW:3000.000kHz Project : 1D0301-03 Mode : Mode 4 SN : #20 092370523860039 Plane : X with Accessory setting : GM power setting 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5260.00</td> <td>106.29</td> <td>37.99</td> <td>68.30</td> <td>92.46</td> <td>34.51</td> <td>9.82</td> <td>30.50</td> <td>100</td> <td>278 Peak</td> </tr> <tr> <td>2</td> <td>5260.00</td> <td>99.10</td> <td>.....</td> <td>85.27</td> <td>34.51</td> <td>9.82</td> <td>30.50</td> <td>100</td> <td>278 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5260.00	106.29	37.99	68.30	92.46	34.51	9.82	30.50	100	278 Peak	2	5260.00	99.10	85.27	34.51	9.82	30.50	100	278 Average
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	1023.14	52.47	-11.33	74.00	39.22	34.33	9.62	30.50	100	278 Peak																																																																
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	5260.00	106.29	37.99	68.30	92.46	34.51	9.82	30.50	100	278 Peak																																																																
2	5260.00	99.10	85.27	34.51	9.82	30.50	100	278 Average																																																																	
Avg.	<p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 VERTICAL RSW: 1000.000kHz VBW:3.0100kHz Project : 1D0301-03 Mode : Mode 4 SN : #20 092370523860039 Plane : X with Accessory setting : GM power setting 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5260.00</td> <td>42.68</td> <td>-11.32</td> <td>54.00</td> <td>29.82</td> <td>34.42</td> <td>9.74</td> <td>30.50</td> <td>100</td> <td>278 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5260.00	42.68	-11.32	54.00	29.82	34.42	9.74	30.50	100	278 Average	-																																									
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	5260.00	42.68	-11.32	54.00	29.82	34.42	9.74	30.50	100	278 Average																																																																



WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																
ANT	802.11a CH52 5260MHz - R																																
1	Vertical	Fundamental																															
Peak	<p>Date: 9 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL RSBW: 1000.000kHz VBW: 3000.000kHz Project : 100301-03 Mode : Mode 4 SI : 920 0492370523860039 Plane : X with Accessory setting : GM power setting 18</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5392.08</td> <td>51.48</td> <td>-22.52</td> <td>74.00</td> <td>37.53</td> <td>34.41</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>278 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	ca	deg		1	5392.08	51.48	-22.52	74.00	37.53	34.41	9.84	30.50	100	278 Peak	-
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	ca	deg																									
1	5392.08	51.48	-22.52	74.00	37.53	34.41	9.84	30.50	100	278 Peak																							
Avg.	<p>Date: 10 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 VERTICAL RSBW: 1000.000kHz VBW: 3.010kHz Project : 100301-03 Mode : Mode 4 SI : 920 0492370523860039 Plane : X with Accessory setting : GM power setting 18</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5597.76</td> <td>41.85</td> <td>-12.17</td> <td>54.00</td> <td>27.91</td> <td>34.58</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>278 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	ca	deg		1	5597.76	41.85	-12.17	54.00	27.91	34.58	9.84	30.50	100	278 Average	-
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	ca	deg																									
1	5597.76	41.85	-12.17	54.00	27.91	34.58	9.84	30.50	100	278 Average																							



WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																																																										
ANT	802.11a CH60 5300MHz - L																																																																										
1	Horizontal	Fundamental																																																																									
Peak	<p>Date: 1 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 HORIZONTAL RSW: 1000.000kHz VBW: 3000.000kHz Project : 1D0301-03 Mode : Mode 5 Site : #20 G092370523860039 Plane : X with Accessory setting : GM power setting 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>deg</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5300.00</td> <td>105.42</td> <td>-11.58</td> <td>74.00</td> <td>38.85</td> <td>34.37</td> <td>9.78</td> <td>30.58</td> <td>100</td> <td>254 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBm	dB	dBm	dBm	dB	dB	dB	deg	deg	1	5300.00	105.42	-11.58	74.00	38.85	34.37	9.78	30.58	100	254 Peak	<p>Date: 3 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 HORIZONTAL RSW: 1000.000kHz VBW: 3000.000kHz Project : 1D0301-03 Mode : Mode 5 Site : #20 G092370523860039 Plane : X with Accessory setting : GM power setting 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>deg</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5300.00</td> <td>105.42</td> <td>-11.58</td> <td>74.00</td> <td>38.85</td> <td>34.37</td> <td>9.78</td> <td>30.58</td> <td>100</td> <td>254 Peak</td> </tr> <tr> <td>2</td> <td>5300.00</td> <td>102.00</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> <td>88.21 34.54 9.83 30.58 100 254 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBm	dB	dBm	dBm	dB	dB	dB	deg	deg	1	5300.00	105.42	-11.58	74.00	38.85	34.37	9.78	30.58	100	254 Peak	2	5300.00	102.00	-	-	-	-	-	-	-	88.21 34.54 9.83 30.58 100 254 Average
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																		
MHz	dBm	dB	dBm	dBm	dB	dB	dB	deg	deg																																																																		
1	5300.00	105.42	-11.58	74.00	38.85	34.37	9.78	30.58	100	254 Peak																																																																	
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																		
MHz	dBm	dB	dBm	dBm	dB	dB	dB	deg	deg																																																																		
1	5300.00	105.42	-11.58	74.00	38.85	34.37	9.78	30.58	100	254 Peak																																																																	
2	5300.00	102.00	-	-	-	-	-	-	-	88.21 34.54 9.83 30.58 100 254 Average																																																																	
Avg.	<p>Date: 2 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 HORIZONTAL RSW: 1000.000kHz VBW: 3.0100kHz Project : 1D0301-03 Mode : Mode 5 Site : #20 G092370523860039 Plane : X with Accessory setting : GM power setting 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>deg</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5340.70</td> <td>45.15</td> <td>-18.85</td> <td>54.00</td> <td>29.49</td> <td>34.42</td> <td>9.74</td> <td>30.58</td> <td>100</td> <td>254 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBm	dB	dBm	dBm	dB	dB	dB	deg	deg	1	5340.70	45.15	-18.85	54.00	29.49	34.42	9.74	30.58	100	254 Average	-																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																		
MHz	dBm	dB	dBm	dBm	dB	dB	dB	deg	deg																																																																		
1	5340.70	45.15	-18.85	54.00	29.49	34.42	9.74	30.58	100	254 Average																																																																	



WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																
ANT	802.11a CH60 5300MHz - R																																
1	Horizontal	Fundamental																															
Peak	<p>Date: 4 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 HORIZONTAL : RBW: 1000.000kHz VBW: 3000.000kHz Project : 100301-03 Mode : Mode 5 SN : 420 0092370523860039 Plane : X with Accessory setting : GM power setting 10</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5300.16</td> <td>52.49</td> <td>-21.51</td> <td>74.00</td> <td>38.57</td> <td>34.58</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>254 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	ca	deg		1	5300.16	52.49	-21.51	74.00	38.57	34.58	9.84	30.50	100	254 Peak	-
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	ca	deg																									
1	5300.16	52.49	-21.51	74.00	38.57	34.58	9.84	30.50	100	254 Peak																							
Avg.	<p>Date: 5 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 HORIZONTAL : RBW: 1000.000kHz VBW: 3.010kHz Project : 100301-03 Mode : Mode 5 SN : 420 0092370523860039 Plane : X with Accessory setting : GM power setting 10</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5301.76</td> <td>45.32</td> <td>-18.68</td> <td>54.00</td> <td>29.48</td> <td>34.58</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>254 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	ca	deg		1	5301.76	45.32	-18.68	54.00	29.48	34.58	9.84	30.50	100	254 Average	-
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	ca	deg																									
1	5301.76	45.32	-18.68	54.00	29.48	34.58	9.84	30.50	100	254 Average																							






WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																																																										
ANT	802.11a CH60 5300MHz - L																																																																										
1	Vertical	Fundamental																																																																									
Peak	<p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL RSNW: 1000.000kHz VBW: 3000.000kHz Project : 1D0301-03 Mode : Mode 5 SN : #20 G092370523860039 Plane : X with Accessory setting : GM power setting 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5899.15</td> <td>53.48</td> <td>-20.52</td> <td>74.00</td> <td>39.97</td> <td>34.35</td> <td>9.66</td> <td>30.50</td> <td>100</td> <td>272 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5899.15	53.48	-20.52	74.00	39.97	34.35	9.66	30.50	100	272 Peak	<p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL RSNW: 1000.000kHz VBW: 3000.000kHz Project : 1D0301-03 Mode : Mode 5 SN : #20 G092370523860039 Plane : X with Accessory setting : GM power setting 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5300.00</td> <td>145.19</td> <td>36.89</td> <td>68.30</td> <td>91.32</td> <td>34.54</td> <td>9.83</td> <td>30.50</td> <td>100</td> <td>272 Peak</td> </tr> <tr> <td>2</td> <td>5300.00</td> <td>98.13</td> <td>.....</td> <td>84.26</td> <td>34.54</td> <td>9.83</td> <td>30.50</td> <td>100</td> <td>272</td> <td>Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5300.00	145.19	36.89	68.30	91.32	34.54	9.83	30.50	100	272 Peak	2	5300.00	98.13	84.26	34.54	9.83	30.50	100	272	Average
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	5899.15	53.48	-20.52	74.00	39.97	34.35	9.66	30.50	100	272 Peak																																																																	
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	5300.00	145.19	36.89	68.30	91.32	34.54	9.83	30.50	100	272 Peak																																																																	
2	5300.00	98.13	84.26	34.54	9.83	30.50	100	272	Average																																																																	
Avg.	<p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 VERTICAL RSNW: 1000.000kHz VBW: 3.0100kHz Project : 1D0301-03 Mode : Mode 5 SN : #20 G092370523860039 Plane : X with Accessory setting : GM power setting 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5899.05</td> <td>42.65</td> <td>-11.37</td> <td>54.00</td> <td>29.05</td> <td>34.38</td> <td>9.78</td> <td>30.50</td> <td>100</td> <td>272 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5899.05	42.65	-11.37	54.00	29.05	34.38	9.78	30.50	100	272 Average	-																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	5899.05	42.65	-11.37	54.00	29.05	34.38	9.78	30.50	100	272 Average																																																																	



WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																
ANT	802.11a CH60 5300MHz - R																																
1	Vertical	Fundamental																															
Peak	<p>Date: 9 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL RSBW: 1000.000kHz VBW: 3000.000kHz Project : 100301-03 Mode : Mode 5 Site : 420 G092310523860039 Plane : X with Accessory setting : GM power setting 18</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5374.08</td> <td>52.70</td> <td>-11.38</td> <td>74.00</td> <td>38.77</td> <td>34.59</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>272 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	ca	deg		1	5374.08	52.70	-11.38	74.00	38.77	34.59	9.84	30.50	100	272 Peak	-
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	ca	deg																									
1	5374.08	52.70	-11.38	74.00	38.77	34.59	9.84	30.50	100	272 Peak																							
Avg.	<p>Date: 10 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 VERTICAL RSBW: 1000.000kHz VBW: 3.010kHz Project : 100301-03 Mode : Mode 5 Site : 420 G092310523860039 Plane : X with Accessory setting : GM power setting 18</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5599.44</td> <td>42.18</td> <td>-11.82</td> <td>54.00</td> <td>28.26</td> <td>34.58</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>272 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	ca	deg		1	5599.44	42.18	-11.82	54.00	28.26	34.58	9.84	30.50	100	272 Average	-
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	ca	deg																									
1	5599.44	42.18	-11.82	54.00	28.26	34.58	9.84	30.50	100	272 Average																							



WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																																																									
ANT	802.11a CH64 5320MHz																																																																									
1	Horizontal	Fundamental																																																																								
Peak	 <p>Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 HORIZONTAL RSNW: 1000.000kHz VBW: 3000.000kHz Project : 1D0301-03 Mode : Mode 6 SN : #20 092370523860039 Plane : X with Accessory setting : GM power setting 18</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5356.64</td> <td>52.62</td> <td>-11.38</td> <td>74.00</td> <td>38.70</td> <td>34.58</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>273 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5356.64	52.62	-11.38	74.00	38.70	34.58	9.84	30.50	100	273 Peak	 <p>Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 HORIZONTAL RSNW: 1000.000kHz VBW: 3000.000kHz Project : 1D0301-03 Mode : Mode 6 SN : #20 092370523860039 Plane : X with Accessory setting : GM power setting 18</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>149.85</td> <td>48.75</td> <td>68.30</td> <td>95.17</td> <td>34.55</td> <td>9.83</td> <td>30.50</td> <td>100</td> <td>273 Peak</td> </tr> <tr> <td>2</td> <td>5320.00</td> <td>140.10</td> <td>.....</td> <td>68.22</td> <td>34.55</td> <td>9.83</td> <td>30.50</td> <td>100</td> <td>273 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	149.85	48.75	68.30	95.17	34.55	9.83	30.50	100	273 Peak	2	5320.00	140.10	68.22	34.55	9.83	30.50	100	273 Average
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	5356.64	52.62	-11.38	74.00	38.70	34.58	9.84	30.50	100	273 Peak																																																																
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	5320.00	149.85	48.75	68.30	95.17	34.55	9.83	30.50	100	273 Peak																																																																
2	5320.00	140.10	68.22	34.55	9.83	30.50	100	273 Average																																																																	
Avg.	 <p>Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 HORIZONTAL RSNW: 1000.000kHz VBW: 3.0100kHz Project : 1D0301-03 Mode : Mode 6 SN : #20 092370523860039 Plane : X with Accessory setting : GM power setting 18</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5356.68</td> <td>45.75</td> <td>-8.25</td> <td>54.00</td> <td>31.83</td> <td>34.58</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>273 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5356.68	45.75	-8.25	54.00	31.83	34.58	9.84	30.50	100	273 Average	-																																									
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	5356.68	45.75	-8.25	54.00	31.83	34.58	9.84	30.50	100	273 Average																																																																



WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																																																									
ANT	802.11a CH64 5320MHz																																																																									
1	Vertical	Fundamental																																																																								
Peak	<p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL RSNW: 1000.000kHz VBW: 3000.000kHz Project : 1D0301-03 Mode : Mode 6 SN : #20 092370523860039 Plane : X with Accessory setting : GM power setting 18</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.48</td> <td>52.43</td> <td>-11.57</td> <td>74.00</td> <td>38.51</td> <td>34.58</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>276 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5350.48	52.43	-11.57	74.00	38.51	34.58	9.84	30.50	100	276 Peak	<p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL RSNW: 1000.000kHz VBW: 3000.000kHz Project : 1D0301-03 Mode : Mode 6 SN : #20 092370523860039 Plane : X with Accessory setting : GM power setting 18</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>145.94</td> <td>37.64</td> <td>68.30</td> <td>92.66</td> <td>34.55</td> <td>9.83</td> <td>30.50</td> <td>100</td> <td>276 Peak</td> </tr> <tr> <td>2</td> <td>5320.00</td> <td>99.13</td> <td>.....</td> <td>85.25</td> <td>34.55</td> <td>9.83</td> <td>30.50</td> <td>100</td> <td>276 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	145.94	37.64	68.30	92.66	34.55	9.83	30.50	100	276 Peak	2	5320.00	99.13	85.25	34.55	9.83	30.50	100	276 Average
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	5350.48	52.43	-11.57	74.00	38.51	34.58	9.84	30.50	100	276 Peak																																																																
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	5320.00	145.94	37.64	68.30	92.66	34.55	9.83	30.50	100	276 Peak																																																																
2	5320.00	99.13	85.25	34.55	9.83	30.50	100	276 Average																																																																	
Avg.	<p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 VERTICAL RSNW: 1000.000kHz VBW: 3.0100kHz Project : 1D0301-03 Mode : Mode 6 SN : #20 092370523860039 Plane : X with Accessory setting : GM power setting 18</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.00</td> <td>44.35</td> <td>-9.67</td> <td>54.00</td> <td>38.41</td> <td>34.58</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>276 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5350.00	44.35	-9.67	54.00	38.41	34.58	9.84	30.50	100	276 Average	-																																									
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	5350.00	44.35	-9.67	54.00	38.41	34.58	9.84	30.50	100	276 Average																																																																



**U-NII-2A 5250~5350MHz
WIFI 802.11n HT20 (Band Edge @ 3m)**

WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																																																																												
ANT	802.11n HT20 CH52 5260MHz - L																																																																																												
1	Horizontal	Fundamental																																																																																											
Peak	<p>Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART: 15.407 3m HF_ ANT_ 3117_ 0107 HORIZONTAL : RBW: 1000.000kHz VEW: 3000.000kHz Project : ID0301-03 Mode : Mode 13 SN : #00 C892370523860039 Plane : X with Accessory setting : MCS9 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1048.38</td> <td>52.83</td> <td>-21.97</td> <td>74.00</td> <td>38.53</td> <td>34.34</td> <td>9.66</td> <td>30.50</td> <td>100</td> <td></td> <td></td> <td>262 Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Over	Line	Level	Factor	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	dB	dB	cm	deg		1	1048.38	52.83	-21.97	74.00	38.53	34.34	9.66	30.50	100			262 Peak	<p>Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART: 15.407 3m HF_ ANT_ 3117_ 0107 HORIZONTAL : RBW: 1000.000kHz VEW: 3000.000kHz Project : ID0301-03 Mode : Mode 13 SN : #00 C892370523860039 Plane : X with Accessory setting : MCS9 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5260.00</td> <td>107.11</td> <td>38.11</td> <td>68.39</td> <td>93.28</td> <td>34.51</td> <td>9.82</td> <td>30.50</td> <td>100</td> <td></td> <td></td> <td>262 Peak</td> </tr> <tr> <td>2</td> <td>5260.00</td> <td>100.00</td> <td>.....</td> <td>60.26</td> <td>38.53</td> <td>9.82</td> <td>30.50</td> <td>100</td> <td></td> <td></td> <td></td> <td>262 Average</td> </tr> </tbody> </table>	Freq	Level	Limit	Over	Line	Level	Factor	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	dB	dB	cm	deg		1	5260.00	107.11	38.11	68.39	93.28	34.51	9.82	30.50	100			262 Peak	2	5260.00	100.00	60.26	38.53	9.82	30.50	100				262 Average
Freq	Level	Limit	Over	Line	Level	Factor	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																		
1	1048.38	52.83	-21.97	74.00	38.53	34.34	9.66	30.50	100			262 Peak																																																																																	
Freq	Level	Limit	Over	Line	Level	Factor	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																		
1	5260.00	107.11	38.11	68.39	93.28	34.51	9.82	30.50	100			262 Peak																																																																																	
2	5260.00	100.00	60.26	38.53	9.82	30.50	100				262 Average																																																																																	
Avg.	<p>Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART: 15.407 AVG 3m HF_ ANT_ 3117_ 0107 HORIZONTAL : RBW: 1000.000kHz VEW: 3000.000kHz Project : ID0301-03 Mode : Mode 13 SN : #00 C892370523860039 Plane : X with Accessory setting : MCS9 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.14</td> <td>43.17</td> <td>-18.83</td> <td>54.00</td> <td>29.51</td> <td>34.42</td> <td>9.74</td> <td>30.50</td> <td>100</td> <td></td> <td></td> <td>262 Average</td> </tr> </tbody> </table>	Freq	Level	Limit	Over	Line	Level	Factor	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	dB	dB	cm	deg		1	5148.14	43.17	-18.83	54.00	29.51	34.42	9.74	30.50	100			262 Average																																																					
Freq	Level	Limit	Over	Line	Level	Factor	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																		
1	5148.14	43.17	-18.83	54.00	29.51	34.42	9.74	30.50	100			262 Average																																																																																	



WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																
ANT	802.11n HT20 CH52 5260MHz - R																																
1	Horizontal	Fundamental																															
<p>Peak</p>	<p>Date: 4 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 HORIZONTAL RSBW: 1000.000kHz VBW: 3000.000kHz Project : 100301-03 Mode : Mode 13 Site : 420 G092310523860039 Plane : X with Accessory setting : MCSO power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5444.16</td> <td>51.04</td> <td>-22.96</td> <td>74.00</td> <td>37.01</td> <td>34.45</td> <td>9.88</td> <td>30.50</td> <td>100</td> <td>262 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	ca	deg		1	5444.16	51.04	-22.96	74.00	37.01	34.45	9.88	30.50	100	262 Peak	-
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	ca	deg																									
1	5444.16	51.04	-22.96	74.00	37.01	34.45	9.88	30.50	100	262 Peak																							
<p>Avg.</p>	<p>Date: 5 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 HORIZONTAL RSBW: 1000.000kHz VBW: 3.010kHz Project : 100301-03 Mode : Mode 13 Site : 420 G092310523860039 Plane : X with Accessory setting : MCSO power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5595.08</td> <td>41.91</td> <td>-12.09</td> <td>54.00</td> <td>27.99</td> <td>34.58</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>262 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	ca	deg		1	5595.08	41.91	-12.09	54.00	27.99	34.58	9.84	30.50	100	262 Average	-
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	ca	deg																									
1	5595.08	41.91	-12.09	54.00	27.99	34.58	9.84	30.50	100	262 Average																							



WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																																																									
ANT	802.11n HT20 CH52 5260MHz - L																																																																									
1	Vertical	Fundamental																																																																								
Peak	<p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL RSNW: 1000.000kHz VBW: 3000.000kHz Project : 1D0301-03 Mode : Mode 13 Site : #20 092310523866039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5914.38</td> <td>52.09</td> <td>-21.91</td> <td>74.00</td> <td>38.66</td> <td>34.31</td> <td>9.62</td> <td>30.58</td> <td>100</td> <td>261 Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	Loss	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg		1	5914.38	52.09	-21.91	74.00	38.66	34.31	9.62	30.58	100	261 Peak	<p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL RSNW: 1000.000kHz VBW: 3000.000kHz Project : 1D0301-03 Mode : Mode 13 Site : #20 092310523866039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5260.00</td> <td>68.97</td> <td>34.67</td> <td>68.38</td> <td>89.14</td> <td>34.51</td> <td>9.82</td> <td>30.58</td> <td>100</td> <td>261 Peak</td> </tr> <tr> <td>2</td> <td>5260.00</td> <td>96.14</td> <td>.....</td> <td>82.31</td> <td>34.51</td> <td>9.82</td> <td>30.58</td> <td>100</td> <td>261 Average</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	Loss	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg		1	5260.00	68.97	34.67	68.38	89.14	34.51	9.82	30.58	100	261 Peak	2	5260.00	96.14	82.31	34.51	9.82	30.58	100	261 Average
Freq	Level	Limit	Line	Level Factor	Loss Factor	Loss	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																																		
1	5914.38	52.09	-21.91	74.00	38.66	34.31	9.62	30.58	100	261 Peak																																																																
Freq	Level	Limit	Line	Level Factor	Loss Factor	Loss	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																																		
1	5260.00	68.97	34.67	68.38	89.14	34.51	9.82	30.58	100	261 Peak																																																																
2	5260.00	96.14	82.31	34.51	9.82	30.58	100	261 Average																																																																	
Avg.	<p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 VERTICAL RSNW: 1000.000kHz VBW: 3.0100kHz Project : 1D0301-03 Mode : Mode 13 Site : #20 092310523866039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5181.92</td> <td>42.41</td> <td>-11.59</td> <td>54.00</td> <td>28.83</td> <td>34.38</td> <td>9.78</td> <td>30.58</td> <td>100</td> <td>261 Average</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	Loss	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg		1	5181.92	42.41	-11.59	54.00	28.83	34.38	9.78	30.58	100	261 Average	-																																									
Freq	Level	Limit	Line	Level Factor	Loss Factor	Loss	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																																		
1	5181.92	42.41	-11.59	54.00	28.83	34.38	9.78	30.58	100	261 Average																																																																



WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																
ANT	802.11n HT20 CH52 5260MHz - R																																
1	Vertical	Fundamental																															
Peak	<p>Date: 9 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL RSBW: 1000.000kHz VBW: 3000.000kHz Project : 100301-03 Mode : Mode 13 Site : 420 G092310523860039 Plane : X with Accessory setting : MCSO power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5498.00</td> <td>59.07</td> <td>-23.83</td> <td>74.00</td> <td>37.01</td> <td>34.42</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>261 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	ca	deg		1	5498.00	59.07	-23.83	74.00	37.01	34.42	9.84	30.50	100	261 Peak	-
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	ca	deg																									
1	5498.00	59.07	-23.83	74.00	37.01	34.42	9.84	30.50	100	261 Peak																							
Avg.	<p>Date: 10 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 VERTICAL RSBW: 1000.000kHz VBW: 3.010kHz Project : 100301-03 Mode : Mode 13 Site : 420 G092310523860039 Plane : X with Accessory setting : MCSO power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5558.48</td> <td>41.45</td> <td>-12.55</td> <td>54.00</td> <td>27.53</td> <td>34.38</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>261 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	ca	deg		1	5558.48	41.45	-12.55	54.00	27.53	34.38	9.84	30.50	100	261 Average	-
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	ca	deg																									
1	5558.48	41.45	-12.55	54.00	27.53	34.38	9.84	30.50	100	261 Average																							



WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																																																									
ANT	802.11n HT20 CH60 5300MHz - L																																																																									
1	Horizontal	Fundamental																																																																								
Peak	<p>Date: 1 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 HORIZONTAL RSW: 1000.000kHz VBW: 3000.000kHz Project : 1D0301-03 Site : #20 G092370523860039 Mode : Mode 14 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5344.28</td> <td>52.84</td> <td>-21.16</td> <td>74.00</td> <td>39.18</td> <td>34.42</td> <td>9.74</td> <td>30.58</td> <td>100</td> <td>261 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5344.28	52.84	-21.16	74.00	39.18	34.42	9.74	30.58	100	261 Peak	<p>Date: 3 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 HORIZONTAL RSW: 1000.000kHz VBW: 3000.000kHz Project : 1D0301-03 Site : #20 G092370523860039 Mode : Mode 14 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5300.00</td> <td>107.48</td> <td>39.10</td> <td>68.38</td> <td>93.53</td> <td>34.54</td> <td>9.83</td> <td>30.58</td> <td>100</td> <td>261 Peak</td> </tr> <tr> <td>2</td> <td>5300.00</td> <td>100.13</td> <td>.....</td> <td>86.26</td> <td>34.54</td> <td>9.83</td> <td>30.58</td> <td>100</td> <td>261 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5300.00	107.48	39.10	68.38	93.53	34.54	9.83	30.58	100	261 Peak	2	5300.00	100.13	86.26	34.54	9.83	30.58	100	261 Average
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	5344.28	52.84	-21.16	74.00	39.18	34.42	9.74	30.58	100	261 Peak																																																																
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	5300.00	107.48	39.10	68.38	93.53	34.54	9.83	30.58	100	261 Peak																																																																
2	5300.00	100.13	86.26	34.54	9.83	30.58	100	261 Average																																																																	
Avg.	<p>Date: 2 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 HORIZONTAL RSW: 1000.000kHz VBW: 3.0100kHz Project : 1D0301-03 Site : #20 G092370523860039 Mode : Mode 14 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5337.55</td> <td>42.95</td> <td>-11.05</td> <td>54.00</td> <td>29.38</td> <td>34.41</td> <td>9.74</td> <td>30.58</td> <td>100</td> <td>261 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5337.55	42.95	-11.05	54.00	29.38	34.41	9.74	30.58	100	261 Average	-																																									
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	5337.55	42.95	-11.05	54.00	29.38	34.41	9.74	30.58	100	261 Average																																																																





WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																
ANT	802.11n HT20 CH60 5300MHz - R																																
1	Horizontal	Vertical																															
Peak	<p>Date: 4 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 HORIZONTAL RSBW: 1000.000kHz VBW: 3000.000kHz Project : 100301-03 Mode : Mode 14 Site : 420 G092310523860039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5356.32</td> <td>52.00</td> <td>-21.92</td> <td>74.00</td> <td>38.16</td> <td>34.58</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>261 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	ca	deg		1	5356.32	52.00	-21.92	74.00	38.16	34.58	9.84	30.50	100	261 Peak	-
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	ca	deg																									
1	5356.32	52.00	-21.92	74.00	38.16	34.58	9.84	30.50	100	261 Peak																							
Avg.	<p>Date: 5 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 HORIZONTAL RSBW: 1000.000kHz VBW: 3.0100kHz Project : 100301-03 Mode : Mode 14 Site : 420 G092310523860039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5352.48</td> <td>42.57</td> <td>-11.43</td> <td>54.00</td> <td>28.05</td> <td>34.58</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>261 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	ca	deg		1	5352.48	42.57	-11.43	54.00	28.05	34.58	9.84	30.50	100	261 Average	-
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	ca	deg																									
1	5352.48	42.57	-11.43	54.00	28.05	34.58	9.84	30.50	100	261 Average																							



WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																																																									
ANT	802.11n HT20 CH60 5300MHz - L																																																																									
1	Vertical	Fundamental																																																																								
Peak	<p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL RSNW: 1000.000kHz VBW: 3000.000kHz Project : 1D0301-03 Mode : Mode 14 Site : #20 G092370523866039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1042.00</td> <td>52.47</td> <td>-11.33</td> <td>74.00</td> <td>39.17</td> <td>34.34</td> <td>9.66</td> <td>30.50</td> <td>100</td> <td>261 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	1042.00	52.47	-11.33	74.00	39.17	34.34	9.66	30.50	100	261 Peak	<p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL RSNW: 1000.000kHz VBW: 3000.000kHz Project : 1D0301-03 Mode : Mode 14 Site : #20 G092370523866039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5300.00</td> <td>143.11</td> <td>34.81</td> <td>68.30</td> <td>89.24</td> <td>34.54</td> <td>9.83</td> <td>30.50</td> <td>100</td> <td>261 Peak</td> </tr> <tr> <td>2</td> <td>5300.00</td> <td>96.23</td> <td>.....</td> <td>82.36</td> <td>34.54</td> <td>9.83</td> <td>30.50</td> <td>100</td> <td>261 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5300.00	143.11	34.81	68.30	89.24	34.54	9.83	30.50	100	261 Peak	2	5300.00	96.23	82.36	34.54	9.83	30.50	100	261 Average
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	1042.00	52.47	-11.33	74.00	39.17	34.34	9.66	30.50	100	261 Peak																																																																
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	5300.00	143.11	34.81	68.30	89.24	34.54	9.83	30.50	100	261 Peak																																																																
2	5300.00	96.23	82.36	34.54	9.83	30.50	100	261 Average																																																																	
Avg.	<p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 VERTICAL RSNW: 1000.000kHz VBW: 3.0100kHz Project : 1D0301-03 Mode : Mode 14 Site : #20 G092370523866039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1048.30</td> <td>42.67</td> <td>-11.33</td> <td>54.00</td> <td>29.17</td> <td>34.34</td> <td>9.66</td> <td>30.50</td> <td>100</td> <td>261 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	1048.30	42.67	-11.33	54.00	29.17	34.34	9.66	30.50	100	261 Average	-																																									
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	1048.30	42.67	-11.33	54.00	29.17	34.34	9.66	30.50	100	261 Average																																																																



WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																
ANT	802.11n HT20 CH60 5300MHz - R																																
1	Vertical	Fundamental																															
<p>Peak</p>	 <p>Date: 9 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL RSBW: 1000.000kHz VBW: 3000.000kHz Project : 100301-03 Mode : Mode 14 Site : 420 G092310523860039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5361.12</td> <td>51.10</td> <td>-22.98</td> <td>74.00</td> <td>37.17</td> <td>34.59</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>261 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	ca	deg		1	5361.12	51.10	-22.98	74.00	37.17	34.59	9.84	30.50	100	261 Peak	-
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	ca	deg																									
1	5361.12	51.10	-22.98	74.00	37.17	34.59	9.84	30.50	100	261 Peak																							
<p>Avg.</p>	 <p>Date: 10 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 VERTICAL RSBW: 1000.000kHz VBW: 3.0100kHz Project : 100301-03 Mode : Mode 14 Site : 420 G092310523860039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5599.44</td> <td>41.86</td> <td>-12.12</td> <td>54.00</td> <td>27.96</td> <td>34.58</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>261 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	ca	deg		1	5599.44	41.86	-12.12	54.00	27.96	34.58	9.84	30.50	100	261 Average	-
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	ca	deg																									
1	5599.44	41.86	-12.12	54.00	27.96	34.58	9.84	30.50	100	261 Average																							



WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																																																										
ANT	802.11n HT20 CH64 5320MHz																																																																										
1	Horizontal	Fundamental																																																																									
Peak	<p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 HORIZONTAL RSW: 1000.000kHz VBW: 3000.000kHz Project : 1D0301-03 Mode : Mode 15 Site : #20 092310523860039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5357.28</td> <td>52.90</td> <td>-11.18</td> <td>74.00</td> <td>38.98</td> <td>34.58</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>257 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5357.28	52.90	-11.18	74.00	38.98	34.58	9.84	30.50	100	257 Peak	<p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 HORIZONTAL RSW: 1000.000kHz VBW: 3000.000kHz Project : 1D0301-03 Mode : Mode 15 Site : #20 092310523860039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>148.85</td> <td>39.75</td> <td>68.30</td> <td>94.17</td> <td>34.55</td> <td>9.83</td> <td>30.50</td> <td>100</td> <td>257 Peak</td> </tr> <tr> <td>2</td> <td>5320.00</td> <td>141.25</td> <td>.....</td> <td>87.37</td> <td>34.55</td> <td>9.83</td> <td>30.50</td> <td>100</td> <td>257</td> <td>Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	148.85	39.75	68.30	94.17	34.55	9.83	30.50	100	257 Peak	2	5320.00	141.25	87.37	34.55	9.83	30.50	100	257	Average
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	5357.28	52.90	-11.18	74.00	38.98	34.58	9.84	30.50	100	257 Peak																																																																	
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	5320.00	148.85	39.75	68.30	94.17	34.55	9.83	30.50	100	257 Peak																																																																	
2	5320.00	141.25	87.37	34.55	9.83	30.50	100	257	Average																																																																	
Avg.	<p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 HORIZONTAL RSW: 1000.000kHz VBW: 3.0100kHz Project : 1D0301-03 Mode : Mode 15 Site : #20 092310523860039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5359.84</td> <td>44.78</td> <td>-9.22</td> <td>54.00</td> <td>38.86</td> <td>34.58</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>257 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5359.84	44.78	-9.22	54.00	38.86	34.58	9.84	30.50	100	257 Average	-																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	5359.84	44.78	-9.22	54.00	38.86	34.58	9.84	30.50	100	257 Average																																																																	



WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																																																														
ANT	802.11n HT20 CH64 5320MHz																																																																														
1	Vertical	Fundamental																																																																													
Peak	<p>Date: 5 Level (dBuV/m) Date: 2022-11-15</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL RSM: 1000.000kHz VBW: 3000.000kHz Project : 1D0301-03 Mode : Mode 15 Site : #20 092370523860039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5367.36</td> <td>51.69</td> <td>-22.31</td> <td>74.00</td> <td>37.76</td> <td>34.59</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>274 Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	dB	ca	deg		1	5367.36	51.69	-22.31	74.00	37.76	34.59	9.84	30.50	100	274 Peak	<p>Date: 4 Level (dBuV/m) Date: 2022-11-15</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL RSM: 1000.000kHz VBW: 3000.000kHz Project : 1D0301-03 Mode : Mode 15 Site : #20 092370523860039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>104.84</td> <td>35.74</td> <td>69.30</td> <td>90.16</td> <td>34.55</td> <td>9.83</td> <td>30.50</td> <td>100</td> <td>274 Peak</td> </tr> <tr> <td>2</td> <td>5320.00</td> <td>97.35</td> <td>.....</td> <td>83.47</td> <td>34.55</td> <td>9.83</td> <td>30.50</td> <td>100</td> <td>274</td> <td>Average</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	dB	ca	deg		1	5320.00	104.84	35.74	69.30	90.16	34.55	9.83	30.50	100	274 Peak	2	5320.00	97.35	83.47	34.55	9.83	30.50	100	274	Average
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark																																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	dB	ca	deg																																																																						
1	5367.36	51.69	-22.31	74.00	37.76	34.59	9.84	30.50	100	274 Peak																																																																					
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark																																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	dB	ca	deg																																																																						
1	5320.00	104.84	35.74	69.30	90.16	34.55	9.83	30.50	100	274 Peak																																																																					
2	5320.00	97.35	83.47	34.55	9.83	30.50	100	274	Average																																																																					
Avg.	<p>Date: 6 Level (dBuV/m) Date: 2022-11-15</p> <p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 VERTICAL RSM: 1000.000kHz VBW: 3.0100kHz Project : 1D0301-03 Mode : Mode 15 Site : #20 092370523860039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5368.00</td> <td>42.61</td> <td>-11.39</td> <td>54.00</td> <td>28.69</td> <td>34.58</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>274 Average</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	dB	ca	deg		1	5368.00	42.61	-11.39	54.00	28.69	34.58	9.84	30.50	100	274 Average	-																																												
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark																																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	dB	ca	deg																																																																						
1	5368.00	42.61	-11.39	54.00	28.69	34.58	9.84	30.50	100	274 Average																																																																					



**U-NII-2A 5250~5350MHz
WIFI 802.11n HT40 (Band Edge @ 3m)**

WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																																																																												
ANT	802.11n HT40 CH54 5270 - L																																																																																												
1	Horizontal	Fundamental																																																																																											
Peak	<p>Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PAR15.407 3m HF ANT_3117_0107 HORIZONTAL Project : RWV-1000.000KHz VEW-3000.000KHz Mode : 100301-03 Mode : Mode 21 SN : #00 C692370523860039 Plane : X with Accessory setting : MCS9 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5130.55</td> <td>52.72</td> <td>-21.28</td> <td>74.00</td> <td>39.67</td> <td>34.41</td> <td>9.74</td> <td>30.50</td> <td>100</td> <td></td> <td></td> <td>263 Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Over	Line	Level	Factor	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBm	dB	dBm	dBm	dB	dB	dB	dB	dB	cm	deg		1	5130.55	52.72	-21.28	74.00	39.67	34.41	9.74	30.50	100			263 Peak	<p>Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PAR15.407 3m HF ANT_3117_0107 HORIZONTAL Project : RWV-1000.000KHz VEW-3000.000KHz Mode : 100301-03 Mode : Mode 21 SN : #00 C692370523860039 Plane : X with Accessory setting : MCS9 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>104.88</td> <td>34.58</td> <td>68.30</td> <td>91.85</td> <td>34.51</td> <td>9.82</td> <td>30.50</td> <td>100</td> <td></td> <td></td> <td>263 Peak</td> </tr> <tr> <td>2</td> <td>5270.00</td> <td>104.85</td> <td>.....</td> <td>64.22</td> <td>34.51</td> <td>9.82</td> <td>30.50</td> <td>100</td> <td></td> <td></td> <td></td> <td>263 Average</td> </tr> </tbody> </table>	Freq	Level	Limit	Over	Line	Level	Factor	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBm	dB	dBm	dBm	dB	dB	dB	dB	dB	cm	deg		1	5270.00	104.88	34.58	68.30	91.85	34.51	9.82	30.50	100			263 Peak	2	5270.00	104.85	64.22	34.51	9.82	30.50	100				263 Average
Freq	Level	Limit	Over	Line	Level	Factor	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																	
MHz	dBm	dB	dBm	dBm	dB	dB	dB	dB	dB	cm	deg																																																																																		
1	5130.55	52.72	-21.28	74.00	39.67	34.41	9.74	30.50	100			263 Peak																																																																																	
Freq	Level	Limit	Over	Line	Level	Factor	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																	
MHz	dBm	dB	dBm	dBm	dB	dB	dB	dB	dB	cm	deg																																																																																		
1	5270.00	104.88	34.58	68.30	91.85	34.51	9.82	30.50	100			263 Peak																																																																																	
2	5270.00	104.85	64.22	34.51	9.82	30.50	100				263 Average																																																																																	
Avg.	<p>Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PAR15.407 AVG 3m HF ANT_3117_0107 HORIZONTAL Project : RWV-1000.000KHz VEW-3000.000KHz Mode : 100301-03 Mode : Mode 21 SN : #00 C692370523860039 Plane : X with Accessory setting : MCS9 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.88</td> <td>43.20</td> <td>-18.88</td> <td>54.00</td> <td>29.54</td> <td>34.42</td> <td>9.74</td> <td>30.50</td> <td>100</td> <td></td> <td></td> <td>263 Average</td> </tr> </tbody> </table>	Freq	Level	Limit	Over	Line	Level	Factor	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBm	dB	dBm	dBm	dB	dB	dB	dB	dB	cm	deg		1	5149.88	43.20	-18.88	54.00	29.54	34.42	9.74	30.50	100			263 Average	-																																																				
Freq	Level	Limit	Over	Line	Level	Factor	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																	
MHz	dBm	dB	dBm	dBm	dB	dB	dB	dB	dB	cm	deg																																																																																		
1	5149.88	43.20	-18.88	54.00	29.54	34.42	9.74	30.50	100			263 Average																																																																																	



WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																
ANT	802.11n HT40 CH54 5270 - R																																
1	Horizontal	Fundamental																															
<p>Peak</p>	<p>Date: 4 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 HORIZONTAL RSBW: 1000.000kHz VBW: 3000.000kHz Project : 100301-03 Mode : Mode 21 Site : #20 0262310523860039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5368.88</td> <td>52.42</td> <td>-11.58</td> <td>74.00</td> <td>38.49</td> <td>34.59</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>263 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg		1	5368.88	52.42	-11.58	74.00	38.49	34.59	9.84	30.50	100	263 Peak	<p>-</p>
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg																									
1	5368.88	52.42	-11.58	74.00	38.49	34.59	9.84	30.50	100	263 Peak																							
<p>Avg.</p>	<p>Date: 5 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 HORIZONTAL RSBW: 1000.000kHz VBW: 3.010kHz Project : 100301-03 Mode : Mode 21 Site : #20 0262310523860039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5352.24</td> <td>42.34</td> <td>-11.46</td> <td>54.00</td> <td>28.62</td> <td>34.58</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>263 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg		1	5352.24	42.34	-11.46	54.00	28.62	34.58	9.84	30.50	100	263 Average	<p>-</p>
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg																									
1	5352.24	42.34	-11.46	54.00	28.62	34.58	9.84	30.50	100	263 Average																							






WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																																																									
ANT	802.11n HT40 CH54 5270 - L																																																																									
1	Vertical	Vertical																																																																								
Peak	<p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL RSW: 1000.000kHz VBW:3000.000kHz Project : 1D0301-03 Mode : Mode 21 Site : #20 092370523866039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1029.48</td> <td>51.98</td> <td>-22.82</td> <td>74.00</td> <td>38.53</td> <td>34.33</td> <td>9.62</td> <td>30.58</td> <td>100</td> <td>273 Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	Loss	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	1029.48	51.98	-22.82	74.00	38.53	34.33	9.62	30.58	100	273 Peak	<p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL RSW: 1000.000kHz VBW:3000.000kHz Project : 1D0301-03 Mode : Mode 21 Site : #20 092370523866039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>101.81</td> <td>33.51</td> <td>68.30</td> <td>87.98</td> <td>34.51</td> <td>9.82</td> <td>30.58</td> <td>100</td> <td>273 Peak</td> </tr> <tr> <td>2</td> <td>5270.00</td> <td>94.87</td> <td>.....</td> <td>80.24</td> <td>34.51</td> <td>9.82</td> <td>30.58</td> <td>100</td> <td>273 Average</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	Loss	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5270.00	101.81	33.51	68.30	87.98	34.51	9.82	30.58	100	273 Peak	2	5270.00	94.87	80.24	34.51	9.82	30.58	100	273 Average
Freq	Level	Limit	Line	Level Factor	Loss Factor	Loss	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	1029.48	51.98	-22.82	74.00	38.53	34.33	9.62	30.58	100	273 Peak																																																																
Freq	Level	Limit	Line	Level Factor	Loss Factor	Loss	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	5270.00	101.81	33.51	68.30	87.98	34.51	9.82	30.58	100	273 Peak																																																																
2	5270.00	94.87	80.24	34.51	9.82	30.58	100	273 Average																																																																	
Avg.	<p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 VERTICAL RSW: 1000.000kHz VBW:3.0100kHz Project : 1D0301-03 Mode : Mode 21 Site : #20 092370523866039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5104.38</td> <td>42.74</td> <td>-11.26</td> <td>54.00</td> <td>29.16</td> <td>34.38</td> <td>9.78</td> <td>30.58</td> <td>100</td> <td>273 Average</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	Loss	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5104.38	42.74	-11.26	54.00	29.16	34.38	9.78	30.58	100	273 Average	-																																									
Freq	Level	Limit	Line	Level Factor	Loss Factor	Loss	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	5104.38	42.74	-11.26	54.00	29.16	34.38	9.78	30.58	100	273 Average																																																																





WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																
ANT	802.11n HT40 CH54 5270 - R																																
1	Vertical	Vertical																															
Peak	<p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL : RBW: 1000.000kHz VBW: 3000.000kHz Project : 100301-03 Mode : Mode 21 Site : 420 0302210523860039 Plane : X with Accessory setting : MCSO power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5434.08</td> <td>52.58</td> <td>-21.42</td> <td>74.00</td> <td>38.55</td> <td>34.45</td> <td>9.88</td> <td>30.50</td> <td>100</td> <td>273 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	ca	deg		1	5434.08	52.58	-21.42	74.00	38.55	34.45	9.88	30.50	100	273 Peak	-
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	ca	deg																									
1	5434.08	52.58	-21.42	74.00	38.55	34.45	9.88	30.50	100	273 Peak																							
Avg.	<p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 VERTICAL : RBW: 1000.000kHz VBW: 3.0100kHz Project : 100301-03 Mode : Mode 21 Site : 420 0302210523860039 Plane : X with Accessory setting : MCSO power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5368.08</td> <td>41.77</td> <td>-12.23</td> <td>54.00</td> <td>27.84</td> <td>34.59</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>273 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	ca	deg		1	5368.08	41.77	-12.23	54.00	27.84	34.59	9.84	30.50	100	273 Average	-
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	ca	deg																									
1	5368.08	41.77	-12.23	54.00	27.84	34.59	9.84	30.50	100	273 Average																							



WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																																																										
ANT	802.11n HT40 CH62 5310 - L																																																																										
1	Horizontal	Fundamental																																																																									
<p>Peak</p>	 <p>Date: 1 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT 3117_0107 HORIZONTAL RSBW: 1000.000kHz VBW: 3000.000kHz Project : 1D0301-03 Mode : Mode 22 SN : #20 0992310523860039 Plane : X with Accessory setting : MCSO power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>9999.95</td> <td>52.62</td> <td>-21.38</td> <td>74.00</td> <td>39.04</td> <td>34.38</td> <td>9.78</td> <td>30.58</td> <td>100</td> <td>254 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	9999.95	52.62	-21.38	74.00	39.04	34.38	9.78	30.58	100	254 Peak	 <p>Date: 3 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT 3117_0107 HORIZONTAL RSBW: 1000.000kHz VBW: 3000.000kHz Project : 1D0301-03 Mode : Mode 22 SN : #20 0992310523860039 Plane : X with Accessory setting : MCSO power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>104.48</td> <td>36.10</td> <td>68.38</td> <td>90.52</td> <td>34.55</td> <td>9.83</td> <td>30.58</td> <td>100</td> <td>254 Peak</td> </tr> <tr> <td>2</td> <td>5310.00</td> <td>97.15</td> <td>.....</td> <td>.....</td> <td>83.27</td> <td>34.55</td> <td>9.83</td> <td>30.58</td> <td>100</td> <td>254 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5310.00	104.48	36.10	68.38	90.52	34.55	9.83	30.58	100	254 Peak	2	5310.00	97.15	83.27	34.55	9.83	30.58	100	254 Average
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	9999.95	52.62	-21.38	74.00	39.04	34.38	9.78	30.58	100	254 Peak																																																																	
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	5310.00	104.48	36.10	68.38	90.52	34.55	9.83	30.58	100	254 Peak																																																																	
2	5310.00	97.15	83.27	34.55	9.83	30.58	100	254 Average																																																																	
<p>Avg.</p>	 <p>Date: 2 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT 3117_0107 HORIZONTAL RSBW: 1000.000kHz VBW: 3.0100kHz Project : 1D0301-03 Mode : Mode 22 SN : #20 0992310523860039 Plane : X with Accessory setting : MCSO power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5347.35</td> <td>42.89</td> <td>-11.11</td> <td>54.00</td> <td>29.23</td> <td>34.42</td> <td>9.74</td> <td>30.58</td> <td>100</td> <td>254 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5347.35	42.89	-11.11	54.00	29.23	34.42	9.74	30.58	100	254 Average																																											
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	5347.35	42.89	-11.11	54.00	29.23	34.42	9.74	30.58	100	254 Average																																																																	



WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																
ANT	802.11n HT40 CH62 5310 - R																																
1	Horizontal	Fundamental																															
<p>Peak</p>	 <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 HORIZONTAL : RBW: 1000.000kHz VBW: 3000.000kHz Project : 100301-03 Mode : Mode 22 SN : 420 0092310523860039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5356.56</td> <td>54.08</td> <td>-19.82</td> <td>74.00</td> <td>41.06</td> <td>34.58</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>254 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg		1	5356.56	54.08	-19.82	74.00	41.06	34.58	9.84	30.50	100	254 Peak	<p>-</p>
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg																									
1	5356.56	54.08	-19.82	74.00	41.06	34.58	9.84	30.50	100	254 Peak																							
<p>Avg.</p>	 <p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 HORIZONTAL : RBW: 1000.000kHz VBW: 3.010kHz Project : 100301-03 Mode : Mode 22 SN : 420 0092310523860039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.32</td> <td>44.76</td> <td>-9.24</td> <td>54.00</td> <td>30.04</td> <td>34.58</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>254 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg		1	5350.32	44.76	-9.24	54.00	30.04	34.58	9.84	30.50	100	254 Average	<p>-</p>
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg																									
1	5350.32	44.76	-9.24	54.00	30.04	34.58	9.84	30.50	100	254 Average																							



WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																																																				
ANT	802.11n HT40 CH62 5310 - L																																																																				
1	Vertical	Fundamental																																																																			
Peak	<p>Date: 6 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL RSM: 1000.000kHz VBW: 3000.000kHz Project : 100301-03 Mode : Mode 22 Site : #20 0922310523860039 Plane : X with Accessory setting : MCSO power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>ca</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10998.00</td> <td>51.31</td> <td>-22.69</td> <td>74.00</td> <td>37.73</td> <td>34.38</td> <td>9.78</td> <td>30.58</td> <td>100</td> <td>262</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	ca	deg	1	10998.00	51.31	-22.69	74.00	37.73	34.38	9.78	30.58	100	262	Peak	<p>Date: 8 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL RSM: 1000.000kHz VBW: 3000.000kHz Project : 100301-03 Mode : Mode 22 Site : #20 0922310523860039 Plane : X with Accessory setting : MCSO power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>ca</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>181.51</td> <td>33.21</td> <td>68.30</td> <td>87.43</td> <td>34.55</td> <td>9.83</td> <td>30.58</td> <td>100</td> <td>262</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5310.00</td> <td>94.15</td> <td>.....</td> <td>80.27</td> <td>34.55</td> <td>9.83</td> <td>30.58</td> <td>100</td> <td>262</td> <td>Average</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	ca	deg	1	5310.00	181.51	33.21	68.30	87.43	34.55	9.83	30.58	100	262	Peak	2	5310.00	94.15	80.27	34.55	9.83	30.58	100	262	Average
Freq	Level	Limit	Line	Level Factor	Loss Factor	Remark																																																															
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	ca	deg																																																													
1	10998.00	51.31	-22.69	74.00	37.73	34.38	9.78	30.58	100	262	Peak																																																										
Freq	Level	Limit	Line	Level Factor	Loss Factor	Remark																																																															
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	ca	deg																																																													
1	5310.00	181.51	33.21	68.30	87.43	34.55	9.83	30.58	100	262	Peak																																																										
2	5310.00	94.15	80.27	34.55	9.83	30.58	100	262	Average																																																											
Avg.	<p>Date: 7 Date: 2022-11-09</p> <p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 VERTICAL RSM: 1000.000kHz VBW: 3.0100kHz Project : 100301-03 Mode : Mode 22 Site : #20 0922310523860039 Plane : X with Accessory setting : MCSO power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>ca</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5076.65</td> <td>42.65</td> <td>-11.37</td> <td>54.00</td> <td>29.86</td> <td>34.37</td> <td>9.78</td> <td>30.58</td> <td>100</td> <td>262</td> <td>Average</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	ca	deg	1	5076.65	42.65	-11.37	54.00	29.86	34.37	9.78	30.58	100	262	Average	-																																							
Freq	Level	Limit	Line	Level Factor	Loss Factor	Remark																																																															
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	ca	deg																																																													
1	5076.65	42.65	-11.37	54.00	29.86	34.37	9.78	30.58	100	262	Average																																																										



WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																
ANT	802.11n HT40 CH62 5310 - R																																
1	Vertical	Fundamental																															
Peak	<p> Date: 9 Level (dBuV/m) Date: 2022-11-09 Frequency (MHz) </p> <p> Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL : RBW: 1000.000kHz VBW: 3000.000kHz Project : 100301-03 Mode : Mode 22 SN : 420 0092370523860039 Plane : X with Accessory setting : MCS0 power setting 16 </p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5398.00</td> <td>52.81</td> <td>-21.19</td> <td>74.00</td> <td>38.89</td> <td>34.58</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>262 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg		1	5398.00	52.81	-21.19	74.00	38.89	34.58	9.84	30.50	100	262 Peak	-
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg																									
1	5398.00	52.81	-21.19	74.00	38.89	34.58	9.84	30.50	100	262 Peak																							
Avg.	<p> Date: 10 Level (dBuV/m) Date: 2022-11-09 Frequency (MHz) </p> <p> Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 VERTICAL : RBW: 1000.000kHz VBW: 3.0100kHz Project : 100301-03 Mode : Mode 22 SN : 420 0092370523860039 Plane : X with Accessory setting : MCS0 power setting 16 </p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5398.00</td> <td>45.22</td> <td>-19.78</td> <td>54.00</td> <td>29.38</td> <td>34.58</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>262 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg		1	5398.00	45.22	-19.78	54.00	29.38	34.58	9.84	30.50	100	262 Average	-
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg																									
1	5398.00	45.22	-19.78	54.00	29.38	34.58	9.84	30.50	100	262 Average																							



**U-NII-2A 5250~5350MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)**

WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																																																																					
ANT	802.11ac VHT80 CH58 5290MHz - L																																																																																					
1	Horizontal	Fundamental																																																																																				
Peak	<p>Date: 1 Level (dBuV/m) Date: 2022-11-10</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HP ANT 3117 0107 HORIZONTAL : RBW 1000.000kHz VBW 3000.000kHz Project : 1D0301-03 Mode : Mode 27 SN : #03 C092370522860039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5248.95</td> <td>52.85</td> <td>-21.15</td> <td>74.00</td> <td>39.19</td> <td>34.42</td> <td>9.74</td> <td>30.50</td> <td>100</td> <td></td> <td>255 Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Over	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	dB	cm	deg		1	5248.95	52.85	-21.15	74.00	39.19	34.42	9.74	30.50	100		255 Peak	<p>Date: 3 Level (dBuV/m) Date: 2022-11-10</p> <p>Site : 03CH02-SZ Condition : PART 15.407 3m HP ANT 3117 0107 HORIZONTAL : RBW 1000.000kHz VBW 3000.000kHz Project : 1D0301-03 Mode : Mode 27 SN : #03 C092370522860039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>101.49</td> <td>33.19</td> <td>68.39</td> <td>87.54</td> <td>34.53</td> <td>9.83</td> <td>30.50</td> <td>100</td> <td></td> <td>255 Peak</td> </tr> <tr> <td>2</td> <td>5290.00</td> <td>104.05</td> <td>.....</td> <td>60.22</td> <td>35.23</td> <td>9.83</td> <td>30.50</td> <td>100</td> <td></td> <td></td> <td>255 Average</td> </tr> </tbody> </table>	Freq	Level	Limit	Over	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	dB	cm	deg		1	5290.00	101.49	33.19	68.39	87.54	34.53	9.83	30.50	100		255 Peak	2	5290.00	104.05	60.22	35.23	9.83	30.50	100			255 Average
Freq	Level	Limit	Over	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark																																																																											
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	5248.95	52.85	-21.15	74.00	39.19	34.42	9.74	30.50	100		255 Peak																																																																											
Freq	Level	Limit	Over	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark																																																																											
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	5290.00	101.49	33.19	68.39	87.54	34.53	9.83	30.50	100		255 Peak																																																																											
2	5290.00	104.05	60.22	35.23	9.83	30.50	100			255 Average																																																																											
Avg.	<p>Date: 2 Level (dBuV/m) Date: 2022-11-10</p> <p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HP ANT 3117 0107 HORIZONTAL : RBW 1000.000kHz VBW 3000.000kHz Project : 1D0301-03 Mode : Mode 27 SN : #03 C092370522860039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5249.10</td> <td>42.83</td> <td>-11.17</td> <td>54.00</td> <td>29.17</td> <td>34.42</td> <td>9.74</td> <td>30.50</td> <td>100</td> <td></td> <td>255 Average</td> </tr> </tbody> </table>	Freq	Level	Limit	Over	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	dB	cm	deg		1	5249.10	42.83	-11.17	54.00	29.17	34.42	9.74	30.50	100		255 Average	-																																																
Freq	Level	Limit	Over	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark																																																																											
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	5249.10	42.83	-11.17	54.00	29.17	34.42	9.74	30.50	100		255 Average																																																																											



WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																
ANT	802.11ac VHT80 CH58 5290MHz - R																																
1	Horizontal	Fundamental																															
Peak	<p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 HORIZONTAL : RBW: 1000.000kHz VBW: 3000.000kHz Project : 100301-03 Mode : Mode 27 Site : 420 G092310523860039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5398.08</td> <td>55.17</td> <td>-18.83</td> <td>74.00</td> <td>41.25</td> <td>34.58</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>255 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg		1	5398.08	55.17	-18.83	74.00	41.25	34.58	9.84	30.50	100	255 Peak	-
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg																									
1	5398.08	55.17	-18.83	74.00	41.25	34.58	9.84	30.50	100	255 Peak																							
Avg.	<p>Site : 03CH02-SZ Condition : PART 15.407 AVG 3m HF ANT_3117_0107 HORIZONTAL : RBW: 1000.000kHz VBW: 3.010kHz Project : 100301-03 Mode : Mode 27 Site : 420 G092310523860039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5398.32</td> <td>47.74</td> <td>-6.26</td> <td>54.00</td> <td>33.82</td> <td>34.58</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>255 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg		1	5398.32	47.74	-6.26	54.00	33.82	34.58	9.84	30.50	100	255 Average	-
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg																									
1	5398.32	47.74	-6.26	54.00	33.82	34.58	9.84	30.50	100	255 Average																							



WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																																																									
ANT	802.11ac VHT80 CH58 5290MHz - L																																																																									
1	Vertical	Fundamental																																																																								
Peak	<p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL RSW: 1000.000kHz VBW:3000.000kHz Project : 1D0301-03 Mode : Mode 27 Site : #20 G992310523866039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5131.25</td> <td>53.01</td> <td>-20.99</td> <td>74.00</td> <td>39.36</td> <td>34.41</td> <td>9.74</td> <td>30.50</td> <td>100</td> <td>273 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5131.25	53.01	-20.99	74.00	39.36	34.41	9.74	30.50	100	273 Peak	<p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL RSW: 1000.000kHz VBW:3000.000kHz Project : 1D0301-03 Mode : Mode 27 Site : #20 G992310523866039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>98.28</td> <td>29.90</td> <td>68.38</td> <td>84.34</td> <td>34.53</td> <td>9.83</td> <td>30.50</td> <td>100</td> <td>273 Peak</td> </tr> <tr> <td>2</td> <td>5290.00</td> <td>91.80</td> <td>.....</td> <td>77.22</td> <td>34.53</td> <td>9.83</td> <td>30.50</td> <td>100</td> <td>273 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5290.00	98.28	29.90	68.38	84.34	34.53	9.83	30.50	100	273 Peak	2	5290.00	91.80	77.22	34.53	9.83	30.50	100	273 Average
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	5131.25	53.01	-20.99	74.00	39.36	34.41	9.74	30.50	100	273 Peak																																																																
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	5290.00	98.28	29.90	68.38	84.34	34.53	9.83	30.50	100	273 Peak																																																																
2	5290.00	91.80	77.22	34.53	9.83	30.50	100	273 Average																																																																	
Avg.	<p>Site : 03CH02-SZ Condition : PART 15.407 3m HF ANT_3117_0107 VERTICAL RSW: 1000.000kHz VBW:3000.000kHz Project : 1D0301-03 Mode : Mode 27 Site : #20 G992310523866039 Plane : X with Accessory setting : MCS0 power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5134.75</td> <td>42.29</td> <td>-11.71</td> <td>54.00</td> <td>28.64</td> <td>34.41</td> <td>9.74</td> <td>30.50</td> <td>100</td> <td>273 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5134.75	42.29	-11.71	54.00	28.64	34.41	9.74	30.50	100	273 Average	-																																									
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	5134.75	42.29	-11.71	54.00	28.64	34.41	9.74	30.50	100	273 Average																																																																