Prüfbericht-Nr.: *Test report no.:*	CN26XBEJ 001	**Auftrags-Nr.:** *Order no.*:	48304996	Seite 1 von 41 *Page 1 of 41*
Kunden-Referenz-Nr.: *Client reference no.:*	N/A	**Auftragsdatum:** *Order date:*	2026-05-06	
Auftraggeber: *Client:*	Fluke Corporation 6920 Seaway Blvd, 9090, Everett, Washington, United States			
Prüfgegenstand: *Test item:*	Acoustic Imager			
Bezeichnung / Typ-Nr.: *Identification / Type no.:*	ii1050, ii1030			
Auftrags-Inhalt: *Order content*:	FCC Part 15E Test report (WiFi 5GHz)			
Prüfgrundlage: *Test specification:*	FCC 47CFR Part 15: Subpart E Section 15.407			
Wareneingangsdatum: *Date of sample receipt:*	2026-05-07			
Prüfmuster-Nr.: *Test sample no:*	A004271216-001 A004271216-002			
Prüfzeitraum: *Testing period:*	2026-06-12 - 2026-06-26			
Ort der Prüfung: *Place of testing:*	TÜV Rheinland Taiwan Ltd. New Taipei Branch			
Prüflaboratorium: *Testing laboratory:*	TÜV Rheinland Taiwan Ltd. Taipei Testing Laboratories			
Prüfergebnis*: *Test result*:*	Pass			

überprüft von: *compiled by:*		**genehmigt von:** authorized by:	
Datum: *Date:* 2026-07-15		**Ausstellungsdatum:** *Issue date:* 2026-07-15	
Stellung */ Position:*	Flight Hsieh Project Engineer	**Stellung** */ Position:*	Zeus Chen Lab Manager

Sonstiges */ Other:*

Zustand des Prüfgegenstandes bei Anlieferung: Prüfmuster vollständig und unbeschädigt
Condition of the test item at delivery: *Test item complete and undamaged*

* Legende:	1 = sehr gut	2 = gut	3 = befriedigend	4 = ausreichend	5 = mangelhaft
	P(ass) = entspricht o.g. Prüfgrundlage(n)		F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	N/A = nicht anwendbar	N/T = nicht getestet
** Legend:*	*1 = very good*	*2 = good*	*3 = satisfactory*	*4 = sufficient*	*5 = poor*
	P(ass) = passed a.m. test specification(s)		*F(ail) = failed a.m. test specification(s)*	*N/A = not applicable*	*N/T = not tested*

Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.
This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.

Anmerkungen
Remarks

1	Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben. Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden. *The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system.* *Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.*
2	Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature *As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature*
3	Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt. *Test clauses with remark of * are subcontracted to qualified subcontractors and descripted under the respective test clause in the report.* *Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.*
4	Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnisen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2023, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezueglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019. *The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the “Zero Guard Band Rule” and “Simple Acceptance” in accordance with ILAC G8:2019 and IEC Guide 115:2023, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.*

TEST SUMMARY

Report Section	FCC Clause	Test Item	Result
5.1.1	15.407(a) & 15.203	Antenna Requirement	Pass
5.1.2	15.407(a)	Maximum Conducted Output Power	Pass
5.1.3	15.407(h)(1)	Transmit Power Control (TPC)	Pass
5.1.4	15.407(a)	26 dB Bandwidth	Pass
5.1.4	2.1049	99% Occupied Bandwidth	Pass
5.1.5	15.407(e)	6 dB Bandwidth (U-NII-3 Band only)	Pass
5.1.6	15.407(a)	Power Spectral Density	Pass
5.1.7	15.407(b) & 15.205 & 15.209	Radiated Spurious Emissions and Band Edges	Pass
5.1.8	15.407(h) & KDB 905462 D02	Dynamic Frequency Selection	Pass
5.2.1	15.207	Mains Conducted Emission	Pass

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

Contents

HISTORY OF THIS TEST REPORT 6

1. GENERAL REMARKS 7
1.1 COMPLEMENTARY MATERIALS 7
1.2 DECISION RULE OF CONFORMITY 7

2. TEST SITES 8
2.1 TEST LABORATORY 8
2.2 TEST FACILITY 8
2.3 TRACEABILITY 9
2.4 CALIBRATION 9
2.5 MEASUREMENT UNCERTAINTY 9

3. GENERAL PRODUCT INFORMATION 10
3.1 PRODUCT FUNCTION AND INTENDED USE 10
3.2 SYSTEM DETAILS AND RATINGS 10
3.3 NOISE GENERATING AND NOISE SUPPRESSING PARTS 11
3.4 SUBMITTED DOCUMENTS 11

4. TEST SET-UP AND OPERATION MODES 12
4.1 PRINCIPLE OF CONFIGURATION SELECTION 12
4.2 CARRIER FREQUENCY AND CHANNEL 13
4.3 TEST OPERATION AND TEST SOFTWARE 14
4.4 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT 16
4.5 TEST SETUP DIAGRAM 16
4.6 DUTY CYCLE OF TEST SIGNAL 18

5. TEST RESULTS 19
5.1 TRANSMITTER REQUIREMENT & TEST SUITES 19
5.1.1 Antenna Requirement 19
5.1.2 Maximum Conducted Output Power 20
5.1.3 Transmit Power Control (TPC) 25
5.1.4 26 dB Bandwidth and 99% Occupied Bandwidth 26
5.1.5 6 dB Bandwidth (5725-5850MHz) 27
5.1.6 Power Spectral Density 28
5.1.7 Radiated Spurious Emissions 30
5.1.8 Dynamic Frequency Selection 35
5.2 MAINS EMISSION 40
5.2.1 Mains Conducted Emission 40

APPENDIX A - TEST RESULT OF CONDUCTED

APPENDIX B - TEST RESULT OF RADIATED EMISSIONS & MAINS CONDUCTED EMISSION

APPENDIX SP - PHOTOGRAPHS OF TEST SETUP

APPENDIX EP - PHOTOGRAPHS OF EUT

HISTORY OF THIS TEST REPORT

Revision	Description	Date Issued
R01	Original Release	2026-07-15

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:
Appendix A - Test Result of Conducted
Appendix B - Test Result of Radiated Emissions & Mains Conducted Emission
Appendix SP - Photographs of Test Setup
Appendix EP - Photographs of EUT

Applied Standard and Test Levels

Radio
FCC 47CFR Part 15: Subpart E Section 15.407
FCC 47CFR Part 2: Subpart J Section 2.1049
ANSI C63.10-2020
KDB 789033 D02 General UNII Test Procedures New Rules v02r01
KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02

1.2 Decision Rule of Conformity

The decision rule of conformity of this test report is following the requirements of the requested standard in the quotation, and agreed among testing laboratory and manufacturer (applicant) to exclude the consideration of Measurement Uncertainty, unless it is required by the specific standard.

2. Test Sites

2.1 Test Laboratory

TÜV Rheinland Taiwan Ltd. Taipei Testing Laboratories

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.
Taipei City 105
Taiwan (R.O.C.)

2.2 Test Facility

TÜV Rheinland Taiwan Ltd. Taipei Testing Laboratories

No.458-18, 458-19, Sec. 2, Fenliao Rd., Linkou Dist.,
New Taipei City 244
Taiwan (R.O.C.)
FCC Registration No.: 180491 (TW3567)
ISED Registration No.: 25563 (CABID TW3567)

2.3 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically in a suitably accredited Calibration Lab. Additionally all equipment is verified for proper performance on a regular basics using in house standards or comparisons.

2.5 Measurement Uncertainty

All measurement uncertainty values are shown with a coverage factor of k=2 to indicate a 95% level of confidence.

Emission Measurement Uncertainty

Parameter	Uncertainty
Radiated Emission (9 kHz ~ 30 MHz)	± 1.15 dB
Radiated Emission (30 MHz ~ 200 MHz)	± 1.32 dB
Radiated Emission (200 MHz ~ 1 GHz)	± 1.31 dB
Radiated Emission (1 GHz ~ 18 GHz)	± 1.53 dB
Radiated Emission (18 GHz ~ 40 GHz)	± 2.50 dB
Mains Conducted Emission	± 1.65 dB

3. General Product Information

3.1 Product Function and Intended Use

The EUT is a Acoustic Imager. It contains a WLAN compatible module enabling the user to communicate data through a Wireless interface.
For details refer to the User Guide, Data Sheet and Circuit Diagram.

3.2 System Details and Ratings

Basic Information of EUT

Item	EUT information
Kind of Equipment/Test Item	Acoustic Imager
Type Identification	ii1050, ii1030
FCC ID	T68-II10X

Technical Specification of EUT

Item	EUT information
Operating Frequency	Band 1: 5180 MHz ~ 5240 MHz Band 2: 5260 MHz ~ 5320 MHz Band 3: 5500 MHz ~ 5700 MHz Band 4: 5745 MHz ~ 5825 MHz
Channel Number	Band 1: 4 for 802.11a, 802.11n HT20 2 for 802.11n HT40 1 for 802.11ac VHT80 Band 2: 4 for 802.11a, 802.11n HT20 2 for 802.11n HT40 1 for 802.11ac VHT80 Band 3: 8 for 802.11a, 802.11n HT20 4 for 802.11n HT40 1 for 802.11ac VHT80 Band 4: 5 for 802.11a, 802.11n HT20 2 802.11n HT40 1 for 802.11ac VHT80
Data Rate	802.11a: 54.0 / 48.0 / 36.0 / 24.0 / 18.0 / 12.0 / 9.0 / 6.0 Mbps 802.11n: up to MCS7 802.11ac: up to MCS9
Operation Voltage	10.8 Vdc (Battery) 20 Vdc (Adapter)
Modulation	OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)

Item	EUT information
Maximum Output Power (mW)	5180 ~ 5240 MHz: 23.71 5260 ~ 5320 MHz: 17.99 5500 ~ 5720 MHz: 16.63 5745 ~ 5825 MHz: 7.98
Maximum EIRP (mW)	5260 ~ 5320 MHz: 40.27 5500 ~ 5720 MHz: 37.24
DFS Mode	Slave without radar detection
Antenna Information	Refer to 5.1.1
Accessory Device	Refer to 4.4

Note:

1. All models are listed below.

Main Model	Series Model	Difference
ii1050	ii1030	All models are electrically identical, the only difference is the software.

3.3 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.4 Submitted Documents

- Circuit Diagram
- Instruction Manual
- Rating Label
- Technical Description

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The test modes were adapted accordingly in reference to the instructions for use.
During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output expected by the customer and is going to be fixed on the firmware of the final end product.

Table for Parameters of Test Software Setting

802.11a		802.11n HT20 802.11ac VHT20		802.11n HT40 802.11ac VHT40		802.11ac VHT80	
Channel	Power Setting	Channel	Power Setting	Channel	Power Setting	Channel	Power Setting
36	Auto (CLPC 13)	36	Auto (CLPC 12)	38	CLPC 13	42	CLPC 13
40	Auto (CLPC 13)	40	Auto (CLPC 12)	46	CLPC 13	58	CLPC 13
48	Auto (CLPC 13)	48	Auto (CLPC 13)	54	CLPC 13	106	CLPC 10
52	Auto (CLPC 14)	52	Auto (CLPC 12)	62	CLPC 13	122	CLPC 8
60	Auto (CLPC 13)	60	Auto (CLPC 12)	102	CLPC 10	155	Auto (CLPC 7)
64	Auto (CLPC 14)	64	Auto (CLPC 13)	110	CLPC 8		
100	CLPC 10	100	CLPC 10	134	CLPC 8		
116	CLPC 8	116	CLPC 8	151	Auto (CLPC 7)		
140	CLPC 8	140	CLPC 8	159	Auto (CLPC 7)		
149	Auto (CLPC 7)	149	Auto (CLPC 7)				
157	Auto (CLPC 7)	157	Auto (CLPC 7)				
165	Auto (CLPC 7)	165	Auto (CLPC 7)				

4.2 Carrier Frequency and Channel

Band	Channel	Frequency (MHz)	802.11a 802.11n HT20 802.11ac VHT20	802.11n HT40 802.11ac VHT40	802.11ac VHT80
U-NII-1 (Band 1)	36	5180	V		
	38	5190		V	
	40	5200	V		
	42	5210			V
	44	5220	V		
	46	5230		V	
	48	5240	V		
U-NII-2A (Band 2)	52	5260	V		
	54	5270		V	
	56	5280	V		
	58	5290			V
	60	5300	V		
	62	5310		V	
	64	5320	V		
U-NII-2C (Band 3)	100	5500	V		
	102	5510		V	
	104	5520	V		
	106	5530			V
	108	5540	V		
	110	5550		V	
	112	5560	V		
	116	5580	V		
	118	5590		V	
	132	5660	V		
	134	5670		V	
	136	5680	V		
	140	5700	V		
U-NII-3 (Band 4)	149	5745	V		
	151	5755		V	
	153	5765	V		
	155	5775			V
	157	5785	V		
	159	5795		V	
	161	5805	V		
	165	5825	V		

4.3 Test Operation and Test Software

Setup for testing: Test samples are provided with a USB interface which makes it possible to control them through a test software installed on a notebook computer.
This software was running on the laptop computer connected to the EUT. It was used to enable the operation modes listed as below.

Test Software	QRCT_v3.0.303.0

The samples were used as follows:
A004271216-001
A004271216-002
Full test was applied on all test modes, but only worst case was shown.

EUT Configure Mode	Applicable To				Description
	Antenna Port Conducted Measurement	Radiated Spurious Emissions above 1 GHz	Radiated Spurious Emissions below 1 GHz	Mains Conducted Emission	
-	√	√	√	√	-

Note:
1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when position on **Z-plane**.
2. "-" means no effect.

Antenna Port Conducted Measurement

☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency (MHz)	Available Channel	Tested Channel	Date Rate (Mbps)
-	802.11a	5180-5240	36 to 48	36, 40, 48	6.0
-		5260-5320	52 to 64	52, 60, 64	
-		5500-5700	100 to 140	100, 116, 140	
-		5745-5825	149 to 165	149, 157, 165	
-	802.11n HT20 (Power only)	5180-5240	36 to 48	36, 40, 48	MCS0
-		5260-5320	52 to 64	52, 60, 64	
-		5500-5700	100 to 140	100, 116, 140	
-		5745-5825	149 to 165	149, 157, 165	
-	802.11n HT40 (Power only)	5180-5240	38 to 46	38, 46	MCS0
-		5260-5320	54 to 62	54, 62	
-		5500-5700	102 to 134	102, 110, 134	
-		5745-5825	151 to 159	151, 159	
-	802.11ac VHT20	5180-5240	36 to 48	36, 40, 48	NSS1 MCS0
-		5260-5320	52 to 64	52, 60, 64	
-		5500-5700	100 to 140	100, 116, 140	
-		5745-5825	149 to 165	149, 157, 165	
-	802.11ac VHT40	5180-5240	38 to 46	38, 46	NSS1 MCS0
-		5260-5320	54 to 62	54, 62	
-		5500-5700	102 to 134	102, 110, 134	
-		5745-5825	151 to 159	151, 159	
-	802.11ac VHT80	5180-5240	42	42	NSS1 MCS0
-		5260-5320	58	58	
-		5500-5700	106	106	
-		5745-5825	155	155	

Radiated Spurious Emissions (Above 1 GHz)

☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency (MHz)	Available Channel	Tested Channel	Date Rate (Mbps)
EUT with Adapter	802.11a	5180-5240	36 to 48	36, 40, 48	6.0
		5260-5320	52 to 64	52, 60, 64	
		5500-5700	100 to 140	100, 116, 140	
		5745-5825	149 to 165	149, 157, 165	
	802.11ac VHT20	5180-5240	36 to 48	36, 40, 48	NSS1 MCS0
		5260-5320	52 to 64	52, 60, 64	
		5500-5700	100 to 140	100, 116, 140	
		5745-5825	149 to 165	149, 157, 165	
	802.11ac VHT40	5180-5240	38 to 46	38, 46	NSS1 MCS0
		5260-5320	54 to 62	54, 62	
		5500-5700	102 to 134	102, 110, 134	
		5745-5825	151 to 159	151, 159	
	802.11ac VHT80	5180-5240	42	42	NSS1 MCS0
		5260-5320	58	58	
		5500-5700	106	106	
		5745-5825	155	155	

Radiated Spurious Emissions (Below 1 GHz)

☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency (MHz)	Available Channel	Tested Channel	Date Rate (Mbps)
EUT Standalone	802.11a	5180-5240	36 to 48	36	6.0
EUT with Adapter	802.11a	5180-5240	36 to 48	36	6.0

Mains Conducted Emission Test

☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency (MHz)	Available Channel	Tested Channel	Date Rate (Mbps)
EUT with Adapter	802.11a	5180-5240	36 to 48	36	6.0

Test Condition

Test Item	Ambient Temperature	Relative Humidity	Tested by
Conducted Measurement	22.7-23.3 °C	57-58 %	Jerome Chang
Radiated Spurious Emissions above 1 GHz	23.7-28.3 °C	51-56 %	Chuan Chu
Radiated Spurious Emissions below 1 GHz	23.7-28.3 °C	51-56 %	Chuan Chu
Mains Conducted Emission	23.7-28.3 °C	51-56 %	Chuan Chu

4.4 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

Accessory of EUT

No.	Product	Brand	Model	Description
A	Adapter	ABP	PD0657C-065A	I/P: 100-240 Vac, 1.5 A O/P: 20 Vdc, 3.25 A
-	Battery	RRC Power Solutions	RRC2040	10.8 Vdc, 3350 mAh
B	USB Cable	ABP	1.5M usb-c cable	--


Support Unit

Support Unit					
No.	Description	Brand	Model	S/N	Remark
1	Dongle	Sandisk	SDDDC4	N/A	--
-	Notebook	DELL	Latitude 7490	887V7Y2	--


4.5 Test Setup Diagram

<Radiated Spurious Emissions mode>


EUT Standalone

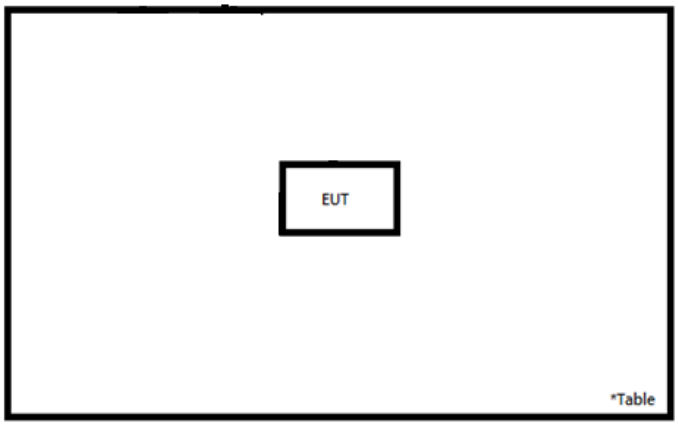

EUT with Adapter

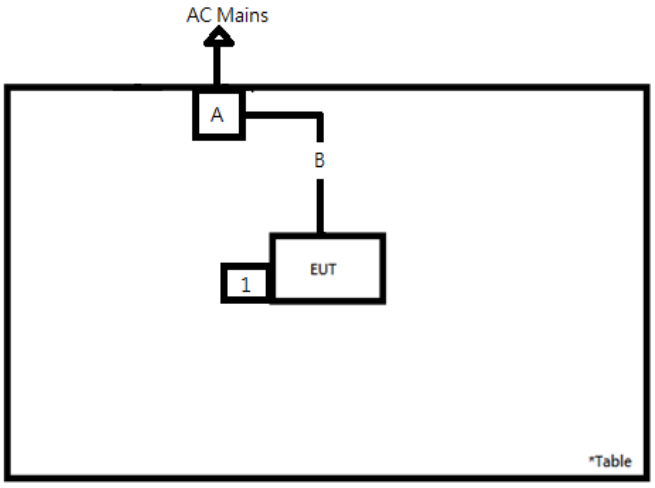


<Mains Conducted Emission mode>

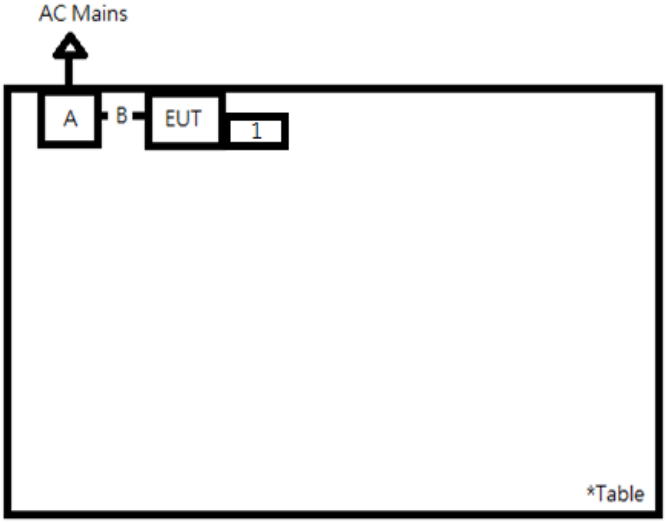


4.6 Duty Cycle of Test Signal

Mode	On + Off Time (ms)	On Time (ms)	Duty Cycle (%)	Duty Factor (dB)
802.11a	2.065	2.025	98.06	0.08
802.11ac VHT20	1.940	1.900	97.94	0.09
802.11ac VHT40	0.975	0.935	95.90	0.18
802.11ac VHT80	0.495	0.450	90.91	0.41


802.11a

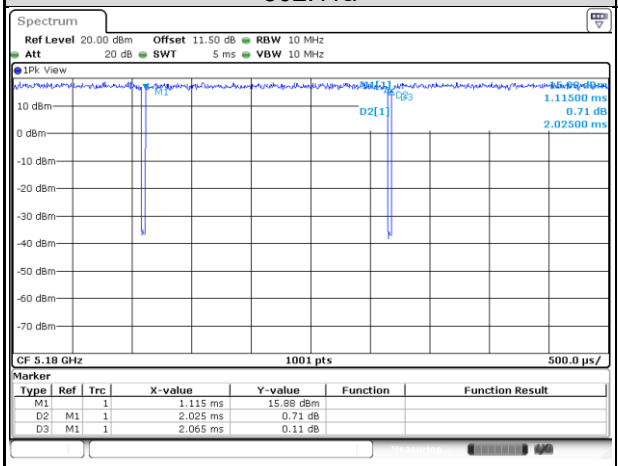


802.11ac VHT20

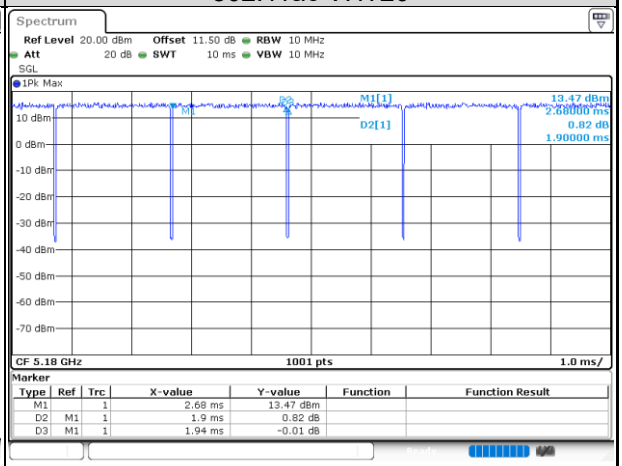

802.11ac VHT40

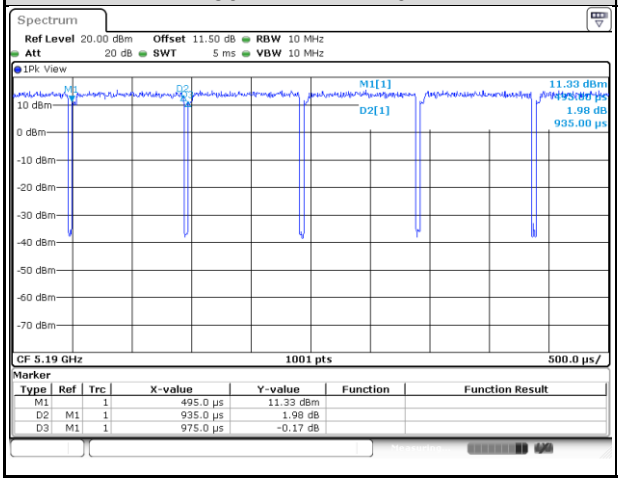

802.11ac VHT80

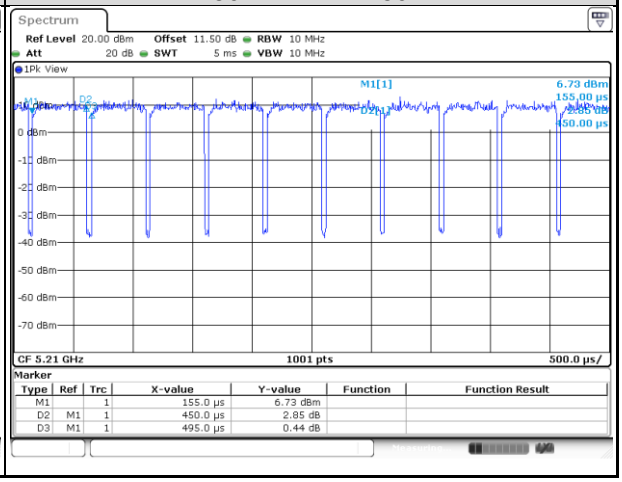

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

Requirement Use of approved antennas only

According to the manufacturer declaration, the EUT has an antenna with a directional gain of 3.5 dBi. The antenna is FPC antenna with no possibility of replacement with a non-approved antenna by the end-user. Therefore, the EUT is considered to comply with this provision.

Refer to EUT photo for details.

5.1.2 Maximum Conducted Output Power

Limit

Operation Band	EUT Category	Limit
U-NII-1	Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p ≦ 125 mW (21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
	Fixed point-to-point Access Point	1 Watt (30 dBm)
	Indoor Access Point	1 Watt (30 dBm)
	Mobile and Portable client device	250 mW (24 dBm)
U-NII-2A	---	250 mW (24 dBm) or 11 dBm + 10 log B*
U-NII-2C	---	250 mW (24 dBm) or 11 dBm + 10 log B*
U-NII-3	---	1 Watt (30 dBm)

Note: B* is the 26 dB emission bandwidth in megahertz

Kind of Test Site Shielded room

Test Setup



Test Instruments


Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Power Meter	Anritsu	ML2495A	1901008	2026/02/24	2027/02/23	2026/06/19	2026/06/19
Power Sensor	Anritsu	MA2411B	1725269	2026/02/24	2027/02/23	2026/06/19	2026/06/19

Test Procedures

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst and set the detector to AVERAGE. Duty factor is not added to measured value.

Gate Setup:

1. Select the [Gates] tab in the software.
2. Check the box (e.g., Gate 1) to display it on the trace.
3. Set Gate Position
   - Drag the gate line with the mouse to the desired point on the waveform, or
   - Enter Values using the [Set] button and input start/stop times.
4. Switch to the next measurement channel and repeat the same gate setup procedure.
5. The instrument calculates average/peak power only within the defined gate interval.

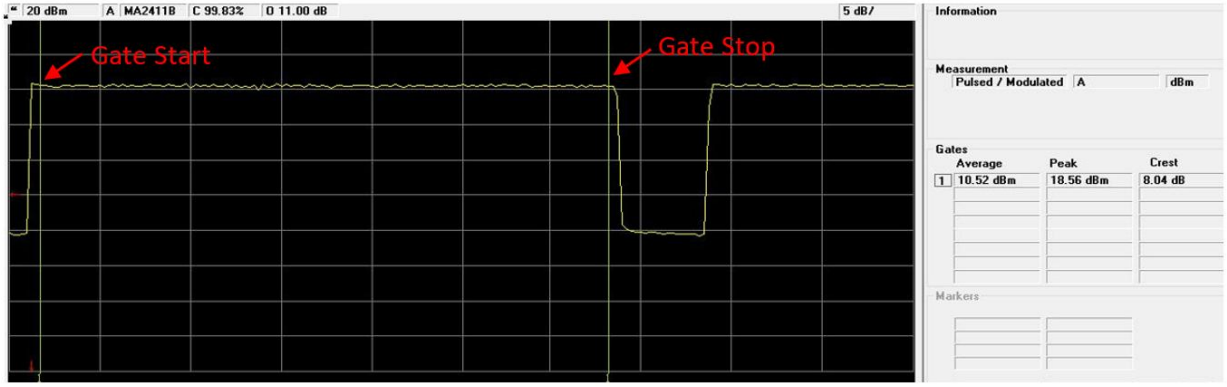

Test Result

<802.11a>

Channel	Channel Frequency (MHz)	Average Output Power		Limit (dBm)
		(dBm)	(mW)	
36	5180	13.75	23.71	30.00
40	5200	12.97	19.82	30.00
48	5240	12.24	16.75	30.00
52	5260	12.55	17.99	24.00
60	5300	11.76	15.00	24.00
64	5320	11.79	15.10	24.00
100	5500	12.21	16.63	24.00
116	5580	9.40	8.71	24.00
140	5700	10.17	10.40	24.00
149	5745	9.02	7.98	30.00
157	5785	8.91	7.78	30.00
165	5825	7.77	5.98	30.00

Note:
For U-NII-2A, U-NII-2C Band:
1. 11 dBm + 10log (24.38) = 24.87 dBm > 24 dBm.
2. 11 dBm + 10log (24.46) = 24.88 dBm > 24 dBm.
3. 11 dBm + 10log (24.82) = 24.95 dBm > 24 dBm.
4. 11 dBm + 10log (24.74) = 24.93 dBm > 24 dBm.
5. 11 dBm + 10log (24.70) = 24.93 dBm > 24 dBm.
6. 11 dBm + 10log (23.78) = 24.76 dBm > 24 dBm.

<802.11n HT20>

Channel	Channel Frequency (MHz)	Average Output Power		Limit (dBm)
		(dBm)	(mW)	
36	5180	11.97	15.74	30.00
40	5200	11.73	14.89	30.00
48	5240	11.26	13.37	30.00
52	5260	11.10	12.88	24.00
60	5300	10.28	10.67	24.00
64	5320	10.92	12.36	24.00
100	5500	11.84	15.28	24.00
116	5580	9.06	8.05	24.00
140	5700	9.74	9.42	24.00
149	5745	7.93	6.21	30.00
157	5785	8.18	6.58	30.00
165	5825	7.16	5.20	30.00

<802.11n HT40>

Channel	Channel Frequency (MHz)	Average Output Power		Limit (dBm)
		(dBm)	(mW)	
38	5190	12.98	19.86	30.00
46	5230	12.50	17.78	30.00
54	5270	11.82	15.21	24.00
62	5310	11.78	15.07	24.00
102	5510	11.84	15.28	24.00
110	5550	9.69	9.31	24.00
134	5670	9.95	9.89	24.00
151	5755	7.42	5.52	30.00
159	5795	7.62	5.78	30.00

<802.11ac VHT20>

Channel	Channel Frequency (MHz)	Average Output Power		Limit (dBm)
		(dBm)	(mW)	
36	5180	12.22	16.67	30.00
40	5200	12.02	15.92	30.00
48	5240	11.49	14.09	30.00
52	5260	11.32	13.55	24.00
60	5300	10.57	11.40	24.00
64	5320	11.15	13.03	24.00
100	5500	12.09	16.18	24.00
116	5580	9.27	8.45	24.00
140	5700	9.96	9.91	24.00
149	5745	8.19	6.59	30.00
157	5785	8.45	7.00	30.00
165	5825	7.38	5.47	30.00

Note:
For U-NII-2A, U-NII-2C Band:
1. 11 dBm + 10log (25.77) = 25.11 dBm > 24 dBm.
2. 11 dBm + 10log (25.85) = 25.13 dBm > 24 dBm.
3. 11 dBm + 10log (24.94) = 24.97 dBm > 24 dBm.
4. 11 dBm + 10log (25.69) = 25.10 dBm > 24 dBm.
5. 11 dBm + 10log (25.61) = 25.08 dBm > 24 dBm.
6. 11 dBm + 10log (25.81) = 25.12 dBm > 24 dBm.

<802.11ac VHT40>

Channel	Channel Frequency (MHz)	Average Output Power		Limit (dBm)
		(dBm)	(mW)	
38	5190	13.22	20.99	30.00
46	5230	12.79	19.01	30.00
54	5270	12.05	16.03	24.00
62	5310	12.02	15.92	24.00
102	5510	12.11	16.26	24.00
110	5550	9.91	9.79	24.00
134	5670	10.22	10.52	24.00
151	5755	7.63	5.79	30.00
159	5795	7.89	6.15	30.00

Note:
For U-NII-2A, U-NII-2C Band:
1. 11 dBm + 10log (41.72) = 27.20 dBm > 24 dBm.
2. 11 dBm + 10log (41.80) = 27.21 dBm > 24 dBm.
3. 11 dBm + 10log (41.48) = 27.18 dBm > 24 dBm.
4. 11 dBm + 10log (41.64) = 27.19 dBm > 24 dBm.
5. 11 dBm + 10log (41.48) = 27.18 dBm > 24 dBm.

<802.11ac VHT80>

Channel	Channel Frequency (MHz)	Average Output Power		Limit (dBm)
		(dBm)	(mW)	
42	5210	13.23	21.04	30.00
58	5290	11.77	15.03	24.00
106	5530	12.13	16.33	24.00
155	5775	7.27	5.33	30.00

Note:
For U-NII-2A, U-NII-2C Band:
1. 11 dBm + 10log (82.96) = 30.19 dBm > 24 dBm.
2. 11 dBm + 10log (82.96) = 30.19 dBm > 24 dBm.

5.1.3 Transmit Power Control (TPC)

Requirement

U-NII devices operating in the 5.25-5.35 GHz band and the 5.47-5.725 GHz band shall employ a TPC mechanism. The U-NII device is required to have capability to operate at least 6 dB below the mean EIRP value of 30 dBm. A TPC mechanism is not required for systems with an e.i.r.p of less than 500 mW.


Maximum EIRP of this device is 40.27 mW which is less than 500mW, therefore, TPC function is not required.

TPC	E.I.R.P	15.407(h)(1)
	> 500 mW	The TPC mechanism is required for system with an E.I.R.P. of above 500 mW.
V	< 500 mW	-

5.1.4 26 dB Bandwidth and 99% Occupied Bandwidth

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV	101512	2026/02/24	2027/02/23	2026/06/19	2026/06/19

Test Procedure

a. Set RBW = approximately 1% of the emission bandwidth.
b. Set the VBW > RBW.
c. Detector = Peak.
d. Trace mode = max hold.
e. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
f. For 99% Bandwidth Measurement, the transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to PEAK. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean power of a given emission.


Test Results

Please refer to Appendix A

5.1.5 6 dB Bandwidth (5725-5850MHz)

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV	101512	2026/02/24	2027/02/23	2026/06/19	2026/06/19

Test Procedure

MEASUREMENT PROCEDURE REF

a. Set resolution bandwidth (RBW) = 100 kHz
b. Set the video bandwidth (VBW) ≥ 3 x RBW, Detector = Peak.
c. Trace mode = max hold.
d. Sweep = auto couple.
e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Test Results

Please refer to Appendix A

5.1.6 Power Spectral Density

Limit


For the 5.15~5.25GHz Bands:
For mobile and portable client devices in the 5.15~5.25GHz band, the Maximum Power spectral density shall not exceed 11dBm/MHz. For an indoor access point operating in the band 5.15~5.25GHz, the maximum power spectral density shall not exceed 17dBm/MHz.

For the 5.25~5.35GHz and 5.47~5.725GHz Bands:
The maximum power spectral density shall not exceed 11dBm/MHz.

For the 5.745~5.85GHz Bands:
The maximum power spectral density shall not exceed 30dBm/500kHz.

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV	101512	2026/02/24	2027/02/23	2026/06/19	2026/06/19

Test Procedure

For U-NII-1, U-NII-2A, U-NII-2C band:

Using method SA-1

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 1 MHz, Set VBW ≥ 3 MHz, Detector = RMS
3. Sweep time = auto, trigger set to “free run”.
4. Trace average at least 100 traces in power averaging mode.
5. Record the max value

Using method SA-2

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 1 MHz, Set VBW ≥ 3 MHz, Detector = RMS
3. Sweep time = auto, trigger set to “free run”.
4. Trace average at least 100 traces in power averaging mode.
5. Record the max value and add 10 log (1/duty cycle)

※For U-NII-3:

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 500 kHz, Set VBW ≥ 3 RBW, Detector = RMS
3. Use the peak marker function to determine the maximum power level in any 500 kHz band segment within the fundamental EBW.
4. Sweep time = auto, trigger set to “free run”.
5. Trace average at least 100 traces in power averaging mode.
6. Record the max value and add 10 log (1/duty cycle)

Test Results

Please refer to Appendix A

5.1.7 Radiated Spurious Emissions


Limit

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must comply with the radiated emission limits specified in §15.209(a).
Emissions radiated outside the restricted and authorized frequency bands must either comply with the radiated emission limits specified for the restricted bands or in §15.407(b).


Kind of Test Site 3m Semi-Anechoic Chamber

Test Setup


<Radiated Emissions below 30 MHz>

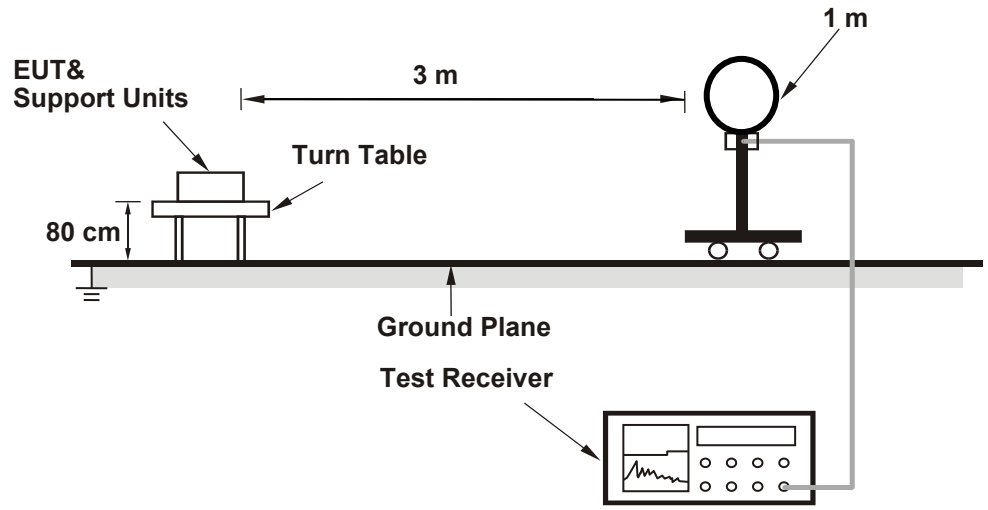

<Radiated Emissions 30 MHz to 1 GHz>

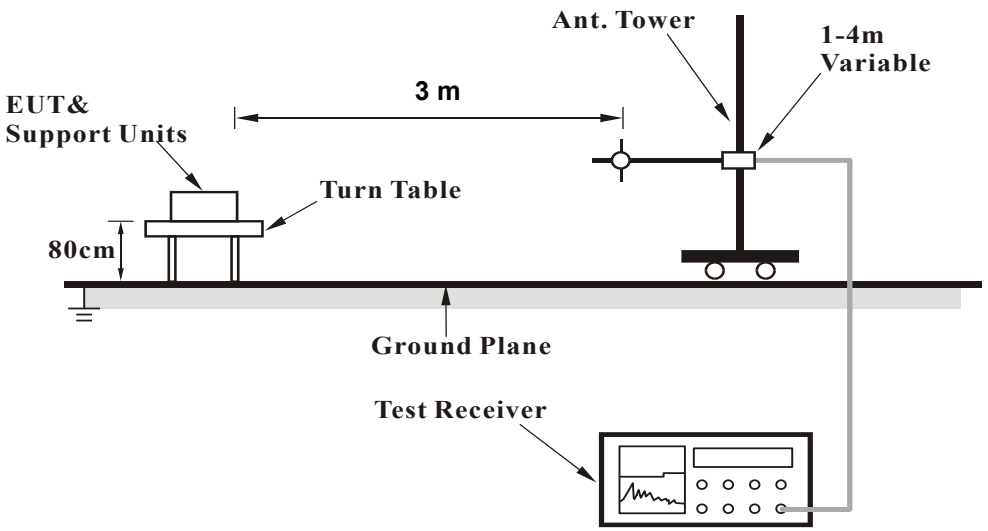

<Radiated Emissions above 1 GHz>

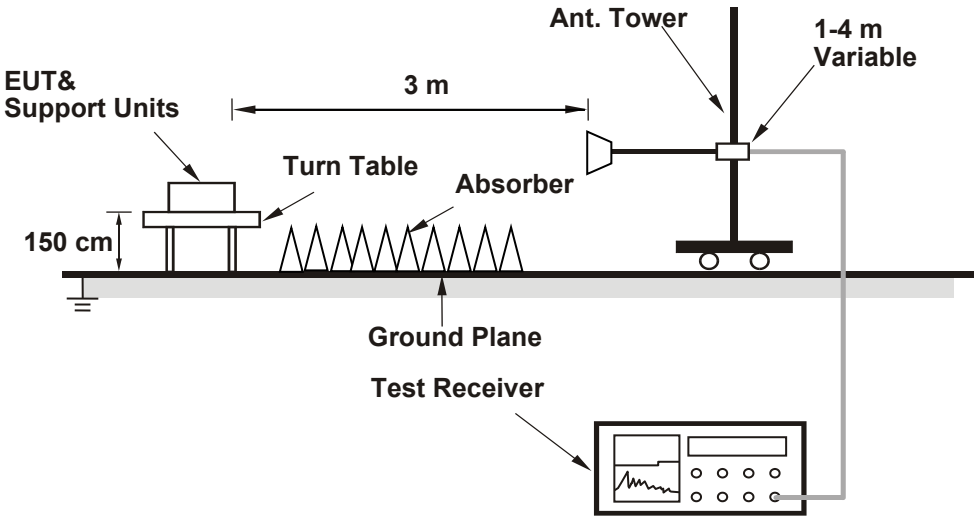

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Above 1 GHz					
Signal Analyzer	R&S	FSV40	101509	2026/05/06	2027/05/05
Horn Antenna	ETS-Lindgren	3117	00218929	2025/11/20	2026/11/19
Horn Antenna	SCHWARZBECK	BBHA 9170	00890	2026/04/29	2027/04/28
HF-AMP + AC source	EMCI	EMC051845SE	980635	2026/03/31	2027/03/30
HF-AMP + AC source	EMCI	EMC184045SE	980656	2026/01/15	2027/01/14
Microwave Cable	EMCI	EM102A-KMKM-700	504231101002	2026/05/08	2027/05/07
Microwave Cable	HUBER+SUHNER	102A-KMKM-200	01	2026/01/16	2027/01/15
Microwave Cable	HUBER+SUHNER	SUCOFLEX 102	802626/2	2026/01/16	2027/01/15
3G High Pass Filter	EMCI	ZHPF3180	08223315	2025/12/18	2026/12/17
7G High Pass Filter	EMCI	HPF0718	G001	2026/04/10	2027/04/09
Test Software	Audix E3	15914a_20191106 tuv	PK-001087	N/A	N/A
30 MHz ~ 1 GHz					
Receiver	R&S	ESR7	102109	2026/02/04	2027/02/03
Bilog Antenna	SCHWARZBECK	VULB-9168	00951	2026/05/11	2027/05/10
LF-AMP	Agilent	8447D	2727A05146	2026/01/15	2027/01/14
RF Cable	EM	RG 214_U/2*11N/7M	24038601	2026/02/25	2027/02/24
Microwave Cable	HUBER+SUHNER	SUCOFLEX 104	802244/4	2026/02/25	2027/02/24
Microwave Cable	HUBER+SUHNER	SUCOFLEX 104	MY37203/4	2026/02/25	2027/02/24
Test Software	Audix E3	15914a_20191106 tuv	PK-001087	N/A	N/A

Test Procedures

For Radiated Emissions below 30 MHz

a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
c. Parallel (OPEN), perpendicular (CLOSE), and ground-parallel (GROUND) orientations of the antenna are set to make the measurement.
d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated Emissions above 30 MHz

a. The EUT was placed on the top of a rotating table 0.8 meters (for 30 MHz ~ 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) or Peak detection (PK) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is ≥ 1/T (Duty cycle < 98 %) or 10 Hz (Duty cycle ≥ 98 %) for Average detection (AV) at frequency above 1 GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The Radiated Emissions testing was performed in the X(E1), Y(H) and Z(E2) axis orientation. The worst-case Axis orientation is recorded in this test report.
6. The emission levels of other frequencies (including the 10th harmonic of the highest fundamental frequency) are very lower than the limit and are not shown in the test report.

Test Results

Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) – Amplifier (dB)
Level (dBuV/m) = Reading (dBuV) + Factor (dB/m)

Please refer to Appendix B.

Note: The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated at least 20 dB below the permissible value to be reported.

5.1.8 Dynamic Frequency Selection

Limit

<DFS Detection Thresholds for Master Devices and Client Devices with Radar Detection>

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP ≥ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note 3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.	


<DFS Response Requirement Values>

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.
Note 1: *Channel Move Time and the Channel Closing Transmission Time* should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The *Channel Closing Transmission Time* is comprised of 200 milliseconds starting at the beginning of the *Channel Move Time* plus any additional intermittent control signals required to facilitate a *Channel* move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the *U-NII Detection Bandwidth* detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.	


Kind of Test Site Shielded room

Test Setup


<Setup for Master with injection at the Master>

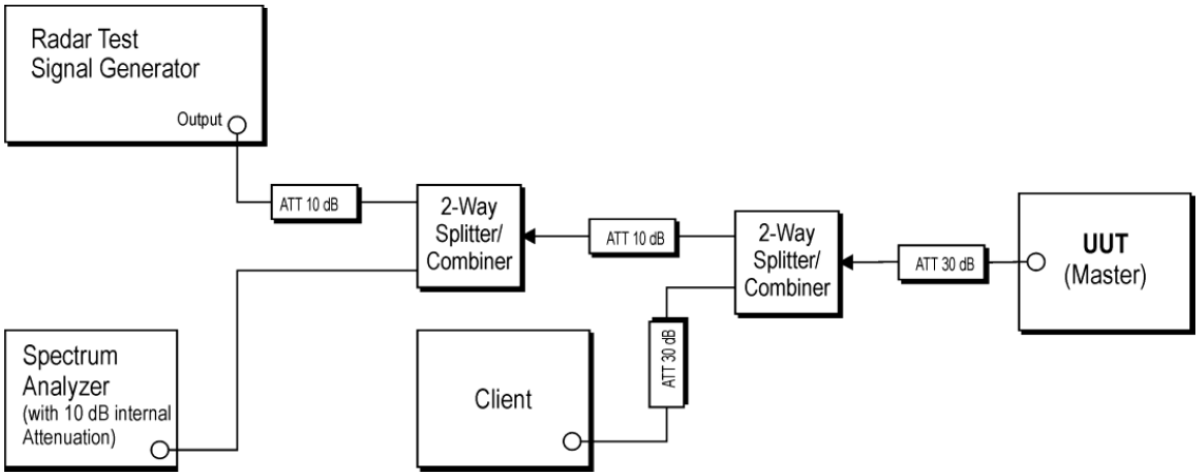

<Setup for Client with injection at the Master>

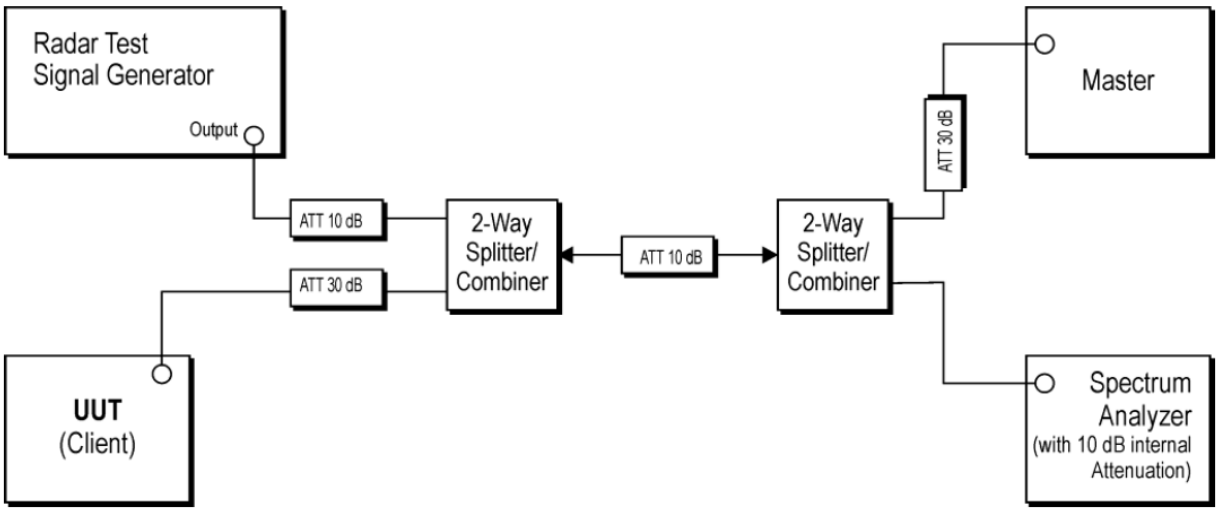

<Setup for Client with injection at the Client>

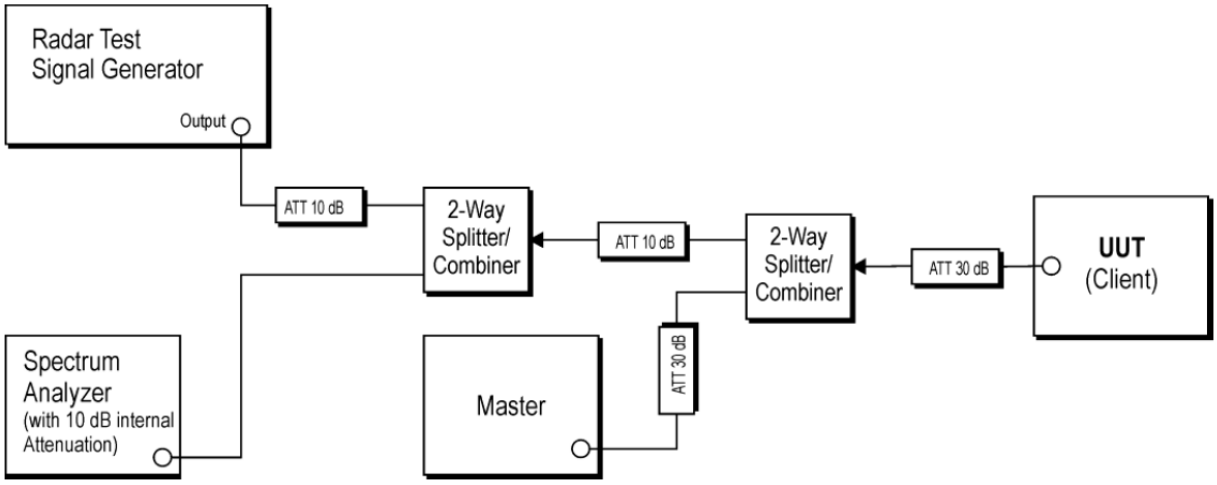

Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	Keysight	N9000B	MY62361339	2026/02/03	2027/02/02	2026/06/16	2026/06/16
EXG Vector Signal Generator	Keysight	N5172B	MY61253270	2025/12/24	2026/12/23	2026/06/16	2026/06/16
Frequency Extender	Keysight	N5182BX07	MY61500182	2025/12/24	2026/12/23	2026/06/16	2026/06/16

Requirement

Requirement	Operational Mode	
	Master Device or Client with Radar Detection	Client Without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	Master Device or Client with Radar Detection	Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required
Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.		

Test Results

<802.11ac VHT80>

Non-occupancy period

Channel (MHz)	Limit (minute)	Result
5290	30	Pass
5530	30	Pass



Band 2	Band 3
	

Channel Moving Time



Channel (MHz)	Channel Move Time (s)	Limit (s)	Result
5290	0.468	10	Pass
5530	0.708	10	Pass

Channel Closing Transmission Time

Channel (MHz)	Channel Closing Transmission Time (ms)	Limit (ms)	Result
5290	0.032	60	Pass
5530	0.018	60	Pass

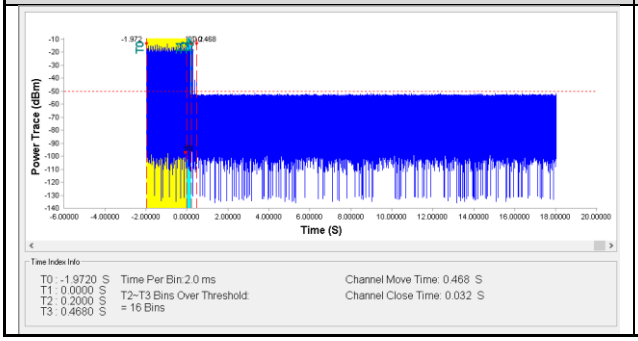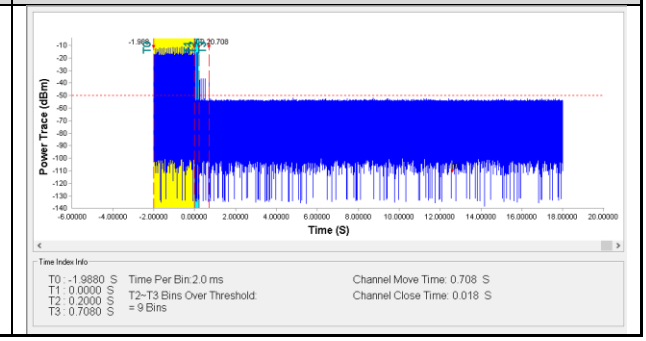Channel Shutdown	
Band 2	Band 3
	

Radar Level

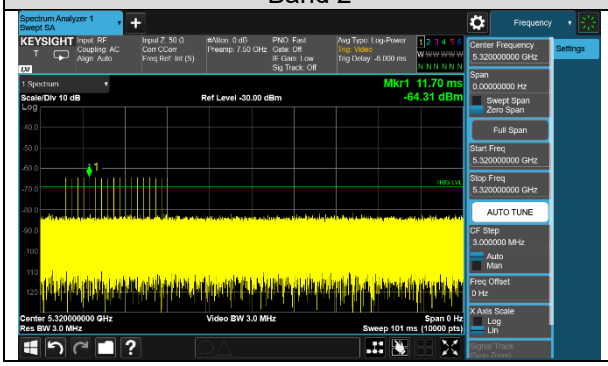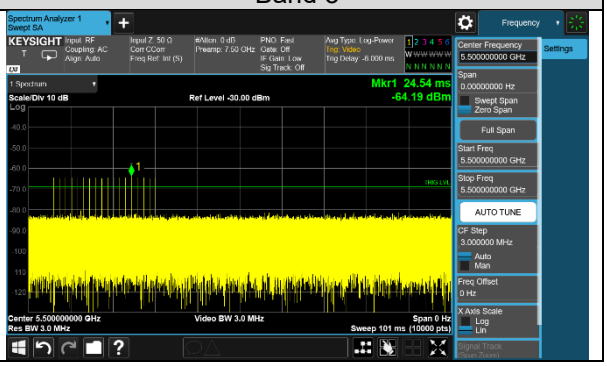Band 2	Band 3
	

5.2 Mains Emission


5.2.1 Mains Conducted Emission

Limit

Mains Conducted emissions as defined in §15.207 must comply with the mains conducted emission limits.

Kind of Test Site Shielded room

Test Setup

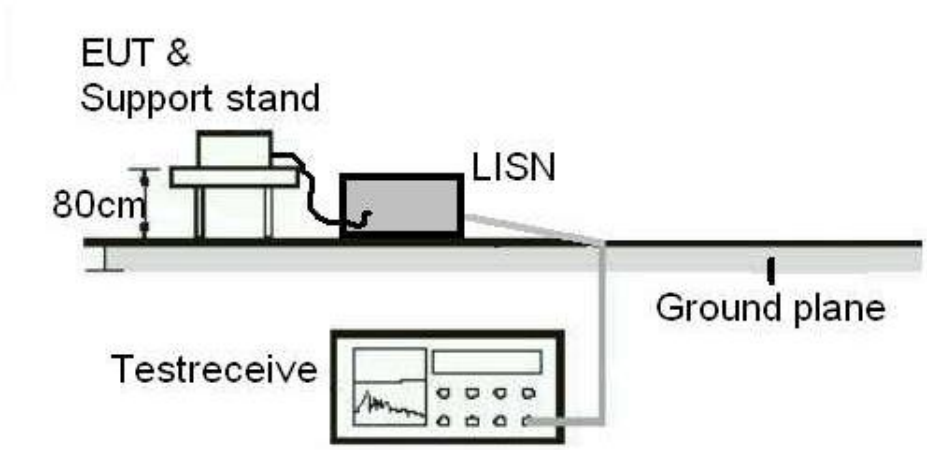

Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Two-Line V-Network	SCHWARZBECK	NSLK 8127	8127-00976	2026/01/07	2027/01/06
EMI Test Receiver	R&S	ESCI	101094	2025/11/19	2026/11/18

Test Procedures

a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50 uH of coupling impedance for the measuring instrument.
b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz – 30 MHz.

Test Results

Please refer to Appendix B.