



中国认可  
国际互认  
检测  
TESTING  
CNAS L3163

# CE Radio Test Report

**Project No.** : 2304C059A  
**Equipment** : Slot-in PC Module  
**Brand Name** : ViewSonic  
**Test Model** : VS19693  
**Series Model** : VPC33-W33-G1, VPC35-W53-G1, VPC37-W53-G1  
**Applicant** : ViewSonic Corporation  
**Address** : 10 Pointe Dr. Suite 200. Brea, CA92821, USA  
**Manufacturer** : ViewSonic Corporation  
**Address** : 10 Pointe Dr. Suite 200. Brea, CA92821, USA  
**Date of Receipt** : May 17, 2023  
**Date of Test** : May 18, 2023 ~ Jul. 26, 2023  
**Issued Date** : Aug. 18, 2023  
**Report Version** : R01  
**Test Sample** : Engineering Sample No.: DG2023051798  
**Standard(s)** : ETSI EN 300 328 V2.2.2 (2019-07)

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.(Dongguan).

**Prepared by** :

Sheldon Ou

**Approved by** :

Ethan Ma

No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong, China.

Tel: +86-769-8318-3000    Web: www.newbtl.com    Service mail: btl\_qa@newbtl.com

**Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by CNAS or any other agency.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

**BTL** is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

**Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

<b>Table of Contents</b>	<b>Page</b>
<b>REPORT ISSUED HISTORY</b>	<b>6</b>
<b>1 . RF EMISSIONS MEASUREMENT</b>	<b>7</b>
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
1.3 TEST ENVIRONMENT CONDITIONS	7
1.4 TEST CHANNEL	7
1.5 TEST METHODOLOGY AND RESULT	8
<b>2 . GENERAL INFORMATION</b>	<b>9</b>
2.1 GENERAL DESCRIPTION OF EUT	9
2.2 DESCRIPTION OF TEST MODES	11
2.3 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	12
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	13
2.5 DESCRIPTION OF SUPPORT UNITS	13
<b>3 . RF OUTPUT POWER</b>	<b>14</b>
3.1 APPLIED PROCEDURES / LIMIT	14
3.2 TEST PROCEDURES	14
3.3 TEST SETUP LAYOUT	14
3.4 TEST DEVIATION	14
3.5 EUT OPERATION DURING TEST	14
3.6 TEST RESULTS	14
<b>4 . DUTY CYCLE, TX-SEQUENCE, TX-GAP</b>	<b>15</b>
4.1 APPLIED PROCEDURES / LIMIT	15
4.2 TEST PROCEDURES	15
4.3 TEST SETUP LAYOUT	15
4.4 TEST DEVIATION	15
4.5 EUT OPERATION DURING TEST	15
4.6 TEST RESULTS	15
<b>5 . ACCUMULATED TRANSMIT TIME, FREQUENCY OCCUPATION AND HOPPING SEQUENCE</b>	<b>16</b>
5.1 APPLIED PROCEDURES / LIMIT	16
5.2 TEST PROCEDURES	17
5.3 TEST SETUP LAYOUT	17
5.4 TEST DEVIATION	17
5.5 EUT OPERATION DURING TEST	17
5.6 TEST RESULTS	17
<b>6 . HOPPING FREQUENCY SEPARATION</b>	<b>18</b>
6.1 APPLIED PROCEDURES / LIMIT	18
6.2 TEST PROCEDURES	18
6.3 TEST SETUP LAYOUT	18
6.4 TEST DEVIATION	18
6.5 EUT OPERATION DURING TEST	18

**Table of Contents****Page**

6.6 TEST RESULTS	18
<b>7 . MEDIUM UTILIZATION (MU) FACTOR</b>	<b>19</b>
7.1 APPLIED PROCEDURES / LIMIT	19
7.2 TEST PROCEDURES	19
7.3 TEST SETUP LAYOUT	19
7.4 TEST DEVIATION	19
7.5 EUT OPERATION DURING TEST	19
7.6 TEST RESULTS	19
<b>8 . ADAPTIVITY (ADAPTIVE FREQUENCY HOPPING)</b>	<b>20</b>
8.1 APPLIED PROCEDURES / LIMIT	20
8.2 TEST PROCEDURES	22
8.3 TEST SETUP LAYOUT	22
8.4 TEST DEVIATION	23
8.5 EUT OPERATION DURING TEST	23
8.6 TEST RESULTS	23
<b>9 . OCCUPIED CHANNEL BANDWIDTH</b>	<b>24</b>
9.1 APPLIED PROCEDURES / LIMIT	24
9.2 TEST PROCEDURES	24
9.3 TEST SETUP LAYOUT	24
9.4 TEST DEVIATION	24
9.5 EUT OPERATION DURING TEST	24
9.6 TEST RESULTS	24
<b>10 . TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN</b>	<b>25</b>
10.1 APPLIED PROCEDURES / LIMIT	25
10.2 TEST PROCEDURES	25
10.3 TEST SETUP LAYOUT	25
10.4 TEST DEVIATION	25
10.5 EUT OPERATION DURING TEST	25
10.6 TEST RESULTS	25
<b>11 . TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN</b>	<b>26</b>
11.1 APPLIED PROCEDURES / LIMIT	26
11.2 TEST PROCEDURES	26
11.3 TEST SETUP LAYOUT	27
11.4 TEST DEVIATION	27
11.5 EUT OPERATION DURING TEST	27
11.6 TEST RESULTS	27
<b>12 . RECEIVER SPURIOUS EMISSIONS</b>	<b>28</b>
12.1 APPLIED PROCEDURES / LIMIT	28
12.2 TEST PROCEDURES	28
12.3 TEST SETUP LAYOUT	28
12.4 TEST DEVIATION	28
12.5 EUT OPERATION DURING TEST	28
12.6 TEST RESULTS	28

<b>Table of Contents</b>	<b>Page</b>
<b>13 . RECEIVER BLOCKING</b>	<b>29</b>
13.1 APPLIED PROCEDURES / LIMIT	29
13.2 TEST PROCEDURES	30
13.3 TEST SETUP LAYOUT	31
13.4 TEST DEVIATION	31
13.5 EUT OPERATION DURING TEST	31
13.6 TEST RESULTS	31
<b>14 . MEASUREMENT INSTRUMENTS LIST</b>	<b>32</b>
<b>15 . EUT TEST PHOTO</b>	<b>34</b>
<b>APPENDIX A - RF OUTPUT POWER</b>	<b>35</b>
<b>APPENDIX B - DUTY CYCLE, TX-SEQUENCE, TX-GAP</b>	<b>37</b>
<b>APPENDIX C - ACCUMULATED TRANSMIT TIME, FREQUENCY OCCUPATION AND HOPPING SEQUENCE</b>	<b>38</b>
<b>APPENDIX D - HOPPING FREQUENCY SEPARATION</b>	<b>49</b>
<b>APPENDIX E - MEDIUM UTILIZATION (MU) FACTOR</b>	<b>52</b>
<b>APPENDIX F - ADAPTIVITY</b>	<b>53</b>
<b>APPENDIX G - OCCUPIED CHANNEL BANDWIDTH</b>	<b>54</b>
<b>APPENDIX H - TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN</b>	<b>57</b>
<b>APPENDIX I - TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN</b>	<b>60</b>
<b>APPENDIX J - RECEIVER SPURIOUS EMISSIONS</b>	<b>77</b>
<b>APPENDIX K - RECEIVER BLOCKING</b>	<b>88</b>
<b>APPENDIX L - INFORMATION AS REQUIRED BY EN 300 328 V2.2.2, CLAUSE 5.4.1</b>	<b>90</b>

**REPORT ISSUED HISTORY**

Report No.	Version	Description	Issued Date	Note
BTL-ETSP-1-2304C059A	R00	This is a copy report which referencing test data are provided from test report (BTL-ETSP-1-2304C059). The product name, brand name, model name, applicant and manufacturer information are changed which does not affect the test results, the rest are kept the same.	Aug. 14, 2023	Invalid
BTL-ETSP-1-2304C059A	R01	Modified the issued date.	Aug. 18, 2023	Valid

## 1. RF EMISSIONS MEASUREMENT

### 1.1 TEST FACILITY

The test facilities used to collect the test data in this report is **DG-CB15/TR15/TR17** at the location of No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong, China.

### 1.2 MEASUREMENT UNCERTAINTY

The measurement uncertainty figures shall be calculated according the methods described in the ETSI TR 100 028 and shall correspond to an expansion factor (coverage factor)  $k=1.96$  or  $k=2$ (which provide confidence levels of respectively 95% and 95.45% in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian)).

Measurement Uncertainty for a Level of Confidence of 95.45%,  $U=2 \times U_c(y)$ .

The BTL measurement uncertainty as below table:

Parameter	Uncertainty
Output Power	$\pm 0.95$ dB
Occupied Channel Bandwidth	$\pm 3.8$ %
Power Spectral Density	$\pm 0.86$ dB
Conducted Spurious Emission	$\pm 2.71$ dB
Spurious Emissions, Radiated $f \leq 1$ GHz	$\pm 3.58$ dB
Spurious Emissions, Radiated $1\text{GHz} < f \leq 12.75\text{GH}$	$\pm 3.78$ dB
Temperature	$\pm 0.08$ °C
Time	$\pm 0.58$ %
Supply voltages	$\pm 0.3$ %

### 1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By	Test Data
RF Output Power	Normal & Extreme	49.2%	DC 19V	Laughing Zhang	May 23, 2023
Accumulated Transmit time, Frequency Occupation & Hopping Sequence	24°C	53%	DC 19V	Kirito Li	Jun. 03, 2023
Hopping Frequency Separation	24°C	53%	DC 19V	Kirito Li	Jun. 03, 2023
Occupied Channel Bandwidth	24°C	53%	DC 19V	Kirito Li	Jun. 03, 2023
Transmitter unwanted emissions in the OOB domain	24°C	53%	DC 19V	Kirito Li	Jun. 03, 2023
Transmitter unwanted emissions in the spurious domain	24-25°C	50-53%	DC 19V	Zack Zhang Kirito Li	May 25, 2023 Jun. 06, 2023
Receiver spurious emissions	24-25°C	50-53%	DC 19V	Zack Zhang Kirito Li	May 25, 2023 Jun. 06, 2023
Receiver Blocking	23.4°C	55.2%	DC 19V	Jaden Kong	Jun. 18, 2023

### 1.4 TEST CHANNEL

Test Channel	EUT Channel	Test Frequency
low	CH00	2402 MHz
middle	CH39	2441 MHz
high	CH78	2480 MHz

## 1.5 TEST METHODOLOGY AND RESULT

Harmonised Standard ETSI EN 300 328					
Essential Requirement			Requirement Conditionality		Result
No	Description	Reference: Clause No	U/C	Condition	
1	RF Output Power	4.3.1.2 or 4.3.2.2	U	-	Pass
2	Power Spectral Density	4.3.2.3	C	Only for non-FHSS equipment	N/A
3	Duty cycle, Tx-Sequence, Tx-gap	4.3.1.3 or 4.3.2.4	C	Only for non-Adaptive equipment	N/A
4	Accumulated Transmit time, Frequency Occupation & Hopping Sequence	4.3.1.4	C	Only for FHSS equipment	Pass
5	Hopping Frequency Separation	4.3.1.5	C	Only for FHSS equipment	Pass
6	Medium Utilization	4.3.1.6 or 4.3.2.5	C	Only for non-Adaptive equipment	N/A
7	Adaptivity	4.3.1.7 or 4.3.2.6	C	Only for Adaptive equipment	N/A
8	Occupied Channel Bandwidth	4.3.1.8 or 4.3.2.7	U	-	Pass
9	Transmitter unwanted emissions in the OOB domain	4.3.1.9 or 4.3.2.8	U	-	Pass
10	Transmitter unwanted emissions in the spurious domain	4.3.1.10 or 4.3.2.9	U	-	Pass
11	Receiver spurious emissions	4.3.1.11 or 4.3.2.10	U	-	Pass
12	Receiver Blocking	4.3.1.12 or 4.3.2.11	U	-	Pass
13	Geo-location capability	4.3.1.13 or 4.3.2.12	C	Only for equipment with geo-location capability	N/A

Note:

- (1) "U/C": Indicates whether the requirement is unconditionally applicable (U) or is conditional upon the manufacturer's claimed functionality of the equipment (C).

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	Slot-in PC Module
Brand Name	ViewSonic
Test Model	VS19693
Series Model	VPC33-W33-G1, VPC35-W53-G1, VPC37-W53-G1
Model Difference(s)	Only the model name is different.
Power Source	DC voltage supplied from AC adapter.(Support unit)
Power Rating	12-19V --- 8A
Operation Frequency	2402 MHz ~ 2480 MHz
Modulation Type	GFSK,π/4-DQPSK,8-DPSK
Modulation Technology	FHSS
Transfer Rate	1Mbps,2Mbps,3Mbps
Max. e.i.r.p.	1Mbps: 8.19 dBm (6.59 mW) 2Mbps: 7.90 dBm (6.17 mW) 3Mbps: 8.15 dBm (6.53 mW)
Categorization	<input type="checkbox"/> Receiver category 1 <input checked="" type="checkbox"/> Receiver category 2 <input type="checkbox"/> Receiver category 3

**Note:**

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

## 2. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

## 3. Table for Filed Antenna:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	B&T	AG-011520-1007	Dipole	SMA-J	2

Note: The antenna gain is provided by the manufacturer.

## 2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test Items	Modulation Type	Data Rate	Operating Mode	Channel
RF Output Power	GFSK	1Mbps	Hopping	00~78
	$\pi/4$ -DQPSK	2Mbps		
	8-DPSK	3Mbps		
Accumulated Transmit time, Frequency Occupation & Hopping Sequence	GFSK	1Mbps	Hopping	00~78
	8-DPSK	3Mbps	Hopping	00~78
Hopping Frequency Separation	GFSK	1Mbps	Hopping	00~78
	8-DPSK	3Mbps	Fixed	00/78
Occupied Channel Bandwidth	GFSK	1Mbps	Fixed	00/78
	8-DPSK	3Mbps	Hopping	00~78
Transmitter unwanted emissions in the OOB domain	GFSK	1Mbps	Hopping	00~78
	8-DPSK	3Mbps	Fixed	00/78
Transmitter unwanted emissions in the spurious domain (30 MHz ~ 1 GHz)	GFSK	1Mbps	Fixed	00/78
			Fixed	00/78
Transmitter unwanted emissions in the spurious domain (1 GHz ~ 12.75 GHz)	GFSK	1Mbps	Fixed	00/78
	8-DPSK	3Mbps	Fixed	00/78
Receiver spurious emissions (30 MHz ~ 1 GHz)	GFSK	1Mbps	Fixed	00/78
Receiver spurious emissions (1 GHz ~ 12.75 GHz)	GFSK	1Mbps	Fixed	00/78
Receiver Blocking	GFSK	1Mbps	Hopping	00~78

**Note:**


- 1) The measurements for RF Output Power were tested with DH1/3/5 during 1Mbps, 2Mbps and 3Mbps, the worst case were 1Mbps (DH5) and 3Mbps (3DH5), only worst case were documented for other test items except Accumulated Transmit time.
- 2) For radiated spurious emissions below 1 GHz and receiver spurious emissions test, the 1Mbps channel 00/78 are found to be the worst case and recorded.

**2.3 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING**

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

Test Software Version	DRTU V1.0
Frequency (MHz)	2402~2480
1Mbps	6
2Mbps	4
3Mbps	4

## 2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

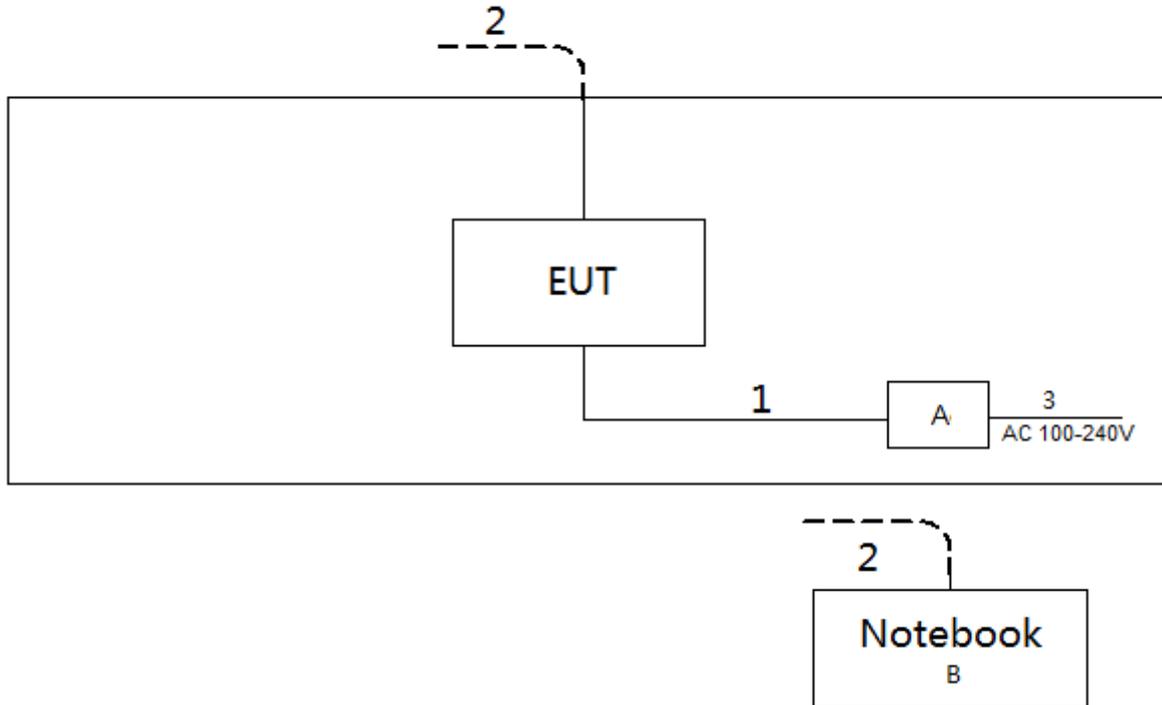

## 2.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model No.	Series No.
A	Adapter	GangQi Electornic	GQ150-1900630-E1	N/A
B	Notebook	Dell	Inspiron 15-7559	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC Cable	NO	NO	1.2m
2	RJ45 Cable	NO	NO	10m
3	AC Cable	NO	NO	1.5m

### 3. RF OUTPUT POWER

#### 3.1 APPLIED PROCEDURES / LIMIT

Clause	4.3.1.2
Test Item	RF output power
Limit	<p>The RF output power for FHSS equipment shall be equal to or less than 20 dBm. Note: For Non-adaptive FHSS equipment, the manufacturer may have declared a reduced RF Output Power (see clause 5.4.1 m) and associated Duty Cycle (see clause 5.4.1 e) that will ensure that the equipment meets the requirement for the Medium Utilization (MU) factor further described in clause 4.3.1.6. This is verified by the conformance test referred to in clause 4.3.1.6.4.</p> <p>For non-adaptive FHSS equipment, where the manufacturer has declared an RF output power lower than 20 dBm e.i.r.p., the RF output power shall be equal to or less than that declared value.</p> <p>This limit shall apply for any combination of power level and intended antenna assembly.</p>

#### 3.2 TEST PROCEDURES


Refer to ETSI EN 300 328, chapter 5.4.2.2.1.

#### 3.3 TEST SETUP LAYOUT

##### Normal Condition



##### Extreme Condition

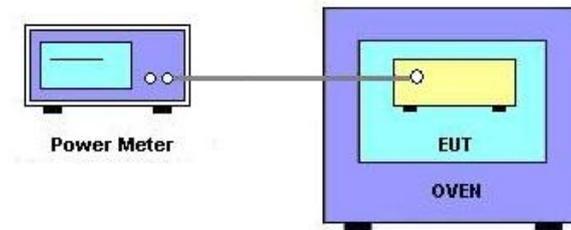

#### 3.4 TEST DEVIATION

There is no deviation with the original standard.

#### 3.5 EUT OPERATION DURING TEST

The measurements shall be performed during continuously transmitting.

#### 3.6 TEST RESULTS

Please refer to the Appendix A.

## 4. DUTY CYCLE, TX-SEQUENCE, TX-GAP


### 4.1 APPLIED PROCEDURES / LIMIT

Clause	4.3.1.3
Test Item	Duty Cycle, Tx-sequence, Tx-gap
Limit	<p>For non-adaptive FHSS equipment, The Duty Cycle shall be equal to or less than the maximum value declared by the manufacturer. The maximum Tx-sequence time shall be 5 ms. The minimum Tx-gap time shall be 5 ms.</p> <p>NOTE: For Non-adaptive FHSS equipment, the manufacturer may have declared a reduced RF Output Power (see clause 5.4.1 m) and associated Duty Cycle (see clause 5.4.1 e) that will ensure that the equipment meets the requirements for the Medium Utilization (MU) factors further described in clause 4.3.1.6. This is verified by the conformance test referred to in clause 4.3.1.6.4.</p>

### 4.2 TEST PROCEDURES

Refer to ETSI EN 300 328, chapter 5.4.2.2.1.

### 4.3 TEST SETUP LAYOUT

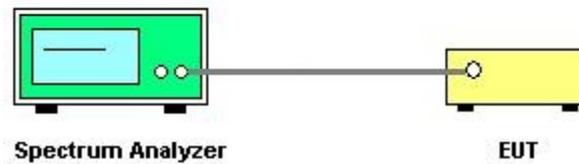

### 4.4 TEST DEVIATION

There is no deviation with the original standard.

### 4.5 EUT OPERATION DURING TEST

The measurements shall be performed during continuously transmitting.

### 4.6 TEST RESULTS

Please refer to the Appendix B.

## 5. ACCUMULATED TRANSMIT TIME, FREQUENCY OCCUPATION AND HOPPING SEQUENCE


### 5.1 APPLIED PROCEDURES / LIMIT

Clause	4.3.1.4
Test Item	Accumulated Transmit Time, Frequency Occupation and Hopping Sequence
Limit	<p><b><u>Non-adaptive FHSS equipment</u></b></p> <p>The Accumulated Transmit Time on any hopping frequency shall not be greater than 15 ms within any observation period of 15 ms multiplied by the minimum number of hopping frequencies (N) that have to be used.</p> <p>In order for the FHSS equipment to comply with the Frequency Occupation requirement, it shall meet either of the following two options:</p> <p>Option 1: Each hopping frequency of the Hopping Sequence shall be occupied at least once within a period not exceeding four times the product of the dwell time and the number of hopping frequencies in use.</p> <p>Option 2: The probability that each hopping frequency is occupied shall be between <math>((1 / U) \times 25 \%)</math> and 77 % where U is the number of hopping frequencies in use.</p> <p>The Hopping Sequence(s) shall contain at least N hopping frequencies where N is either 5 or the result of 15 MHz divided by the minimum Hopping Frequency Separation in MHz, whichever is the greater.</p> <p>NOTE: See also clause 4.3.1.5.3.1 for the Hopping Frequency Separation applicable to non-adaptive FHSS equipment.</p> <p>Non-Adaptive FHSS equipment, may blacklist some but not all hopping frequencies. From the N hopping frequencies defined above, the equipment shall transmit on at least one hopping frequency. For the blacklisted frequencies, the equipment has to occupy these frequencies for the duration of the average dwell time (see also definition for blacklisted frequency in clause 3.1).</p> <p><b><u>Adaptive FHSS equipment</u></b></p> <p>Adaptive FHSS equipment shall be capable of operating over a minimum of 70 % of the band specified in table 1.</p> <p>The Accumulated Transmit Time on any hopping frequency shall not be greater than 400 ms within any observation period of 400 ms multiplied by the minimum number of hopping frequencies (N) that have to be used.</p> <p>In order for the FHSS equipment to comply with the Frequency Occupation requirement, it shall meet either of the following two options:</p> <p>Option 1: Each hopping frequency of the Hopping Sequence shall be occupied at least once within a period not exceeding four times the product of the dwell time and the number of hopping frequencies in use.</p> <p>Option 2: The occupation probability for each frequency shall be between <math>((1 / U) \times 25 \%)</math> and 77 % where U is the number of hopping frequencies in use.</p> <p>The Hopping Sequence(s) shall contain at least N hopping frequencies at all times, where N is either 15 or the result of 15 MHz divided by the minimum Hopping Frequency Separation in MHz, whichever is the greater.</p> <p>NOTE: See also clause 4.3.1.5.3.2 for the Hopping Frequency Separation applicable to adaptive FHSS equipment.</p> <p>For Adaptive FHSS equipment, from the N hopping frequencies defined above, the equipment shall consider at least one hopping frequency for its transmissions. Providing that there is no interference present on this hopping frequency with a level above the detection threshold defined in clause 4.3.1.7.2.2, point 5 or clause 4.3.1.7.3.2, point 5, then the equipment shall have transmissions on this hopping frequency. For Adaptive FHSS equipment using LBT, if a signal is detected during the CCA, the equipment may jump immediately to the next hopping frequency in the Hopping Sequence (see clause 4.3.1.7.2.2, point 2) provided the limit for Accumulated Transmit Time on the new hopping frequency is respected.</p>

## 5.2 TEST PROCEDURES

Refer to ETSI EN 300 328, chapter 5.4.4.2.1.

## 5.3 TEST SETUP LAYOUT

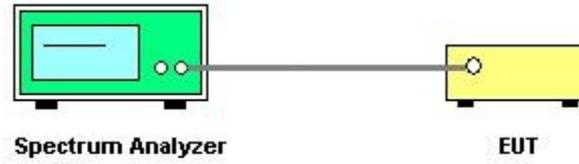

## 5.4 TEST DEVIATION

There is no deviation with the original standard.

## 5.5 EUT OPERATION DURING TEST

The measurements shall be performed during continuously transmitting.

## 5.6 TEST RESULTS

Please refer to the Appendix C.

## 6. HOPPING FREQUENCY SEPARATION


### 6.1 APPLIED PROCEDURES / LIMIT

Clause	4.3.1.5
Test Item	Hopping Frequency Separation
Limit	<p><b>Non-adaptive FHSS equipment</b>                      For non-adaptive FHSS equipment, the Hopping Frequency Separation shall be equal to or greater than the Occupied Channel Bandwidth (see clause 4.3.1.8), with a minimum separation of 100 kHz.                      For FHSS equipment with a maximum declared RF Output power level of less than 10 dBm e.i.r.p. or for non-adaptive FHSS equipment operating in a mode where the RF Output power is less than 10 dBm e.i.r.p., the Hopping Frequency Separation shall be equal to or greater than 100 kHz.</p> <p><b>Adaptive FHSS equipment</b>                      For adaptive FHSS equipment, the minimum Hopping Frequency Separation shall be 100 kHz.                      Adaptive FHSS equipment that switched to a non-adaptive mode for one or more hopping frequencies because interference was detected on each of these hopping frequencies with a level above the threshold level defined in clause 4.3.1.7.2.2, point 5 or clause 4.3.1.7.3.2, point 5, does not have to comply with the Hopping Frequency Separation provided in clause 4.3.1.5.3.1 for non-adaptive FHSS equipment. If the Hopping Frequency Separation is below the Occupied Channel Bandwidth but greater than 100 kHz, the equipment is allowed to continue to operate with this Hopping Frequency Separation as long as the interference remains present on these hopping frequencies. As this relaxed Hopping Frequency Separation only applies to adaptive FHSS equipment, the FHSS equipment shall continue to operate in an adaptive mode on all other hopping frequencies.                      Adaptive FHSS equipment which decided to operate in a non-adaptive mode on one or more hopping frequencies without the presence of interference, shall comply with the limit for Hopping Frequency Separation for non-adaptive FHSS equipment defined in clause 4.3.1.5.3.1 (first paragraph) for these hopping frequencies.</p>

### 6.2 TEST PROCEDURES

Refer to ETSI EN 300 328, chapter 5.4.5.2.1.

### 6.3 TEST SETUP LAYOUT

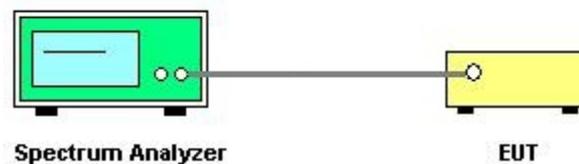

### 6.4 TEST DEVIATION

There is no deviation with the original standard.

### 6.5 EUT OPERATION DURING TEST

The measurements shall be performed during continuously transmitting.

### 6.6 TEST RESULTS

Please refer to the Appendix D.

## 7. MEDIUM UTILIZATION (MU) FACTOR


### 7.1 APPLIED PROCEDURES / LIMIT

Clause	4.3.1.6
Test Item	Medium Utilization (MU) factor
Limit	The maximum Medium Utilization factor for non-adaptive FHSS equipment shall be 10 %.

### 7.2 TEST PROCEDURES

Refer to ETSI EN 300 328, chapter 5.4.2.2.1.

### 7.3 TEST SETUP LAYOUT

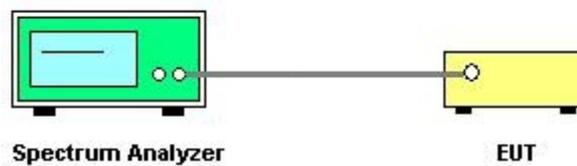

### 7.4 TEST DEVIATION

There is no deviation with the original standard.

### 7.5 EUT OPERATION DURING TEST

The measurements shall be performed during continuously transmitting.

### 7.6 TEST RESULTS

Please refer to the Appendix E.

## 8. ADAPTIVITY (ADAPTIVE FREQUENCY HOPPING)

### 8.1 APPLIED PROCEDURES / LIMIT

Clause	4.3.1.7
Test Item	Adaptivity (Adaptive Frequency Hopping)
Limit	<p><b>Adaptive FHSS using LBT</b> Adaptive FHSS equipment using LBT shall comply with the following minimum set of requirements:</p> <ol style="list-style-type: none"> <li>1) At the start of every dwell time, before transmission on a hopping frequency, the equipment shall perform a Clear Channel Assessment (CCA) check using energy detect. The CCA observation time shall be not less than 0,2 % of the Channel Occupancy Time with a minimum of 18 <math>\mu</math>s. If the equipment finds the hopping frequency to be clear, it may transmit immediately.</li> <li>2) If it is determined that a signal is present with a level above the detection threshold defined in step 5 the hopping frequency shall be marked as 'unavailable'. Then the equipment may jump to the next frequency in the hopping scheme even before the end of the dwell time, but in that case the 'unavailable' channel cannot be considered as being 'occupied' and shall be disregarded with respect to the requirement of the minimum number of hopping frequencies as defined in clause 4.3.1.4.3.2. Alternatively, the equipment can remain on the frequency during the remainder of the dwell time. However, if the equipment remains on the frequency with the intention to transmit, it shall perform an Extended CCA check in which the (unavailable) channel is observed for a random duration between the value defined for the CCA observation time in step 1 and 5 % of the Channel Occupancy Time defined in step 3. If the Extended CCA check has determined the frequency to be no longer occupied, the hopping frequency becomes available again. If the Extended CCA time has determined the channel still to be occupied, it shall perform new Extended CCA checks until the channel is no longer occupied.</li> <li>3) The total time during which an equipment has transmissions on a given hopping frequency without reevaluating the availability of that frequency is defined as the Channel Occupancy Time. The Channel Occupancy Time for a given hopping frequency, which starts immediately after a successful CCA, shall be less than 60 ms followed by an Idle Period of minimum 5 % of the Channel Occupancy Time with a minimum of 100 <math>\mu</math>s. After the Idle Period has expired, the procedure as in step 1 shall be repeated before having new transmissions on this hopping frequency during the same dwell time. For LBT based adaptive FHSS equipment with a dwell time &lt; 60 ms, the maximum Channel Occupancy Time is limited by the dwell time.</li> <li>4) 'Unavailable' channels may be removed from or may remain in the Hopping Sequence, but in any case:       <ul style="list-style-type: none"> <li>- apart from Short Control Signalling Transmissions referred to in clause 4.3.1.7.4, there shall be no transmissions on 'unavailable' channels;</li> <li>- a minimum of N hopping frequencies as defined in clause 4.3.1.4.3.2 shall always be maintained.</li> </ul> </li> <li>5) The detection threshold shall be proportional to the transmit power of the transmitter: for a 20 dBm e.i.r.p. transmitter the detection threshold level (TL) shall be equal to or less than -70 dBm/MHz at the input to the receiver assuming a 0 dBi (receive) antenna assembly. This threshold level (TL) may be corrected for the (receive) antenna assembly gain (G); however, beamforming gain (Y) shall not be taken into account. For power levels less than 20 dBm e.i.r.p., the detection threshold level may be relaxed to:  <math display="block">TL = -70 \text{ dBm/MHz} + 10 \times \log_{10} (100 \text{ mW}/P_{\text{out}}) \text{ (} P_{\text{out}} \text{ in mW e.i.r.p.)}</math> </li> </ol>


Limit	<p>6) The equipment shall comply with the requirements defined in step 1 to step 4 of the present clause in the presence of an unwanted CW signal as defined in table 2.</p> <p style="text-align: center;"><b>Table 2: Unwanted Signal parameters</b></p> <table border="1" data-bbox="459 353 1337 689"> <thead> <tr> <th data-bbox="459 353 746 405">Wanted signal mean power from companion device</th> <th data-bbox="746 353 1075 405">Unwanted CW signal frequency (MHz)</th> <th data-bbox="1075 353 1337 405">Unwanted CW signal power (dBm)</th> </tr> </thead> <tbody> <tr> <td data-bbox="459 405 746 456">sufficient to maintain the link (see note 2)</td> <td data-bbox="746 405 1075 456">2 395 or 2 488,5 (see note 1)</td> <td data-bbox="1075 405 1337 456">-35 (see note 3)</td> </tr> <tr> <td colspan="3" data-bbox="459 456 1337 689">                     NOTE 1: The highest frequency shall be used for testing operating channels within the range 2 400 MHz to 2 442 MHz, while the lowest frequency shall be used for testing operating channels within the range 2 442 MHz to 2 483,5 MHz. See clause 5.4.6.1.                      NOTE 2: A typical conducted value which can be used in most cases is -50 dBm/MHz.                      NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna.                 </td> </tr> </tbody> </table>	Wanted signal mean power from companion device	Unwanted CW signal frequency (MHz)	Unwanted CW signal power (dBm)	sufficient to maintain the link (see note 2)	2 395 or 2 488,5 (see note 1)	-35 (see note 3)	NOTE 1: The highest frequency shall be used for testing operating channels within the range 2 400 MHz to 2 442 MHz, while the lowest frequency shall be used for testing operating channels within the range 2 442 MHz to 2 483,5 MHz. See clause 5.4.6.1. NOTE 2: A typical conducted value which can be used in most cases is -50 dBm/MHz. NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna.		
Wanted signal mean power from companion device	Unwanted CW signal frequency (MHz)	Unwanted CW signal power (dBm)								
sufficient to maintain the link (see note 2)	2 395 or 2 488,5 (see note 1)	-35 (see note 3)								
NOTE 1: The highest frequency shall be used for testing operating channels within the range 2 400 MHz to 2 442 MHz, while the lowest frequency shall be used for testing operating channels within the range 2 442 MHz to 2 483,5 MHz. See clause 5.4.6.1. NOTE 2: A typical conducted value which can be used in most cases is -50 dBm/MHz. NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna.										
Limit	<p><b><u>Adaptive FHSS using DAA</u></b></p> <p>Adaptive FHSS equipment using DAA, shall comply with the following minimum set of requirements:</p> <ol style="list-style-type: none"> <li>1) During normal operation, the equipment shall evaluate the presence of a signal for each of its hopping frequencies. If it is determined that a signal is present with a level above the detection threshold defined in step 5 the hopping frequency shall be marked as 'unavailable'.</li> <li>2) The hopping frequency shall remain unavailable for a minimum time equal to 1 second or 5 times the actual number of hopping frequencies in the current (adapted) channel map used by the equipment, multiplied with the Channel Occupancy Time whichever is greater. There shall be no transmissions during this silent period on this hopping frequency. After this, the hopping frequency may be considered again as an 'available' frequency.</li> <li>3) The total time during which an equipment has transmissions on a given hopping frequency without re-evaluating the availability of that hopping frequency is defined as the Channel Occupancy Time.                      The Channel Occupancy Time for a given hopping frequency shall be less than 40 ms. For equipment using a dwell time &gt; 40 ms that wants to have other transmissions during the same hop (dwell time) an Idle Period (no transmissions) of minimum 5 % of the Channel Occupancy Period with a minimum of 100 µs shall be implemented.                      After the Idle Period has expired, the equipment may continue its normal operation as explained in step 1.                      For FHSS equipment using DAA with a dwell time &lt; 40 ms, the maximum Channel Occupancy Time may be non-contiguous, i.e. spread over a number of Hopping Sequences (equal to 40 ms divided by the dwell time [ms]).</li> <li>4) In case the 'unavailable' channels remain in the Hopping Sequence, apart from the Short Control Signalling Transmissions referred to in clause 4.3.1.7.4, there shall be no transmissions on these 'unavailable' channels. In case the 'unavailable channels' are removed from the Hopping Sequence, a minimum of N hopping frequencies as defined in clause 4.3.1.4.3.2 shall always be maintained.</li> <li>5) The detection threshold shall be proportional to the transmit power of the transmitter: for a 20 dBm e.i.r.p. transmitter the detection threshold level (TL) shall be equal to or less than -70 dBm/MHz at the input to the receiver assuming a 0 dBi (receive) antenna assembly. This threshold level (TL) may be corrected for the (receive) antenna assembly gain (G); however, beamforming gain (Y) shall not be taken into account. For power levels below 20 dBm e.i.r.p., the detection threshold level may be relaxed to:  <math display="block">TL = -70 \text{ dBm/MHz} + 10 \times \log_{10} (100 \text{ mW}/P_{out}) \text{ (} P_{out} \text{ in mW e.i.r.p.)}</math> </li> </ol>									

Limit	6) The equipment shall comply with the requirements defined in step 1 to step 4 of the present clause in the presence of an unwanted CW signal as defined in table 3.							
	<b>Table 3: Unwanted Signal parameters</b>							
	<table border="1"> <thead> <tr> <th>Wanted signal mean power from companion device (dBm)</th> <th>Unwanted signal frequency (MHz)</th> <th>Unwanted CW signal power (dBm)</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">-30 (see note 2)</td> <td style="text-align: center;">2 395 or 2 488,5 (see note 1)</td> <td style="text-align: center;">-35 (see note 2)</td> </tr> </tbody> </table>	Wanted signal mean power from companion device (dBm)	Unwanted signal frequency (MHz)	Unwanted CW signal power (dBm)	-30 (see note 2)	2 395 or 2 488,5 (see note 1)	-35 (see note 2)	<p>NOTE 1: The highest frequency shall be used for testing operating channels within the range 2 400 MHz to 2 442 MHz, while the lowest frequency shall be used for testing operating channels within the range 2 442 MHz to 2 483,5 MHz. See clause 5.4.6.1.</p> <p>NOTE 2: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density in front of the UUT antenna (see example below).</p>
Wanted signal mean power from companion device (dBm)	Unwanted signal frequency (MHz)	Unwanted CW signal power (dBm)						
-30 (see note 2)	2 395 or 2 488,5 (see note 1)	-35 (see note 2)						
<p><b>Short Control Signalling Transmissions</b>                  If implemented, Short Control Signalling Transmissions shall have a maximum TxOn / (TxOn + TxOff) ratio of 10 % within any observation period of 50 ms or within an observation period equal to the dwell time, whichever is less.</p>								

## 8.2 TEST PROCEDURES

Refer to ETSI EN 300 328, chapter 5.4.6.2.1.

## 8.3 TEST SETUP LAYOUT

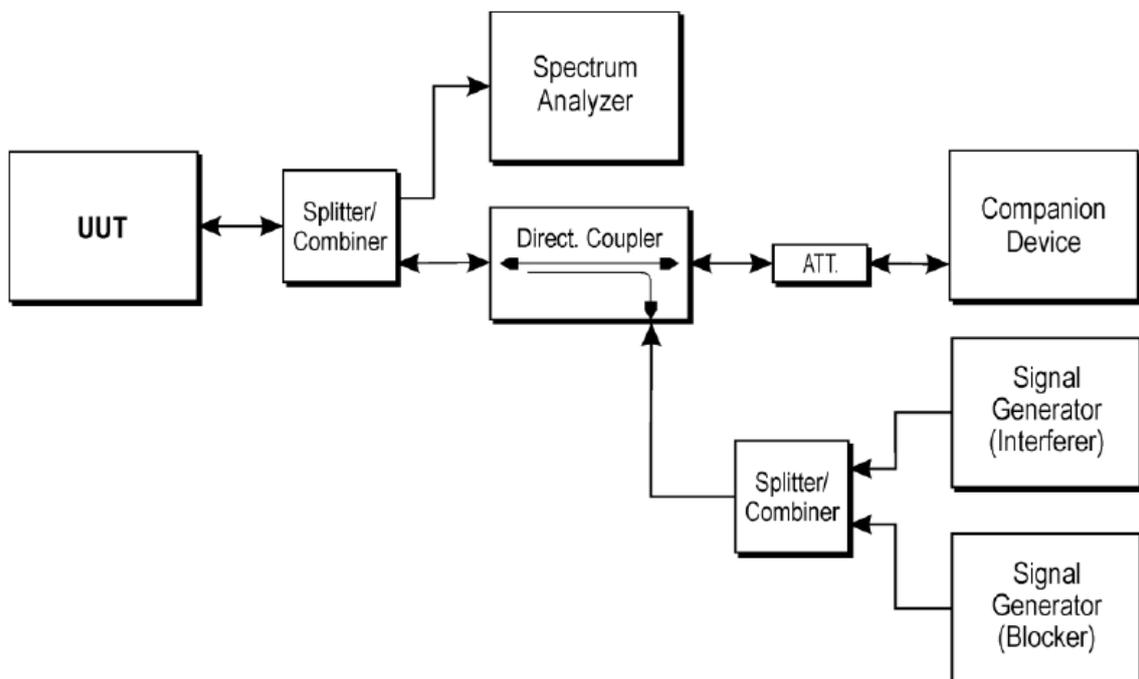

**8.4 TEST DEVIATION**

There is no deviation with the original standard.

**8.5 EUT OPERATION DURING TEST**

The measurements shall be performed during normal operation.

**8.6 TEST RESULTS**

Please refer to the Appendix F.

## 9. OCCUPIED CHANNEL BANDWIDTH


### 9.1 APPLIED PROCEDURES / LIMIT

Clause	4.3.1.8						
Test Item	Occupied Channel Bandwidth						
Limit	<p>The Occupied Channel Bandwidth for each hopping frequency shall be within the band given in table 1.</p> <p style="text-align: center;"><b>Table 1: Service frequency bands</b></p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th></th> <th>Service frequency bands</th> </tr> </thead> <tbody> <tr> <td>Transmit</td> <td>2 400 MHz to 2 483,5 MHz</td> </tr> <tr> <td>Receive</td> <td>2 400 MHz to 2 483,5 MHz</td> </tr> </tbody> </table> <p>In addition, for non-adaptive FHSS equipment with e.i.r.p. greater than 10 dBm, the Occupied Channel Bandwidth for every occupied hopping frequency shall be equal to or less than 5 MHz.</p>		Service frequency bands	Transmit	2 400 MHz to 2 483,5 MHz	Receive	2 400 MHz to 2 483,5 MHz
	Service frequency bands						
Transmit	2 400 MHz to 2 483,5 MHz						
Receive	2 400 MHz to 2 483,5 MHz						

### 9.2 TEST PROCEDURES

Refer to ETSI EN 300 328, chapter 5.4.7.2.1.

### 9.3 TEST SETUP LAYOUT

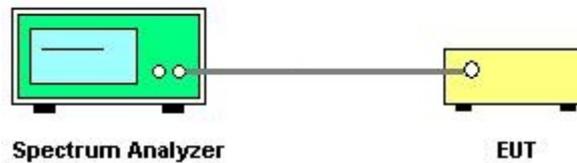

### 9.4 TEST DEVIATION

There is no deviation with the original standard.

### 9.5 EUT OPERATION DURING TEST

The measurements shall be performed during continuously transmitting.

### 9.6 TEST RESULTS

Please refer to the Appendix G.

## 10. TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN


### 10.1 APPLIED PROCEDURES / LIMIT

Clause	4.3.1.9
Test Item	Transmitter unwanted emissions in the out-of-band domain
Limit	<p>The transmitter unwanted emissions in the out-of-band domain shall not exceed the values provided by the mask in figure.</p> <p>A: -10 dBm/MHz e.i.r.p.                  B: -20 dBm/MHz e.i.r.p.                  C: Spurious Domain limits</p> <p><i>BW = Occupied Channel Bandwidth in MHz or 1 MHz whichever is greater</i></p>

### 10.2 TEST PROCEDURES

Refer to ETSI EN 300 328, chapter 5.4.8.2.1.

### 10.3 TEST SETUP LAYOUT

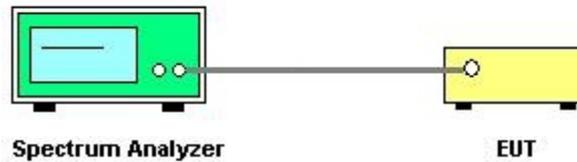

### 10.4 TEST DEVIATION

There is no deviation with the original standard.

### 10.5 EUT OPERATION DURING TEST

The measurements shall be performed during continuously transmitting.

### 10.6 TEST RESULTS

Please refer to the Appendix H.

## 11. TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN

### 11.1 APPLIED PROCEDURES / LIMIT


Clause	4.3.1.10																																				
Test Item	Transmitter unwanted emissions in the spurious domain																																				
Limit	<p>The transmitter unwanted emissions in the spurious domain shall not exceed the values given in table 4.</p> <p>In case of equipment with antenna connectors, these limits apply to emissions at the antenna port (conducted). For emissions radiated by the cabinet or emissions radiated by integral antenna equipment (without antenna connectors), these limits are e.r.p. for emissions up to 1 GHz and e.i.r.p. for emissions above 1 GHz.</p> <p style="text-align: center;"><b>Table 4: Transmitter limits for spurious emissions</b></p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Frequency range</th> <th>Maximum power</th> <th>Bandwidth</th> </tr> </thead> <tbody> <tr> <td>30 MHz to 47 MHz</td> <td>-36 dBm</td> <td>100 kHz</td> </tr> <tr> <td>47 MHz to 74 MHz</td> <td>-54 dBm</td> <td>100 kHz</td> </tr> <tr> <td>74 MHz to 87,5 MHz</td> <td>-36 dBm</td> <td>100 kHz</td> </tr> <tr> <td>87,5 MHz to 118 MHz</td> <td>-54 dBm</td> <td>100 kHz</td> </tr> <tr> <td>118 MHz to 174 MHz</td> <td>-36 dBm</td> <td>100 kHz</td> </tr> <tr> <td>174 MHz to 230 MHz</td> <td>-54 dBm</td> <td>100 kHz</td> </tr> <tr> <td>230 MHz to 470 MHz</td> <td>-36 dBm</td> <td>100 kHz</td> </tr> <tr> <td>470 MHz to 694 MHz</td> <td>-54 dBm</td> <td>100 kHz</td> </tr> <tr> <td>694 MHz to 1 GHz</td> <td>-36 dBm</td> <td>100 kHz</td> </tr> <tr> <td></td> <td>1 GHz to 12,75 GHz</td> <td>-30 dBm</td> <td>1 MHz</td> </tr> </tbody> </table>			Frequency range	Maximum power	Bandwidth	30 MHz to 47 MHz	-36 dBm	100 kHz	47 MHz to 74 MHz	-54 dBm	100 kHz	74 MHz to 87,5 MHz	-36 dBm	100 kHz	87,5 MHz to 118 MHz	-54 dBm	100 kHz	118 MHz to 174 MHz	-36 dBm	100 kHz	174 MHz to 230 MHz	-54 dBm	100 kHz	230 MHz to 470 MHz	-36 dBm	100 kHz	470 MHz to 694 MHz	-54 dBm	100 kHz	694 MHz to 1 GHz	-36 dBm	100 kHz		1 GHz to 12,75 GHz	-30 dBm	1 MHz
	Frequency range	Maximum power	Bandwidth																																		
	30 MHz to 47 MHz	-36 dBm	100 kHz																																		
	47 MHz to 74 MHz	-54 dBm	100 kHz																																		
	74 MHz to 87,5 MHz	-36 dBm	100 kHz																																		
	87,5 MHz to 118 MHz	-54 dBm	100 kHz																																		
	118 MHz to 174 MHz	-36 dBm	100 kHz																																		
	174 MHz to 230 MHz	-54 dBm	100 kHz																																		
	230 MHz to 470 MHz	-36 dBm	100 kHz																																		
	470 MHz to 694 MHz	-54 dBm	100 kHz																																		
694 MHz to 1 GHz	-36 dBm	100 kHz																																			
	1 GHz to 12,75 GHz	-30 dBm	1 MHz																																		

### 11.2 TEST PROCEDURES


Refer to ETSI EN 300 328, chapter 5.4.9.2.1 and 5.4.9.2.2.

### 11.3 TEST SETUP LAYOUT


#### Conducted Measurement

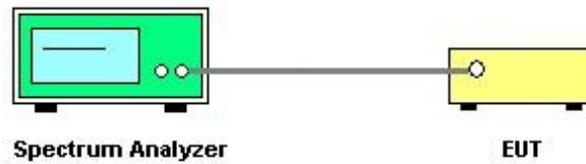

#### Radiated Measurement Test Set-Up Frequency Below 1 GHz

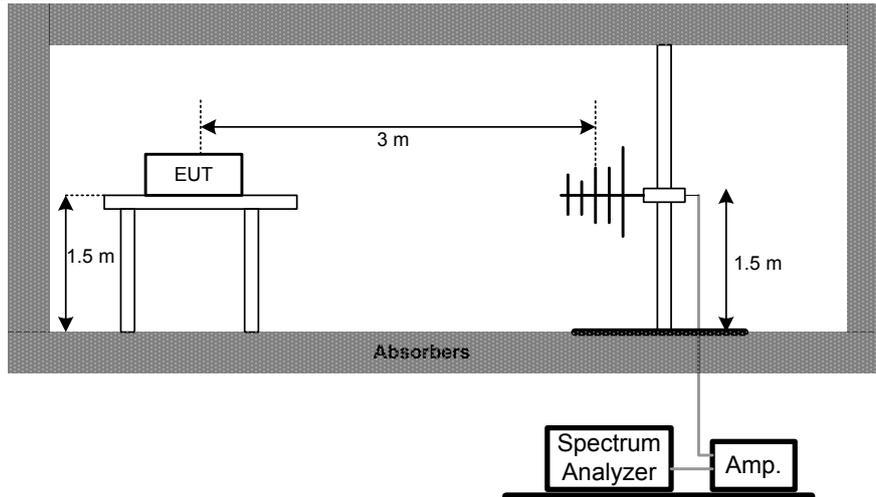

#### Radiated Measurement Test Set-Up Frequency Above 1 GHz

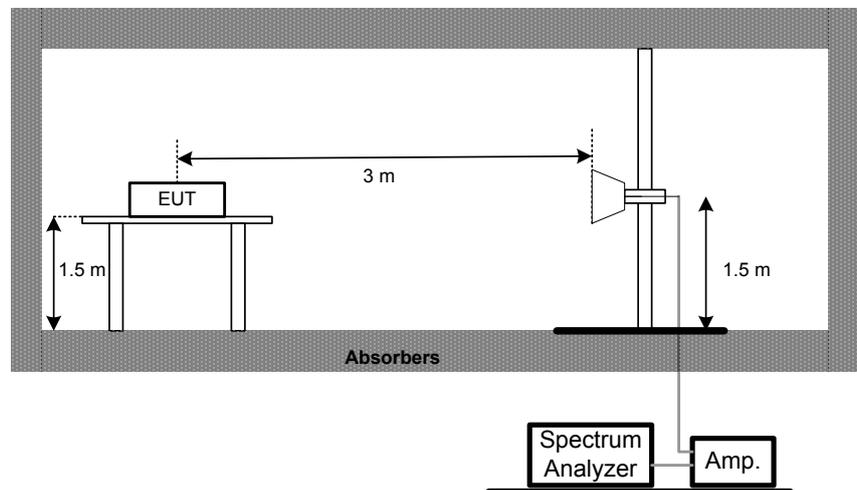

### 11.4 TEST DEVIATION

There is no deviation with the original standard.

### 11.5 EUT OPERATION DURING TEST

The measurements shall be performed during continuously transmitting.

### 11.6 TEST RESULTS

Please refer to the Appendix I.

## 12. RECEIVER SPURIOUS EMISSIONS

### 12.1 APPLIED PROCEDURES / LIMIT

Clause	4.3.1.11										
Test Item	Receiver spurious emissions										
Limit	<p>The receiver spurious emissions shall not exceed the values given in table 5. In case of FHSS equipment with antenna connectors, these limits apply to emissions at the antenna port (conducted). For emissions radiated by the cabinet or emissions radiated by integral antenna equipment (without antenna connectors), these limits are e.r.p. for emissions up to 1 GHz and e.i.r.p. for emissions above 1 GHz.</p> <p style="text-align: center;"><b>Table 5: Spurious emission limits for receivers</b></p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Frequency range</th> <th>Maximum power</th> <th>Bandwidth</th> </tr> </thead> <tbody> <tr> <td>30 MHz to 1 GHz</td> <td>-57 dBm</td> <td>100 kHz</td> </tr> <tr> <td>1 GHz to 12,75 GHz</td> <td>-47 dBm</td> <td>1 MHz</td> </tr> </tbody> </table>		Frequency range	Maximum power	Bandwidth	30 MHz to 1 GHz	-57 dBm	100 kHz	1 GHz to 12,75 GHz	-47 dBm	1 MHz
Frequency range	Maximum power	Bandwidth									
30 MHz to 1 GHz	-57 dBm	100 kHz									
1 GHz to 12,75 GHz	-47 dBm	1 MHz									

### 12.2 TEST PROCEDURES

Refer to ETSI EN 300 328, chapter 5.4.10.2.1 and 5.4.10.2.2.

### 12.3 TEST SETUP LAYOUT

Refer to clause 11.3.

### 12.4 TEST DEVIATION

There is no deviation with the original standard.

### 12.5 EUT OPERATION DURING TEST

The measurements shall be performed during continuously receiving.

### 12.6 TEST RESULTS

Please refer to the Appendix J.

### 13. RECEIVER BLOCKING

#### 13.1 APPLIED PROCEDURES / LIMIT

Clause	4.3.1.12											
Test Item	Receiver Blocking											
Limit	While maintaining the minimum performance criteria as defined in clause 4.3.1.12.3, the blocking levels at specified frequency offsets shall be equal to or greater than the limits defined for the applicable receiver category provided in table 6, table 7 or table 8.											
	Receiver Category 1 Table 6 contains the Receiver Blocking parameters for Receiver Category 1 equipment.											
	<b>Table 6: Receiver Blocking parameters for Receiver Category 1 equipment</b> <table border="1"> <thead> <tr> <th>Wanted signal mean power from companion device (dBm) (see notes 1 and 4)</th> <th>Blocking signal frequency (MHz)</th> <th>Blocking signal power (dBm) (see note 4)</th> <th>Type of blocking signal</th> </tr> </thead> <tbody> <tr> <td>(-133 dBm + 10 × log<sub>10</sub>(OCBW)) or -68 dBm whichever is less (see note 2)</td> <td>2 380 2 504</td> <td rowspan="2">-34</td> <td rowspan="2">CW</td> </tr> <tr> <td>(-139 dBm + 10 × log<sub>10</sub>(OCBW)) or -74 dBm whichever is less (see note 3)</td> <td>2 300 2 330 2 360 2 524 2 584 2 674</td> </tr> </tbody> </table>			Wanted signal mean power from companion device (dBm) (see notes 1 and 4)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 4)	Type of blocking signal	(-133 dBm + 10 × log <sub>10</sub> (OCBW)) or -68 dBm whichever is less (see note 2)	2 380 2 504	-34	CW	(-139 dBm + 10 × log <sub>10</sub> (OCBW)) or -74 dBm whichever is less (see note 3)
Wanted signal mean power from companion device (dBm) (see notes 1 and 4)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 4)	Type of blocking signal									
(-133 dBm + 10 × log <sub>10</sub> (OCBW)) or -68 dBm whichever is less (see note 2)	2 380 2 504	-34	CW									
(-139 dBm + 10 × log <sub>10</sub> (OCBW)) or -74 dBm whichever is less (see note 3)	2 300 2 330 2 360 2 524 2 584 2 674											
NOTE 1: OCBW is in Hz. NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P <sub>min</sub> + 26 dB where P <sub>min</sub> is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal. NOTE 3: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P <sub>min</sub> + 20 dB where P <sub>min</sub> is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal. NOTE 4: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.												

Limit

Receiver Category 2  
Table 7 contains the Receiver Blocking parameters for Receiver Category 2 equipment.

**Table 7: Receiver Blocking parameters receiver Category 2 equipment**

Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal
(-139 dBm + 10 × log <sub>10</sub> (OCBW) + 10 dB) or (-74 dBm + 10 dB) whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW

NOTE 1: OCBW is in Hz.

NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to  $P_{min} + 26$  dB where  $P_{min}$  is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.

NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.

Receiver Category 3  
Table 8 contains the Receiver Blocking parameters for Receiver Category 3 equipment.

**Table 8: Receiver Blocking parameters receiver Category 3 equipment**

Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal
(-139 dBm + 10 × log <sub>10</sub> (OCBW) + 20 dB) or (-74 dBm + 20 dB) whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW

NOTE 1: OCBW is in Hz.


NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to  $P_{min} + 30$  dB where  $P_{min}$  is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.

NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.

## 13.2 TEST PROCEDURES

Refer to ETSI EN 300 328, chapter 5.4.11.2.1.

### 13.3 TEST SETUP LAYOUT

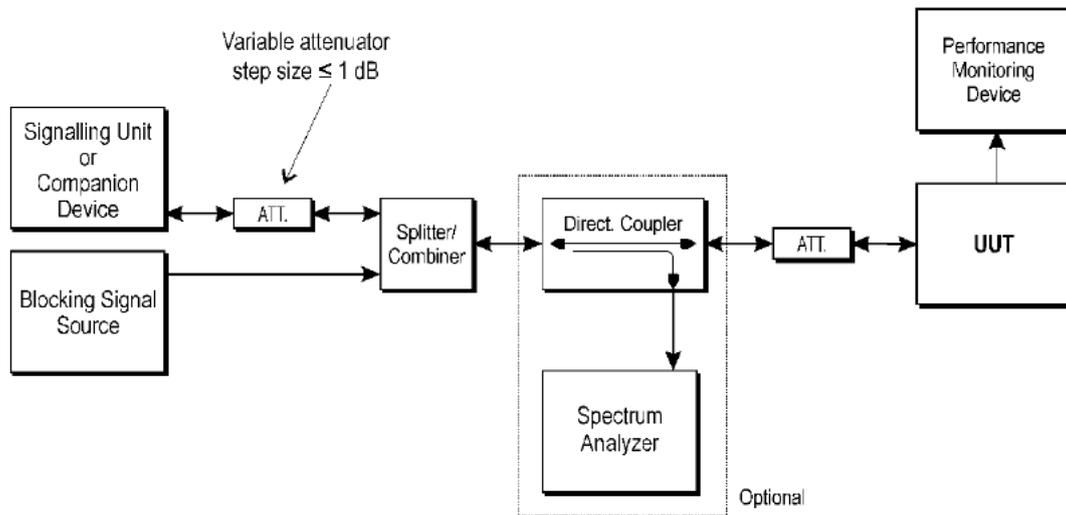

### 13.4 TEST DEVIATION

There is no deviation with the original standard.

### 13.5 EUT OPERATION DURING TEST

The measurements shall be performed during normal receiving.

### 13.6 TEST RESULTS

Please refer to the Appendix K.

**14. MEASUREMENT INSTRUMENTS LIST**

RF Output Power					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Table top type high and low temperature test chamber	CEPREI	CEEC-M64T-40	15-008	Jan. 08, 2024
2	Power Sensor	Agilent	U2021XA	MY53320006	Jan. 08, 2024
3	Power Sensor	Agilent	U2021XA	MY53340001	Jan. 08, 2024
4	Power Sensor	Agilent	U2021XA	MY53340005	Jan. 08, 2024
5	Power Sensor	Agilent	U2021XA	MY53340007	Jan. 08, 2024
6	Cable	Woke	20210802 001	N/A	N/A
7	Cable	Woke	60CM	N/A	N/A
8	Measurement Software	BTL	EN300328	N/A	N/A
9	Attenuator	Talent Microwave	TA10A2-S-18	N/A	N/A



Accumulated Transmit time, Frequency Occupation and Hopping Sequence & Hopping Frequency Separation & Occupied Channel Bandwidth & Transmitter unwanted emissions in the out-of-band domain & Transmitter and Receiver Spurious Emission (Conducted Measurement)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EXA Signal Analyzer	Keysight	N9010A	MY56480488	Jan. 08, 2024
2	Attenuator	Talent Microwave	TA10A0-S-26.5	N/A	N/A
3	Measurement Software	BTL	EN300328	N/A	N/A

Receiver Blocking					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	wideband radio communication tester	R&S	CMW500	153083	Jan. 08, 2024
2	EXG-B RF Vector Signal Generator	Keysight	N5172B	MY53051637	Jan. 08, 2024
3	Shielding box	Jiachen	JC-PB2009	200917D0184A	Jan. 08, 2024
4	Power divider	N/A	PD-2SF-2080	N / A	Jan. 08, 2024
5	Cable	RegalWay	20210802 013	N/A	N/A
6	Cable	RegalWay	20210802 021	N/A	N/A

Transmitter and Receiver Spurious Emission (Radiated Measurement)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Amplifier	HP	8447D	2944A11203	Jan. 08, 2024
2	EXA Spectrum Analyzer	Agilent	N9010A	MY50520044	Jan. 08, 2024
3	Controller	Innco Systems GmbH	CO3000-4port	CO3000/1155/45430119/P	N/A
4	Trilog-Broadband Antenna	Schwarzbeck	VULB9160	9160-3232	Feb. 24, 2024
5	Cable	Talent microwave	L6-NMNM-10M	N/A	N/A
6	Cable	Talent microwave	S02-181212-270	N/A	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
8	DRG Horn Antenna	ETS	3117-PA	221576	Mar. 04, 2024
9	Preamplifier	ETS	3117-PA	221576	Jul. 03, 2023
10	Cable	Talent microwave	A81-SMAMSMAM-12.5M	N/A	N/A
11	Cable	RegalWay	A4.0-2.9M2.9M-2.5m	N/A	Now. 30, 2023
12	Cable	Tonscend	HF160-KMKM-3M	N/A	Now. 30, 2023
13	EXA Signal Analyzer	Keysight	N9010A	MY56480488	Jan. 16, 2024
14	DRG Horn Antenna	ETS	3116C	218942	Mar. 02, 2024
15	Pre-Amplifier	EMC INSTRUMENT	EMC184045SE	980409	Jan. 08, 2024

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

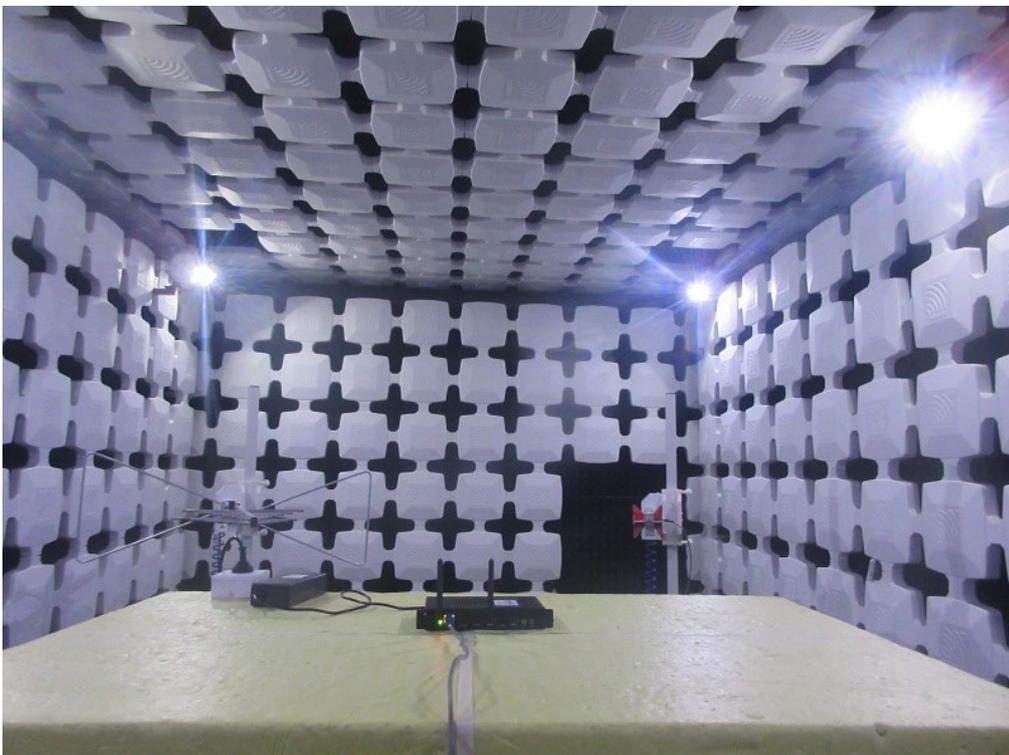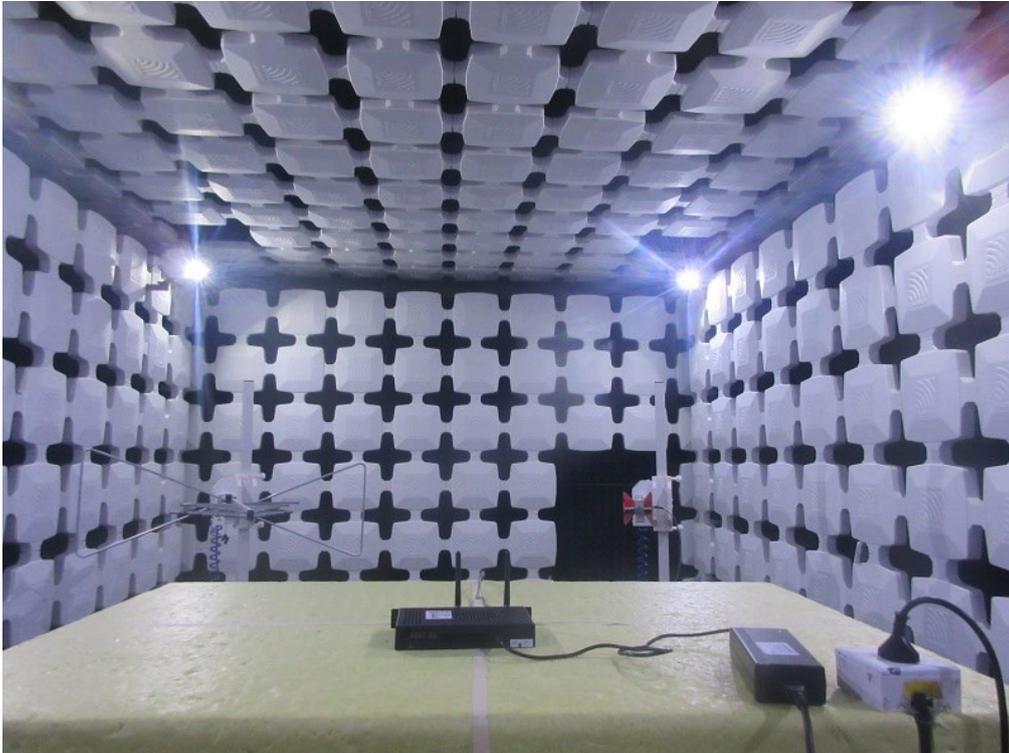**15. EUT TEST PHOTO****Radiated Emissions Test Photos**

## APPENDIX A - RF OUTPUT POWER

Test Mode:	TX Mode_1Mbps
------------	---------------

Test Conditions		e.i.r.p. ( dBm )
T nom (°C)	23.6	8.19
T min (°C)	0	8.15
T max (°C)	45	7.97
Max. e.i.r.p.		8.19
Limits		20dBm
Result		Pass
Burst Number		12

Test Mode:	TX Mode_2Mbps
------------	---------------

Test Conditions		e.i.r.p. ( dBm )
T nom (°C)	23.6	7.90
T min (°C)	0	7.86
T max (°C)	45	7.71
Max. e.i.r.p.		7.90
Limits		20dBm
Result		Pass
Burst Number		12

Test Mode:	TX Mode_3Mbps
------------	---------------

Test Conditions		e.i.r.p. ( dBm )
T nom (°C)	23.6	8.15
T min (°C)	0	8.08
T max (°C)	45	7.90
Max. e.i.r.p.		8.15
Limits		20dBm
Result		Pass
Burst Number		12

Note: e.i.r.p. = Conducted output power + G (Ant Gain)

## APPENDIX B - DUTY CYCLE, TX-SEQUENCE, TX-GAP

**Test Mode: N/A**

Note: "N/A" denotes test is not applicable to this device.

**APPENDIX C - ACCUMULATED TRANSMIT TIME, FREQUENCY  
OCCUPATION AND HOPPING SEQUENCE**

Test Mode:	TX Mode_1Mbps
------------	---------------

Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (3.16s Pluse N)	Dwell Time (s)	Limits (s)
DH1	2402	0.378	32	0.1210	0.4000
DH3	2402	1.630	16	0.2608	0.4000
DH5	2402	2.880	6	0.1728	0.4000
DH1	2480	0.378	32	0.1210	0.4000
DH3	2480	1.630	20	0.3260	0.4000
DH5	2480	2.860	8	0.2288	0.4000

**NOTE:**


DH1 Packet permit maximum  $1600 / 79 / 2 = 10.12$  hops per second in each channel (1 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times  $10.12 \times 31.6 = 320$  within 31.6 seconds.

DH3 Packet permit maximum  $1600 / 79 / 4 = 5.06$  hops per second in each channel (3 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times  $5.06 \times 31.6 = 160$  within 31.6 seconds.


DH5 Packet permit maximum  $1600 / 79 / 6 = 3.37$  hops per second in each channel (5 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times  $3.37 \times 31.6 = 106.6$  within 31.6 seconds.

Mode	Frequency (MHz)	Number of Hopping Channel	Time (ms) of 4*dwell time* (ms)*Actual number of hopping frequencies in use	Number of transmission in a period of 4*dwell time*Actual number of hopping frequencies in use	4*dwell time* 79 (ms) Minimum Frequency Occupation (ms)	Minimum Limit (ms)	Result
DH1	2402	79	119.4480	2	0.7560	0.378	Pass
DH3	2402	79	515.0800	2	3.2600	1.630	Pass
DH5	2402	79	910.0800	2	5.7600	2.880	Pass
DH1	2480	79	119.4480	1	0.3780	0.378	Pass
DH3	2480	79	515.0800	3	4.8900	1.630	Pass
DH5	2480	79	903.7600	3	8.5800	2.860	Pass


### 2402 MHz-DH1

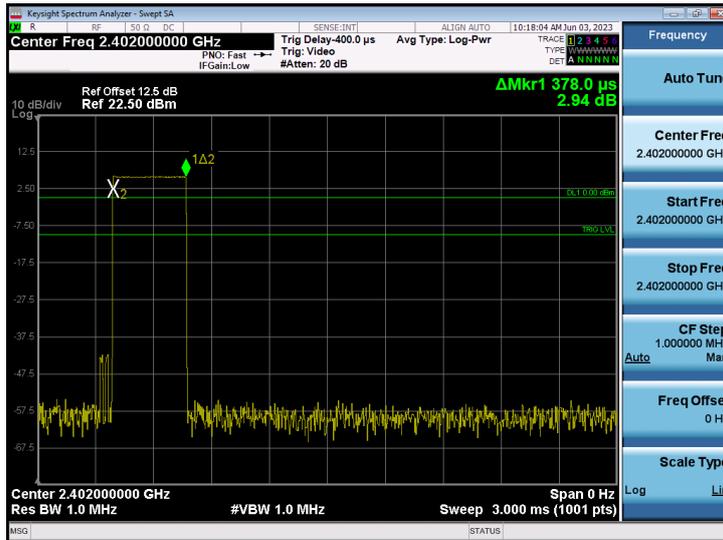


### 2402 MHz-DH3

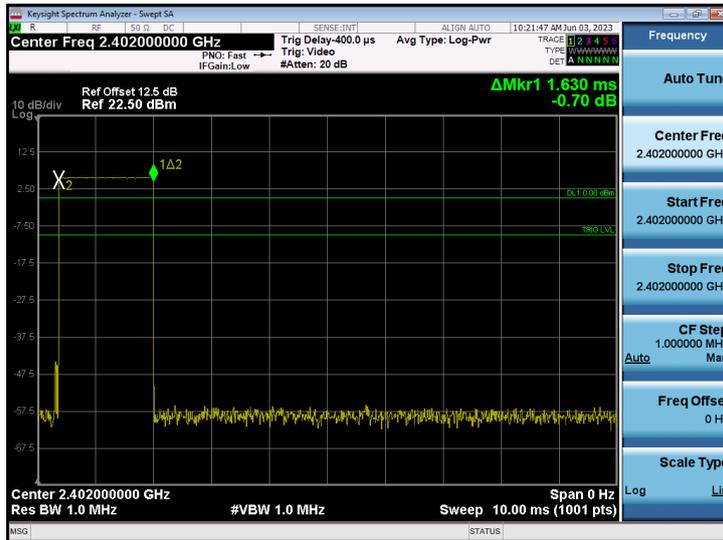


### 2402 MHz-DH5

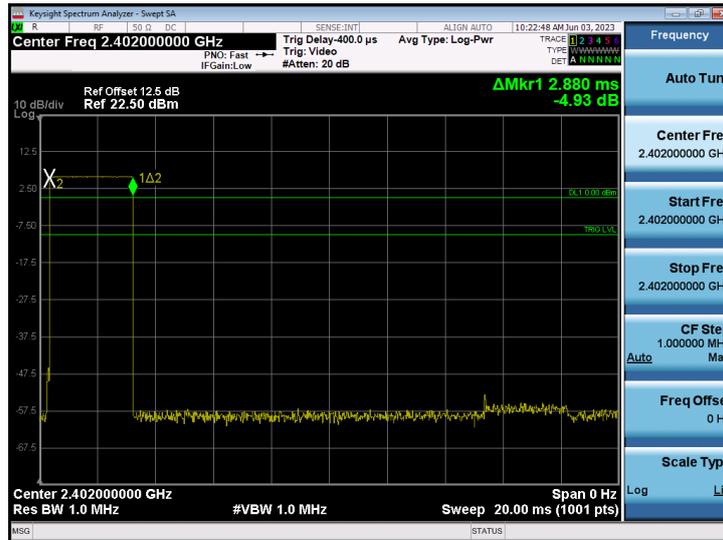


### 2480 MHz-DH1

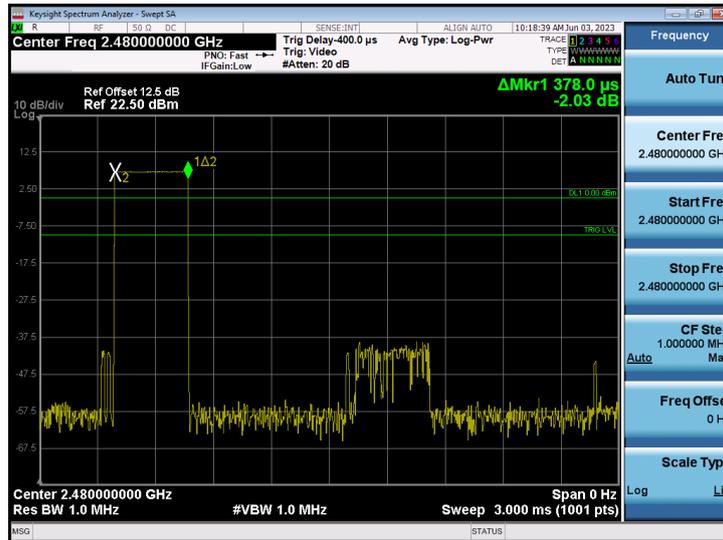

### 2480 MHz-DH3

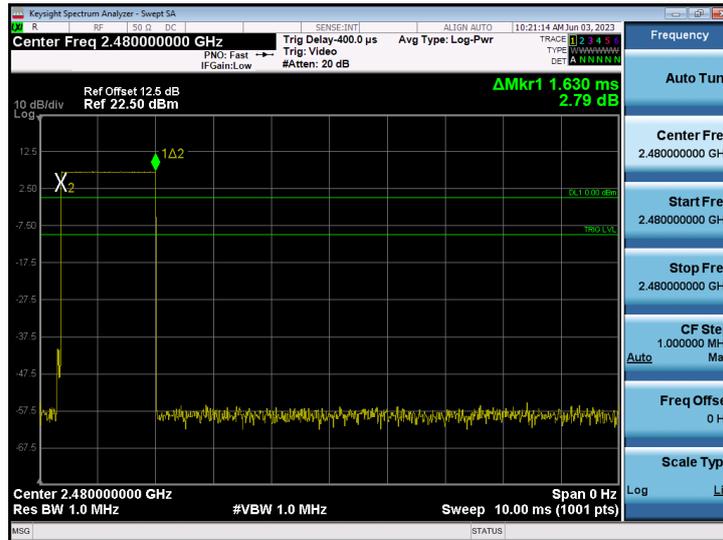

### 2480 MHz-DH5

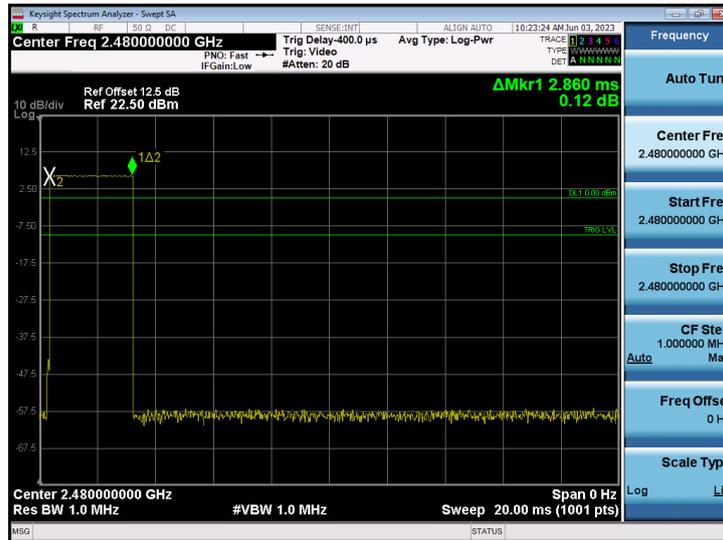


Test Mode:	TX Mode_1Mbps
------------	---------------

Frequency Band (MHz)	Number of Hopping Frequencies	Limit	Result
2400-2483.5	79	≥ 15	PASS

Frequency Band (MHz)	20dB Points Occupied Bandwidth (MHz)	Limit (MHz)	Result
2400-2483.5	79.58	≥ 58.45	PASS

Number of Hopping Frequencies &amp; 20dB Points Occupied Bandwidth

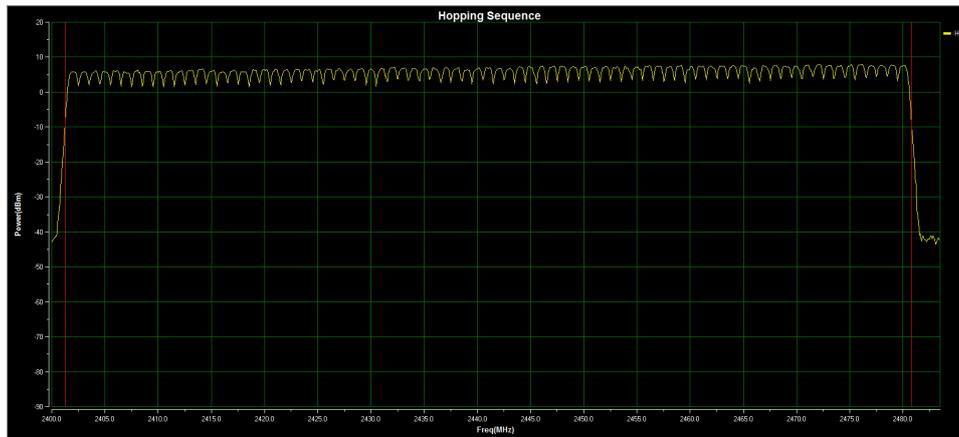

Hopping Sequence (MHz): 79.58	Band Occupancy Use (%): 95.30
Hopping Channel Number: 79	

Test Mode:	TX Mode_3Mbps
------------	---------------

Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (3.16s Pluse N)	Dwell Time (s)	Limits (s)
3DH1	2402	0.387	31	0.1200	0.4000
3DH3	2402	1.640	19	0.3116	0.4000
3DH5	2402	2.880	9	0.2592	0.4000
3DH1	2480	0.390	32	0.1248	0.4000
3DH3	2480	1.630	19	0.3097	0.4000
3DH5	2480	2.880	4	0.1152	0.4000

**NOTE:**


3DH1 Packet permit maximum  $1600 / 79 / 2 = 10.12$  hops per second in each channel (1 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times  $10.12 \times 31.6 = 320$  within 31.6 seconds.

3DH3 Packet permit maximum  $1600 / 79 / 4 = 5.06$  hops per second in each channel (3 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times  $5.06 \times 31.6 = 160$  within 31.6 seconds.


3DH5 Packet permit maximum  $1600 / 79 / 6 = 3.37$  hops per second in each channel (5 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times  $3.37 \times 31.6 = 106.6$  within 31.6 seconds.

Mode	Frequency (MHz)	Number of Hopping Channel	Time (ms) of 4*dwell time* (ms)*Actual number of hopping frequencies in use	Number of transmission in a period of 4*dwell time*Actual number of hopping frequencies in use	4*dwell time* 79 (ms) Minimum Frequency Occupation (ms)	Minimum Limit (ms)	Result
3DH1	2402	79	122.2920	2	0.7740	0.387	Pass
3DH3	2402	79	518.2400	3	4.9200	1.640	Pass
3DH5	2402	79	910.0800	3	8.6400	2.880	Pass
3DH1	2480	79	123.2400	3	1.1700	0.390	Pass
3DH3	2480	79	515.0800	1	1.6300	1.630	Pass
3DH5	2480	79	910.0800	3	8.6400	2.880	Pass


### 2402 MHz-3DH1

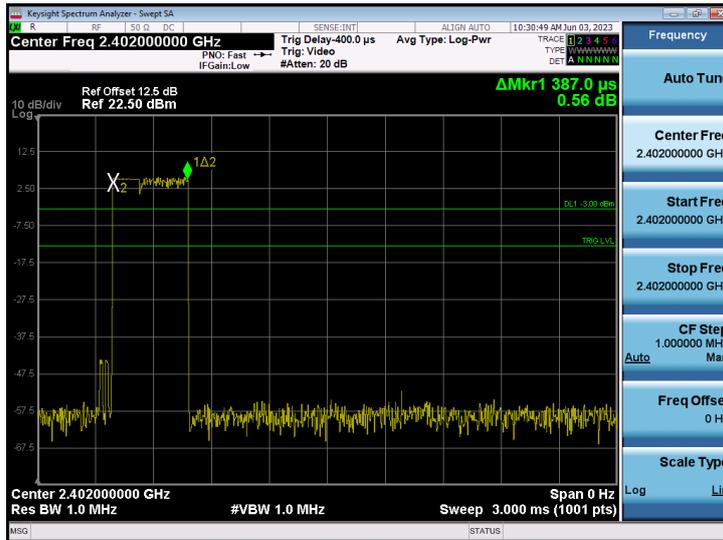


### 2402 MHz-3DH3

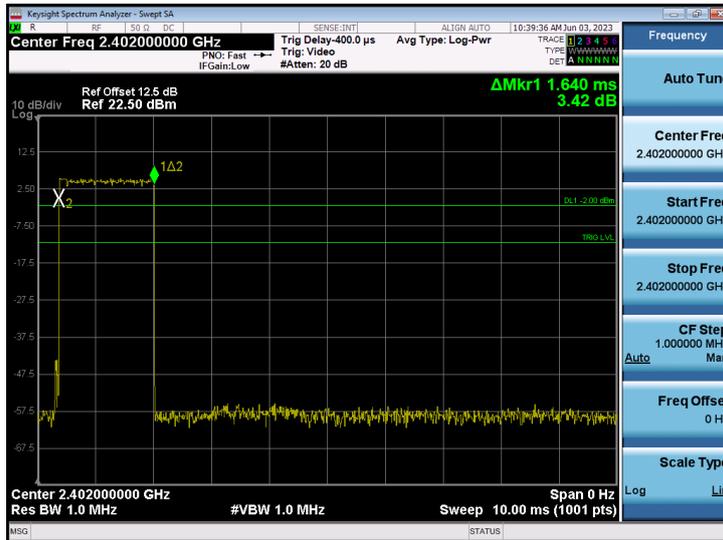


### 2402 MHz-3DH5

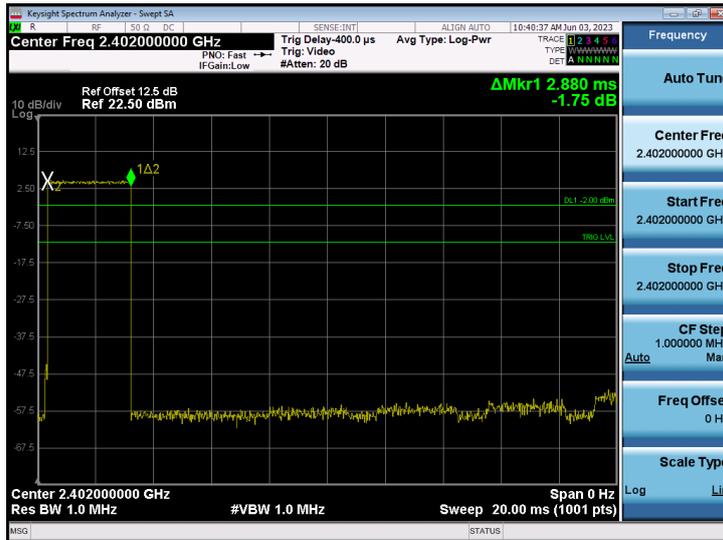


### 2480 MHz-3DH1

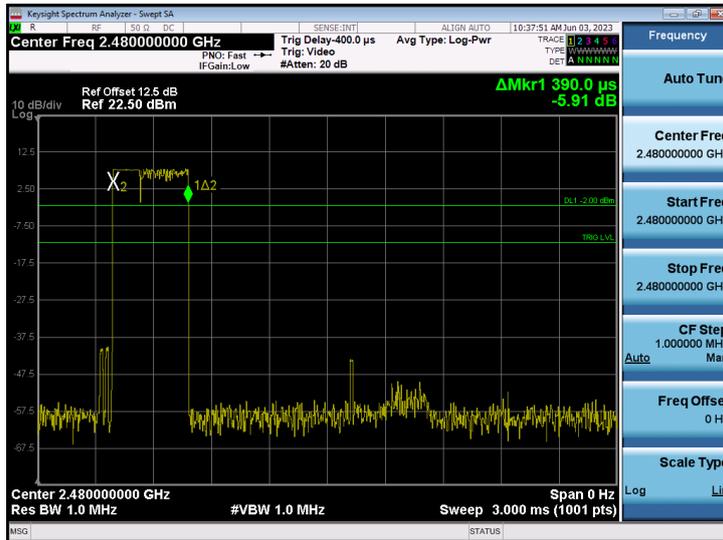

### 2480 MHz-3DH3

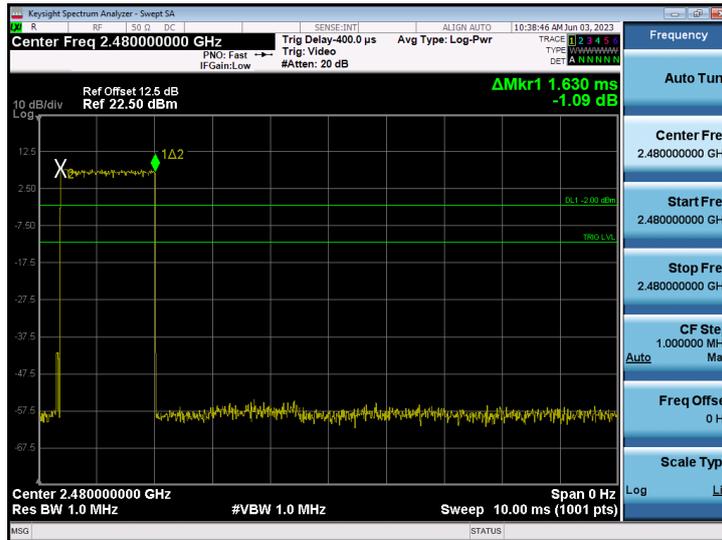

### 2480 MHz-3DH5

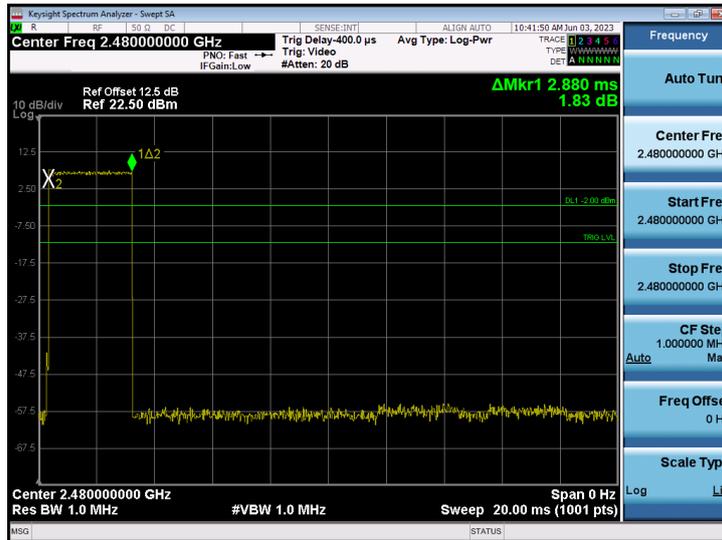


Test Mode:	TX Mode_3Mbps
------------	---------------

Frequency Band (MHz)	Number of Hopping Frequencies	Limit	Result
2400-2483.5	79	$\geq 15$	PASS

Frequency Band (MHz)	20dB Points Occupied Bandwidth (MHz)	Limit (MHz)	Result
2400-2483.5	80.08	$\geq 58.45$	PASS

Number of Hopping Frequencies &amp; 20dB Points Occupied Bandwidth

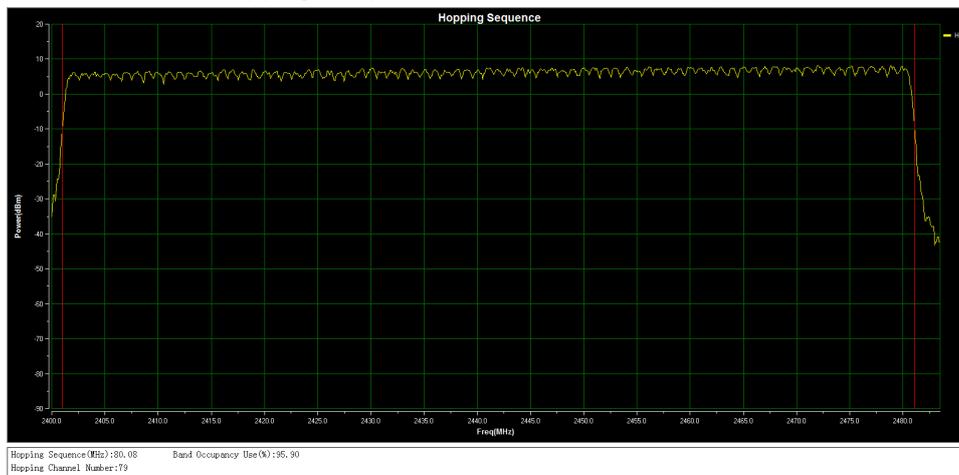

## **APPENDIX D - HOPPING FREQUENCY SEPARATION**

Test Mode: TX Mode\_1Mbps

Frequency Band (MHz)	Channel Separation (MHz)	Channel Separation Limit (kHz)	Result
2400-2483.5	1.00	100	Pass

### 1Mbps




Hopping Frequency Separation(MHz):1.00  
Test Result:Pass

Test Mode: TX Mode\_3Mbps

Frequency Band (MHz)	Channel Separation (MHz)	Channel Separation Limit (kHz)	Result
2400-2483.5	1.04	100	Pass

**3Mbps**

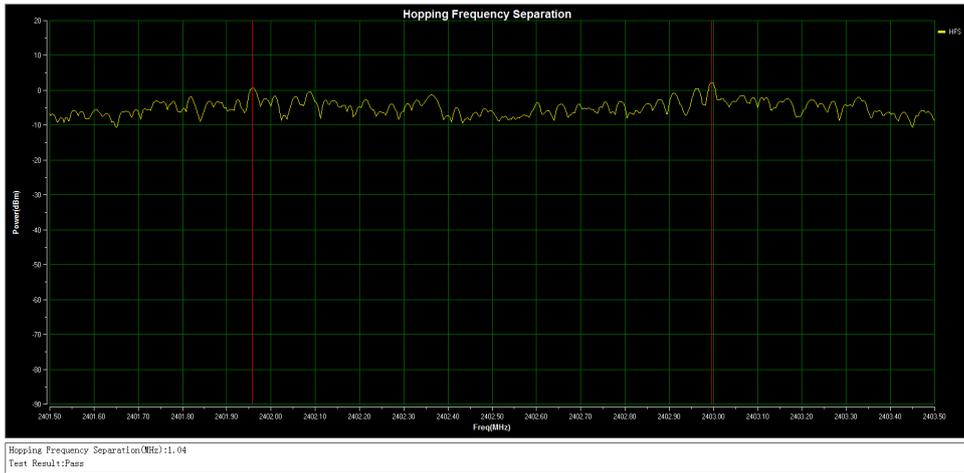

## APPENDIX E - MEDIUM UTILIZATION (MU) FACTOR

**Test Mode: N/A**

Note: "N/A" denotes test is not applicable to this device.

## APPENDIX F - ADAPTIVITY

**Test Mode: N/A**

Note: "N/A" denotes test is not applicable to this device.

## **APPENDIX G - OCCUPIED CHANNEL BANDWIDTH**

Test Mode:	TX Mode_1Mbps
------------	---------------

Frequency (MHz)	Occupied Channel Bandwidth (MHz)	F <sub>L</sub> at 99% BW (MHz)	F <sub>H</sub> at 99% BW (MHz)	Result
2402	0.882	2401.55	-	Pass
2480	0.889	-	2480.44	
N/A		F <sub>L</sub> > 2400	F <sub>H</sub> < 2483.5	

### TX Mode 2402MHz 1Mbps



### TX Mode 2480MHz 1Mbps




<b>Test Mode:</b>	<b>TX Mode_3Mbps</b>
-------------------	----------------------

Frequency (MHz)	Occupied Channel Bandwidth (MHz)	F <sub>L</sub> at 99% BW (MHz)	F <sub>H</sub> at 99% BW (MHz)	Result
2402	1.383	2401.30	-	Pass
2480	1.384	-	2480.68	
N/A		F <sub>L</sub> > 2400	F <sub>H</sub> < 2483.5	

### TX Mode\_2402MHz\_3Mbps





### TX Mode\_2480MHz\_3Mbps

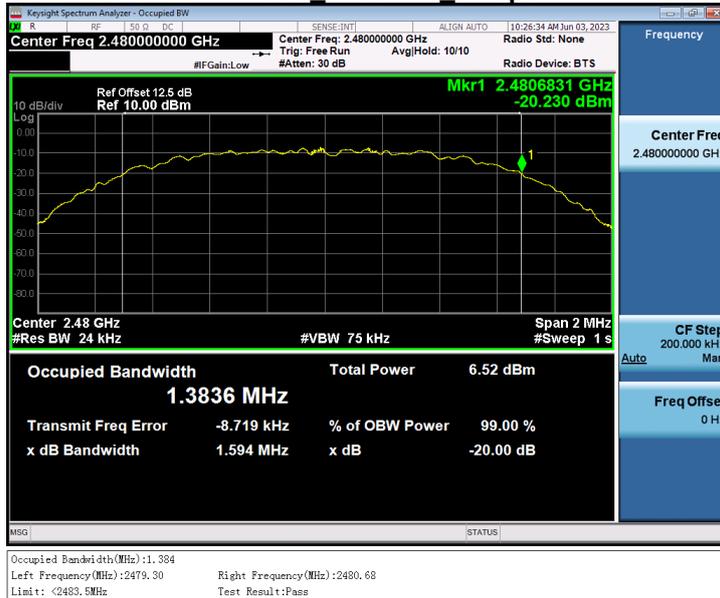

## **APPENDIX H - TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN**


Test Mode: TX Mode\_1Mbps

### TX Mode\_1Mbps

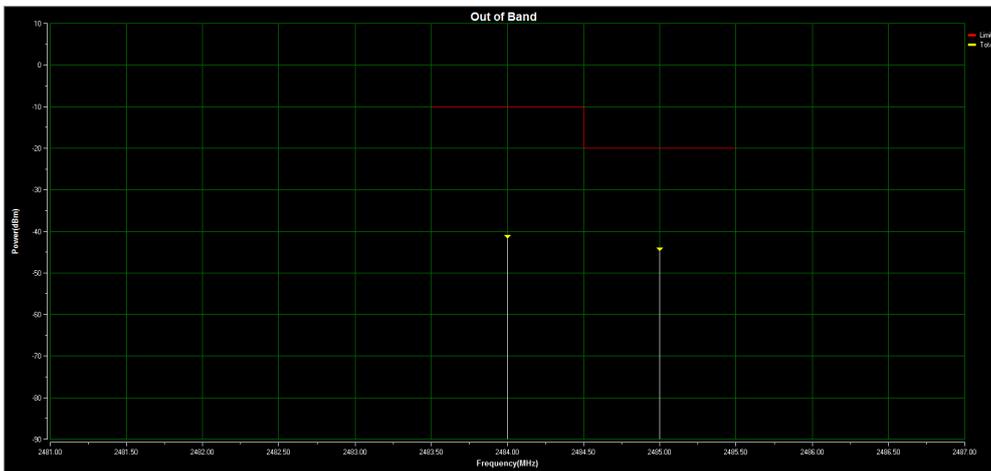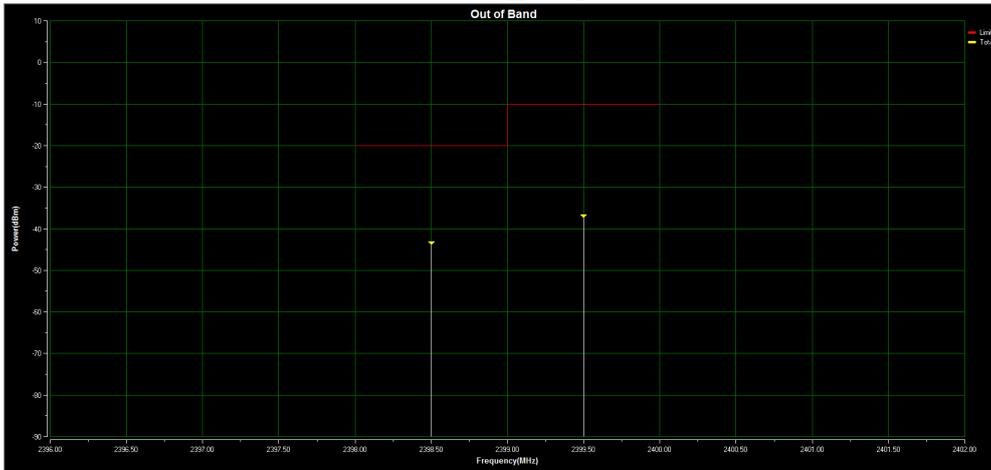


Test Mode: TX Mode\_3Mbps

### TX Mode\_3Mbps

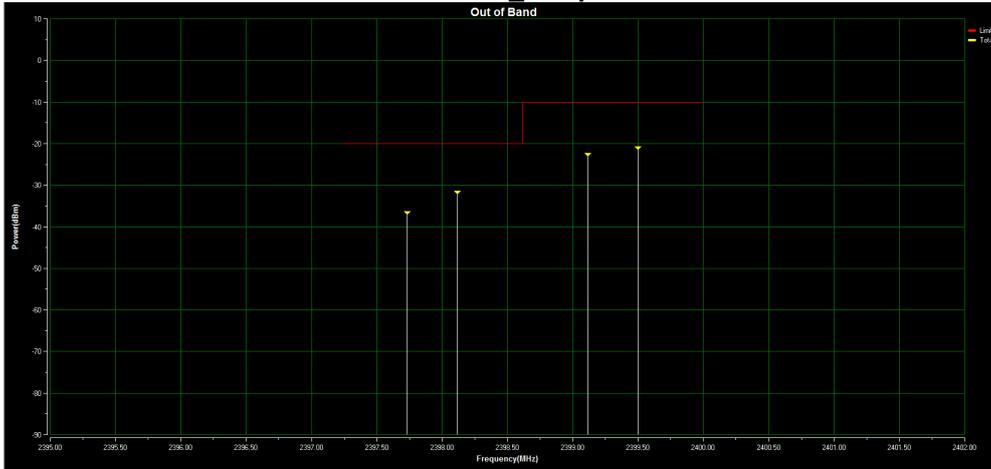

Test Result: Pass

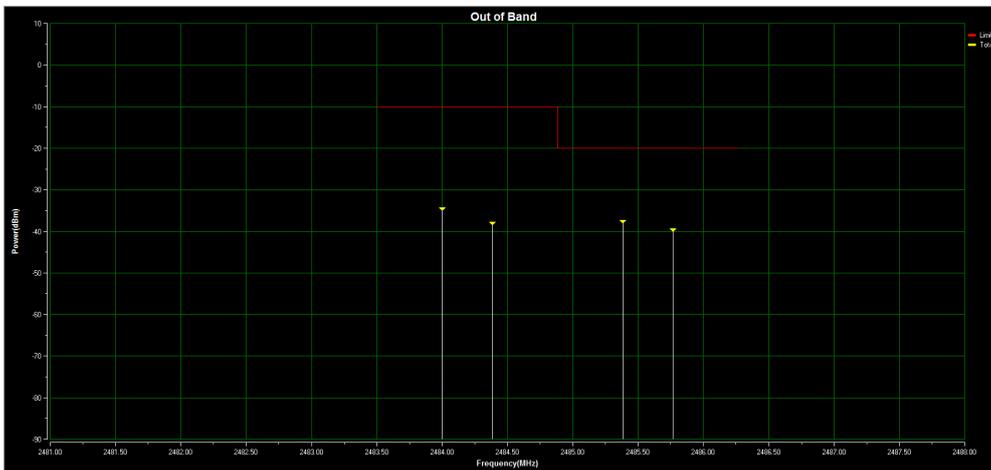


Test Result: Pass


## **APPENDIX I - TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN**

Test Mode: TX Mode\_1Mbps

### TX Mode 2402 MHz

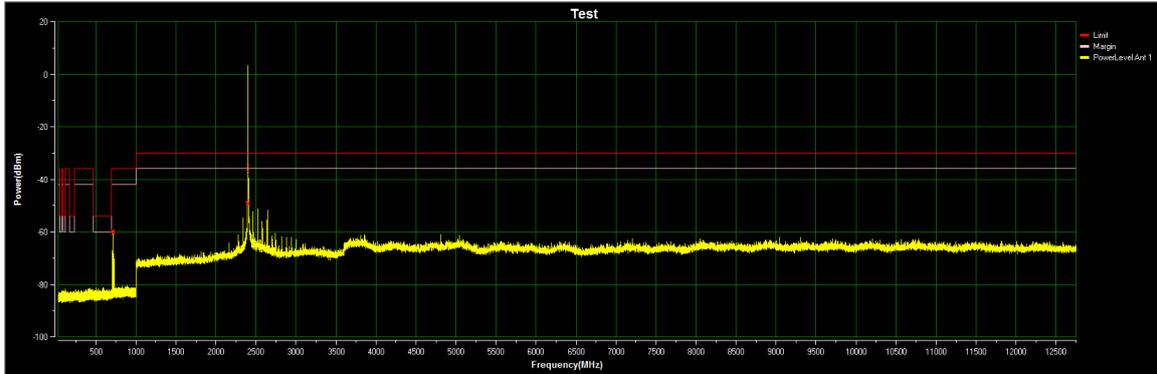


Frequency(MHz)	Reading Level (dBm)	Limit (dBm)	Margin (dB)	Result
711.25	-59.3	-36	23.3	Pass
711.2	-59.31	-36	23.31	Pass
710.65	-59.66	-36	23.66	Pass
711.9	-60.05	-36	24.05	Pass
710.6	-60.22	-36	24.22	Pass
711.85	-60.29	-36	24.29	Pass
2397	-34.45	-30	4.45	Pass
2397.5	-34.51	-30	4.51	Pass
2398	-36.69	-30	6.69	Pass
2395.5	-48.03	-30	18.03	Pass
2396	-48.84	-30	18.84	Pass
2396.5	-48.85	-30	18.85	Pass

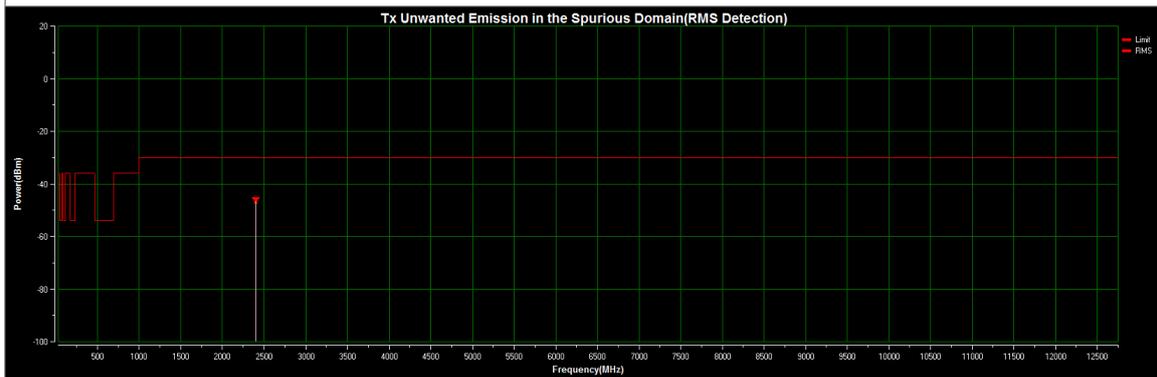


Frequency(MHz)	Reading Level (dBm)	Limit (dBm)	Margin (dB)	Result
2397	-46.64	-30	16.64	Pass
2397.5	-46.6	-30	16.6	Pass

## TX Mode 2480 MHz

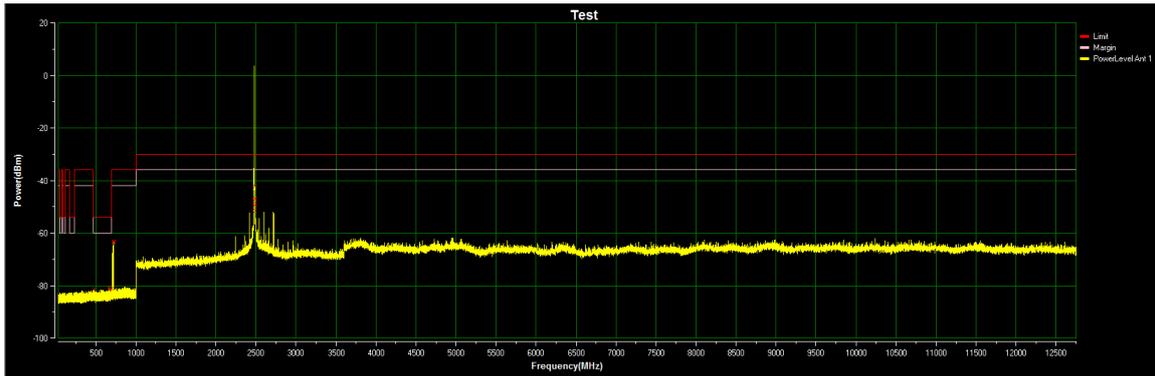


Frequency(MHz)	Reading Level (dBm)	Limit (dBm)	Margin(dB)	Result
672.15	-80.75	-54	26.75	Pass
692.1	-80.84	-54	26.84	Pass
722.25	-63.04	-36	27.04	Pass
722.15	-63.09	-36	27.09	Pass
672.2	-81.13	-54	27.13	Pass
476.6	-81.14	-54	27.14	Pass
2495.5	-42.01	-30	12.01	Pass
2496.5	-46.57	-30	16.57	Pass
2496	-46.78	-30	16.78	Pass
2497.5	-48.72	-30	18.72	Pass
2497	-49.12	-30	19.12	Pass
2499.5	-51.32	-30	21.32	Pass

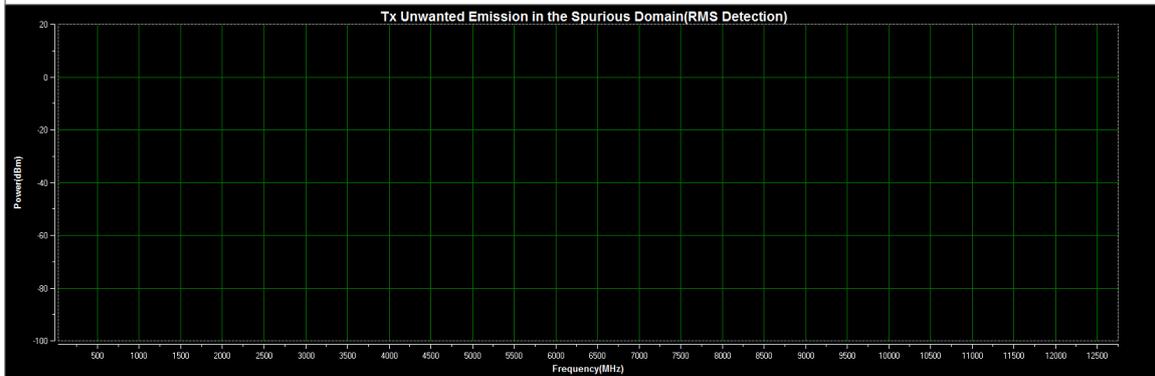


Frequency(MHz)	Reading Level (dBm)	Limit (dBm)	Margin(dB)	Result
----------------	---------------------	-------------	------------	--------

Test Mode: TX Mode\_3Mbps

### TX Mode 2402 MHz

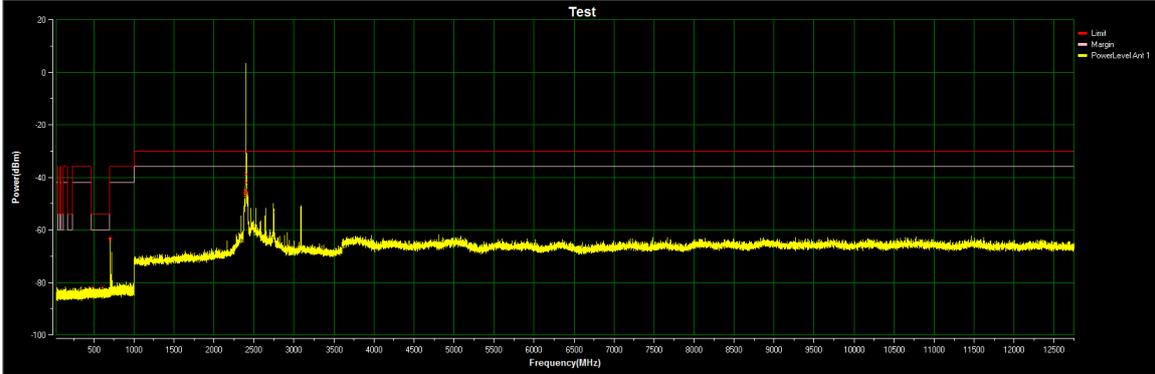


Frequency (MHz)	Reading Level (dBm)	Limit (dBm)	Margin (dB)	Result
705.5	-62.52	-36	26.52	Pass
705.55	-62.63	-36	26.63	Pass
605.55	-81.34	-54	27.34	Pass
605.6	-81.34	-54	27.34	Pass
496.85	-81.37	-54	27.37	Pass
705.45	-63.48	-36	27.48	Pass
2397	-38.5	-30	8.5	Pass
2396.5	-41.76	-30	11.76	Pass
2396	-44.97	-30	14.97	Pass
2395.5	-45.07	-30	15.07	Pass
2395	-45.7	-30	15.7	Pass
2394	-46.53	-30	16.53	Pass

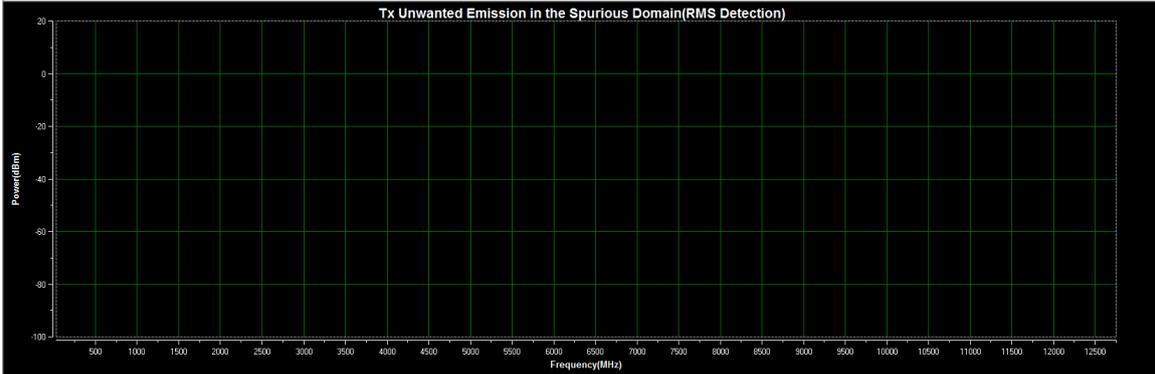


Frequency (MHz)	Reading Level (dBm)	Limit (dBm)	Margin (dB)	Result
-----------------	---------------------	-------------	-------------	--------

## TX Mode 2480 MHz

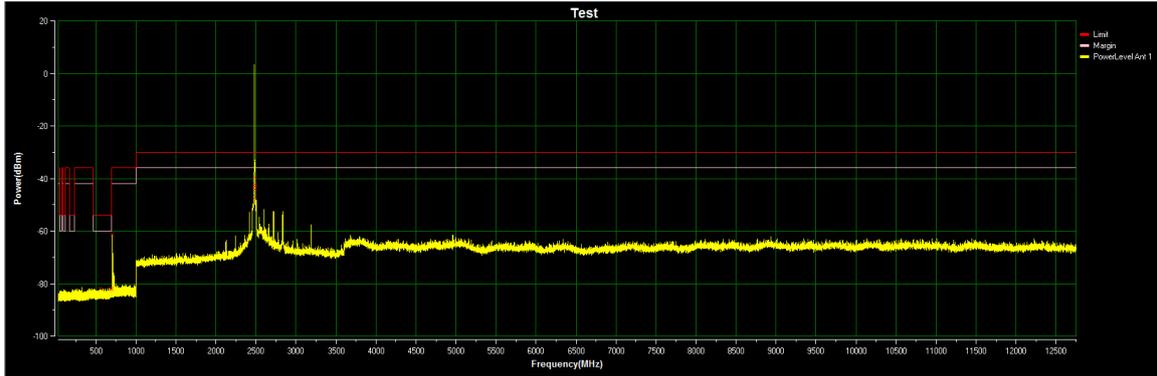


Frequency(MHz)	Reading Level (dBm)	Limit (dBm)	Margin (dB)	Result
705.4	-61	-36	25	Pass
705.45	-61.13	-36	25.13	Pass
679.5	-81.63	-54	27.63	Pass
693.45	-81.64	-54	27.64	Pass
556.55	-81.66	-54	27.66	Pass
556.5	-81.67	-54	27.67	Pass
2497.5	-39.29	-30	9.29	Pass
2498	-39.32	-30	9.32	Pass
2497	-41.96	-30	11.96	Pass
2498.5	-42.79	-30	12.79	Pass
2496.5	-43.74	-30	13.74	Pass
2499	-46.71	-30	16.71	Pass

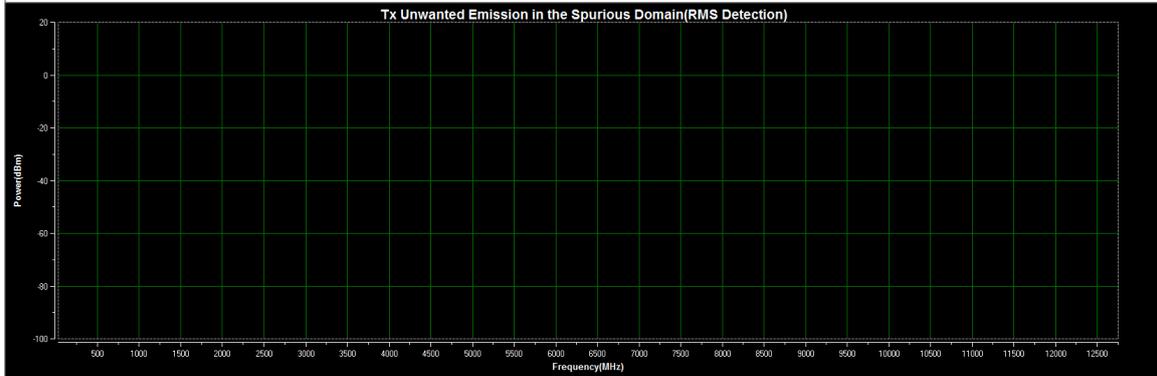


Frequency(MHz)	Reading Level (dBm)	Limit (dBm)	Margin (dB)	Result
----------------	---------------------	-------------	-------------	--------

Test Mode	TX Mode 2402 MHz_1Mbps	Polarization	Vertical
-----------	------------------------	--------------	----------

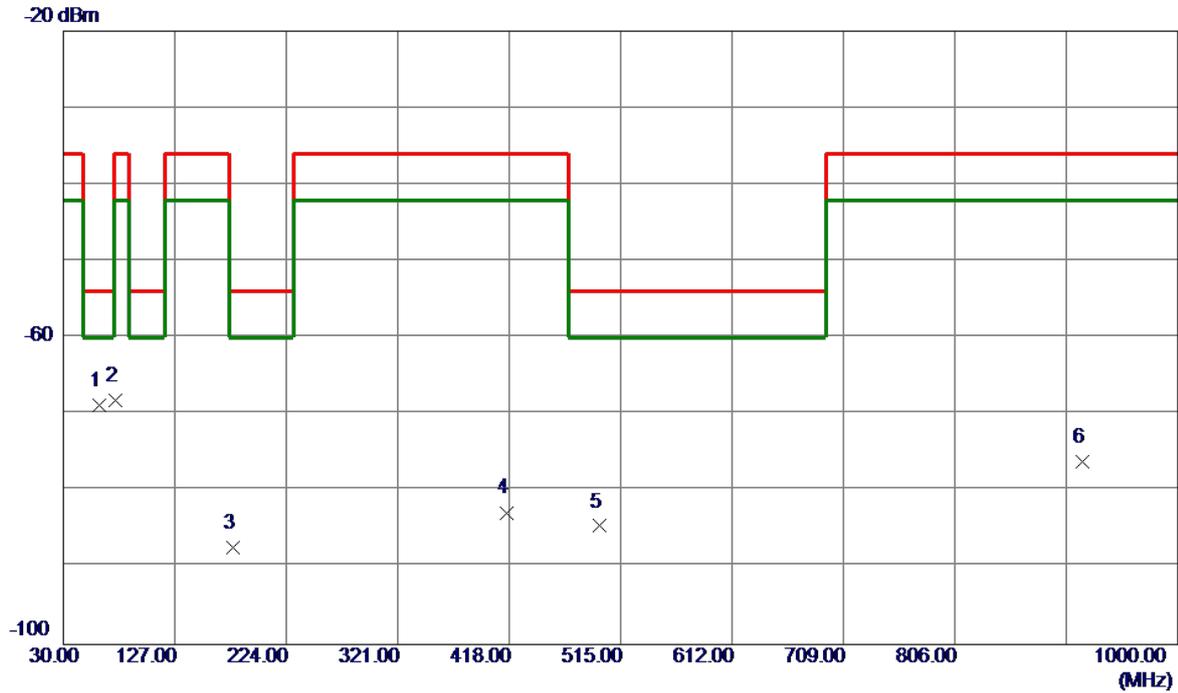


No.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measurement dBm	Limit dBm	Margin dB	Detector	Comment
1 *	60.7490	-65.31	-3.48	-68.79	-54.00	-14.79	RMS	
2	75.6870	-68.96	0.85	-68.11	-36.00	-32.11	RMS	
3	177.6339	-77.19	-10.17	-87.36	-54.00	-33.36	RMS	
4	415.9630	-75.50	-7.30	-82.80	-36.00	-46.80	RMS	
5	496.8610	-77.84	-6.72	-84.56	-54.00	-30.56	RMS	
6	916.9680	-76.74	0.53	-76.21	-36.00	-40.21	RMS	

Test Mode	TX Mode 2402 MHz_1Mbps	Polarization	Horizontal
-----------	------------------------	--------------	------------

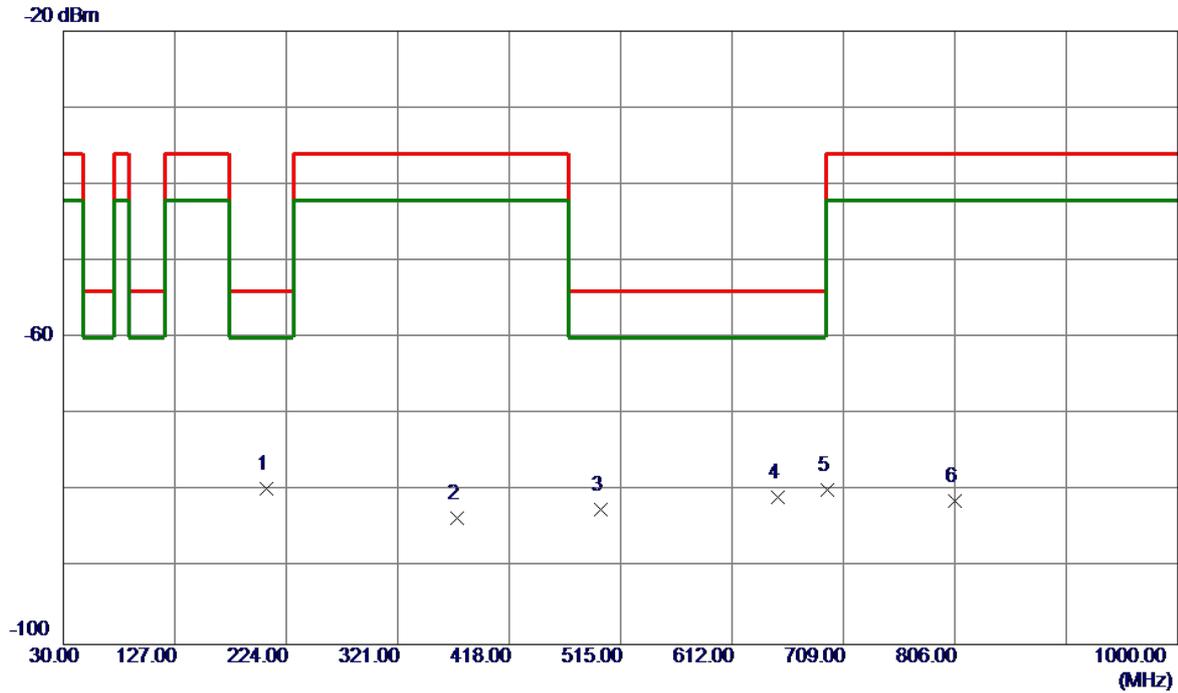


No.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measurement dBm	Limit dBm	Margin dB	Detector	Comment
1 *	206.6370	-68.86	-10.77	-79.63	-54.00	-25.63	RMS	
2	372.9920	-75.80	-7.71	-83.51	-36.00	-47.51	RMS	
3	497.4430	-76.36	-6.00	-82.36	-54.00	-28.36	RMS	
4	652.3520	-77.25	-3.61	-80.86	-54.00	-26.86	RMS	
5	694.5470	-77.41	-2.37	-79.78	-36.00	-43.78	RMS	
6	806.2910	-80.09	-1.21	-81.30	-36.00	-45.30	RMS	

Test Mode	TX Mode 2480 MHz_1Mbps	Polarization	Vertical
-----------	------------------------	--------------	----------

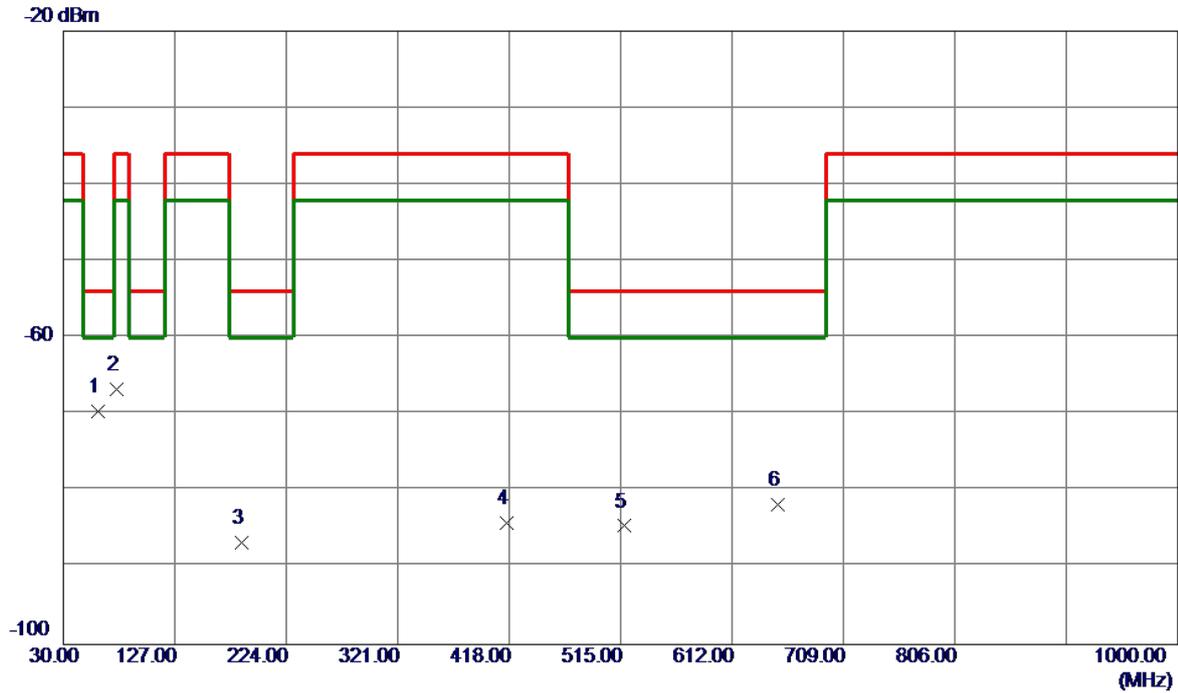


No.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure ment dBm	Limit dBm	Margin dB	Detector	Comment
1 *	60.0700	-66.81	-2.83	-69.64	-54.00	-15.64	RMS	
2	76.0750	-67.51	0.74	-66.77	-36.00	-30.77	RMS	
3	185.0060	-75.34	-11.34	-86.68	-54.00	-32.68	RMS	
4	415.9630	-76.86	-7.30	-84.16	-36.00	-48.16	RMS	
5	518.4920	-78.20	-6.36	-84.56	-54.00	-30.56	RMS	
6	651.9640	-77.49	-4.29	-81.78	-54.00	-27.78	RMS	

Test Mode	TX Mode 2480 MHz_1Mbps	Polarization	Horizontal
-----------	------------------------	--------------	------------

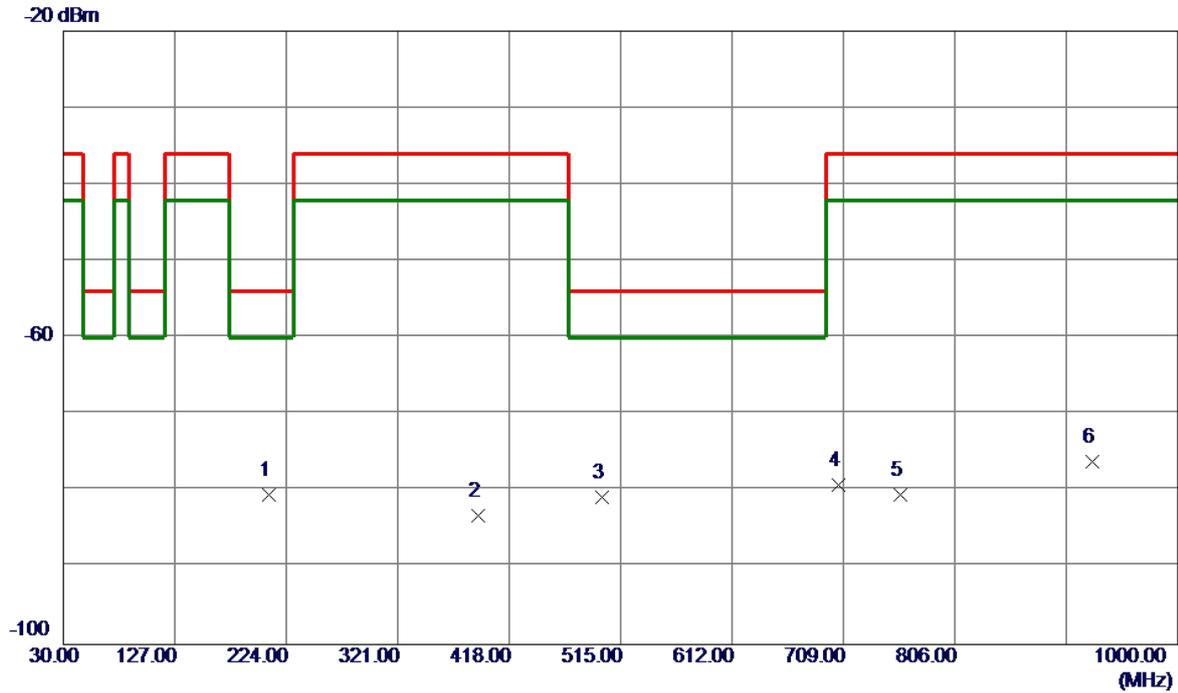


No.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measurement dBm	Limit dBm	Margin dB	Detector	Comment
1 *	208.3829	-69.90	-10.52	-80.42	-54.00	-26.42	RMS	
2	390.5489	-75.69	-7.47	-83.16	-36.00	-47.16	RMS	
3	498.7040	-74.85	-5.96	-80.81	-54.00	-26.81	RMS	
4	704.6350	-77.02	-2.17	-79.19	-36.00	-43.19	RMS	
5	758.0820	-78.74	-1.75	-80.49	-36.00	-44.49	RMS	
6	925.6010	-77.15	0.99	-76.16	-36.00	-40.16	RMS	

Test Mode	TX Mode 2402 MHz_1Mbps	Polarization	Vertical
-----------	------------------------	--------------	----------

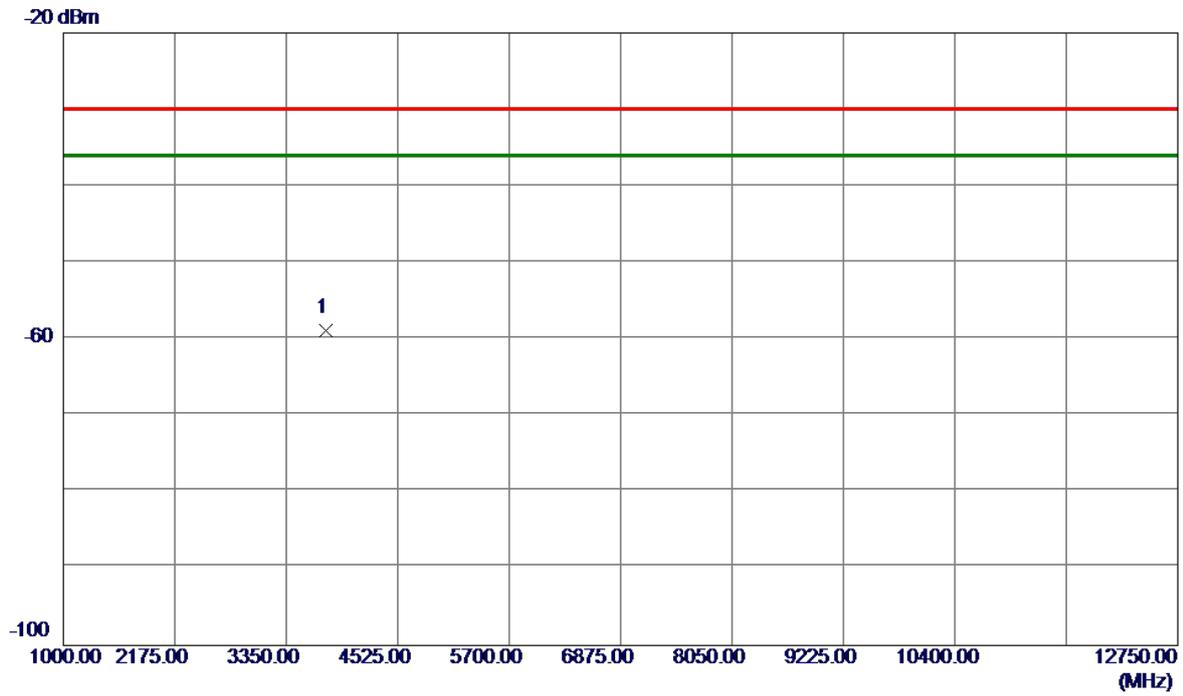


No.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure ment dBm	Limit dBm	Margin dB	Detector	Comment
1 *	3768.8870	-59.03	0.07	-58.96	-30.00	-28.96	RMS	

Test Mode	TX Mode 2402 MHz_1Mbps	Polarization	Horizontal
-----------	------------------------	--------------	------------

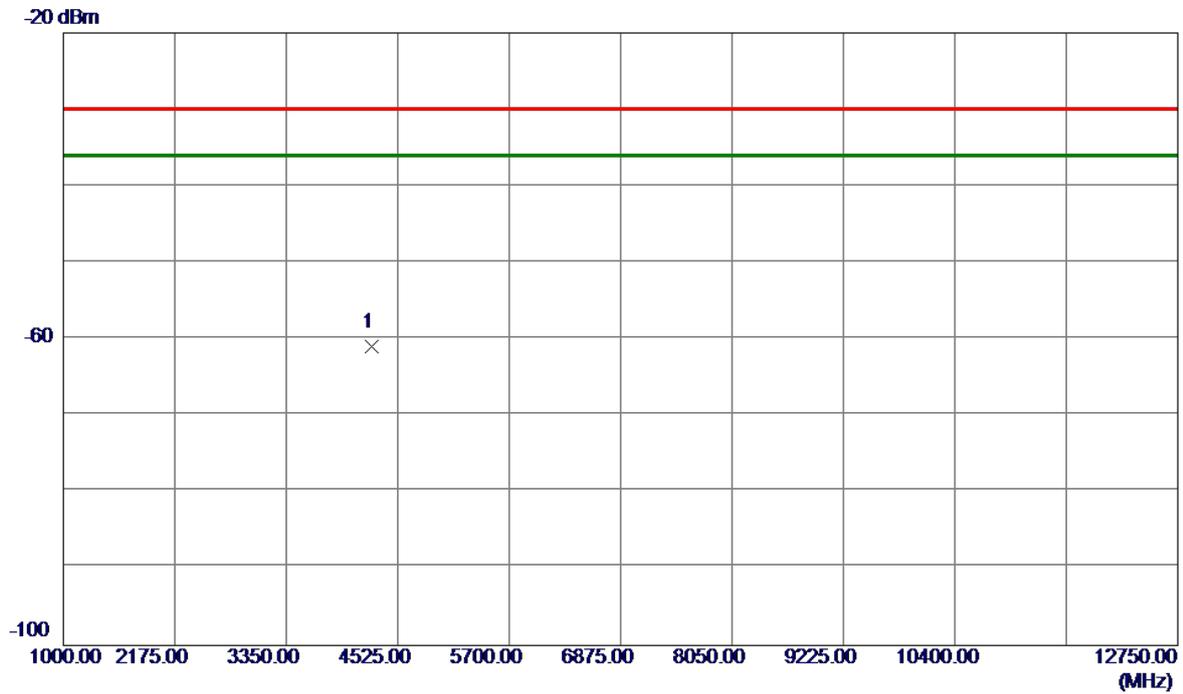


No.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure ment dBm	Limit dBm	Margin dB	Detector	Comment
1 *	4248.2879	-61.01	-0.01	-61.02	-30.00	-31.02	RMS	

Test Mode	TX Mode 2480 MHz_1Mbps	Polarization	Vertical
-----------	------------------------	--------------	----------

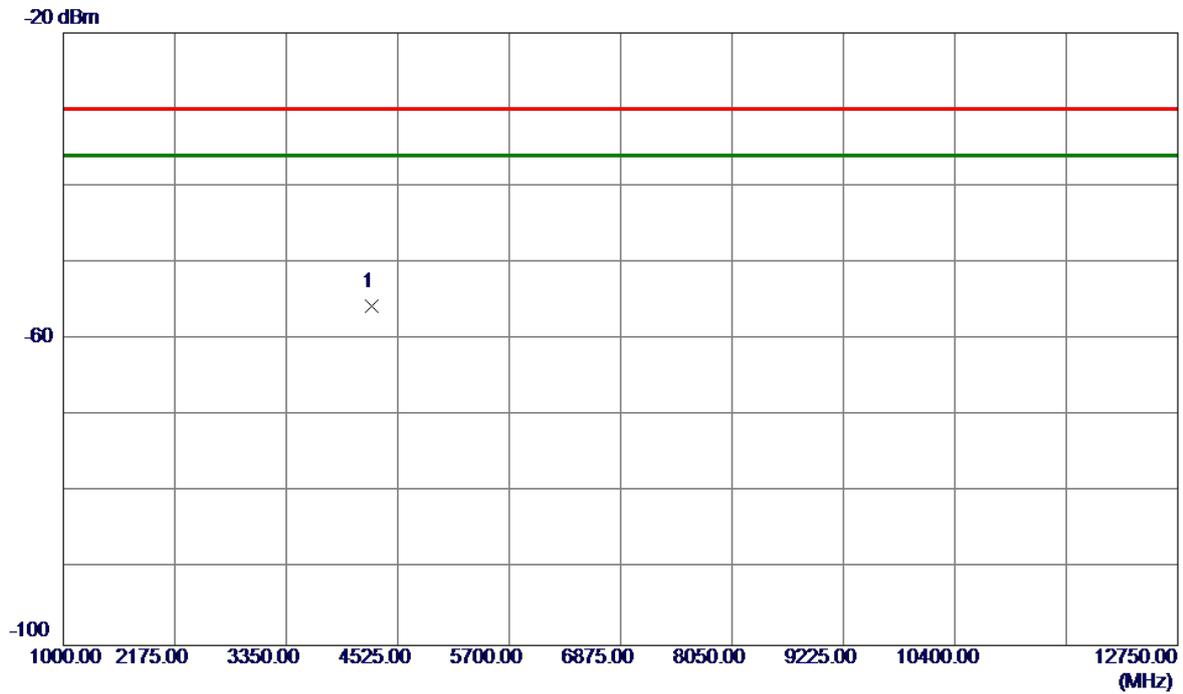


No.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure ment dBm	Limit dBm	Margin dB	Detector	Comment
1 *	4255.9250	-55.61	-0.13	-55.74	-30.00	-25.74	RMS	

Test Mode	TX Mode 2480 MHz_1Mbps	Polarization	Horizontal
-----------	------------------------	--------------	------------

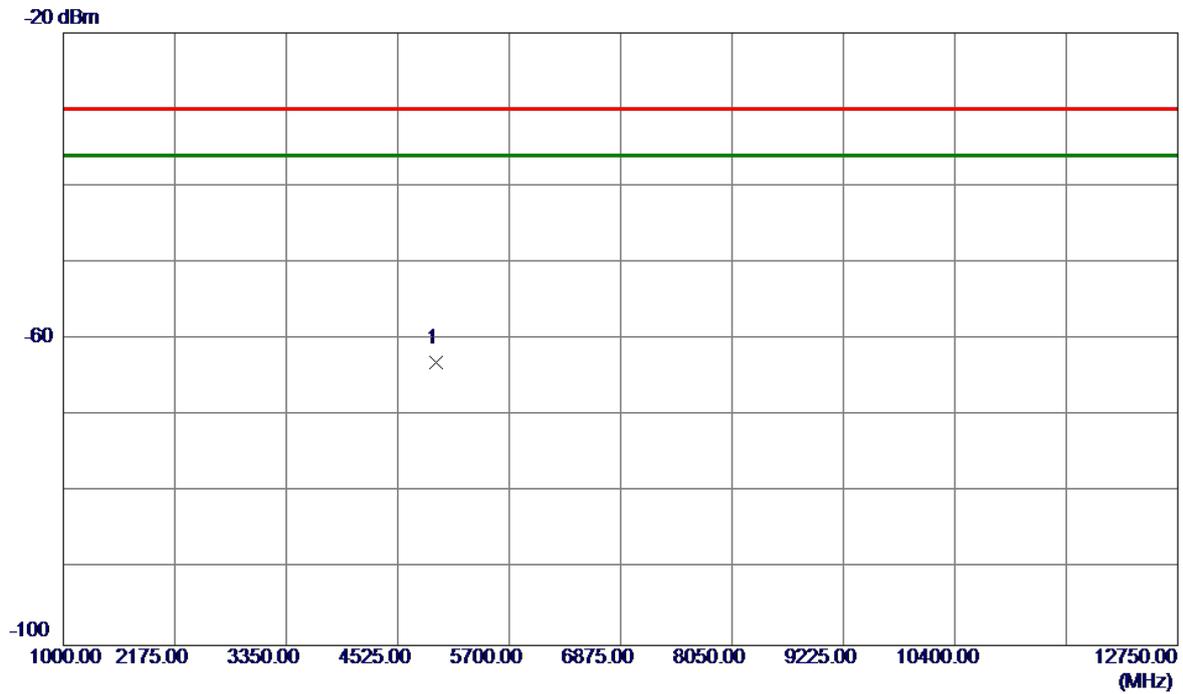


No.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure ment dBm	Limit dBm	Margin dB	Detector	Comment
1 *	4935.6629	-64.23	1.23	-63.00	-30.00	-33.00	RMS	

Test Mode	TX Mode 2402 MHz_3Mbps	Polarization	Vertical
-----------	------------------------	--------------	----------

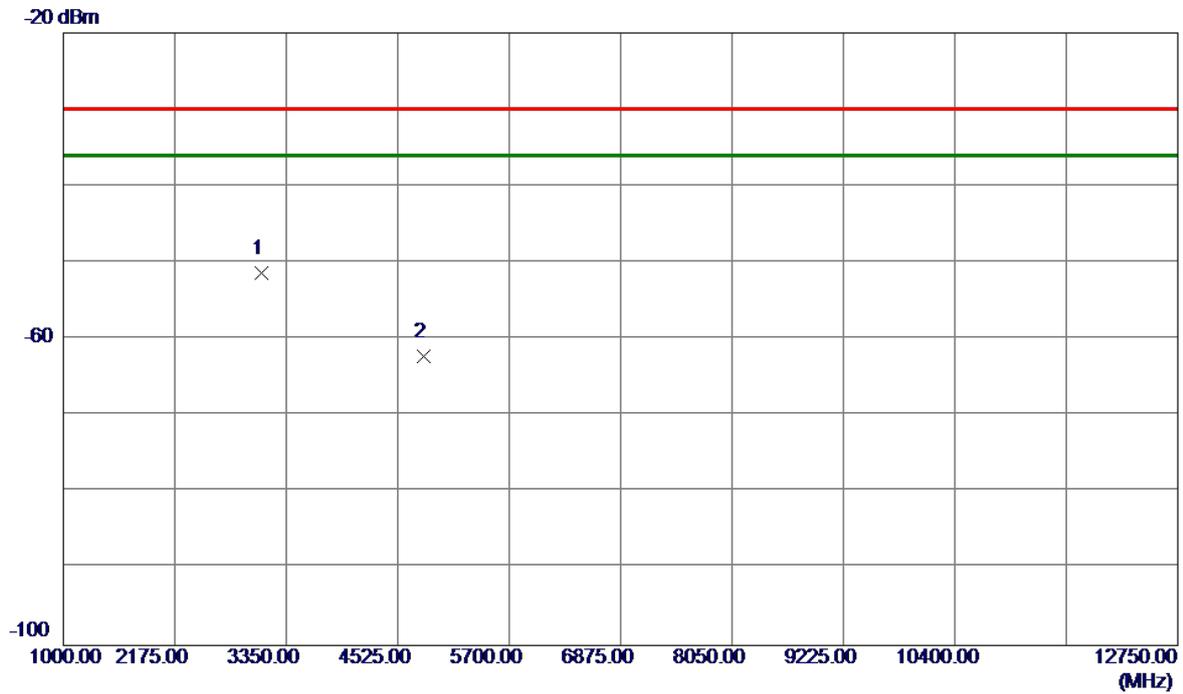


No.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure ment dBm	Limit dBm	Margin dB	Detector	Comment
1 *	3087.9750	-51.08	-0.22	-51.30	-30.00	-21.30	RMS	
2	4804.0630	-63.36	1.19	-62.17	-30.00	-32.17	RMS	

Test Mode	TX Mode 2402 MHz_3Mbps	Polarization	Horizontal
-----------	------------------------	--------------	------------

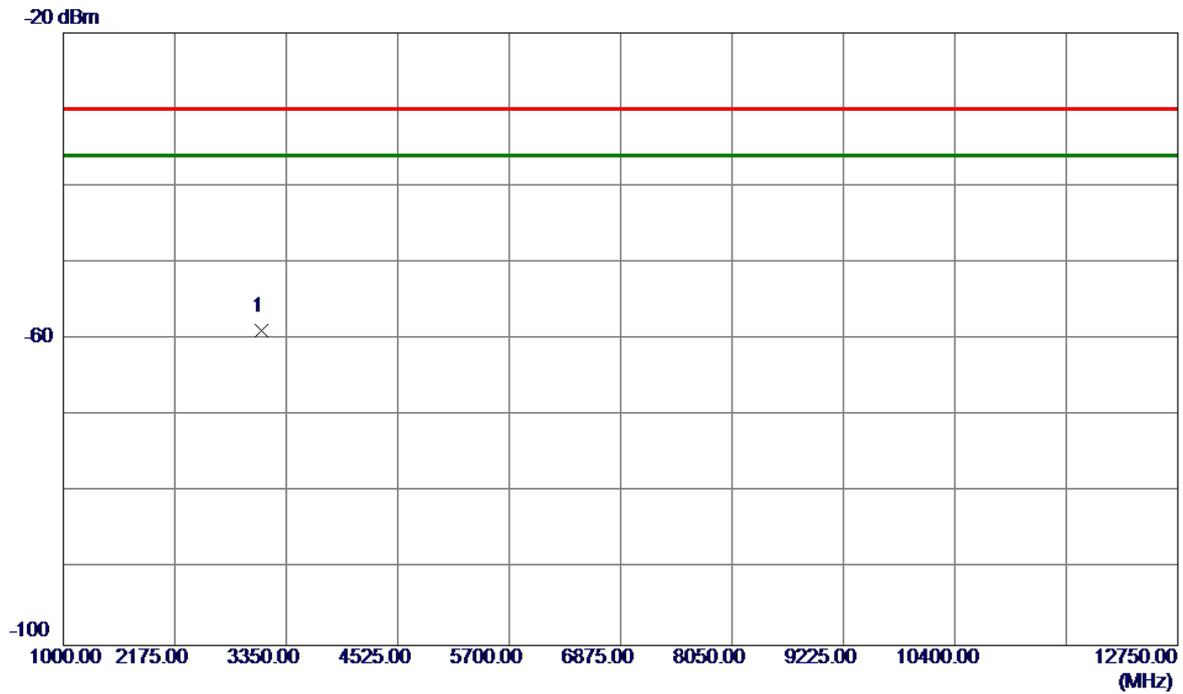


No.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure ment dBm	Limit dBm	Margin dB	Detector	Comment
1 *	3088.5630	-58.42	-0.48	-58.90	-30.00	-28.90	RMS	

Test Mode	TX Mode 2480 MHz_3Mbps	Polarization	Vertical
-----------	------------------------	--------------	----------

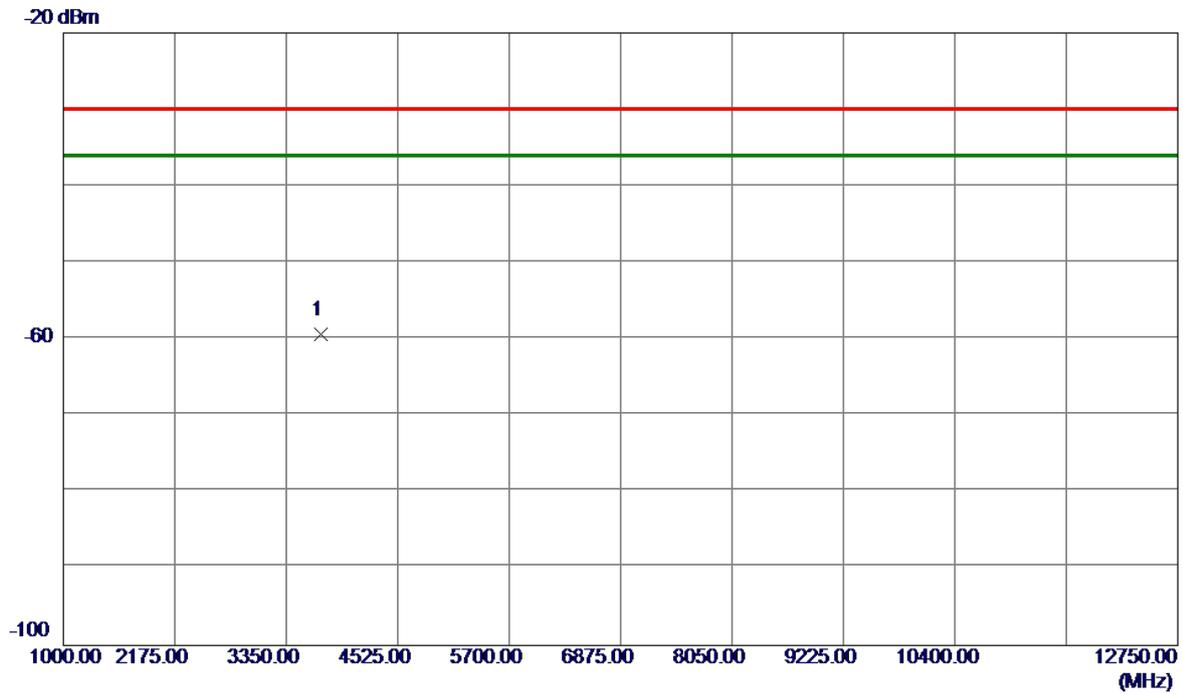

No.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure ment dBm	Limit dBm	Margin dB	Detector	Comment
1 *	3710.1370	-59.70	0.35	-59.35	-30.00	-29.35	RMS	

Test Mode	TX Mode 2480 MHz_3Mbps	Polarization	Horizontal
-----------	------------------------	--------------	------------

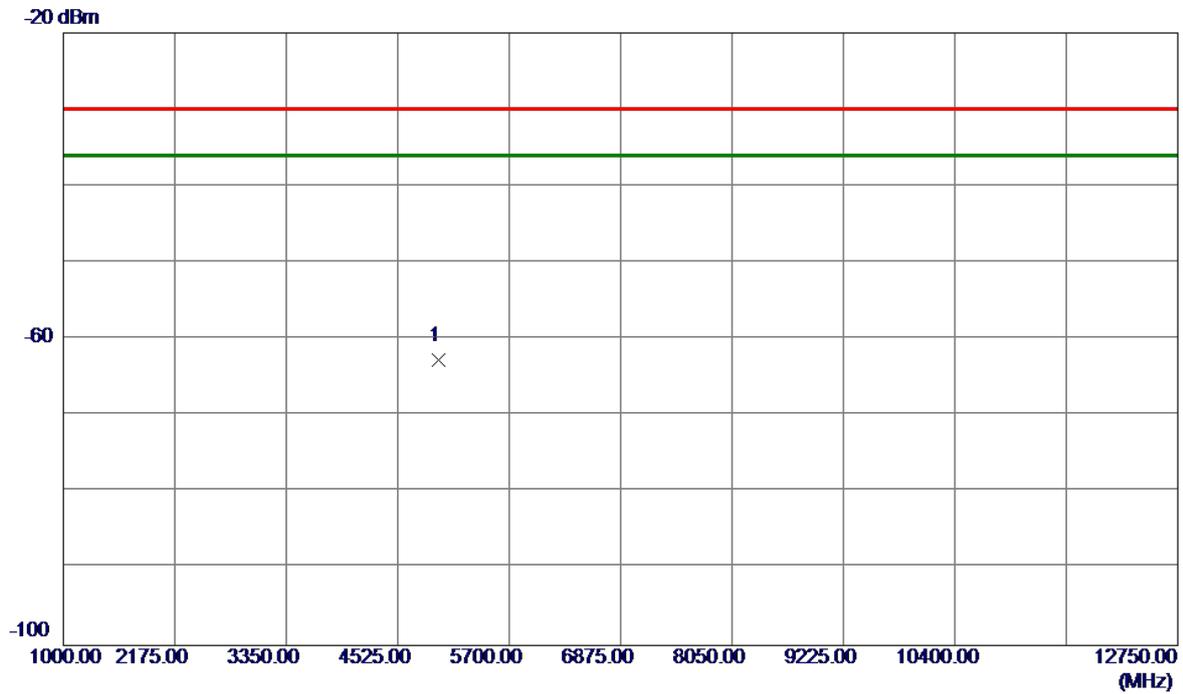


No.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure ment dBm	Limit dBm	Margin dB	Detector	Comment
1 *	4957.4000	-63.98	1.27	-62.71	-30.00	-32.71	RMS	


## **APPENDIX J - RECEIVER SPURIOUS EMISSIONS**

Test Mode: RX Mode\_1Mbps

### RX Mode 2402 MHz

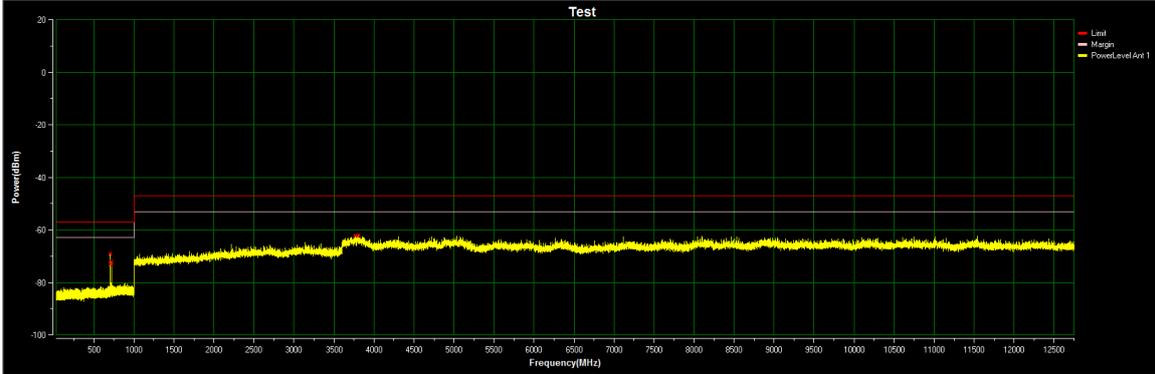


Frequency (MHz)	Reading Level (dBm)	Limit (dBm)	Margin (dB)	Result
705.45	-68.71	-57	11.71	Pass
705.4	-69.07	-57	12.07	Pass
722.25	-71.76	-57	14.76	Pass
722.2	-72.15	-57	15.15	Pass
705.5	-72.42	-57	15.42	Pass
705.35	-72.92	-57	15.92	Pass
3811.5	-61.68	-47	14.68	Pass
3765.5	-61.84	-47	14.84	Pass
3769.5	-62	-47	15	Pass
3789.5	-62.03	-47	15.03	Pass
3796	-62.2	-47	15.2	Pass
3796.5	-62.2	-47	15.2	Pass

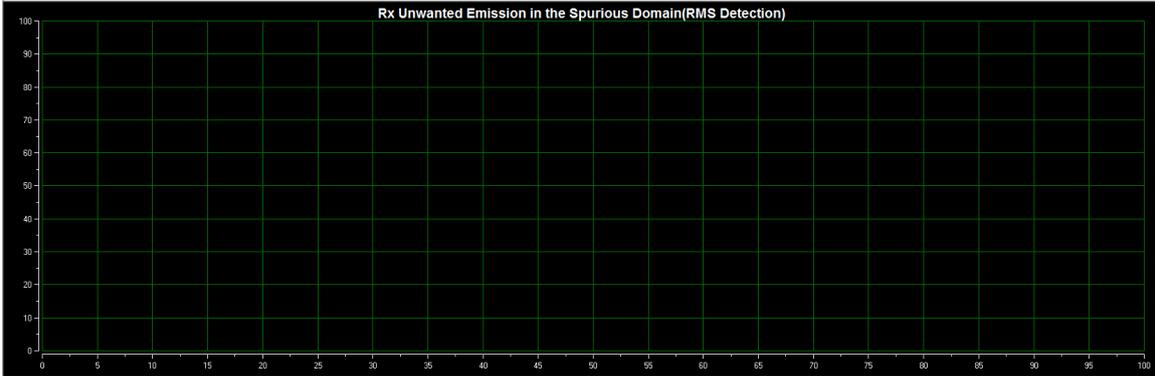


Frequency (MHz)	Reading Level (dBm)	Limit (dBm)	Margin (dB)	Result
-----------------	---------------------	-------------	-------------	--------

## RX Mode 2480 MHz

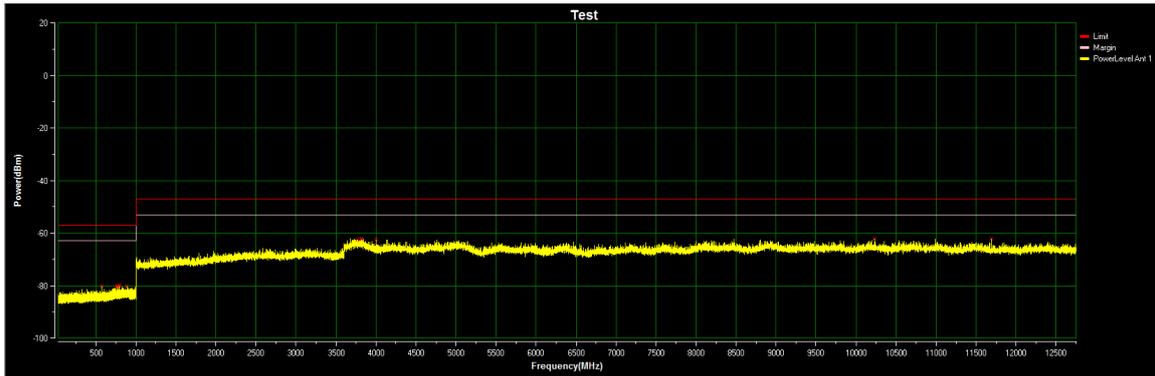


Frequency(MHz)	Reading Level (dBm)	Limit (dBm)	Margin(dB)	Result
793.05	-79.68	-57	22.68	Pass
570	-79.85	-57	22.85	Pass
762.25	-79.95	-57	22.95	Pass
793	-79.97	-57	22.97	Pass
890.25	-79.97	-57	22.97	Pass
762.2	-80.12	-57	23.12	Pass
3821.5	-61.72	-47	14.72	Pass
11691.5	-61.9	-47	14.9	Pass
10227.5	-61.94	-47	14.94	Pass
3815	-62.03	-47	15.03	Pass
3767	-62.04	-47	15.04	Pass
4005.5	-62.05	-47	15.05	Pass

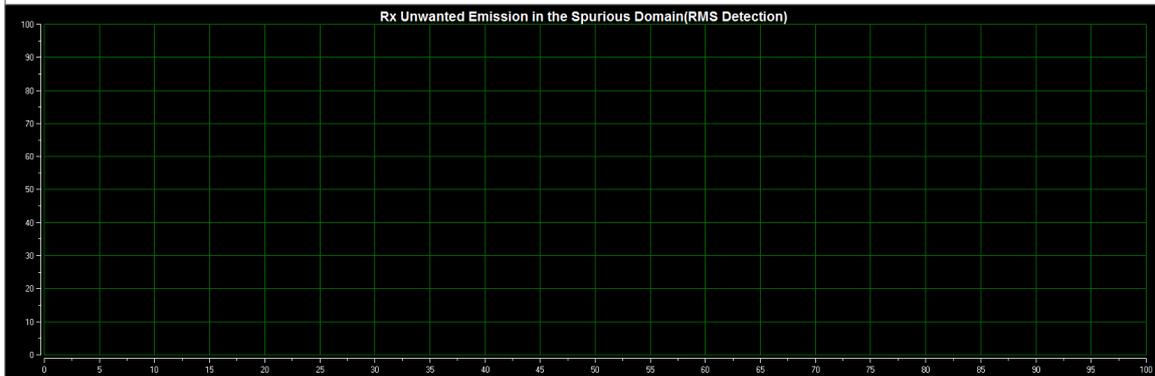


Frequency(MHz)	Reading Level (dBm)	Limit (dBm)	Margin(dB)	Result
----------------	---------------------	-------------	------------	--------

Test Mode	RX Mode 2402 MHz_1Mbps	Polarization	Vertical
-----------	------------------------	--------------	----------

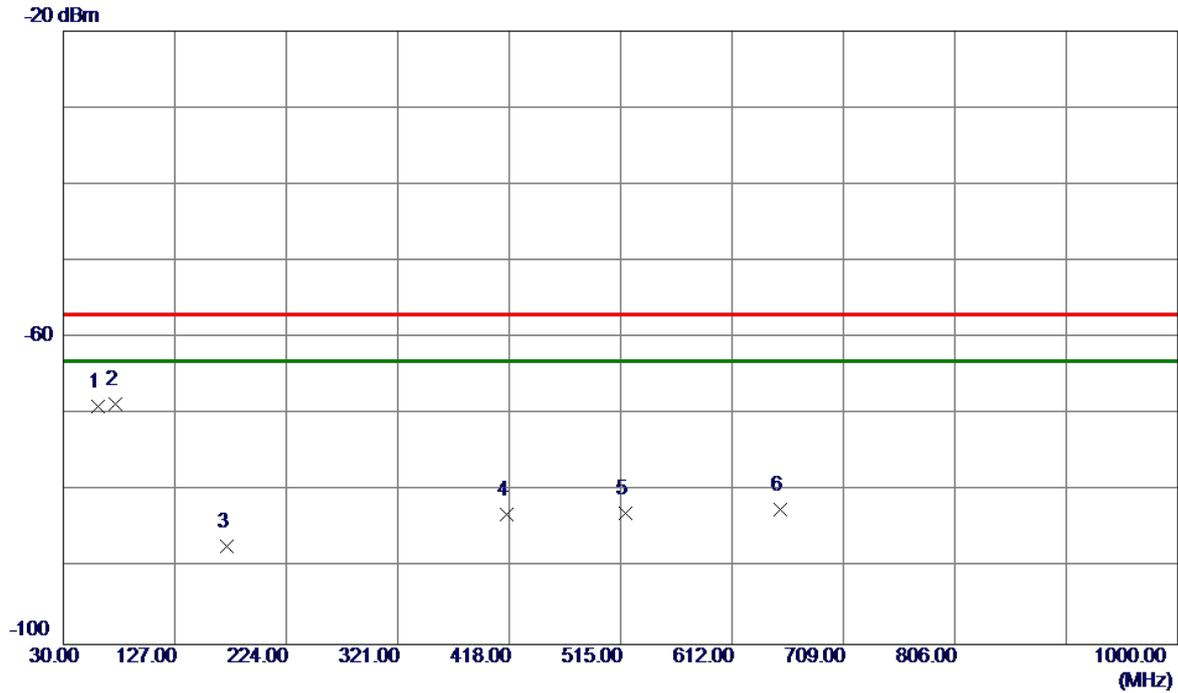


No.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure ment dBm	Limit dBm	Margin dB	Detector	Comment
1	60.5550	-65.61	-3.30	-68.91	-57.00	-11.91	RMS	
2 *	74.9110	-69.55	0.91	-68.64	-57.00	-11.64	RMS	
3	172.1050	-78.35	-8.85	-87.20	-57.00	-30.20	RMS	
4	415.9630	-75.71	-7.30	-83.01	-57.00	-26.01	RMS	
5	519.3650	-76.55	-6.35	-82.90	-57.00	-25.90	RMS	
6	653.7100	-78.11	-4.28	-82.39	-57.00	-25.39	RMS	

Test Mode	RX Mode 2402 MHz_1Mbps	Polarization	Horizontal
-----------	------------------------	--------------	------------

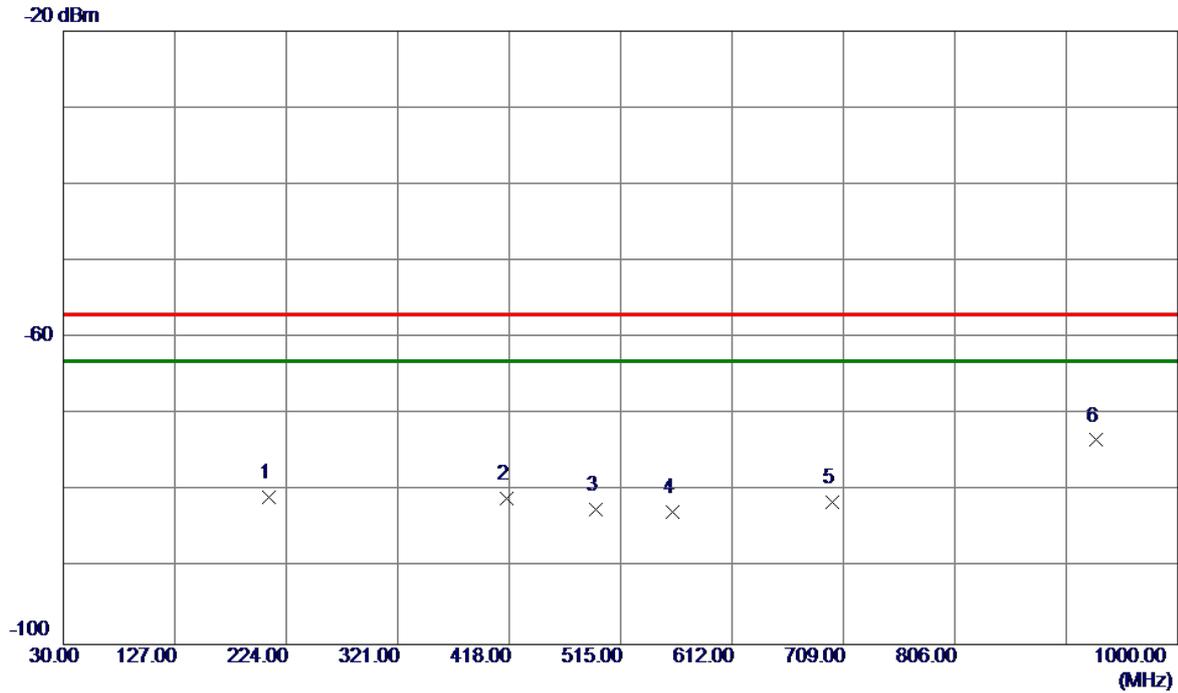


No.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure ment dBm	Limit dBm	Margin dB	Detector	Comment
1	208.5770	-70.28	-10.50	-80.78	-57.00	-23.78	RMS	
2	415.9630	-73.75	-7.17	-80.92	-57.00	-23.92	RMS	
3	493.8540	-76.37	-6.10	-82.47	-57.00	-25.47	RMS	
4	559.8140	-78.13	-4.66	-82.79	-57.00	-25.79	RMS	
5	699.4940	-79.16	-2.22	-81.38	-57.00	-24.38	RMS	
6 *	928.8020	-74.40	1.04	-73.36	-57.00	-16.36	RMS	

Test Mode	RX Mode 2480 MHz_1Mbps	Polarization	Vertical
-----------	------------------------	--------------	----------

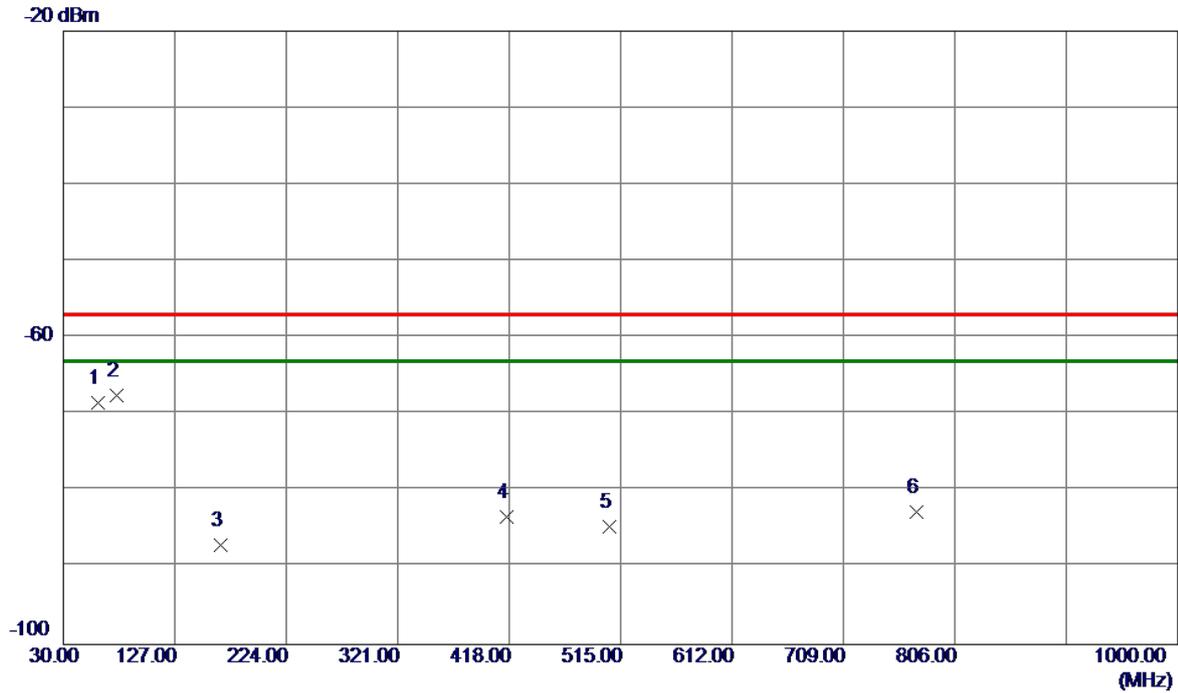


No.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure ment dBm	Limit dBm	Margin dB	Detector	Comment
1	60.5550	-65.25	-3.30	-68.55	-57.00	-11.55	RMS	
2 *	75.9780	-68.24	0.77	-67.47	-57.00	-10.47	RMS	
3	166.5760	-79.26	-7.73	-86.99	-57.00	-29.99	RMS	
4	415.9630	-76.05	-7.30	-83.35	-57.00	-26.35	RMS	
5	505.1060	-78.05	-6.56	-84.61	-57.00	-27.61	RMS	
6	772.2440	-80.77	-1.98	-82.75	-57.00	-25.75	RMS	

Test Mode	RX Mode 2480 MHz_1Mbps	Polarization	Horizontal
-----------	------------------------	--------------	------------

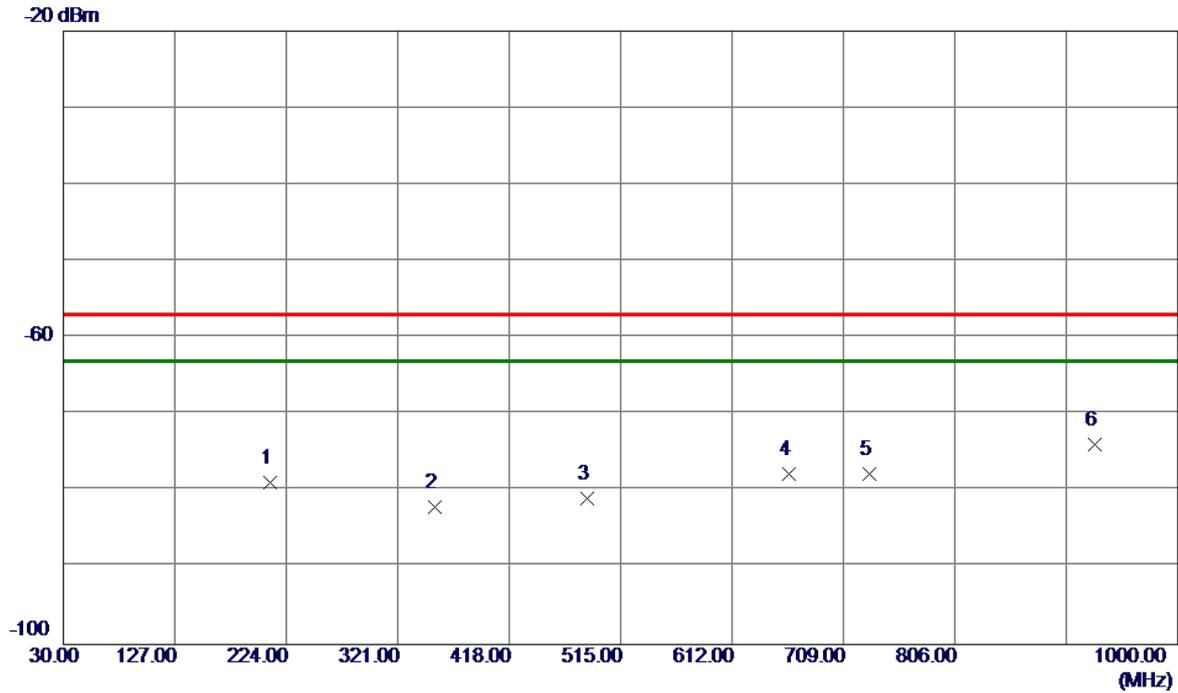


No.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure ment dBm	Limit dBm	Margin dB	Detector	Comment
1	209.8380	-68.51	-10.32	-78.83	-57.00	-21.83	RMS	
2	353.3980	-74.19	-7.94	-82.13	-57.00	-25.13	RMS	
3	485.6090	-74.60	-6.34	-80.94	-57.00	-23.94	RMS	
4	661.3730	-74.35	-3.35	-77.70	-57.00	-20.70	RMS	
5	732.0860	-75.81	-1.97	-77.78	-57.00	-20.78	RMS	
6 *	927.3470	-74.87	1.02	-73.85	-57.00	-16.85	RMS	

Test Mode	RX Mode 2402 MHz_1Mbps	Polarization	Vertical
-----------	------------------------	--------------	----------

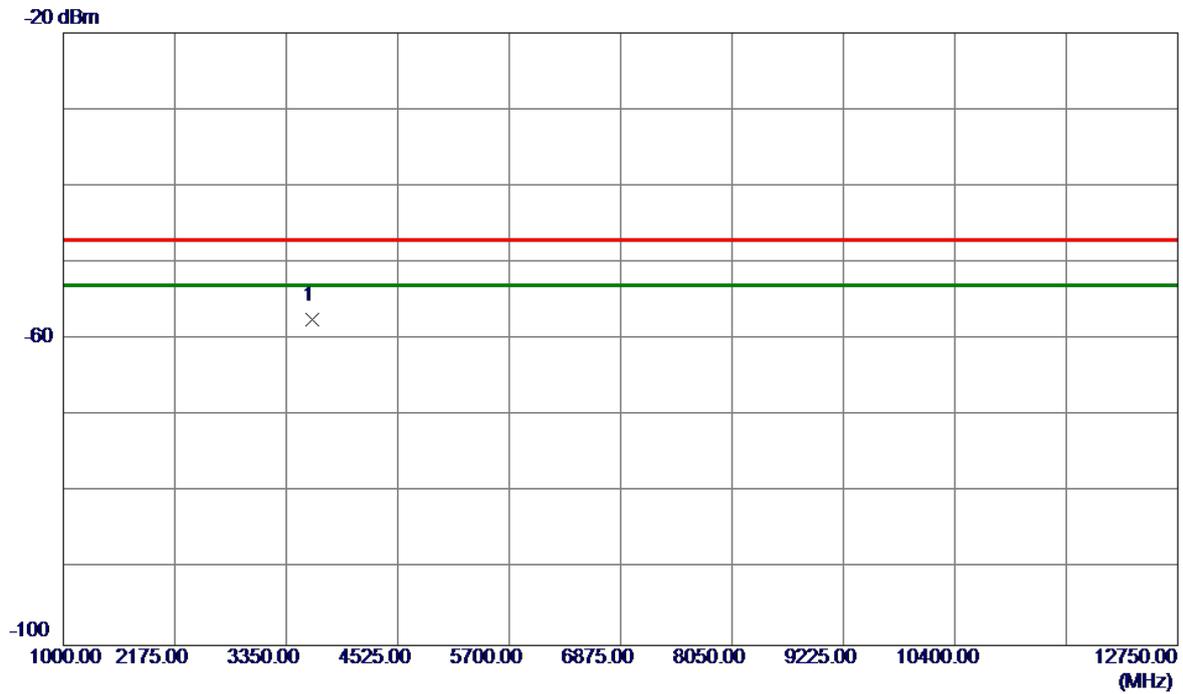


No.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure ment dBm	Limit dBm	Margin dB	Detector	Comment
1 *	3619.6620	-58.06	0.62	-57.44	-47.00	-10.44	RMS	

Test Mode	RX Mode 2402 MHz_1Mbps	Polarization	Horizontal
-----------	------------------------	--------------	------------

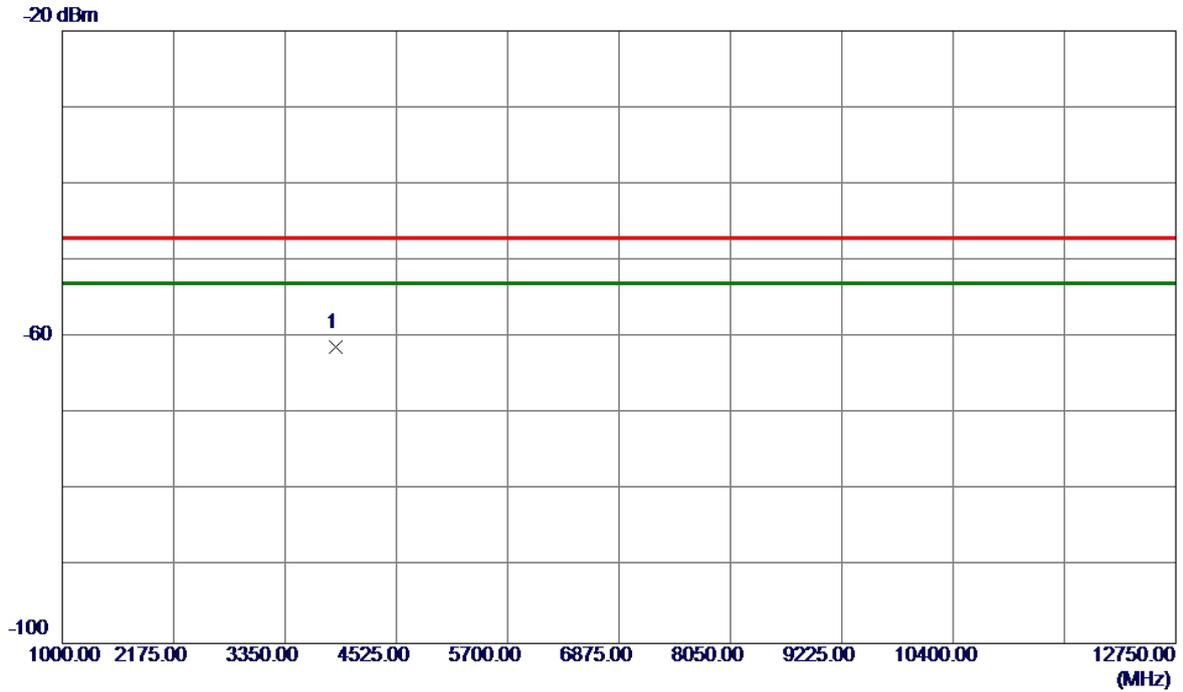


No.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure ment dBm	Limit dBm	Margin dB	Detector	Comment
1 *	3888.7380	-61.05	-0.21	-61.26	-47.00	-14.26	RMS	

Test Mode	RX Mode 2480 MHz_1Mbps	Polarization	Vertical
-----------	------------------------	--------------	----------

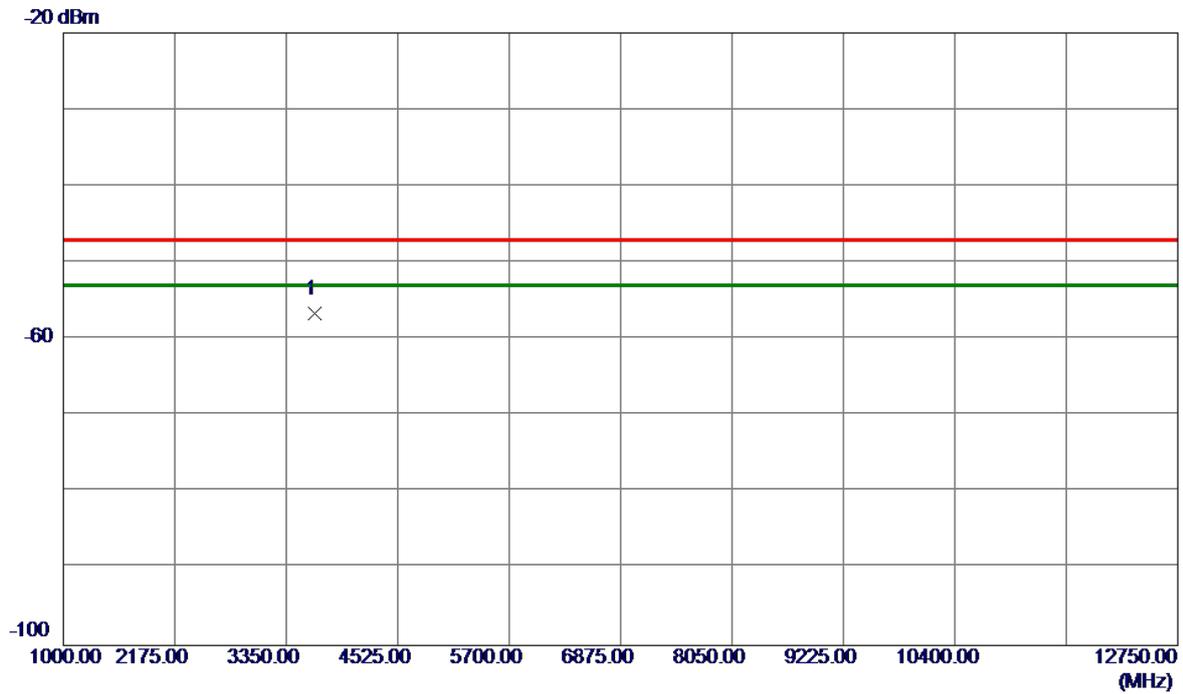

No.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure ment dBm	Limit dBm	Margin dB	Detector	Comment
1 *	3649.0370	-57.20	0.53	-56.67	-47.00	-9.67	RMS	

Test Mode	RX Mode 2480 MHz_1Mbps	Polarization	Horizontal
-----------	------------------------	--------------	------------

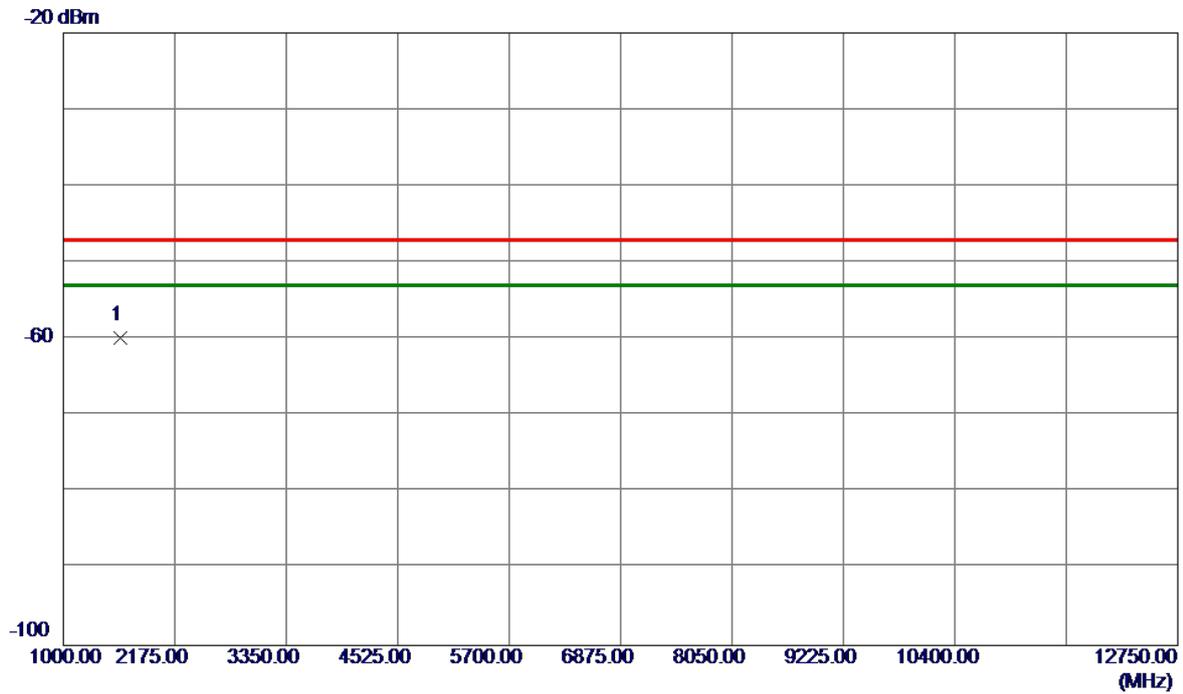

No.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure ment dBm	Limit dBm	Margin dB	Detector	Comment
1 *	1596.3129	-51.57	-8.35	-59.92	-47.00	-12.92	RMS	

## **APPENDIX K - RECEIVER BLOCKING**

Receiver Blocking Result						
Modulation Mode	Operation Mode	Wanted Signal Mean Power from Companion Device (dBm) (See Note 1)	Blocking Signal Freq. (MHz) (See Note 2)	Blocking Signal Power (dBm) (See Note 1)	Blocking Signal Power + Max. Ant. Gain (dBm)	PER (%)
1 Mbps	hopping	-67.54	2380	-34	-32	2.20
			2300	-34	-32	2.80
		-67.51	2504	-34	-32	3.60
			2584	-34	-32	2.60
Limit	PER(Packet Error Rate) ≤ 10%					
Result	Pass					

**Note:**

- 1) The levels had been corrected by the actual antenna assembly gain.
- 2) The test report did not use the shift of blocking frequencies with the standard Clause 5.4.11.2.1 Step 5.

**APPENDIX L - INFORMATION AS REQUIRED BY  
EN 300 328 V2.2.2, CLAUSE 5.4.1**

In accordance with ETSI EN 300 328, clause 5.4.1, the following information is provided by the manufacturer.

**a) The type of wideband data transmission equipment:**

- FHSS  
 non-FHSS

**b) In case of FHSS:**

(1) In case of non-Adaptive FHSS equipment:

The number of Hopping Frequencies:   N/A  

(2) In case of Adaptive FHSS equipment:

The maximum number of Hopping Frequencies:   79  

The minimum number of Hopping Frequencies:   15  

(3) The (average) dwell time:   0.3260   s

**c) Adaptive / non-adaptive equipment:**

- non-adaptive Equipment  
 adaptive Equipment without the possibility to switch to a non-adaptive mode  
 adaptive Equipment which can also operate in a non-adaptive mode

**d) In case of adaptive equipment:**

The maximum Channel Occupancy Time implemented by the equipment:   N/A   ms

- The equipment has implemented an LBT mechanism

\* In case of non-FHSS equipment:

- The equipment is Frame Based equipment  
 The equipment is Load Based equipment  
 The equipment can switch dynamically between Frame Based and Load Based

equipment

The CCA time implemented by the equipment:   N/A    $\mu$ s

- The equipment has implemented a DAA mechanism  
 The equipment can operate in more than one adaptive mode

**f) The worst case operational mode for each of the following tests:**

- (1) RF Output Power: 8.19 dBm
- (2) Power Spectral Density: N/A dBm/MHz
- (3) Duty cycle, Tx-Sequence, Tx-gap: N/A
- (4) Accumulated Transmit time, Frequency Occupation & Hopping Sequence (only for FHSS equipment): 0.3260 s, 1 , 79
- (5) Hopping Frequency Separation (only for FHSS equipment): 1.00 MHz
- (6) Medium Utilization: N/A
- (7) Adaptivity: N/A ; Receiver Blocking: 3.60 %
- (8) Nominal Channel Bandwidth: 1.384 MHz
- (9) Transmitter unwanted emissions in the OOB domain: -21.48 dBm
- (10) Transmitter unwanted emissions in the spurious domain: -68.79 dBm
- (11) Receiver spurious emissions: -56.67 dBm

**g) The different transmit operating modes (tick all that apply):**

- Operating mode 1: Single Antenna Equipment
  - Equipment with only one antenna
  - Equipment with two diversity antennas but only one antenna active at any moment in time
  - Smart Antenna Systems with two or more antennas, but operating in a (legacy) mode

where only one antenna is used (e.g. IEEE 802.11™ legacy mode in smart antenna systems)

- Operating mode 2: Smart Antenna Systems - Multiple Antennas without beam forming
  - Single spatial stream/Standard throughput (e.g. IEEE 802.11™ legacy mode)
  - High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 1
  - High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 2

NOTE: Add more lines if more channel bandwidths are supported.

- Operating mode 3: Smart Antenna Systems - Multiple Antennas with beam forming
  - Single spatial stream/Standard throughput (e.g. IEEE 802.11™ legacy mode)
  - High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 1
  - High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 2

NOTE: Add more lines if more channel bandwidths are supported.

**h) In case of Smart Antenna Systems: N/A**

(1) The number of Receive chains: \_\_\_\_\_

(2) The number of Transmit chains: \_\_\_\_\_

 symmetrical power distribution asymmetrical power distribution

In case of beam forming, the maximum (additional) beam forming gain: \_\_\_\_\_ dB

NOTE: The additional beam forming gain does not include the basic gain of a single antenna.

**i) Operating Frequency Range(s) of the equipment:**(1) Operating Frequency Range 1: 2402 MHz to 2480 MHz

NOTE: Add more lines if more Frequency Ranges are supported.

**j) Nominal Channel Bandwidth(s):**(1) Nominal Channel Bandwidth 1: 1.384 MHz

NOTE: Add more lines if more channel bandwidths are supported.

**k) Type of Equipment (stand-alone, combined, plug-in radio device, etc.):** Stand-alone Combined Equipment Plug-in radio device Other \_\_\_\_\_**l) The extreme operating conditions that apply to the equipment:**Operating temperature range: 0 ° C to 45 ° CDetails provided are for the:  stand-alone equipment combined equipment test jig

**n) The nominal voltages of the stand-alone radio equipment or the nominal voltages of the combined equipment or test jig in case of plug-in devices:**

Details provided are for the:  stand-alone equipment

combined equipment

test jig

Supply Voltage  AC mains State AC voltage \_\_\_\_ V

DC State DC voltage 19 V

In case of DC, indicate the type of power source

Internal Power Supply

External Power Supply or AC/DC adapter

Battery

Other: \_\_\_\_\_

**o) Describe the test modes available which can facilitate testing:**

The measurements shall be performed during continuously transmitting and normal operation.

**p) The equipment type (e.g. Bluetooth®, IEEE 802.11™, IEEE 802.15.4™, proprietary, etc.):**

Bluetooth®

**s) Geo-location capability supported by the equipment:**

Yes

The geographical location determined by the equipment as defined in clause 4.3.1.13.2 or clause 4.3.2.12.2 is not accessible to the user

No

**End of Test Report**