

ETSI EN 300 328 V2.2.2

TEST REPORT

For

WIFI+BT Module

MODEL NUMBER: WXT52M2511

REPORT NUMBER: 4791023025-1-RF-1

ISSUE DATE: October 26, 2023

Prepared for

**Hui Zhou Gaoshengda Technology Co.,LTD
No.2,Jin-da Road,Huinan High-tech Industrial Park,Hui-ao Avenue,Huizhou
City,Guangdong,China**

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products.

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	October 26, 2023	Initial Issue	

Summary of Test Results

Test Item	Clause	Limit/Requirement	Result
NORMAL AND EXTREME CONDITIONS	N/A	Clause 5.1.2	Pass
RF output power	Clause 5.4.2.2.1.2	Clause 4.3.2.2	Pass
Power Spectral Density	Clause 5.4.3.2.1	Clause 4.3.2.3	Pass
Duty Cycle, Tx-sequence, Tx-gap	Clause 5.4.2.2.1.3	Clause 4.3.2.4	N/A
Medium Utilization (MU) factor	Clause 5.4.2.2.1.4	Clause 4.3.2.5	N/A
Adaptivity (non-FHSS)	Clause 5.4.6.2.1	Clause 4.3.2.6	N/A
Occupied Channel Bandwidth	Clause 5.4.7.2.1	Clause 4.3.2.7	Pass
Transmitter unwanted emissions in the out-of-band domain	Clause 5.4.8.2.1	Clause 4.3.2.8	Pass
Transmitter unwanted emissions in the spurious domain	Clause 5.4.9.2.1& Clause 5.4.9.2.2	Clause 4.3.2.9	Pass
Receiver spurious emissions	Clause 5.4.10.2.1& Clause 5.4.10.2.2	Clause 4.3.2.10	Pass
Receiver Blocking	Clause 5.4.11.2.1	Clause 4.3.2.11	Pass
Geo-location capability	N/A	Clause 4.3.2.12	N/A

Note:

1. N/A: In this whole report not applicable.

*This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

*The measurement result for the sample received is <Pass> according to <ETSI EN 300 328 V2.2.2> when <Simple Acceptance> decision rule is applied.

CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. MEASURING INSTRUMENT CALIBRATION	8
4.2. MEASUREMENT UNCERTAINTY	8
5. EQUIPMENT UNDER TEST	9
5.1. DESCRIPTION OF EUT	9
5.2. DESCRIPTION OF EQUIPMENT CATEGORY	9
5.3. CHANNEL LIST	9
5.4. MAXIMUM POWER	10
5.5. TEST CHANNEL CONFIGURATION	10
5.6. THE WORSE CASE POWER SETTING PARAMETER	10
5.7. DESCRIPTION OF AVAILABLE ANTENNAS	10
5.8. SUPPORT UNITS FOR SYSTEM TEST	11
5.9. TEST SYSTEM CONFIGURATION	12
5.10. DESCRIPTION OF THE EQUIPMENT UNDER TESTED	13
6. MEASURING EQUIPMENT AND SOFTWARE USED	15
7. TEST PROCEDURES AND RESULTS	18
7.1. NORMAL AND EXTREME CONDITIONS	18
7.2. RF OUTPUT POWER	19
7.3. POWER SPECTRAL DENSITY	20
7.4. OCCUPIED CHANNEL BANDWIDTH	21
7.5. TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN	22
7.6. TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN	24
7.7. RECEIVER SPURIOUS EMISSIONS	27
7.8. RECEIVER BLOCKING	29
8. TEST DATA	33
Appendix A: RF Output Power	33
Appendix B: Power Spectral Density	34
Appendix C: Occupied Channel Bandwidth	37
Appendix D: Transmitter unwanted emissions in the out-of-band domain	40

Appendix E: Transmitter unwanted emissions in the spurious domain.....	43
TX Radiated Test Result.....	47
Appendix F: Receiver spurious emissions.....	53
RX Radiated Test Result	56
Appendix G: Receiver Blocking.....	58
APPENDIX: PHOTOGRAPHS OF TEST CONFIGURATION.....	59

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: Hui Zhou Gaoshengda Technology Co.,LTD
Address: No.2,Jin-da Road,Huinan High-tech Industrial Park,Hui-ao Avenue,Huizhou City,Guangdong,China

Manufacturer Information

Company Name: Hui Zhou Gaoshengda Technology Co.,LTD
Address: No.2,Jin-da Road,Huinan High-tech Industrial Park,Hui-ao Avenue,Huizhou City,Guangdong,China

EUT Information

EUT Name: WIFI+BT Module
Model: WXT52M2511
Brand: GSD
Sample Received Date: October 8, 2023
Sample Status: Normal
Sample ID: 6522183
Date of Tested: October 11, 2023 to October 26, 2023


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
ETSI EN 300 328 V2.2.2	Pass

Prepared By:



Fanny Huang
Engineer Project Associate

Checked By:



Denny Huang
Senior Project Engineer

Approved By:



Stephen Guo
Operations Manager

2. TEST METHODOLOGY

All tests were performed in accordance with the standard ETSI EN 300 328 V2.2.2

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA. FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046. VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B, the VCCI registration No. is C-20012 and T-20011
---------------------------	---

Note 1:

All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China.

Note 2:

The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3:

For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Case	Description	Limit	Uncertainties
5.3.2.2.1.1	RF Output Power	± 1.5 dB	1.15
5.3.2.2.1.2	Duty Cycle	± 5 %	0.03
	Tx Sequence	± 5 %	0.03
	Tx Gap	± 5 %	0.03
5.3.2.2.1.3	Medium Utilisation	± 5 %	0.10
5.3.3.2.1	Power Spectral Density	± 3 dB	1.21
5.3.4.2.1	Accumulated Dwell Time	± 5 %	0.05
	Minimum Frequency Occupation Time	± 5 %	0.15
5.3.5.2.1	Hopping Frequency Separation	-	0.24
5.3.8.2.1	Occupied Channel Bandwidth	± 5 %	1.71
5.3.9..2.1	Out-of-band emissions	± 3 dB	1.39
5.3.10.2.1	Transmitter unwanted emissions in the spurious domain		
	30 MHz to 1 GHz	± 3 dB	0.64
	1 GHz to 12.75GHz	± 3 dB	1.68
5.3.11.2.1	Receiver Spurious emission		
	30 MHz to 1 GHz	± 3 dB	0.64
	1 GHz to 12.75GHz	± 3 dB	1.68

Test Item	Uncertainty
Uncertainty for Radiation Emission test	4.62 dB (30 MHz-1 GHz)
	3.50 dB (1 GHz-18 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of k=2.	

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	WIFI+BT Module
Model	WXT52M2511

Frequency Range:	2402 MHz to 2480 MHz
Type of Modulation:	GFSK
Data Rates:	1Mbps/2Mbps
Normal Test Voltage:	DC 5 V

5.2. DESCRIPTION OF EQUIPMENT CATEGORY

EUT belong to	Receiver category	Relevant receiver clauses
☐	1	Adaptive equipment with a maximum RF output power greater than 10 dBm e.i.r.p.
☒	2	Non-adaptive equipment with a Medium Utilization (MU) factor greater than 1 % and less than or equal to 10 % or adaptive equipment with a maximum RF output power of 10 dBm e.i.r.p.
☐	3	Non-adaptive equipment with a maximum Medium Utilization (MU) factor of 1 % or adaptive equipment with a maximum RF output power of 0 dBm e.i.r.p.

5.3. CHANNEL LIST

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	11	2424	22	2446	33	2468
1	2404	12	2426	23	2448	34	2470
2	2406	13	2428	24	2450	35	2472
3	2408	14	2430	25	2452	36	2474
4	2410	15	2432	26	2454	37	2476
5	2412	16	2434	27	2456	38	2478
6	2414	17	2436	28	2458	39	2480
7	2416	18	2438	29	2460	/	/
8	2418	19	2440	30	2462	/	/
9	2420	20	2442	31	2464	/	/
10	2422	21	2444	32	2468	/	/

5.4. MAXIMUM POWER

Test Mode	Frequency (MHz)	Channel Number	Max AVG EIRP (dBm)
GFSK(1Mbps)	2402 ~ 2480	0-39[40]	3.20
GFSK(2Mbps)	2402 ~ 2480	0-39[40]	3.28

5.5. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel	Frequency
LE 1M	CH 0(Low Channel), CH 19(MID Channel), CH 39(High Channel)	2402 MHz, 2440 MHz, 2480 MHz
LE 2M	CH 0(Low Channel), CH 19(MID Channel), CH 39(High Channel)	2402 MHz, 2440 MHz, 2480 MHz

5.6. THE WORSE CASE POWER SETTING PARAMETER

The Worst Case Power Setting Parameter under 2400 ~ 2483.5MHz Band				
Test Software Version		WCN_Comboo_Tool		
Modulation Type	Transmit Antenna Number	Test Software setting value		
		CH 0	CH 19	CH 39
GFSK(1Mbps)	1	default	default	default
GFSK(2Mbps)	1	default	default	default

5.7. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)
1	2402-2480	PCB Antenna	-1.77

Test Mode	Transmit and Receive Mode	Description
GFSK(1Mbps)	1TX, 1RX	Chain 1 can be used as transmitting/receiving antenna.
GFSK(2Mbps)	1TX, 1RX	Chain 1 can be used as transmitting/receiving antenna.

Note: The value of the antenna gain was declared by customer.

5.8. SUPPORT UNITS FOR SYSTEM TEST

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remarks
1	Laptop	Lenovo	E42-80	R303U5AG

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	/	/	1.0	/


ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
/	/	/	/	/


TEST SETUP

The EUT can work in engineering mode with a software through a Laptop.

SETUP DIAGRAM FOR TESTS

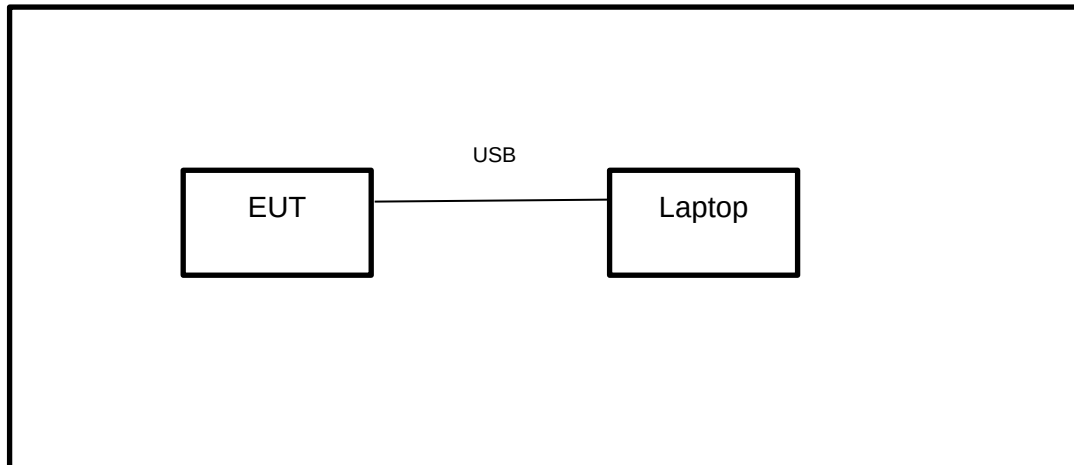

Tonsend SRD Test System



5.10. DESCRIPTION OF THE EQUIPMENT UNDER TESTED

(INFORMATION AS REQUIRED BY EN 300 328 V2.2.2, CLAUSE 5.4.1)

a)	Modulation Type		
	☐ FHSS		
	☒ non-FHSS		
b)	FHSS Equipment Description		
	The Number of Hopping Frequencies	The Maximum	/
		The Minimum	/
	The (average) dwell time		/
c)	Adaptive / Non-adaptive Equipment		
	☐ Non-adaptive Equipment		
	☒ Adaptive Equipment Without the Possibility to Switch to A Non-adaptive Mode		
	☐ Adaptive Equipment Which can also operate in A Non-adaptive Mode		
d)	Adaptive Equipment Description		
	The maximum Channel Occupancy Time implemented by the equipment		/
	☒ The equipment has implemented an LBT mechanism		
	☐ The equipment has implemented a DAA mechanism		
	☐ The equipment can operate in more than one adaptive mode		
e)	The different transmit operating modes		
	☒ Operating mode 1 (single antenna)	☒ Equipment with only one antenna	
		☐ Equipment with two diversity antennas but only one antenna active at any moment in time	
		☐ Smart Antenna Systems with two or more antennas, but operating in a (legacy) mode where only one antenna is used (e.g. IEEE 802.11™ legacy mode in smart antenna systems)	
	☐ Operating mode 2: Smart Antenna Systems - Multiple Antennas without beam forming	☐ Single spatial stream/Standard throughput/(e.g. IEEE 802.11™ legacy mode)	
		☐ High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 1	
		☐ High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 2	
	☐ Operating mode 3: Smart Antenna Systems - Multiple Antennas with beam forming	☐ Single spatial stream/Standard throughput (e.g. IEEE 802.11™ legacy mode)	
		☐ High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 1	
		☐ High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 2	
f)	In case of Smart Antenna Systems		
	The number of Receive chains		1
	The number of Transmit chains		1
	In case of beam forming, the maximum (additional) beam forming gain:		/
g)	Operating Frequency Range(s) of the equipment		
	Operating Frequency Range	2402 MHz to 2480 MHz	
h)	Nominal Channel Bandwidth(s)		
	Occupied Channel Bandwidth	2.085MHz	
i)	Type of Equipment		

	☒ Stand-Alone				
	☐ Plug-in radio Equipment				
	☐ Combined Equipment				
j)	The extreme operating conditions that apply to the equipment				
	Operating temperature range		-10 °C to 70 °C		
k)	The intended combination(s) of the radio equipment power settings and one or more antenna assemblies and their corresponding e.i.r.p levels				
	Antenna Type	☒ Integral Antenna	Antenna Gain	-1.77 dBi	
		☐ Dedicated Antennas (equipment with antenna connector)	☐ Single power level with corresponding antenna(s)	Gain	
			☐ Multiple power settings and corresponding antenna(s)	Power Level 1	
				Power Level 2	
				Power Level 3	
l)	The nominal voltages of the stand-alone radio equipment or the nominal voltages of the combined (host) equipment or test jig in case of plug-in devices:				
	Details provided are for the	☒ Testing of stand-alone equipment			
		☐ Combined equipment			
		☐ Test jig			
	Supply Voltage	☐ AC mains	State AC voltage		
		☒ DC	State DC voltage	☐ Internal Power Supply	
				☐ External Power Supply or AC/DC adapter	
				☐ Battery	
				☒ Other	DC 5 V
m)	The equipment type				
	☒ Bluetooth®				
	☐ IEEE 802.11™ [i.3]				
	☐ Proprietary				
n)	Geo-location capability supported by the equipment		☐ Yes		
			☐ The geographical location determined by the equipment as defined in clause 4.3.1.13.2 or clause 4.3.2.12.2 is not accessible to the user.		
			☒ No		

6. MEASURING EQUIPMENT AND SOFTWARE USED

R&S TS 8997 Test System						
Equipment	Manufacturer	Model No.	Serial No.	Upper Last Cal.	Last Cal.	Due. Date
Power sensor, Power Meter	R&S	OSP120	100921	/	Mar.31, 2023	Mar.30, 2024
Vector Signal Generator	R&S	SMBV100A	261637	Oct.17, 2022	Oct.12, 2023	Oct.11, 2024
Signal Generator	R&S	SMB100A	178553	Oct.17, 2022	Oct.12, 2023	Oct.11, 2024
Signal Analyzer	R&S	FSV40	101118	Oct.17, 2022	Oct.12, 2023	Oct.11, 2024
Software						
Description	Manufacturer		Name		Version	
For R&S TS 8997 Test System	Rohde & Schwarz		EMC 32		10.60.10	
Tonsend RF Test System						
Equipment	Manufacturer	Model No.	Serial No.	Upper Last Cal.	Last Cal.	Due. Date
Wideband Radio Communication Tester	R&S	CMW500	155523	Oct.17, 2022	Oct.12, 2023	Oct.11, 2024
Wireless Connectivity Tester	R&S	CMW270	1201.0002N75-102	Sep.28, 2022	Sep.27, 2023	Sep.26, 2024
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Oct.17, 2022	Oct.12, 2023	Oct.11, 2024
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Oct.17, 2022	Oct.12, 2023	Oct.11, 2024
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Oct.17, 2022	Oct.12, 2023	Oct.11, 2024
DC power supply	Keysight	E3642A	MY55159130	Oct.17, 2022	Oct.12, 2023	Oct.11, 2024
Temperature & Humidity Chamber	SANMOOD	SG-80-CC-2	2088	Oct.17, 2022	Oct.12, 2023	Oct.11, 2024
Attenuator	Aglient	8495B	2814a12853	Oct.18, 2022	Oct.12, 2023	Oct.11, 2024
RF Control Unit	Tonscend	JS0806-2	23B80620666	/	April 18,2023	April 17,2024
Software						
Description	Manufacturer	Name			Version	
Tonsend SRD Test System	Tonsend	JS1120-3 RF Test System			V3.2.22	

RSE Test System						
Equipment	Manufacturer	Model No.	Serial No.	Upper Last Cal.	Last Cal.	Due. Date
Spectrum Analyzer	R&S	FSW	1312.8000K26-103950-sj	Oct. 18, 2022	Oct.12, 2023	Oct.11, 2024
Trilog broadband antenna	Schwarzbeck	VULB9163	01061	/	Feb.7,2023	Feb.6,2026
Horn Antenna	ETS-Lindgren	3117	00213191	/	Feb.7,2023	Feb.6,2026
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Oct.17, 2022	Oct.12, 2023	Oct.11, 2024
Preamplifier	TDK	PA-02-0118	TRS-305-00066	Jun.19,2023	Oct.12, 2023	Oct.11, 2024
High Gain Horn Antenna	Schwarzbeck	BBHA-9170	697	/	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-2	TRS-307-00002	Oct.17, 2022	Oct.12, 2023	Oct.11, 2024
Preamplifier	TDK	PA-02-3	TRS-308-00002	Oct.17, 2022	Oct.12, 2023	Oct.11, 2024
Band Reject Filter	Wainwright	WRCJV12-5695-5725-5850-5880-40SS	4	/	Dec.01,2022	Nov.30,2023
Band Reject Filter	Wainwright	WRCJV20-5120-5150-5350-5380-60SS	2	/	Dec.01,2022	Nov.30,2023
Band Reject Filter	Wainwright	WRCJV20-5440-5470-5725-5755-60SS	1	/	Dec.01,2022	Nov.30,2023
Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	4	/	Dec.01,2022	Nov.30,2023
Notch Filter	Wainwright	WRCT5-901.6-902.3-902.5-903.2-40SS	1	/	Dec.01,2022	Nov.30,2023
Band Reject Filter	Wainwright	WRCD5-1746.4-174725-1747.55-1748.4-40SS	1	/	Dec.01,2022	Nov.30,2023
Highpass Filter	Wainwright	WHKX10-5850-6500-1800-40SS	4	/	Dec.01,2022	Nov.30,2023
Highpass Filter	Wainwright	WHKX10-2700-3000-1800-40SS	24	/	Dec.01,2022	Nov.30,2023

Software			
Description	Manufacturer	Name	Version
For TDK RSE Test System	TDK	TDK Emission lab	V10.81

Other Instrument						
Equipment	Manufacturer	Model No.	Serial No.	Upper Last Cal.	Last Cal.	Due. Date
Temperature humidity probe	OMEGA	ITHX-SD-5	18470007	Oct.22, 2022	Oct.19, 2023	Oct.18, 2024
Barometer	Yiyi	Baro	N/A	Oct.24, 2022	Oct.19, 2023	Oct.18, 2024
Attenuator	Agilent	8495B	2814a12853	Oct.18, 2022	Oct.12, 2023	Oct.11, 2024

7. TEST PROCEDURES AND RESULTS

7.1. NORMAL AND EXTREME CONDITIONS

REQUIREMENT

None; for reporting purposes only.

RESULTS

	Normal Test Conditions	Extreme Test Conditions
Relative Humidity	45 % ~ 70 %	/
Atmospheric Pressure	100 kPa ~ 102 kPa	/
Temperature	NT (Normal Temperature): 22 °C ~ 28 °C	/
Supply Voltage	NV (Normal Voltage): DC 5 V	LT (Low Temperature): -10 °C
		HT (High Temperature): 70 °C
		/

DESCRIPTION

Pass

7.2. RF OUTPUT POWER

LIMITS

RF OUTPUT POWER	
Condition	Limit
☐ Non-adaptive non-FHSS Equipment	For non-adaptive non-FHSS equipment, where the manufacturer has declared an RF output power of less than 20 dBm e.i.r.p., the RF output power shall be equal to or less than that declared value.
☒ Adaptive non-FHSS Equipment	non-FHSS equipment shall be equal to or less than 20 dBm.

TEST PROCEDURE

Refer to ETSI EN 300 328 V2.2.2 (2019-07) Clause 5.4.2

The power sensor was used for power measurement, and it use a fast power sensor with a minimum sensitivity of -40 dBm and capable of minimum 1 MS/s.

The test software was used to control the power detector and the sampling unit.

For adaptive equipment, the measurement duration shall be long enough to ensure a minimum number of bursts (at least 10) are captured.

Measurement	
☒ Conducted measurement	☐ Radiated measurement

CALCULATIONS

Add the (stated) antenna assembly gain G in dBi of the individual antenna.

- In case of smart antenna systems operating in mode with beamforming (see clause 5.3.2.2.4), add the additional beamforming gain Y in dB.
- If more than one antenna assembly is intended for this power setting, the maximum overall antenna gain (G or G + Y) shall be used.
- The RF Output Power (P_{out}) shall be calculated using the formula below:

$$P_{out} = A + G + Y$$

TEST ENVIRONMENT

Temperature	24.2°C	Relative Humidity	68.0%
Atmosphere Pressure	101kPa	Test Voltage	DC 5 V

TEST DATE / ENGINEER

Test Date	October 11, 2023	Test By	Johnson Liu
-----------	------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix A

7.3. POWER SPECTRAL DENSITY

LIMITS

Power Spectral Density	
Condition	Limit
All types of non-FHSS equipment	10 dBm/MHz

TEST PROCEDURE

Refer to ETSI EN 300 328 V2.2.2 (2019-07) Clause 5.4.3

R&S EMC32 software is used to control the spectrum analyzer to use the following settings:

Start Frequency	2400 MHz
Stop Frequency	2483.5 MHz
Detector	RMS
Sweep Point	> 8 350; for spectrum analyzers not supporting this number of sweep points, the frequency band may be segmented
RBW	10 kHz
VBW	30 kHz
Trace Mode	Max Hold
Sweep Time	For non-continuous transmissions: $2 \times \text{Channel Occupancy Time} \times \text{number of sweep points}$ For non-adaptive equipment use the maximum TX-sequence time in the formula above instead of the Channel Occupancy Time For continuous transmissions: 10 s; the sweep time may be increased further until a value where the sweep time has no further impact anymore on the RMS value of the signal

The test software acquires the trace data and calculate the Spectral Density in 1 MHz.

TEST ENVIRONMENT

Temperature	24.2°C	Relative Humidity	68.0%
Atmosphere Pressure	101kPa	Test Voltage	DC 5 V

TEST DATE / ENGINEER

Test Date	October 11, 2023	Test By	Johnson Liu
-----------	------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix B

7.4. OCCUPIED CHANNEL BANDWIDTH

LIMITS

OCCUPIED CHANNEL BANDWIDTH		
Condition		Limit
All types of equipment		Each hopping frequency shall be within the 2400 to 2483.5 MHz band
Additional requirement	For non-adaptive non-FHSS equipment with e.i.r.p. greater than 10 dBm	Each hopping frequency shall be equal to or less than 20 MHz

TEST PROCEDURE

Refer to ETSI EN 300 328 V2.2.2 (2019-07) clause 5.4.7

Measurement	
☒ Conducted measurement	☐ Radiated measurement

Connect the UUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Frequency Span	2 × Nominal Channel Bandwidth
Detector	RMS
RBW	~ 1 % of the span without going below 1 %
VBW	3 × RBW
Trace	Max hold
Sweep Time	1s

TEST ENVIRONMENT

Temperature	24.2°C	Relative Humidity	68.0%
Atmosphere Pressure	101kPa	Test Voltage	DC 5 V

TEST DATE / ENGINEER

Test Date	October 11, 2023	Test By	Johnson Liu
-----------	------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix C

7.5. TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN

LIMITS

Transmitter Unwanted Emissions in The Out-Of-Band Domain	
Condition	Limit
Under Normal Test Condition	The transmitter unwanted emissions in the out-of-band domain shall not exceed the values provided by the mask in figure 3.

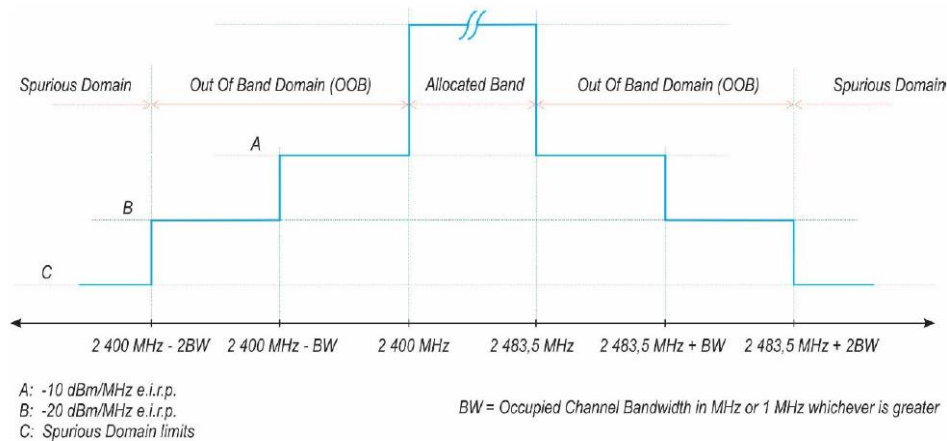


Figure 3: Transmit mask

TEST PROCEDURE

Refer to ETSI EN 300 328 V2.2.2 (2019-07) clause 5.4.8

Measurement	
☒ Conducted measurement	☐ Radiated measurement

Connect the UUT to the spectrum analyzer and use the following settings:

Span	Zero Span
Filter Mode	Channel Filter
Trace Mode	Max Hold
Trigger Mode	Video
Detector	RMS
Sweep Points	Sweep time [μs] / (1 μs) with a maximum of 30 000
RBW / VBW	1 MHz / 3 MHz
Measurement Mode	Time Domain Power
Sweep Time	> 120 % of the duration of the longest burst detected during the measurement of the RF Output Power

TEST ENVIRONMENT

Temperature	24.2°C	Relative Humidity	68.0%
Atmosphere Pressure	101kPa	Test Voltage	DC 5 V

TEST DATE / ENGINEER

Test Date	October 11, 2023	Test By	Johnson Liu
-----------	------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix D

7.6. TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN

LIMITS

The transmitter unwanted emissions in the spurious domain shall not exceed the values given in table 12.

In case of equipment with antenna connectors, these limits apply to emissions at the antenna port (conducted). For emissions radiated by the cabinet or emissions radiated by integral antenna equipment (without antenna connectors), these limits are e.r.p. for emissions up to 1 GHz and as e.i.r.p. for emissions above 1 GHz.

Table 12: Transmitter limits for spurious emissions

Frequency range	Maximum power	Bandwidth
30 MHz to 47 MHz	-36 dBm	100 kHz
47 MHz to 74 MHz	-54 dBm	100 kHz
74 MHz to 87,5 MHz	-36 dBm	100 kHz
87,5 MHz to 118 MHz	-54 dBm	100 kHz
118 MHz to 174 MHz	-36 dBm	100 kHz
174 MHz to 230 MHz	-54 dBm	100 kHz
230 MHz to 470 MHz	-36 dBm	100 kHz
470 MHz to 694 MHz	-54 dBm	100 kHz
694 MHz to 1 GHz	-36 dBm	100 kHz
1 GHz to 12,75 GHz	-30 dBm	1 MHz

TEST PROCEDURE

Refer to Refer to ETSI EN 300 328 V2.2.2 (2019-07) clause 5.4.9

Measurement	
☒ Conducted measurement	☒ Radiated measurement

Spectrum analyser settings for pre-scan:


RBW	100 kHz (< 1 GHz) / 1 MHz (> 1 GHz)
VBW	300 kHz (< 1 GHz) / 3 MHz (> 1 GHz)
Detector Mode	Peak
Filter type	3 dB (Gaussian)
Trace Mode	Max hold
Sweep Points	$\geq 19\,400$ (< 1 GHz); $\geq 23\,500$ (> 1 GHz); for spectrum analyzers not supporting this high number of sweep points, the frequency band may be segmented.

Sweep Time	For non continuous transmissions (duty cycle less than 100 %), the sweep time shall be sufficiently long, such that for each 100 kHz frequency step, the measurement time is greater than two transmissions of the UUT, on any channel. For FHSS equipment operating in a normal operating (hopping not disabled) mode, the sweep time shall be further increased to capture multiple transmissions on any of the hopping frequencies. The above sweep time setting may result in long measuring times in case of FHSS equipment. To avoid such long measuring times, an FFT analyzer may be used.
------------	---

Spectrum analyser settings for the emissions identified during the pre-scan:

Measurement Mode	Time Domain Power
Centre Frequency	Frequency of the emission identified during the pre-scan
RBW	100 kHz (< 1 GHz) / 1 MHz (> 1 GHz)
VBW	300 kHz (< 1 GHz) / 3 MHz (> 1 GHz)
Frequency Span	Zero Span
Sweep Mode	Single Sweep
Detector Mode	RMS
Trace Mode	Max hold
Trigger Mode	Video (burst signals) or Manual (continuous signals)
Sweep Points	Sweep time [μ s] / (1 μ s) with a maximum of 30 000
Sweep Time	> 120 % of the duration of the longest burst detected during the measurement of the RF Output Power

TEST SETUP

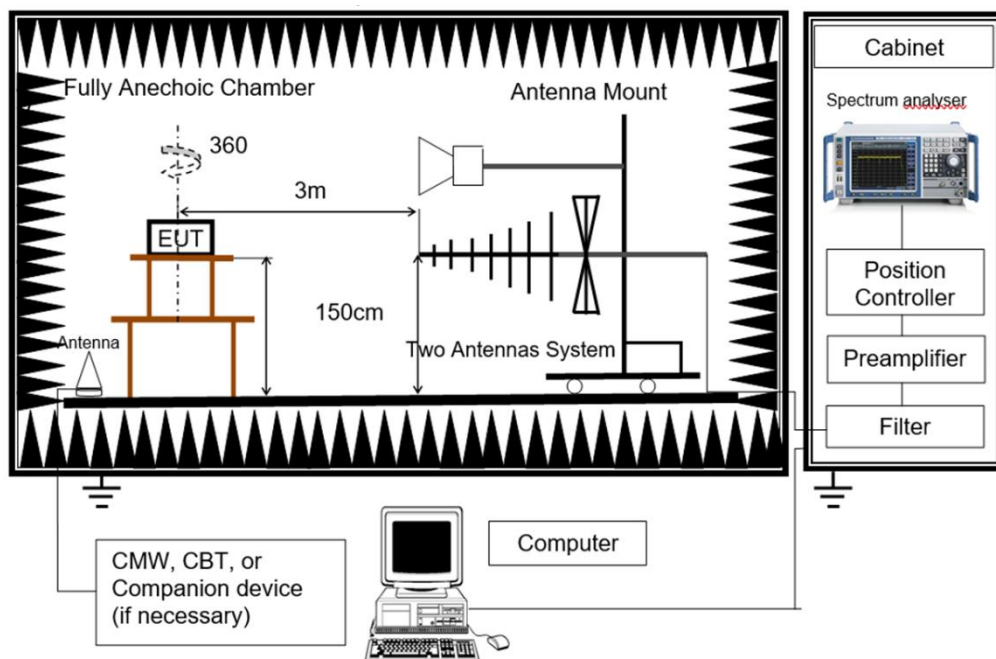

TEST ENVIRONMENT

Temperature	24.2°C	Relative Humidity	68.0%
Atmosphere Pressure	101kPa	Test Voltage	DC 5 V

TEST DATE / ENGINEER

Test Date	October 11, 2023	Test By	Johnson Liu
-----------	------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix E

7.7. RECEIVER SPURIOUS EMISSIONS

LIMITS

The spurious emissions of the receiver shall not exceed the values given in table 13.
In case of non-FHSS equipment with antenna connectors, these limits apply to emissions at the antenna port (conducted). For emissions radiated by the cabinet or for emissions radiated by integral antenna equipment (without antenna connectors), these limits are e.r.p. for emissions up to 1 GHz and e.i.r.p. for emissions above 1 GHz.

Table 13: Spurious emission limits for receivers

Frequency range	Maximum power	Bandwidth
30 MHz to 1 GHz	-57 dBm	100 kHz
1 GHz to 12,75 GHz	-47 dBm	1 MHz

TEST PROCEDURE

Please refer to ETSI EN 300 328 V2.2.2 (2019-07) Clause 5.4.10

Measurement	
☒ Conducted measurement	☒ Radiated measurement

Please refer to ETSI EN 300 328 V2.2.2 (2019-07) Clause 5.4.10

Spectrum analyser settings for pre-scan:


RBW	100 kHz (< 1 GHz) / 1 MHz (> 1 GHz)
VBW	300 kHz (< 1 GHz) / 3 MHz (> 1 GHz)
Detector Mode	Peak
Filter type	3 dB (Gaussian)
Trace Mode	Max hold
Sweep Points	$\geq 19\,400$ (< 1 GHz); $\geq 23\,500$ (> 1 GHz); for spectrum analyzers not supporting this high number of sweep points, the frequency band may be segmented.
Sweep Time	Auto

Spectrum analyser settings for the emissions identified during the pre-scan:

Measurement Mode	Time Domain Power
Centre Frequency	Frequency of the emission identified during the pre-scan
RBW	100 kHz (< 1 GHz) / 1 MHz (> 1 GHz)
VBW	300 kHz (< 1 GHz) / 3 MHz (> 1 GHz)
Frequency Span	Zero Span
Sweep Mode	Single Sweep

Detector Mode	RMS
Trace Mode	Max hold
Trigger Mode	Video (burst signals) or Manual (continuous signals)
Sweep Points	$\geq 30\,000$
Sweep Time	30 ms

TEST SETUP

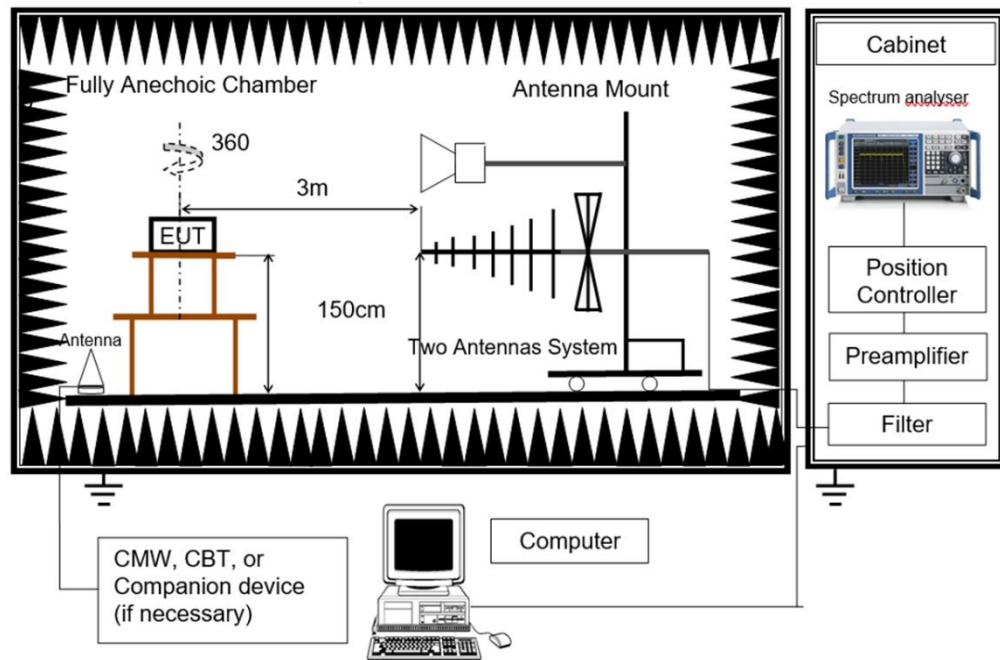

TEST ENVIRONMENT

Temperature	24.2°C	Relative Humidity	68.0%
Atmosphere Pressure	101kPa	Test Voltage	DC 5 V

TEST DATE / ENGINEER

Test Date	October 11, 2023	Test By	Johnson Liu
-----------	------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix F

7.8. RECEIVER BLOCKING

LIMITS

Performance Criteria

For equipment that supports a PER or FER test to be performed, the minimum performance criterion shall be a PER or FER less than or equal to 10 %.

For equipment that does not support a PER or a FER test to be performed, the minimum performance criterion shall be no loss of the wireless transmission function needed for the intended use of the equipment.

While maintaining the minimum performance criteria as defined in clause 4.3.2.11.3, the blocking levels at specified frequency offsets shall be equal to or greater than the limits defined for the applicable receiver category provided in table 14, table 15 or table 16.

☐ Receiver Category 1

Table 14: Receiver Blocking parameters for Receiver Category 1 equipment

Wanted signal mean power from companion device (dBm) (see notes 1 and 4)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 4)	Type of blocking signal
$(-133 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}))$ or -68 dBm whichever is less (see note 2)	2 380 2 504	-34	CW
$(-139 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}))$ or -74 dBm whichever is less (see note 3)	2 300 2 330 2 360 2 524 2 584 2 674		

NOTE 1: OCBW is in Hz.

NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\min} + 26 \text{ dB}$ where $P_{\min}$ is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.

NOTE 3: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\min} + 20 \text{ dB}$ where $P_{\min}$ is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.

NOTE 4: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.

☒ Receiver Category 2

Table 15: Receiver Blocking parameters receiver Category 2 equipment

Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal
(-139 dBm + 10 × log ₁₀ (OCBW) + 10 dB) or (-74 dBm + 10 dB) whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW
NOTE 1: OCBW is in Hz. NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{min} + 26$ dB where P_{min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal. NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.			

☐ Receiver Category 3

Table 16: Receiver Blocking parameters receiver Category 3 equipment

Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal
(-139 dBm + 10 × log ₁₀ (OCBW) + 20 dB) or (-74 dBm + 20 dB) whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW
NOTE 1: OCBW is in Hz. NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{min} + 30$ dB where P_{min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal. NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.			

TEST PROCEDURE

Please refer to ETSI EN 300 328 V2.2.2 (2019-07) Clause 5.4.11

Measurement	
☒ Conducted measurement	☐ Radiated measurement

Step 1:

- For non-FHSS equipment, the UUT shall be set to the lowest operating channel on which the blocking test has to be performed (see clause 5.4.11.1).

Step 2:

- The blocking signal generator is set to the first frequency as defined in the appropriate table corresponding to the receiver category and type of equipment.

Step 3:

- With the blocking signal generator switched off, a communication link is established between the UUT and the associated companion device using the test setup shown in figure 6.
- Unless the option provided in note 2 of the applicable table referred to in clause 5.4.11.2.1 is used, the level of the wanted signal shall be set to the value provided in the table corresponding to the receiver category and type of equipment. The test procedure defined in clause 5.4.2, and more in particular clause 5.4.2.2.1.2, can be used to measure the (conducted) level of the wanted signal however no correction shall be made for antenna gain of the companion device (step 6 in clause 5.4.2.2.1.2 shall be ignored). This level may be measured directly at the output of the companion device and a correction is made for the coupling loss into the UUT. The actual level for the wanted signal shall be recorded in the test report.
- When the option provided in note 2 of the applicable table referred to in clause 5.4.11.2.1 is used, the attenuation of the variable attenuator shall be increased in 1 dB steps to a value at which the minimum performance criteria as specified in clause 4.3.1.12.3 or clause 4.3.2.11.3 is still met. The resulting level for the wanted signal at the input of the UUT is P_{min}. This signal level (P_{min}) is increased by the value provided in note 2 of the applicable table corresponding to the receiver category and type of equipment.

Step 4:

- The blocking signal at the UUT is set to the level provided in the table corresponding to the receiver category and type of equipment.
- If the performance criteria as specified in clause 4.3.1.12.3 or clause 4.3.2.11.3 are met then proceed to step 6.

Step 5:

- If the performance criteria as specified in clause 4.3.1.12.3 or clause 4.3.2.11.3 is not met, step 3 and step 4 shall be repeated after that the frequency of the blocking signal set in step 2 has been increased with a value equal to the Occupied Channel Bandwidth except:
 - For the blocking frequency 2 380 MHz, where this frequency offset shall be less than or equal to 10 MHz. If this frequency offset is more than 7 MHz, the level of the wanted signal shall be increased by 3 dB.
 - For the blocking frequency 2 503,5 MHz, where this frequency offset shall be less than or equal to 10 MHz. If this frequency offset is more than 7 MHz, the level of the wanted signal shall be decreased by 3 dB.
- If the performance criteria as specified in clause 4.3.1.12.3 or clause 4.3.2.11.3 is still not met, step 3 and step 4 shall be repeated after that the frequency of the blocking signal set in step 2 has been decreased with a value equal to the Occupied Channel Bandwidth except:
 - For the blocking frequency 2 380 MHz, where this frequency offset shall be less than or equal to 10 MHz. If this frequency offset is more than 7 MHz, the level of the wanted signal shall be decreased by 3 dB.
 - For the blocking frequency 2 503,5 MHz, where this frequency offset shall be less than or equal to 10 MHz. If this frequency offset is more than 7 MHz, the level of the wanted signal shall be increased by 3 dB.
- If the performance criteria as specified in clause 4.3.1.12.3 or clause 4.3.2.11.3 is still not met, the UUT fails to comply with the Receiver Blocking requirement and step 6 and step 7 are no longer required.

- It shall be recorded in the test report whether the shift of blocking frequencies as described in the present step was used.

Step 6:

- Repeat step 4 and step 5 for each remaining combination of frequency and level for the blocking signal as provided in the table corresponding to the receiver category and type of equipment.


Step 7:

- For non-FHSS equipment, repeat step 2 to step 6 with the UUT operating at the highest operating channel on which the blocking test has to be performed (see clause 5.4.11.1).

Step 8:

- It shall be assessed and recorded in the test report whether the UUT complies with the Receiver Blocking requirement.

TEST SETUP

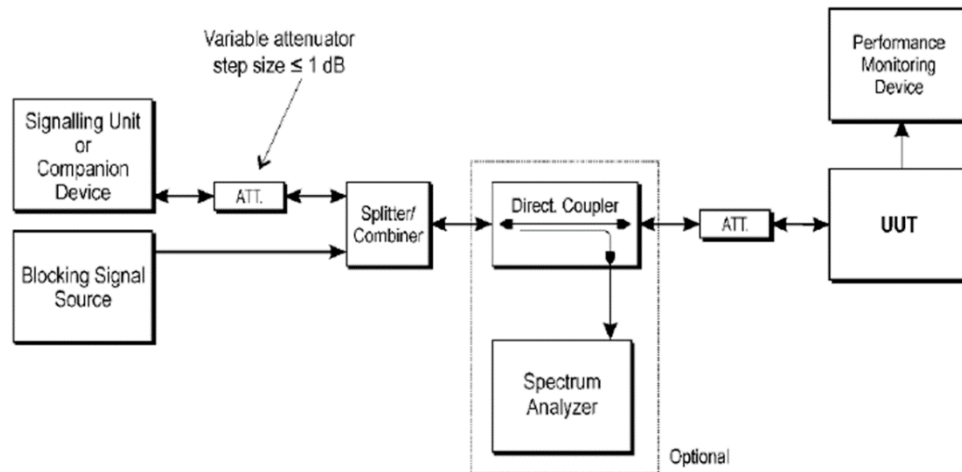

TEST ENVIRONMENT

Temperature	24.2°C	Relative Humidity	68.0%
Atmosphere Pressure	101kPa	Test Voltage	DC 5 V

TEST DATE / ENGINEER

Test Date	October 11, 2023	Test By	Johnson Liu
-----------	------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix G

8. TEST DATA

Appendix A: RF Output Power

Condition	Mode	Frequency (MHz)	Antenna	Max EIRP (dBm)	Limit (dBm)	Verdict
NTNV	BLE 1M	2402	Ant1	3.09	20	Pass
	BLE 1M	2440	Ant1	2.99	20	Pass
	BLE 1M	2480	Ant1	3.20	20	Pass
	BLE 2M	2402	Ant1	3.28	20	Pass
	BLE 2M	2440	Ant1	3.28	20	Pass
	BLE 2M	2480	Ant1	3.24	20	Pass

Condition	Mode	Frequency (MHz)	Antenna	Max EIRP (dBm)	Limit (dBm)	Verdict
LTVN	BLE 1M	2402	Ant1	2.80	20	Pass
	BLE 1M	2440	Ant1	2.66	20	Pass
	BLE 1M	2480	Ant1	2.84	20	Pass
	BLE 2M	2402	Ant1	3.02	20	Pass
	BLE 2M	2440	Ant1	3.00	20	Pass
	BLE 2M	2480	Ant1	2.97	20	Pass


Condition	Mode	Frequency (MHz)	Antenna	Max EIRP (dBm)	Limit (dBm)	Verdict
LTVN	BLE 1M	2402	Ant1	2.78	20	Pass
	BLE 1M	2440	Ant1	2.68	20	Pass
	BLE 1M	2480	Ant1	2.86	20	Pass
	BLE 2M	2402	Ant1	2.90	20	Pass
	BLE 2M	2440	Ant1	2.92	20	Pass
	BLE 2M	2480	Ant1	2.93	20	Pass

Appendix B: Power Spectral Density


Mode	Frequency (MHz)	Antenna	Max PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
BLE 1M	2402	Ant1	3.03	10	Pass
	2440		2.93	10	Pass
	2480		3.14	10	Pass
BLE 2M	2402		2.05	10	Pass
	2440		2.07	10	Pass
	2480		2.02	10	Pass

Test Graphs


PSD NVNT BLE 1M 2402MHz Ant1

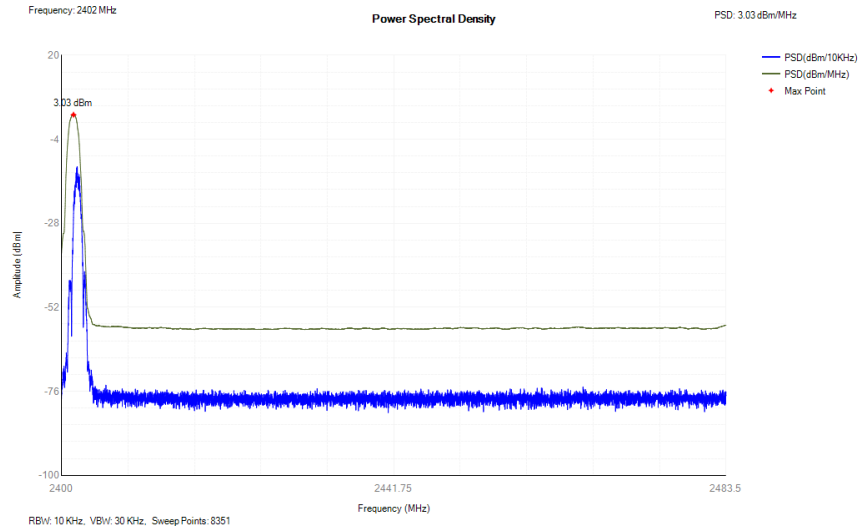


PSD NVNT BLE 1M 2440MHz Ant1

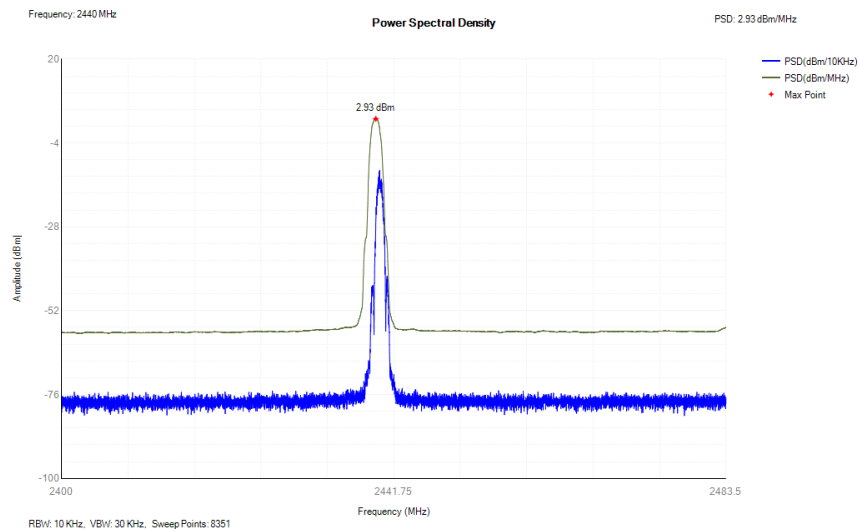

PSD NVNT BLE 1M 2480MHz Ant1

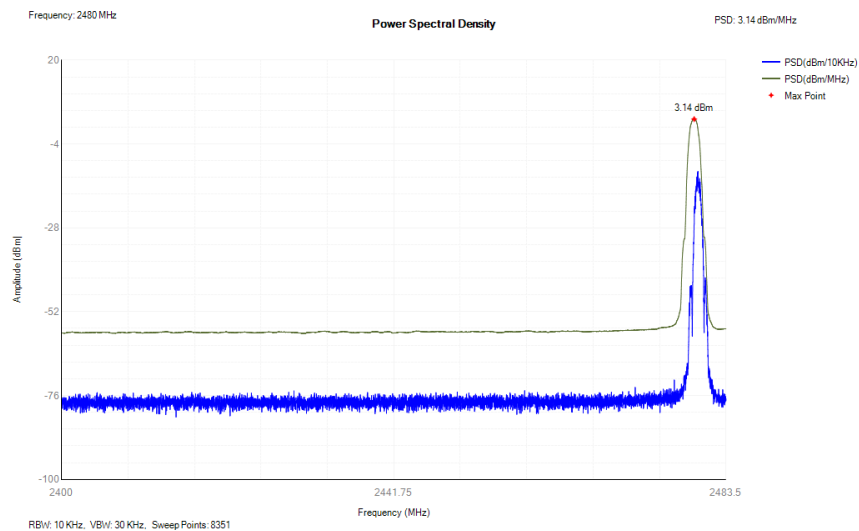


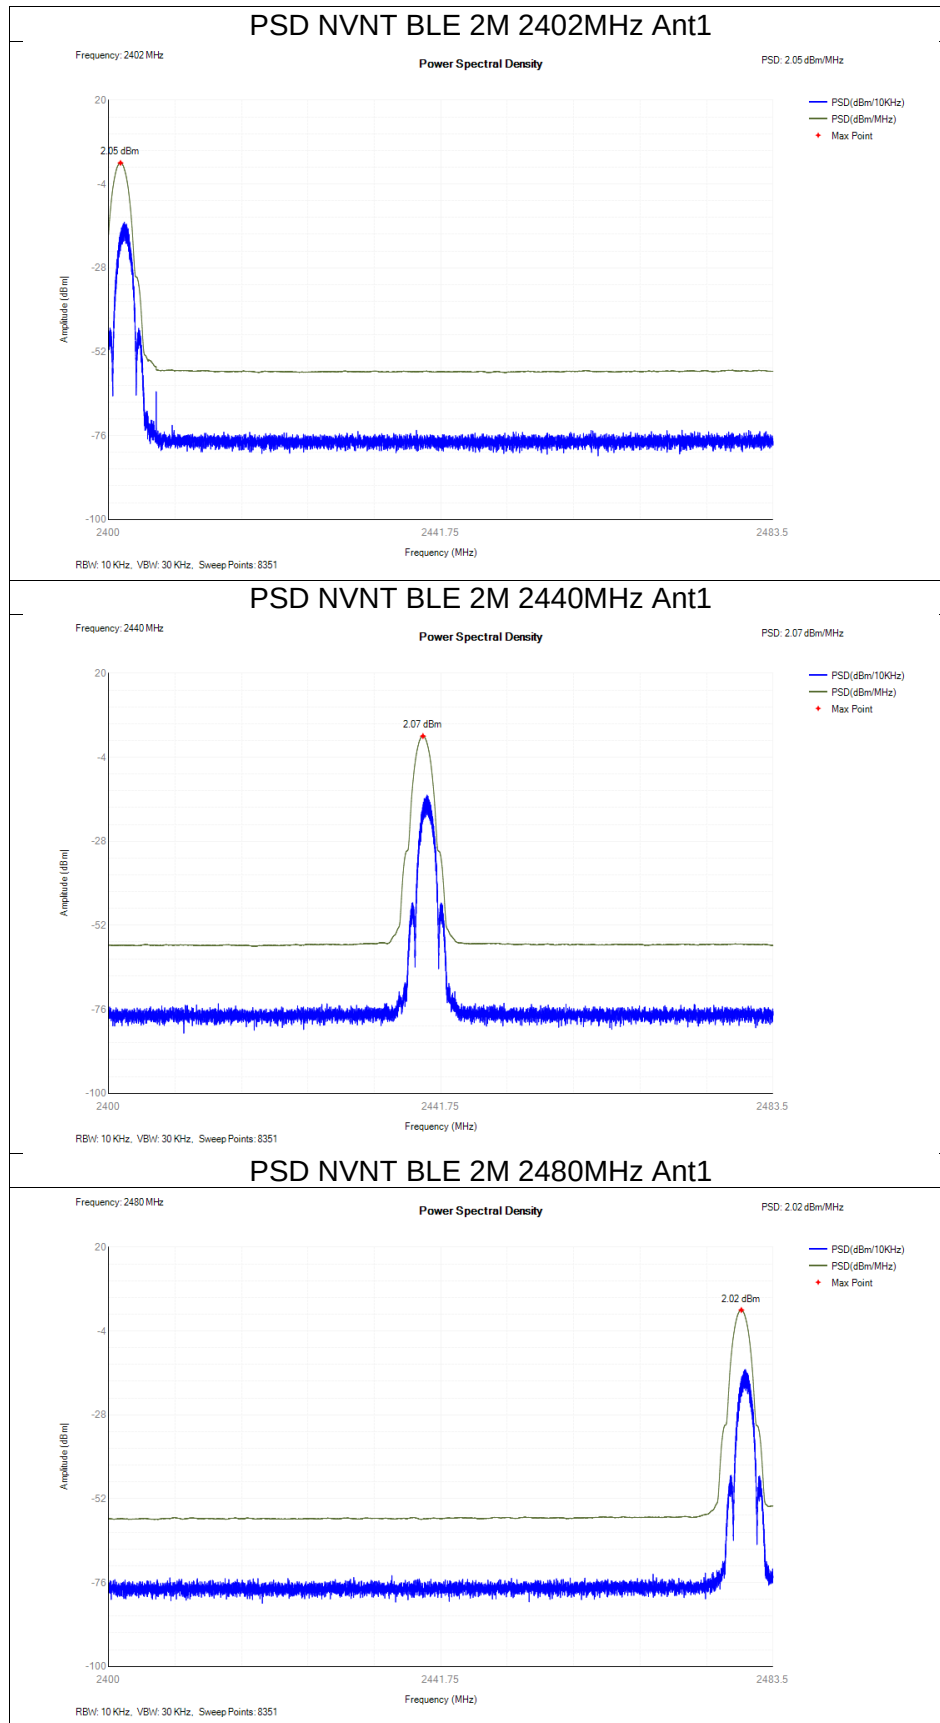

Appendix C: Occupied Channel Bandwidth

Mode	Frequency (MHz)	Antenna	Center Frequency (MHz)	OBW (MHz)	Lower Edge (MHz)	Upper Edge (MHz)	Limit OBW (MHz)	Verdict
BLE 1M	2402	Ant1	2402.013	1.037	2401.494	2402.531	2400 - 2483.5MHz	Pass
	2480		2480.013	1.037	2479.495	2480.531	2400 - 2483.5MHz	Pass
BLE 2M	2402		2402.002	2.083	2400.96	2403.043	2400 - 2483.5MHz	Pass
	2480		2480.002	2.085	2478.959	2481.044	2400 - 2483.5MHz	Pass



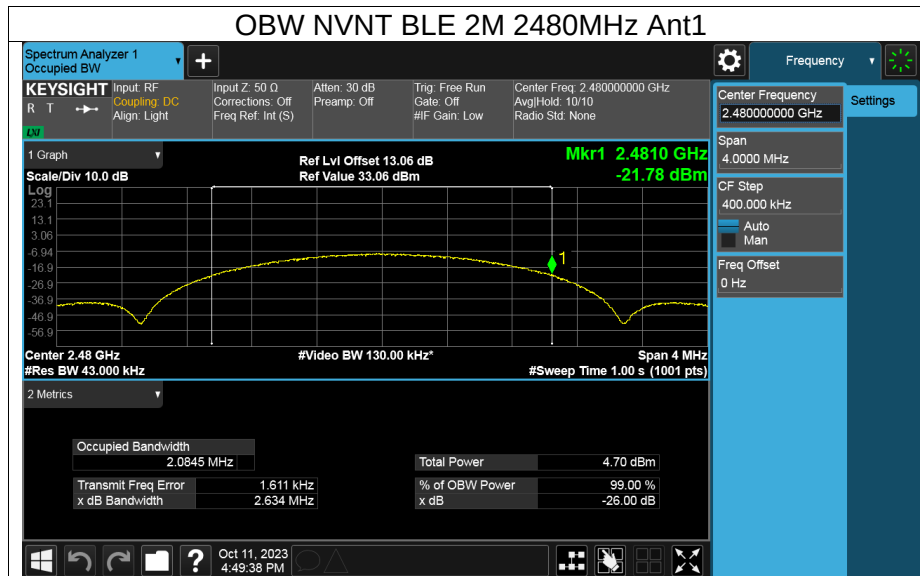


Appendix D: Transmitter unwanted emissions in the out-of-band domain


Mode	Frequency (MHz)	Antenna	OOB Frequency (MHz)	Level (dBm/MHz)	Limit (dBm/MHz)	Verdict
BLE 1M	2402	Ant1	2399.5	-56.86	-10	Pass
			2399.463	-58.29	-10	Pass
			2398.463	-58.58	-20	Pass
			2398.426	-58.45	-20	Pass
	2480		2484	-58.78	-10	Pass
			2484.037	-59.12	-10	Pass
			2485.037	-59.29	-20	Pass
			2485.074	-59.48	-20	Pass
BLE 2M	2402		2399.5	-34.84	-10	Pass
			2398.5	-56.52	-10	Pass
			2398.417	-57.03	-10	Pass
			2397.417	-59.58	-20	Pass
			2396.417	-59.69	-20	Pass
			2396.334	-59.43	-20	Pass
	2480		2484	-57.86	-10	Pass
			2485	-59.42	-10	Pass
			2485.085	-59.52	-10	Pass
			2486.085	-59.51	-20	Pass
		2487.085	-59.64	-20	Pass	
		2487.17	-59.85	-20	Pass	

Test Graphs


Tx. Emissions OOB NVNT BLE 1M 2402MHz Ant1

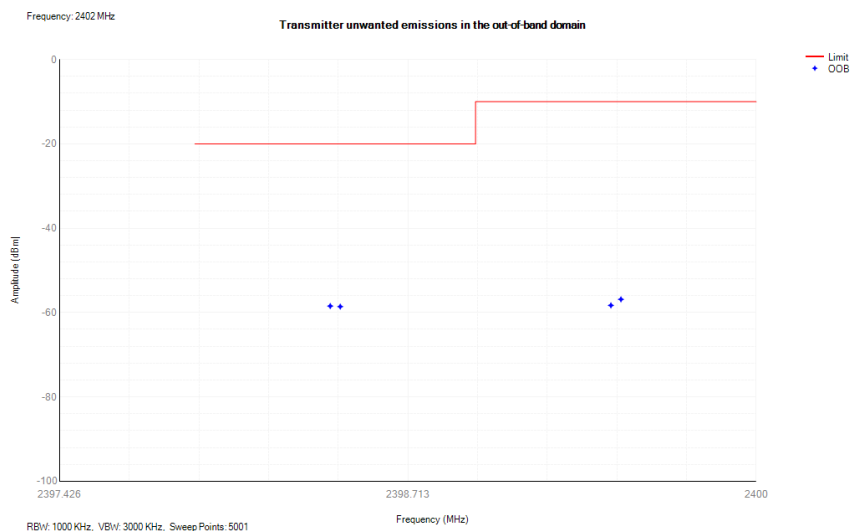


Tx. Emissions OOB NVNT BLE 1M 2480MHz Ant1

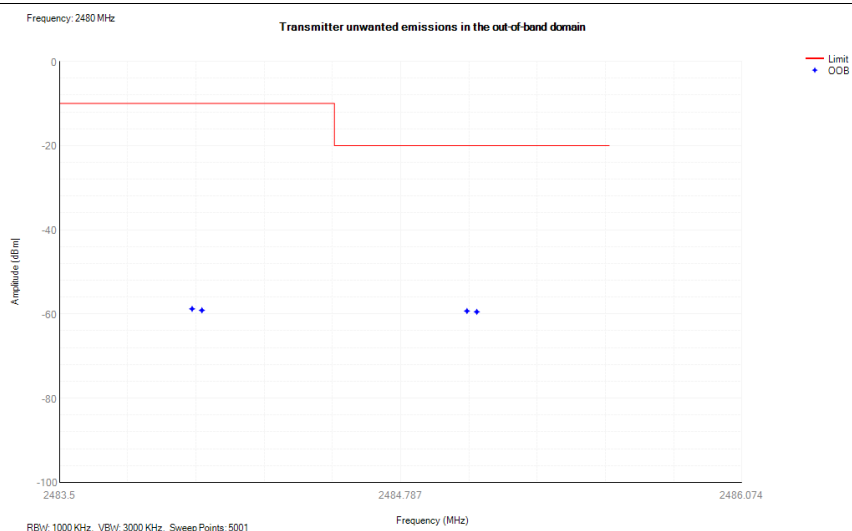

Tx. Emissions OOB NVNT BLE 2M 2402MHz Ant1

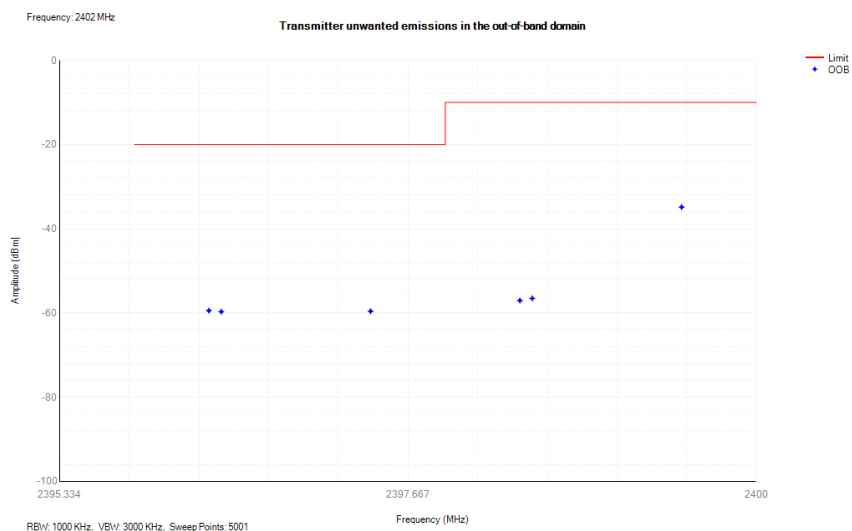

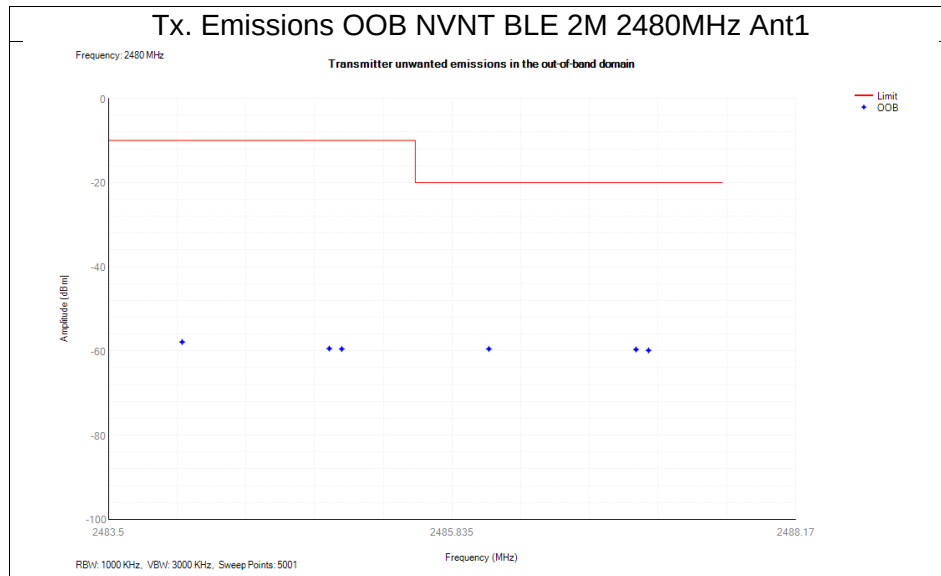


Appendix E: Transmitter unwanted emissions in the spurious domain

Mode	Frequency (MHz)	Antenna	Range (MHz)	Spur Freq (MHz)	Peak (dBm)	RMS (dBm)	Limit (dBm)	Verdict		
BLE 1M	2402	Ant1	30 -47	37.20	-72.66	NA	-36	Pass		
			47 -74	58.40	-73.16	NA	-54	Pass		
			74 -87.5	85.50	-72.35	NA	-36	Pass		
			87.5 - 118	93.05	-71.57	NA	-54	Pass		
			118 - 174	172.95	-71.49	NA	-36	Pass		
			174 - 230	226.95	-72.32	NA	-54	Pass		
			230 - 470	416.95	-70.98	NA	-36	Pass		
			470 - 694	497.30	-70.48	NA	-54	Pass		
			694 - 1000	861.25	-69.19	NA	-36	Pass		
			1000 - 2398	2397.50	-48.35	NA	-30	Pass		
			2485.5 - 12750	3762.50	-51.05	NA	-30	Pass		
	2480		30 -47	36.50	-72.87	NA	-36	Pass		
			47 -74	63.40	-72.46	NA	-54	Pass		
			74 -87.5	74.85	-73.15	NA	-36	Pass		
			87.5 - 118	110.75	-72.44	NA	-54	Pass		
			118 - 174	144.00	-71.75	NA	-36	Pass		
			174 - 230	187.35	-72.22	NA	-54	Pass		
			230 - 470	427.50	-70.84	NA	-36	Pass		
			470 - 694	564.30	-70.64	NA	-54	Pass		
			694 - 1000	816.20	-69.59	NA	-36	Pass		
			1000 - 2398	2386.50	-55.93	NA	-30	Pass		
			2485.5 - 12750	3766.00	-50.59	NA	-30	Pass		
			BLE 2M	2402	30 -47	38.05	-73.46	NA	-36	Pass
					47 -74	64.10	-72.85	NA	-54	Pass
					74 -87.5	83.55	-72.43	NA	-36	Pass
					87.5 - 118	91.45	-72.24	NA	-54	Pass
					118 - 174	168.05	-72.03	NA	-36	Pass
					174 - 230	194.90	-72.44	NA	-54	Pass
					230 - 470	430.20	-71.25	NA	-36	Pass


		470 - 694	663.60	-70.33	NA	-54	Pass
		694 - 1000	845.35	-68.92	NA	-36	Pass
		1000 - 2396	2392.00	-55.10	NA	-30	Pass
		2487.5 - 12750	3849.00	-51.17	NA	-30	Pass
	2480	30 -47	36.50	-72.88	NA	-36	Pass
		47 -74	52.05	-72.90	NA	-54	Pass
		74 -87.5	75.20	-72.12	NA	-36	Pass
		87.5 - 118	98.60	-72.92	NA	-54	Pass
		118 - 174	145.80	-71.19	NA	-36	Pass
		174 - 230	203.80	-71.87	NA	-54	Pass
		230 - 470	274.15	-70.83	NA	-36	Pass
		470 - 694	599.65	-70.21	NA	-54	Pass
		694 - 1000	844.45	-69.23	NA	-36	Pass
		1000 - 2396	2329.50	-56.38	NA	-30	Pass
		2487.5 - 12750	3865.00	-51.46	NA	-30	Pass

Test Graphs


Tx. Spurious NVNT BLE 1M 2402MHz Ant1

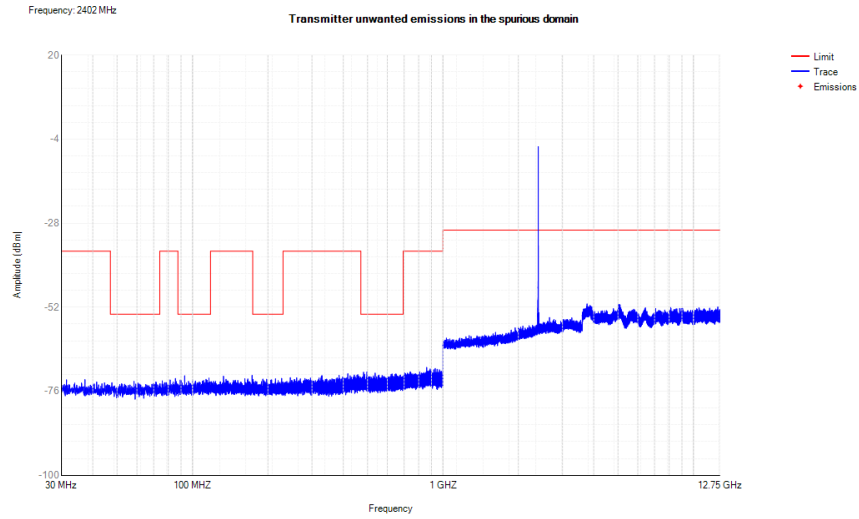


Tx. Spurious NVNT BLE 1M 2480MHz Ant1

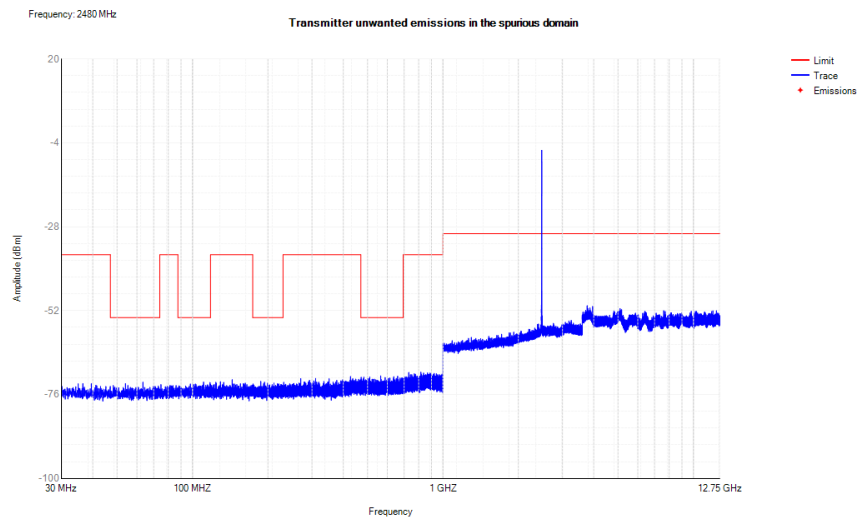


Tx. Spurious NVNT BLE 2M 2402MHz Ant1

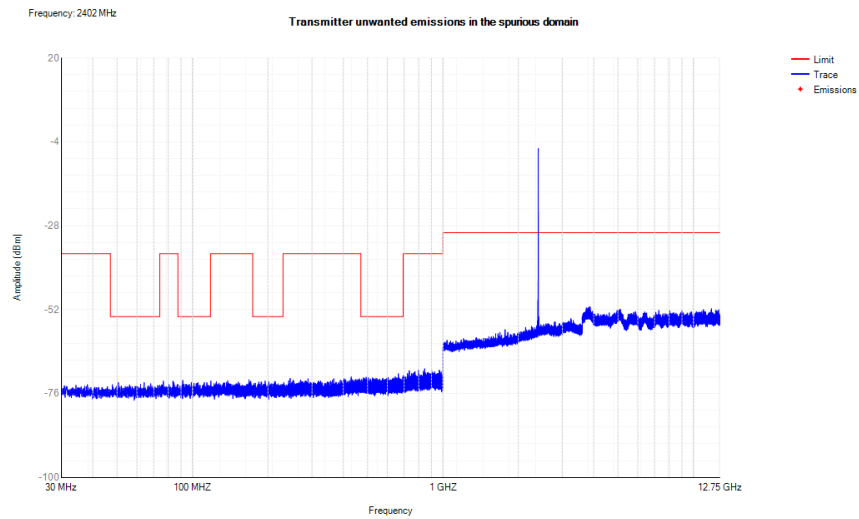

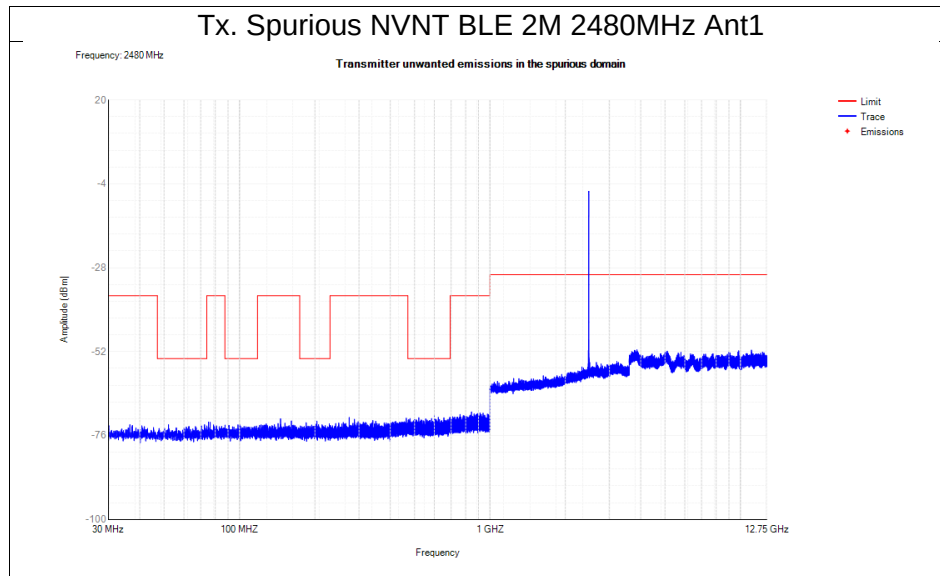

TX Radiated Test Result

Transmitter unwanted emissions in the spurious domain 30 MHz-1GHz			
Measurement Method	Radiated	Polar:	Horizontal/Vertical
Test Mode:	LE 1M	Test Channel:	CH 0

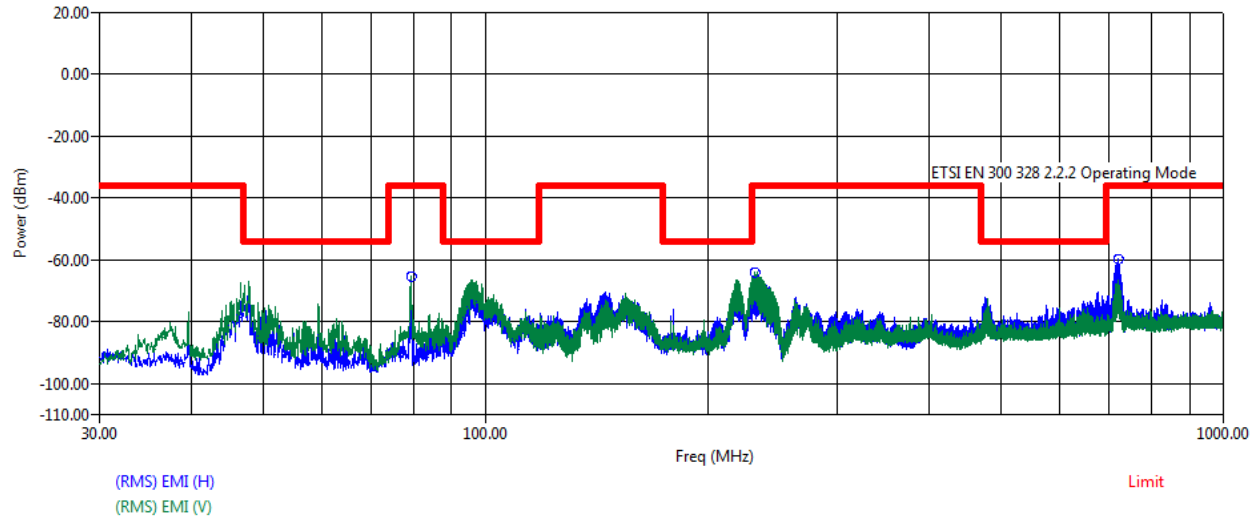

Freq (MHz)	(RMS) Trace (H) (dBuV)	ERP Factor (H) (dB)	Transducer (H) (dB)	Cable (H) (dB)	Preamp (H) (dB)	(RMS) EMI (H) (dBm)	Limit (dBm)	(RMS) Margin (H) (dB)
79.25	59.47	-86.81	0.00	1.12	43.00	-69.22	-36.00	-33.22
231.65	59.14	-86.48	0.00	2.04	43.07	-68.38	-36.00	-32.38
718.85	56.33	-77.05	0.00	3.64	42.75	-59.82	-36.00	-23.82
Freq (MHz)	(RMS) Trace (V) (dBuV)	ERP Factor (V) (dB)	Transducer (V) (dB)	Cable (V) (dB)	Preamp (V) (dB)	(RMS) EMI (V) (dBm)	Limit (dBm)	(RMS) Margin (V) (dB)
79.25	64.19	-87.41	0.00	1.12	43.00	-65.09	-36.00	-29.09
231.65	63.60	-86.51	0.00	2.04	43.07	-63.94	-36.00	-27.94
718.85	47.36	-76.41	0.00	3.64	42.75	-68.15	-36.00	-32.15

Note:


(RMS) EMI (H) = (RMS) Trace (H) + ERP Factor (H) + Transducer (H) + Cable (H) - Premp (H)

(RMS) EMI (V) = (RMS) Trace (V) + ERP Factor (V) + Transducer (V) + Cable (H) - Premp (V)

(RMS) Margin (H) = (RMS) EMI (H) - Limit

(RMS) Margin (V) = (RMS) EMI (V) - Limit

Transmitter unwanted emissions in the spurious domain 30 MHz-1GHz			
Measurement Method	Radiated	Polar:	Horizontal/Vertical
Test Mode:	LE 1M	Test Channel:	CH 39

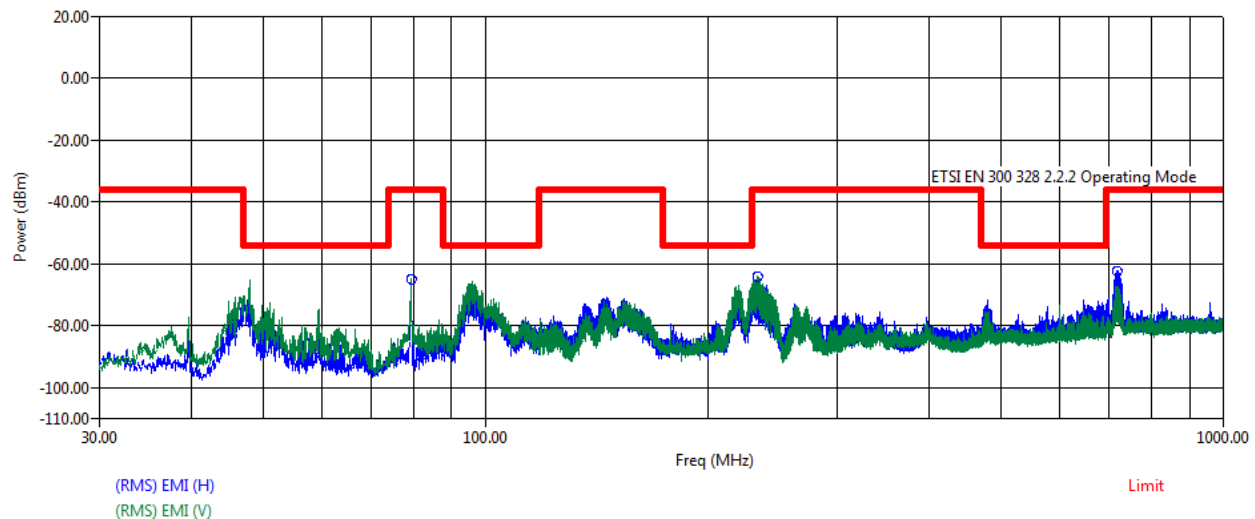

Freq (MHz)	(RMS) Trace (H) (dBuV)	ERP Factor (H) (dB)	Transducer (H) (dB)	Cable (H) (dB)	Preamp (H) (dB)	(RMS) EMI (H) (dBm)	Limit (dBm)	(RMS) Margin (H) (dB)
79.20	58.87	-86.81	0.00	1.12	43.00	-69.81	-36.00	-33.81
233.80	59.06	-86.70	0.00	2.05	43.07	-68.65	-36.00	-32.65
716.65	54.00	-77.14	0.00	3.62	42.75	-62.26	-36.00	-26.26
Freq (MHz)	(RMS) Trace (V) (dBuV)	ERP Factor (V) (dB)	Transducer (V) (dB)	Cable (V) (dB)	Preamp (V) (dB)	(RMS) EMI (V) (dBm)	Limit (dBm)	(RMS) Margin (V) (dB)
79.20	64.51	-87.41	0.00	1.12	43.00	-64.77	-36.00	-28.77
233.80	63.56	-86.70	0.00	2.05	43.07	-64.15	-36.00	-28.15
716.65	45.83	-76.54	0.00	3.62	42.75	-69.84	-36.00	-33.84

Note:

(RMS) EMI (H) = (RMS) Trace (H) + ERP Factor (H) + Transducer (H) + Cable (H) - Preamp (H)


(RMS) EMI (V) = (RMS) Trace (V) + ERP Factor (V) + Transducer (V) + Cable (H) - Preamp (V)

(RMS) Margin (H) = (RMS) EMI (H) - Limit

(RMS) Margin (V) = (RMS) EMI (V) - Limit

Note: All the modes had been tested, but only the worst data was recorded in the report.

Transmitter unwanted emissions in the spurious domain 1GHz-12.75GHz			
Measurement Method	Radiated	Polar:	Horizontal/Vertical
Test Mode:	LE 1M	Test Channel:	CH 0

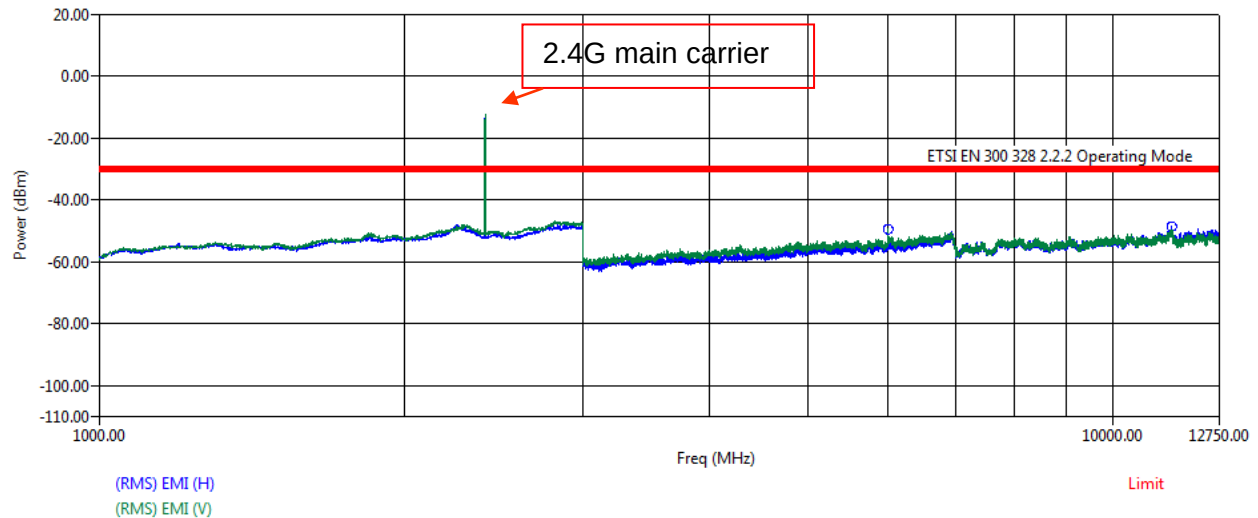


Freq (MHz)	(RMS) Trace (H) (dBuV)	ERP Factor (H) (dB)	Transducer (H) (dB)	Cable (H) (dB)	Preamp (H) (dB)	(RMS) EMI (H) (dBm)	Limit (dBm)	(RMS) Margin (H) (dB)
6000.00	38.58	-60.88	0.00	11.59	42.60	-53.31	-30.00	-23.31
11424.00	33.45	-56.48	0.00	16.47	42.03	-48.59	-30.00	-18.59
Freq (MHz)	(RMS) Trace (V) (dBuV)	ERP Factor (V) (dB)	Transducer (V) (dB)	Cable (V) (dB)	Preamp (V) (dB)	(RMS) EMI (V) (dBm)	Limit (dBm)	(RMS) Margin (V) (dB)
6000.00	41.33	-59.45	0.00	11.59	42.60	-49.13	-30.00	-19.13
11424.00	30.88	-57.02	0.00	16.47	42.03	-51.69	-30.00	-21.69

Note:

$(\text{RMS}) \text{ EMI (H)} = (\text{RMS}) \text{ Trace (H)} + \text{ERP Factor (H)} + \text{Transducer (H)} + \text{Cable (H)} - \text{Preamp (H)}$
 $(\text{RMS}) \text{ EMI (V)} = (\text{RMS}) \text{ Trace (V)} + \text{ERP Factor (V)} + \text{Transducer (V)} + \text{Cable (H)} - \text{Preamp (V)}$
 $(\text{RMS}) \text{ Margin (H)} = (\text{RMS}) \text{ EMI (H)} - \text{Limit}$
 $(\text{RMS}) \text{ Margin (V)} = (\text{RMS}) \text{ EMI (V)} - \text{Limit}$

Note: 2.4G main carrier was recorded in the plot.

Transmitter unwanted emissions in the spurious domain 1GHz-12.75GHz			
Measurement Method	Radiated	Polar:	Horizontal/Vertical
Test Mode:	LE 1M	Test Channel:	CH 39

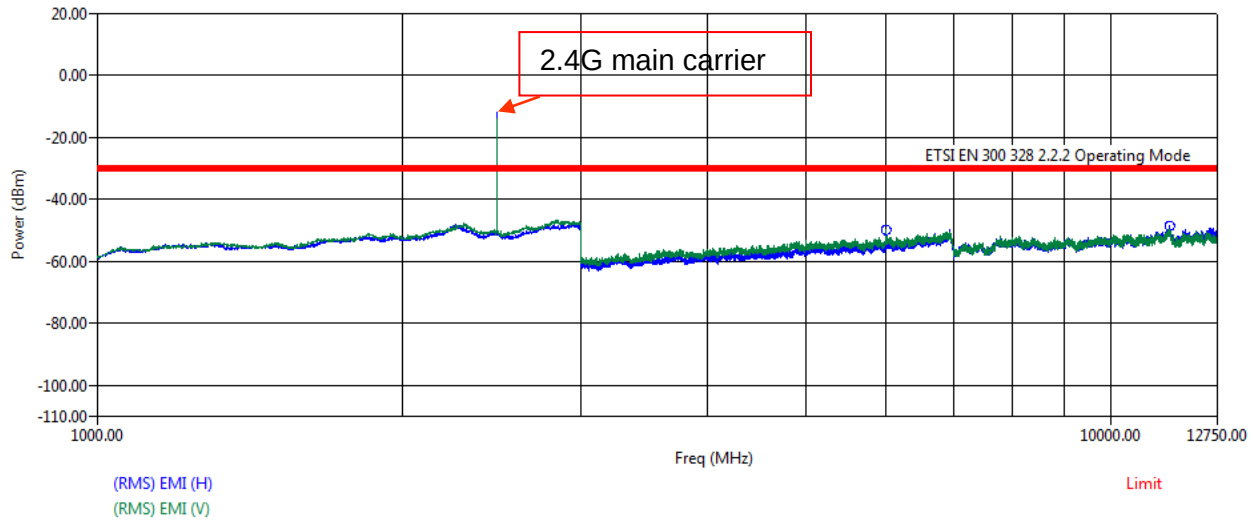


Freq (MHz)	(RMS) Trace (H) (dBuV)	ERP Factor (H) (dB)	Transducer (H) (dB)	Cable (H) (dB)	Preamp (H) (dB)	(RMS) EMI (H) (dBm)	Limit (dBm)	(RMS) Margin (H) (dB)
6000.00	40.59	-60.88	0.00	11.59	42.60	-51.30	-30.00	-21.30
11422.00	33.50	-56.52	0.00	16.48	42.03	-48.57	-30.00	-18.57
Freq (MHz)	(RMS) Trace (V) (dBuV)	ERP Factor (V) (dB)	Transducer (V) (dB)	Cable (V) (dB)	Preamp (V) (dB)	(RMS) EMI (V) (dBm)	Limit (dBm)	(RMS) Margin (V) (dB)
6000.00	40.85	-59.45	0.00	11.59	42.60	-49.61	-30.00	-19.61
11422.00	31.16	-57.06	0.00	16.48	42.03	-51.45	-30.00	-21.45

Note:

- (RMS) EMI (H) = (RMS) Trace (H) + ERP Factor (H) + Transducer (H) + Cable (H) - Premp (H)
- (RMS) EMI (V) = (RMS) Trace (V) + ERP Factor (V) + Transducer (V) + Cable (H) - Premp (V)
- (RMS) Margin (H) = (RMS) EMI (H) – Limit
- (RMS) Margin (V) = (RMS) EMI (V) - Limit

Note: 2.4G main carrier was recorded in the plot.

Transmitter unwanted emissions in the spurious domain 1GHz-12.75GHz			
Measurement Method	Radiated	Polar:	Horizontal/Vertical
Test Mode:	LE 2M	Test Channel:	CH 0

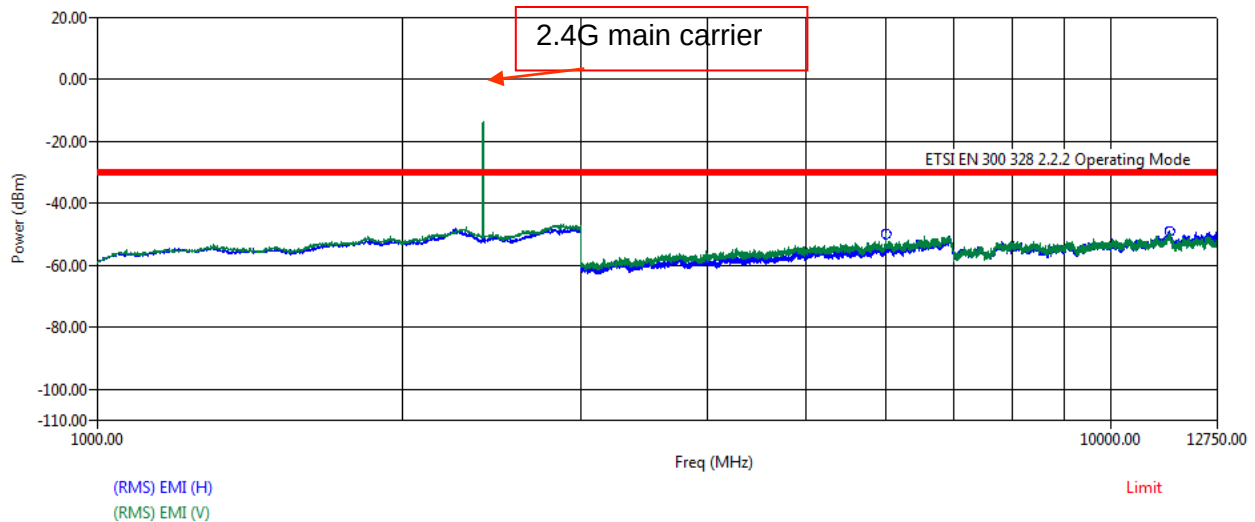


Freq (MHz)	(RMS) Trace (H) (dBuV)	ERP Factor (H) (dB)	Transducer (H) (dB)	Cable (H) (dB)	Preamplifier (H) (dB)	(RMS) EMI (H) (dBm)	Limit (dBm)	(RMS) Margin (H) (dB)
6000.00	38.19	-60.88	0.00	11.59	42.60	-53.70	-30.00	-23.70
11450.50	32.59	-55.96	0.00	16.41	42.02	-48.98	-30.00	-18.98
Freq (MHz)	(RMS) Trace (V) (dBuV)	ERP Factor (V) (dB)	Transducer (V) (dB)	Cable (V) (dB)	Preamplifier (V) (dB)	(RMS) EMI (V) (dBm)	Limit (dBm)	(RMS) Margin (V) (dB)
6000.00	40.93	-59.45	0.00	11.59	42.60	-49.53	-30.00	-19.53
11450.50	31.41	-56.46	0.00	16.41	42.02	-50.65	-30.00	-20.65

Note:

$$\begin{aligned}
 \text{(RMS) EMI (H)} &= \text{(RMS) Trace (H)} + \text{ERP Factor (H)} + \text{Transducer (H)} + \text{Cable (H)} - \text{Preamplifier (H)} \\
 \text{(RMS) EMI (V)} &= \text{(RMS) Trace (V)} + \text{ERP Factor (V)} + \text{Transducer (V)} + \text{Cable (H)} - \text{Preamplifier (V)} \\
 \text{(RMS) Margin (H)} &= \text{(RMS) EMI (H)} - \text{Limit} \\
 \text{(RMS) Margin (V)} &= \text{(RMS) EMI (V)} - \text{Limit}
 \end{aligned}$$

Note: 2.4G main carrier was recorded in the plot.

Transmitter unwanted emissions in the spurious domain 1GHz-12.75GHz			
Measurement Method	Radiated	Polar:	Horizontal/Vertical
Test Mode:	LE 2M	Test Channel:	CH 39

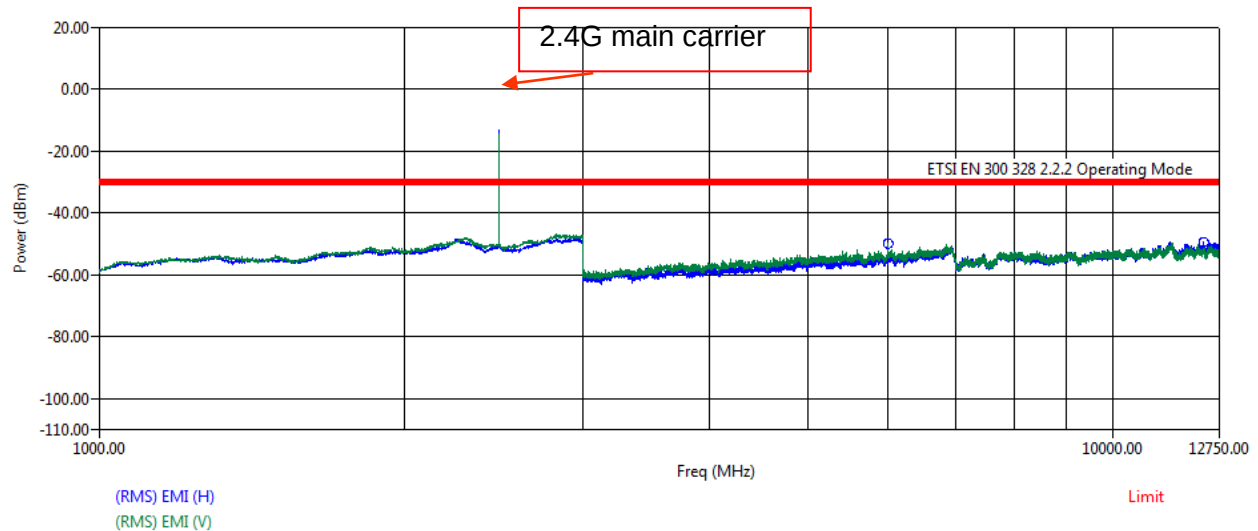

Freq (MHz)	(RMS) Trace (H) (dBuV)	ERP Factor (H) (dB)	Transducer (H) (dB)	Cable (H) (dB)	Preamp (H) (dB)	(RMS) EMI (H) (dBm)	Limit (dBm)	(RMS) Margin (H) (dB)
6000.00	39.58	-60.88	0.00	11.59	42.60	-52.31	-30.00	-22.31
12302.50	32.80	-58.10	0.00	17.57	41.64	-49.37	-30.00	-19.37
Freq (MHz)	(RMS) Trace (V) (dBuV)	ERP Factor (V) (dB)	Transducer (V) (dB)	Cable (V) (dB)	Preamp (V) (dB)	(RMS) EMI (V) (dBm)	Limit (dBm)	(RMS) Margin (V) (dB)
6000.00	40.76	-59.45	0.00	11.59	42.60	-49.70	-30.00	-19.70
12302.50	29.79	-58.99	0.00	17.57	41.64	-53.27	-30.00	-23.27

Note:

(RMS) EMI (H) = (RMS) Trace (H) + ERP Factor (H) + Transducer (H) + Cable (H) - Premp (H)

(RMS) EMI (V) = (RMS) Trace (V) + ERP Factor (V) + Transducer (V) + Cable (H) - Premp (V)

(RMS) Margin (H) = (RMS) EMI (H) – Limit

(RMS) Margin (V) = (RMS) EMI (V) - Limit


Note: 2.4G main carrier was recorded in the plot.

Appendix F: Receiver spurious emissions


Mode	Frequency (MHz)	Antenna	Range (MHz)	Spur Freq (MHz)	Peak (dBm)	RMS (dBm)	Limit (dBm)	Verdict
BLE 1M	2402	Ant1	30 - 1000	888.3	-79.58	NA	-57	Pass
			1000 - 12750	6286	-63.03	NA	-47	Pass
	2480		30 - 1000	871.35	-79.60	NA	-57	Pass
			1000 - 12750	11848	-61.34	NA	-47	Pass
BLE 2M	2402		30 - 1000	816.15	-79.68	NA	-57	Pass
			1000 - 12750	3886	-62.30	NA	-47	Pass
	2480		30 - 1000	911.35	-80.00	NA	-57	Pass
			1000 - 12750	3888.5	-62.11	NA	-47	Pass

Test Graphs


Rx. Spurious NVNT BLE 1M 2402MHz Ant1

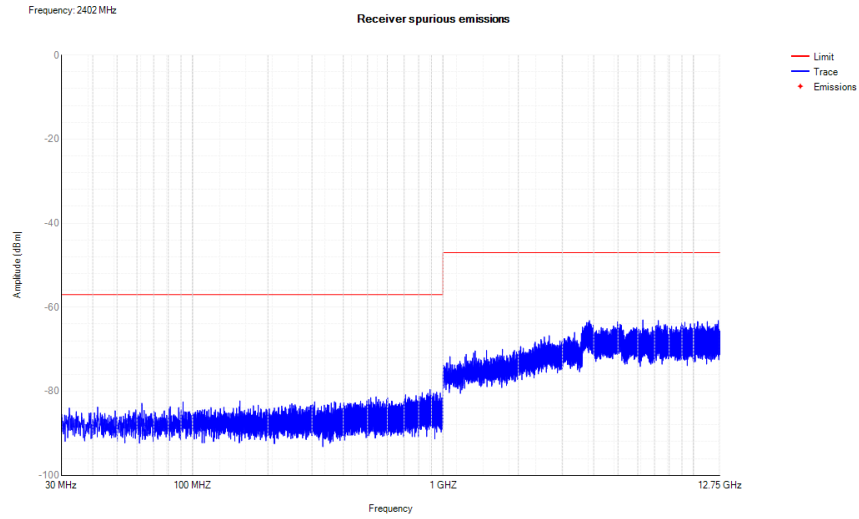


Rx. Spurious NVNT BLE 1M 2480MHz Ant1

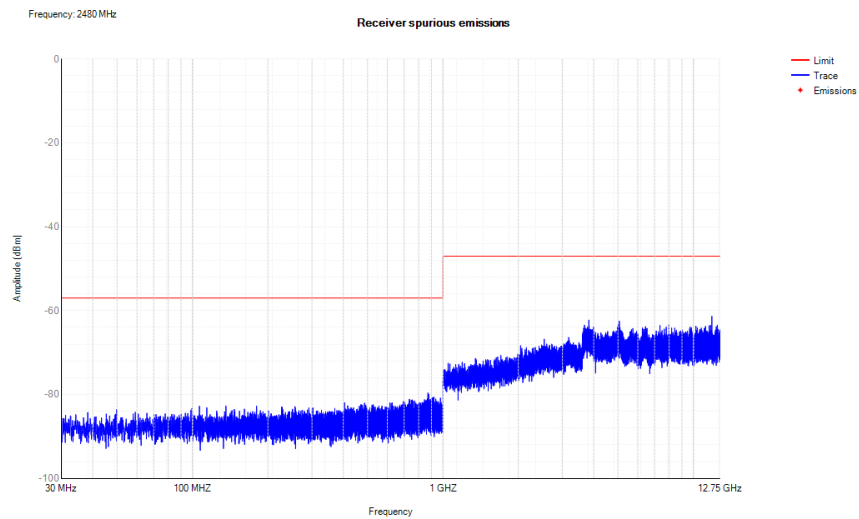


Rx. Spurious NVNT BLE 2M 2402MHz Ant1

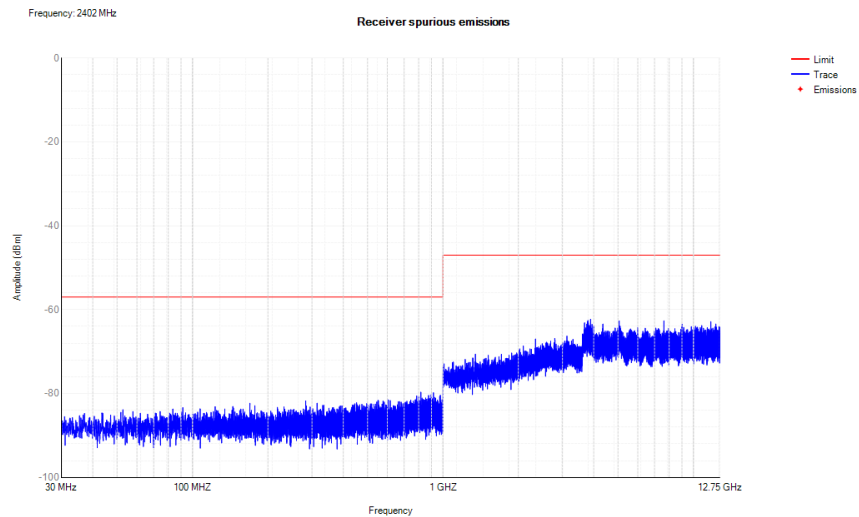

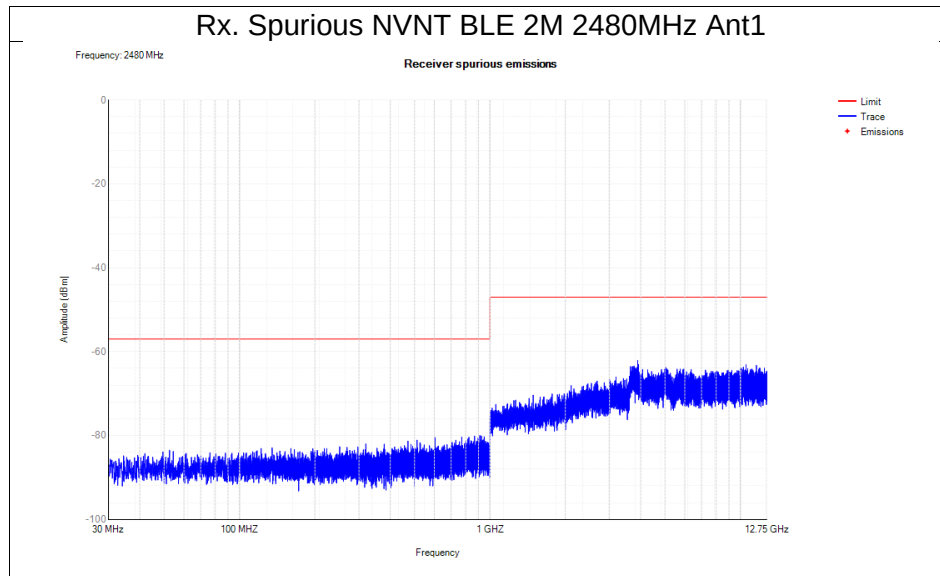

RX Radiated Test Result

Receiver spurious emissions 30 MHz-12.75GHz			
Measurement Method	Radiated	Polar:	Horizontal/Vertical
Test Mode:	LE 1M	Test Channel:	CH 0

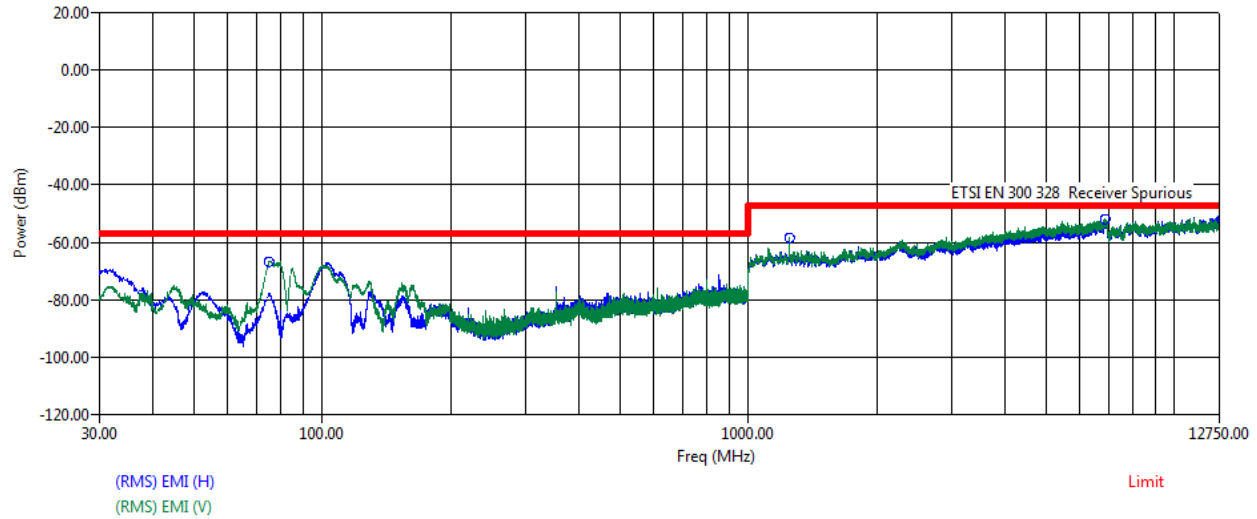


Freq (MHz)	(RMS) Trace (H) (dBuV)	ERP Factor (H) (dB)	Transducer (H) (dB)	Cable (H) (dB)	Preamp (H) (dB)	(RMS) EMI (H) (dBm)	Limit (dBm)	(RMS) Margin (H) (dB)
75.00	50.69	-87.07	0.00	1.09	43.00	-78.30	-57.00	-21.30
1244.50	41.44	-68.72	0.00	4.70	43.54	-66.12	-47.00	-19.12
6856.00	34.37	-59.22	0.00	11.38	41.73	-55.21	-47.00	-8.21
Freq (MHz)	(RMS) Trace (V) (dBuV)	ERP Factor (V) (dB)	Transducer (V) (dB)	Cable (V) (dB)	Preamp (V) (dB)	(RMS) EMI (V) (dBm)	Limit (dBm)	(RMS) Margin (V) (dB)
75.00	62.81	-87.39	0.00	1.09	43.00	-66.49	-57.00	-9.49
1244.50	49.25	-68.59	0.00	4.70	43.54	-58.17	-47.00	-11.17
6856.00	36.66	-58.37	0.00	11.38	41.73	-52.07	-47.00	-5.07

Note:

- (RMS) EMI (H) = (RMS) Trace (H) + ERP Factor (H) + Transducer (H) + Cable (H) - Premp (H)
- (RMS) EMI (V) = (RMS) Trace (V) + ERP Factor (V) + Transducer (V) + Cable (H) - Premp (V)
- (RMS) Margin (H) = (RMS) EMI (H) - Limit
- (RMS) Margin (V) = (RMS) EMI (V) - Limit

Receiver spurious emissions 30 MHz-12.75GHz			
Measurement Method	Radiated	Polar:	Horizontal/Vertical
Test Mode:	LE 1M	Test Channel:	CH 39

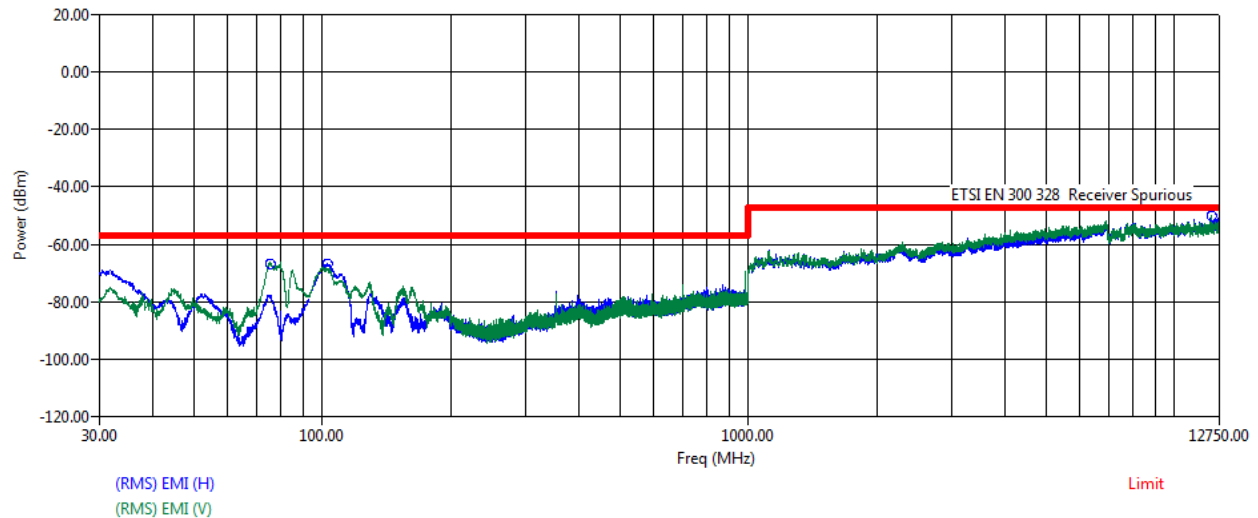

Freq (MHz)	(RMS) Trace (H) (dBuV)	ERP Factor (H) (dB)	Transducer (H) (dB)	Cable (H) (dB)	Preamplifier (H) (dB)	(RMS) EMI (H) (dBm)	Limit (dBm)	(RMS) Margin (H) (dB)
75.45	50.33	-87.05	0.00	1.09	43.00	-78.62	-57.00	-21.62
102.70	61.17	-86.16	0.00	1.28	43.00	-66.71	-57.00	-9.71
12171.00	30.29	-57.90	0.00	15.62	41.71	-53.70	-47.00	-6.70
Freq (MHz)	(RMS) Trace (V) (dBuV)	ERP Factor (V) (dB)	Transducer (V) (dB)	Cable (V) (dB)	Preamplifier (V) (dB)	(RMS) EMI (V) (dBm)	Limit (dBm)	(RMS) Margin (V) (dB)
75.45	62.60	-87.39	0.00	1.09	43.00	-66.70	-57.00	-9.70
102.70	58.53	-86.25	0.00	1.28	43.00	-69.44	-57.00	-12.44
12171.00	34.88	-58.64	0.00	15.62	41.71	-49.85	-47.00	-2.85

Note:

(RMS) EMI (H) = (RMS) Trace (H) + ERP Factor (H) + Transducer (H) + Cable (H) - Preamplifier (H)

(RMS) EMI (V) = (RMS) Trace (V) + ERP Factor (V) + Transducer (V) + Cable (H) - Preamplifier (V)

(RMS) Margin (H) = (RMS) EMI (H) - Limit

(RMS) Margin (V) = (RMS) EMI (V) - Limit

Note: All the modes had been tested, but only the worst data was recorded in the report.

Appendix G: Receiver Blocking

Mode	Antenna	Channel	Wanted signal [dBm]	Freq. [MHz]	CW [dBm]	PER [%]	Limit [%]	Verdict
BLE 1M	Ant1	2402	-70.61	2300	-35.77	5.20	<=10	PASS
			-70.61	2380	-35.77	1.20	<=10	PASS
		2480	-70.61	2504	-35.77	5.00	<=10	PASS
			-70.61	2584	-35.77	5.20	<=10	PASS

APPENDIX: PHOTOGRAPHS OF TEST CONFIGURATION

Transmitter unwanted emissions in the spurious domain



END OF REPORT