



N° 1-6736
Scope available
on www.cofrac.fr



TEST REPORT

EUT Description	WLAN and BT, 2x2 PCIe M.2 1216 adapter card
Brand Name	Intel®
Model Name	BE201D2W
Date of Test Start/End	2024-01-10 / 2024-02-13
Features	2x2 Wi-Fi - Bluetooth® (see section 5)
Description	Modular sample

Applicant	Intel Corporation SAS
Address	425 Rue de Goa – Le Cargo B6 – 06600 Antibes, FRANCE
Contact Person	Irina Vicente
Telephone/Fax/ Email	irina.vicente@intel.com

Reference Standards	ETSI EN 300 328 V2.2.2 (see section 1)
---------------------	---

Test Report identification	231120-05.TR01
Revision Control	Rev. 00 This test report revision replaces any previous test report revision (see section 8)

The test results relate only to the samples tested.
Reference to accreditation shall be used only by full reproduction of test report.

Issued by

Reviewed by

Cedric REQUIN
(Test Engineer Lead)

Zayd OUACHICHA
(Technical Manager)

Intel Corporation S.A.S – WRF Lab
425 rue de Goa – Le Cargo B6 - 06600, Antibes, France
Tel. +33493001400 / Fax +33493001401

Table of Contents

1. Standards, reference documents and applicable test methods	3
2. General conditions, competences and guarantees	3
3. Environmental Conditions	3
4. Test samples	4
5. EUT Features	5
6. Remarks and comments	5
7. Test Verdicts summary	6
7.1. BT LOW ENERGY	6
8. Document Revision History	6
Annex A. Test & System Description	7
A.1 MEASUREMENT SYSTEM	7
A.2 TEST EQUIPMENT LIST	10
A.3 MEASUREMENT UNCERTAINTY EVALUATION	12
Annex B. Test Results	13
B.1 TEST CONDITIONS	13
B.2 RF OUTPUT POWER	14
B.3 POWER SPECTRAL DENSITY	16
B.4 OCCUPIED CHANNEL BANDWIDTH	20
B.5 TRANSMITTER UNWANTED EMISSION IN THE OUT-OF-BAND DOMAIN	24
B.6 TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN	29
B.7 RECEIVER SPURIOUS EMISSIONS	30
B.8 RECEIVER BLOCKING	33
Annex C. Photographs	35
C.1 TEST SETUP	35
C.2 TEST SAMPLE	37

1. Standards, reference documents and applicable test methods

1. ETSI EN300 328 v2.2.2, Wideband transmission systems; Data transmission equipment operating in the 2,4 GHz band; Harmonised Standard for access to radio spectrum

2. General conditions, competences and guarantees

- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an ISO/IEC 17025:2017 testing laboratory accredited by the French Committee for Accreditation (Cofrac) with the certificate number 1-6736.
- ✓ Intel WRF Lab only provides testing services and is committed to providing reliable, unbiased test results and interpretations.
- ✓ Intel WRF Lab is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.
- ✓ Intel WRF Lab has developed calibration and proficiency programs for its measurement equipment to ensure correlated and reliable results to its customers.
- ✓ This report is only referred to the item that has undergone the test.
- ✓ This report does not imply an approval of the product by the Certification Bodies or competent Authorities

3. Environmental Conditions

- ✓ At the site where the measurements were performed the following limits were not exceeded during the tests:

Temperature	$23.5 \pm 1.1^{\circ}\text{C}$
Humidity	$43.8\% \pm 9.3\%$

4. Test samples

Sample	Control #	Description	Model	Serial #	Date of receipt	Note
#01	231120-05.S04	WIFI 7 Module	BE201D2W	WFM:60452EB8A42F	2024-01-05	Conducted + Adaptivity Tests
	231109-03.S50	Extender	PCB00862-00_A	2305108150	2023-11-10	
	200702-02.S05	Laptop	HP(HSN-I41C-5)	00095002K9	2020-07-07	
#02	231120-05.S12	WIFI 7 Module	BE201D2W	WFM: F8FE5ECDC927	2024-02-06	Receiver Blocking Tests
	231109-03.S49	Extender	PCB00862-00_A	2305108150	2023-11-10	
	200702-02.S03	Laptop	HP(HSN-I41C-5)	00095002JP	2020-07-10	
#03	231120-05.S03	WiFi 7 Module	BE201D2W	60452EB8A3BC	2024-01-05	Used for Radiated Spurious Emissions tests
	220225-03.S07	Microwave Absorber	Eccosorb BSR-1	-	2022-03-14	
	231109-03.S48	Adaptor	PCB00866-00_A	124627	2023-11-24	
	200611-03.S31	Extender	ADEXELEC	-	2020-08-19	
	200504-04.S07	Laptop	Latitude 5401	BVHLK13	2020-06-02	
	230223-02.S47	Triband Antenna	-	005	2023-04-20	
	230223-02.S48	Triband Antenna	-	006	2023-04-20	
	231120-05.S21	WiFi 7 Module	BE201D2W	F8FE5CDCA49	2024-02-07	
	180001-01.S21	Socket	1216SD to M.2	-	2021-06-07	
#04	231120-05.S02	WiFi 7 Module	BE201D2W	60452EB8A407	2024-01-05	Used for Radiated Spurious Emissions tests
	220225-03.S07	Microwave Absorber	Eccosorb BSR-1	-	2022-03-14	
	231109-03.S47	Adaptor	PCB00866-00_A	124727	2023-11-24	
	220915-09.S01	Extender	ADEXELEC	-	2022-04-06	
	200611-03.S30	Laptop	Latitude 5401	6DJLK13	2020-08-19	
	230223-02.S49	Triband Antenna	-	007	2023-04-20	
	230223-02.S50	Triband Antenna	-	008	2023-04-20	
	231120-05.S20	WiFi 7 Module	BE201D2W	F8FE5ECDCB43	2024-02-07	
	180001-01.S21	Socket	1216SD to M.2	-	2021-06-07	

5. EUT Features

The herein information is provided by the customer.

Intel WRF Lab declines any responsibility for the accuracy of the stated customer provided information, especially if it has any impact on the correctness of test results presented in this report.

Brand Name	Intel®		
Model Name	BE201D2W		
Software Version	Radiated: DRTU.05312.99.0.85 Conducted: DRTU.05726.99.0.86		
Driver Version	Radiated: 99.0.85.3 Conducted: 99.0.86.3		
Supported Radios	802.11b/g/n/ax/be 2.4GHz 802.11a/n/ac/ax/be 5.2GHz 5.6GHz 5.8GHz 802.11ax/be 6.0GHz Bluetooth 2.4GHz		
Antenna Information	Transmitter	Chain A(1)	Chain B(2)
	Manufacturer	Intel WRF Lab	Intel WRF Lab
	Antenna type	PIFA	PIFA
	Part number	WRF-Tri Band-Antenna	WRF-Tri Band-Antenna
	Antenna peak gain (dBi)	3	3

6. Remarks and comments

- According to the applicant declaration, the device BE201D2W operating in BLE mode is non adaptive equipment so it is considered as receiver category 2.

7. Test Verdicts summary

The statement of conformity to applicable standards in the table below are based on the measured values, without taking into account the measurement uncertainties.

7.1. BT Low Energy

Mode	ETSI clause	Test	Verdict
2.4GHz	4.3.2.2	RF output power	P
	4.3.2.3	Power spectral density	P
	4.3.2.4	Duty Cycle, Tx-sequence, TX gap	P
	4.3.2.5	Medium Utilization (MU) factor.	P
	4.3.2.6	Adaptivity (adaptive equipment using modulations other than FHSS)	P
	4.3.2.7	Occupied Channel Bandwidth	P
	4.3.2.8	Transmitter unwanted emissions in the out-of-band domain	P
	4.3.2.9	Transmitter unwanted emissions in the spurious domain	P
	4.3.2.10	Receiver spurious emissions	P
	4.3.2.11	Receiver Blocking	P

P: Pass

F: Fail

NM: Not Measured

NA: Not Applicable

8. Document Revision History

Revision #	Modified by	Revision Details
Rev. 00	R.SIMONINI T.GAMAIN	First Issue

Annex A. Test & System Description


A.1 Measurement System

Bluetooth LE does not fulfill the FHSS requirements in clause §4.2.1. Instead, ETSI classifies Bluetooth LE as a system using DSSS modulation. Measurements were performed using the following setups and made in accordance to the general provisions of EN300 328 v2.2.2 agreeing to the requirements for DSSS modulation.

Rohde & Schwarz TS8997 system with the switching unit OSP120, OSP B-157 and software EMC32 were employed.


The DUT was installed in a test fixture and then connected to a laptop computer and AC/DC power adapter. The laptop computer was used to configure the EUT to continuously transmit at a specified output power using the Intel proprietary tool DRTU.

Setups for conducted and radiated measurements are shown below.

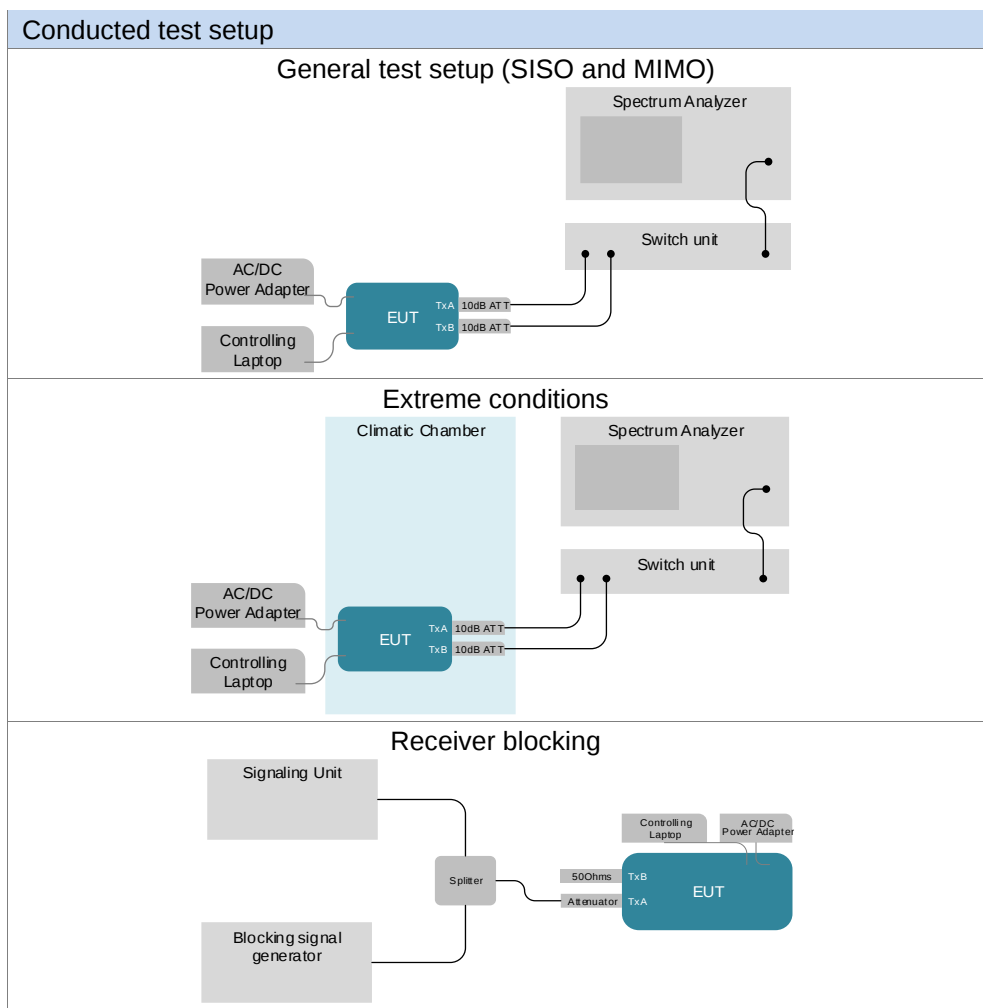


Radiated test setup


Radiated Setup 30 MHz - 1 GHz (Transmitter tests)

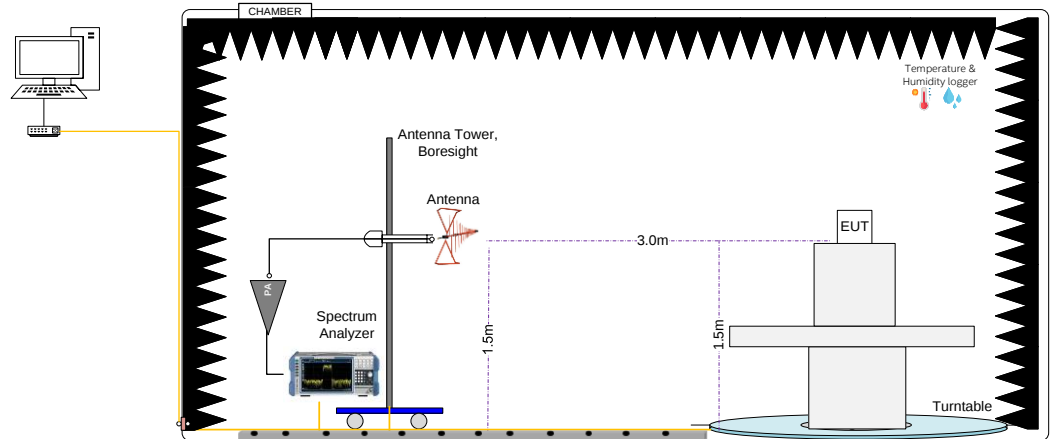


Radiated Setup 1 GHz – 11 GHz (Transmitter tests)

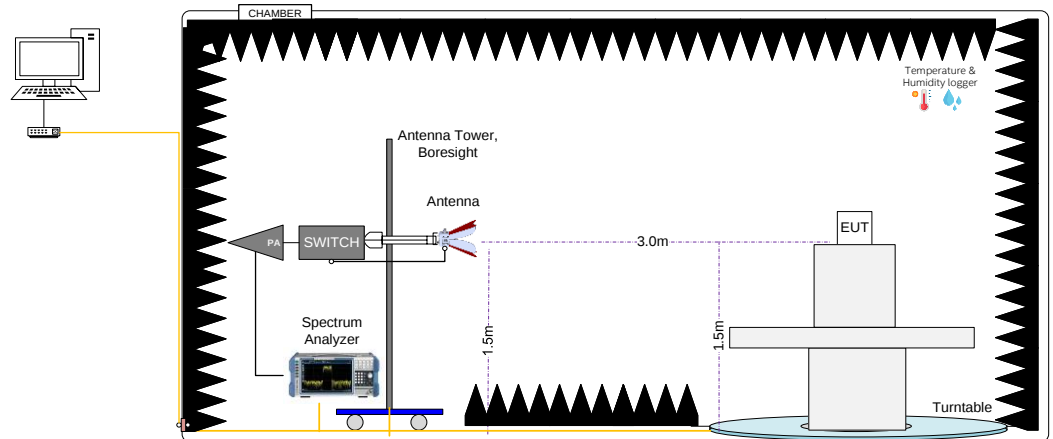


Radiated Setup 11 GHz – 12.75 GHz (Transmitter tests)

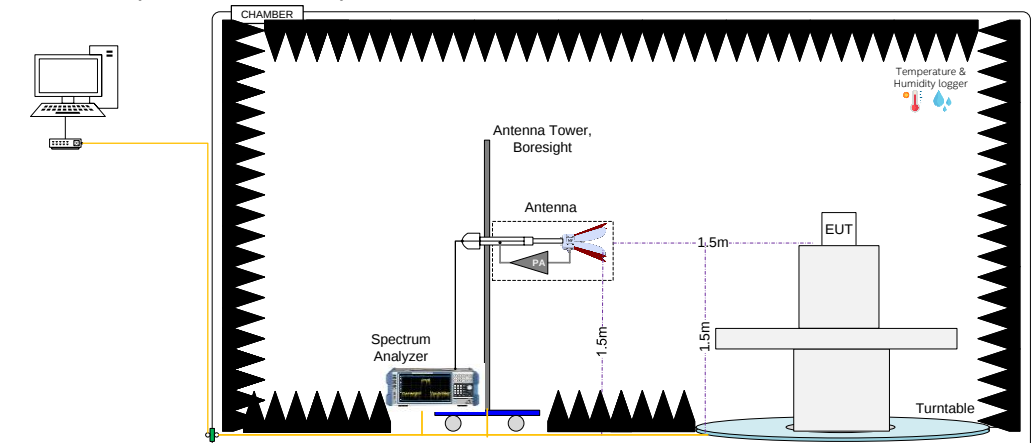

Radiated Setup 30 MHz – 1 GHz (Receiver tests)

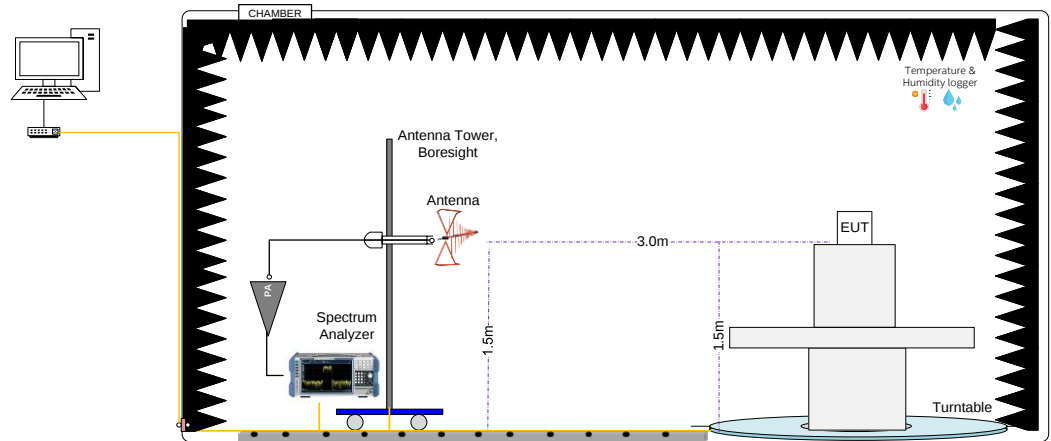

Radiated Setup 1 GHz – 12.75 GHz (Receiver tests)

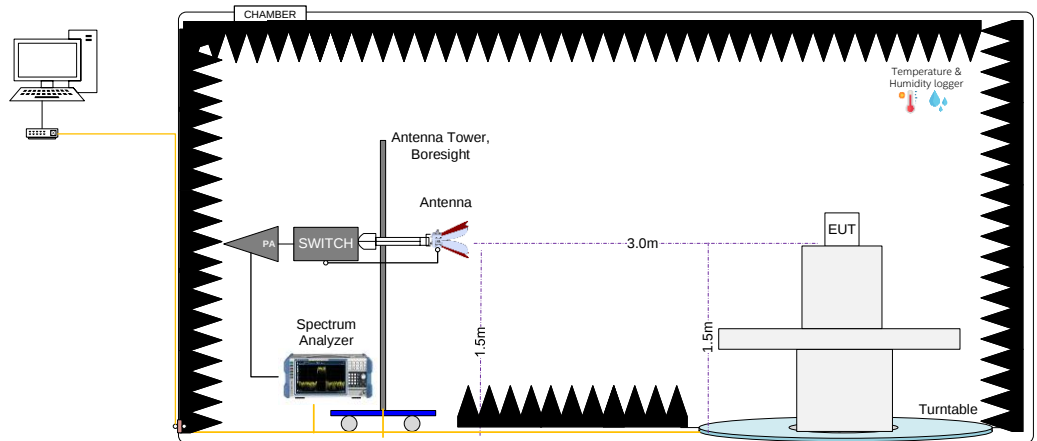

A.2 Test Equipment List

Conducted setup

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
017-015	Switch unit	OSP 120	101172	Rohde & Schwarz	2022-04-29	2024-04-29
481-000	Access point 802.11n	AIR-CAP3502E-A-K9	FTX1438S6P4	Cisco	N/A	N/A
017-003	DC Power supply	E3640A	MY40006885	Agilent	N/A	N/A
133-000	Oscilloscope	RTE1052	101135	Rohde & Schwarz	2022-03-25	2024-03-25
299-000	Multimeter	34401A	US360546853146A00597	HPAgilent	2022-01-18	2024-01-18*
311-000	Climatic chamber	SLT34/40	56746020930010	Secasi	2023-12-20	2025-12-20
134-000	Spectrum analyzer	FSV30	103308	Rohde & Schwarz	2023-07-26	2025-07-26
273-000	Spectrum analyzer	FSV30	103309	Rohde & Schwarz	2023-02-01	2025-02-01
503-000	Spectrum analyzer	FSVA3013	102318	Rohde & Schwarz	2023-08-09	2025-08-09
017-000	Measurement Software	WMS32 V11.40	200226	Rohde & Schwarz	N/A	N/A
363-000	Temp & Humidity Logger	RA12E-TH1-RAS	RA12-D0EB1A	AVTECH	2023-09-28	2025-09-28
237-000	10dB directional coupler	MC2047-10	01-062	Fairview	2023-03-03	2024-03-03
017-005	RF Cable 0.5m	PE3CA1039	-	Pasternack	2023-03-03	2024-03-03
017-006	RF Cable 1.2m	PE3C0666	-	Pasternack	2023-03-03	2024-03-03
017-007	Cable SMA Male to ML51-P	HRMP-ML51LP	DTR178-100RS	Hirose	2023-03-03	2024-03-03
017-008	Cable SMA Male to ML51-P	HRMP-ML51LP	DTR178-100RS	Hirose	2023-03-03	2024-03-03
281-000	Thermometer	t3000FC	46320036	Fluke	2022-03-03	2024-03-03
017-011	RF Cable 2m	0900670672000PJ	1936949	Radiall	2023-03-03	2024-03-03
017-012	RF Cable 2m	0900670672000PJ	1936947	Radiall	2023-03-03	2024-03-03
017-019	10dB attenuator	-	-	Pasternack	2023-03-03	2024-03-03
017-020	10dB attenuator	-	-	Pasternack	2023-03-03	2024-03-03
008-025	Power Sensor	NRP-Z57	101280	Rohde & Schwarz	2022-04-22	2024-04-22

*Equipment not used outside of calibration period
N/A: Not Applicable

Receiver blocking Setup

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
125-000	Communication tester	CMW500	129337	Rohde & Schwarz	2023-04-20	2025-04-20
130-000	Signal generator	SMB100A	178217	Rohde & Schwarz	2023-07-26	2025-07-26
018-005	SMA-SMA 45cm RF Cable	FMC020285-18	-	Fairview Microwave	2023-03-03	2024-03-03
363-000	Temp & Humidity Logger	RA12E-TH1-RAS	RA12-D0EB1A	AVTECH	2023-09-28	2025-09-28
018-000	2 Way SMA Power Divider	PE2084	-	Pasternack	2023-03-03	2024-03-03
016-003	SMA-SMA 45cm RF Cable	FMC0202085-18	-	Fairview Microwave	2023-03-03	2024-03-03
018-006	SMA-SMA 45cm RF Cable	FMC0202085-18	-	Fairview Microwave	2023-03-03	2024-03-03

N/A: Not Applicable

Radiated Setup #1

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
006-000*	Anechoic Chamber	FACT3	5720	ETS-Lindgren	2022-01-21	2024-02-21
006-008	Measurement SW, v11.30	EMC32	100623	Rohde & Schwarz	N/A	N/A
259-000	Temp & Humidity Logger	RA12E-TH-RAS	RA12-B9BD70	Avtech	2022-06-27	2024-06-27
006-001	Turn Table	ETS	-	ETS-Lindgren	N/A	N/A
006-011	Boresight antenna mast	BAM 4.0-P	P/278/2890.01	Maturo	N/A	N/A
007-008	Double Horn Ridged antenna +PA	3116C-PA	00169308bis + 00196308	ETS-Lindgren	2023-0-30	2025-05-30
057-000	Double Horn Ridged antenna	3117	167062	ETS-Lindgren	2022-07-08	2024-07-08
006-061	Bi-Log Periodic antenna	CBL6143A	61382	Teseq	2022-10-24	2024-10-24
147-000	Spectrum analyzer	FSW43	101847	Rohde & Schwarz	2022-11-30	2024-11-30
301-000	Amplifier 9kHz-1300MHz	8447F	3113A07440	HP	2023-03-03	2024-03-03
261-000	Amplifier 1GHz-18GHz	3117-PA	00157993	ETS-Lindgren	2023-02-20	2024-02-20
006-068	RF Switch	RC-2SP6T-40	02112090061	Micro-Circuits	2023-08-22	2024-08-22
006-066	Cable 7m – 25MHz to 40GHz	R286304174	20.46.370	Radiall	2023-08-16	2024-08-16
006-063	Cable 30cm – 1GHz to 40GHz	PE371-12	-	Pasternack	2023-02-27	2024-02-27
006-064	Cable 30cm – 1GHz to 40GHz	PE371-12	-	Pasternack	2023-02-27	2024-02-27
006-065	Cable 60cm – 25MHz to 1GHz	PE300-24	-	Pasternack	2023-06-02	2024-06-02

N/A: Not Applicable

*Within a grace period of 30 days

Radiated Setup #2

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
007-000	Anechoic chamber	RFD-FA-100	5996	ETS Lindgren	2021-09-14	2024-03-14
127-000	Spectrum Analyzer	FSV40	101358	Rohde & Schwarz	2023-01-27	2025-01-27
007-007	Double Ridge Horn (1- 18GHz)	3117	00152266	ETS Lindgren	2022-03-29	2024-03-29
007-006	Switch & Positioner	EMCenter	00151232	ETS Lindgren	N/A	N/A
059-000	Double Ridge Horn (1- 18GHz)	3117	201542	ETS-Lindgren	2023-09-26	2025-09-26
264-000	Amplifier 1GHz-18GHz	3117-PA	00169546	ETS-Lindgren	2023-02-20	2024-02-20
007-011*	RF Cable 1-18GHz - 6.5m	140-8500-11-51	001	Atem	2023-02-15	2024-03-15
007-005	Measurement SW, v11.20.00	EMC32	100401	Rohde & Schwarz	N/A	N/A
007-003	Antenna Tower	2171B-3.0M	00150123	ETS Lindgren	N/A	N/A
007-002	Turntable	-	-	ETS Lindgren	N/A	N/A
007-014*	RF Cable 18-40 GHz 6m	R286304009	1747364	Radiall	2023-02-16	2024-03-16
007-022*	RF Cable 1-18GHz, 1.5m	0501050991200GX	19.23.493	Radiall	2023-02-13	2024-03-13
007-015*	RF Cable 1GHz-18GHz 1.5m	-	-	Spirent	2023-02-13	2024-03-13
007-018*	RF Cable 1-9.5GHz 1.2m	0500990991200KE	-	Radiall	2023-02-13	2024-03-13
007-020*	RF Cable 1-18GHz, 1.2 m	2301761761200PJ	12.22.1104	Radiall	2023-02-15	2024-03-15
349-000	Temp & Humidity Logger	RA12E-TH1-RAS	RA12-D4F8C3	Avtech	2023-11-30	2025-11-30

N/A: Not Applicable

*Within a grace period of 30 days

Shared Radiated Equipment

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
412-000	DRTU Power finder V2.1	-	-	Intel	NA	NA
139-000	Power Sensor	NRP-Z81	104383	Rohde & Schwarz	2023-04-21	2025-04-21
061-000	Power Sensor	NRP-Z81	104386	Rohde & Schwarz	2022-03-25	2024-03-25
140-000	Power Sensor	NRP-Z81	104382	Rohde & Schwarz	2022-03-25	2024-03-25
423-000	Power Sensor	NRP-Z81	101152	Rohde & Schwarz	2022-05-18	2024-05-18

A.3 Measurement Uncertainty Evaluation

The system uncertainty evaluation is shown in the table below with a coverage factor of $k = 2$ to indicate a 95% level of confidence:

Measurement type	Uncertainty	Unit
Occupied Channel Bandwidth	± 2.08	%
RF Output Power, conducted	± 0.99	dB
Power Spectral Density, conducted	± 0.99	dB
Unwanted Emission, conducted	± 0.89	dB
Radiated test < 1GHz	± 4.03	dB
Radiated test 1GHz –12.75 GHz	± 4.01	dB
Temperature	± 0.30	°C
Supply voltages	$< \pm 0.01$	%
Time	± 0.01	%

Annex B. Test Results

The herein test results were performed by:

Test case measurement	Test Personnel
RF output power, duty cycle	T.Gamain
Power spectral density	T.Gamain
Occupied channel bandwidth	T.Gamain
Transmitter unwanted emission in the out-of-band domain	T.Gamain
Transmitter unwanted emissions in the spurious domain	K.Khatib, R.Simonini
Receiver spurious emissions	K.Khatib, R.Simonini
Receiver blocking	Z.Ouachicha

B.1 Test Conditions

ETSI clause	Conditions	ETSI EN 300 328 v2.2.2 Annex E
5.1.2.1	The normal temperature and humidity conditions for tests shall be any convenient combination of temperature and humidity within the following ranges: • Temperature: +15 °C to +35 °C; • Relative humidity: 20 % to 75 %.	"Information provided by the customer"
5.1.2.2	The normal test voltage for the equipment shall be the nominal voltage for which the equipment was designed.	
5.1.3	Some tests in the present document need to be repeated at extreme temperatures. Where that is the case, measurements shall be made over the extremes of the operating temperature range as declared by the manufacturer.	

B.2 RF output power

Test limits

ETSI clause	Limits
4.3.2.2.3	For non-adaptive non-FHSS equipment, where the manufacturer has declared an RF output power of less than 20 dBm e.i.r.p., the RF output power shall be equal to or less than that declared value. This limit shall apply for any combination of power level and intended antenna assembly.

Test conditions

ETSI clause	Conditions
5.4.2.1	The measurements for RF output power shall be performed at both normal environmental conditions and at the extremes of the operating temperature range. For equipment using wide band modulations other than FHSS, the measurement shall be performed at the lowest, the middle, and the highest channel on which the equipment can operate.

Test procedure

The conducted setups shown in section *Test & System Description* were used to measure the RF output power. The antenna terminal of the EUT is connected to the OSP120 through a 10dB attenuator and a cable. System connection cable loss is compensated by the EMC32 software

Antenna gain is taken in account and added by the software to the measurements. The EIRP power (dBm) is calculated by adding the declared maximum antenna gain to the measured conducted power.

Results tables**Normal conditions**

				Power [dBm]	
Mode	Data Rate	Meas. Duty Cycle [%]	Freq. [MHz]	Measured Conducted	EIRP
BLE	1M	61.68	2402	6.9	9.9
			2442	6.9	9.9
			2480	6.8	9.8
BLE	2M	31.99	2402	6.8	9.8
			2442	6.9	9.9
			2480	6.8	9.8

Extreme temperature conditions (Tmax = +70°C)

				Power [dBm]	
Mode	Data Rate	Meas. Duty Cycle [%]	Freq. [MHz]	Measured Conducted	EIRP
BLE	1M	61.68	2402	6.7	9.7
			2442	6.4	9.4
			2480	6.4	9.4
BLE	2M	31.99	2402	6.7	9.7
			2442	6.4	9.4
			2480	6.4	9.4

Extreme temperature conditions (Tmin = -10°C)

				Power [dBm]	
Mode	Data Rate	Meas. Duty Cycle [%]	Freq. [MHz]	Measured Conducted	EIRP
BLE	1M	61.68	2402	6.7	9.7
			2442	6.4	9.4
			2480	6.5	9.5
BLE	2M	31.99	2402	6.6	9.6
			2442	6.4	9.4
			2480	6.5	9.5

B.3 Power Spectral Density

Test limits

ETSI clause	Limits
4.3.2.3.3	The maximum Power Spectral Density for non-FHSS equipment is 10 dBm per MHz.

Test conditions

ETSI clause	Conditions
5.4.3.1	These measurements shall only be performed at normal test conditions. The measurement shall be repeated for the equipment being configured to operate at the lowest, the middle, and the highest frequency of the stated frequency range. For the duration of the test, the equipment shall not change its operating frequency.

Test procedure

The conducted setup shown in section *Test & System Description* was used to measure the power spectral density (PSD) accordingly to the test method described in ETSI EN 300 328 v2.2.2 §5.4.3.2.1. The antenna terminal of the EUT is connected to the OSP120 through a 10dB attenuator and a cable, the spectrum analyzer is connected to the receiver port on the OSP. System connection cable loss is compensated by the EMC32 software to measure all parameters.

Antenna gain is taken in account and added by the software to the measurements. The EIRP power (dBm) is calculated by adding the declared maximum antenna gain to the measured conducted power.


Results tables

Mode	Data Rate	Meas. Duty Cycle [%]	Freq. [MHz]	PSD [dBm/MHz]
BLE	1M	61.68	2402	9.88
			2442	9.85
			2480	9.95
BLE	2M	31.99	2402	9.03
			2442	9.11
			2480	9.03


Results screenshot

BLE 1M


PSD – 2402 MHz

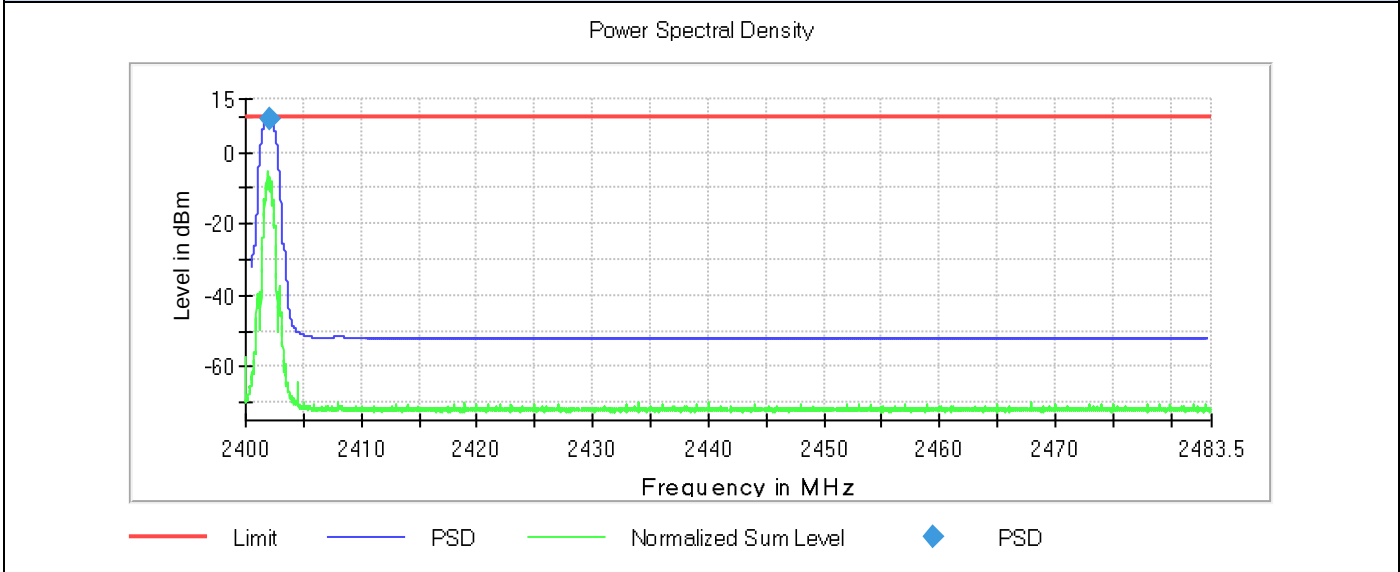

PSD – 2442 MHz

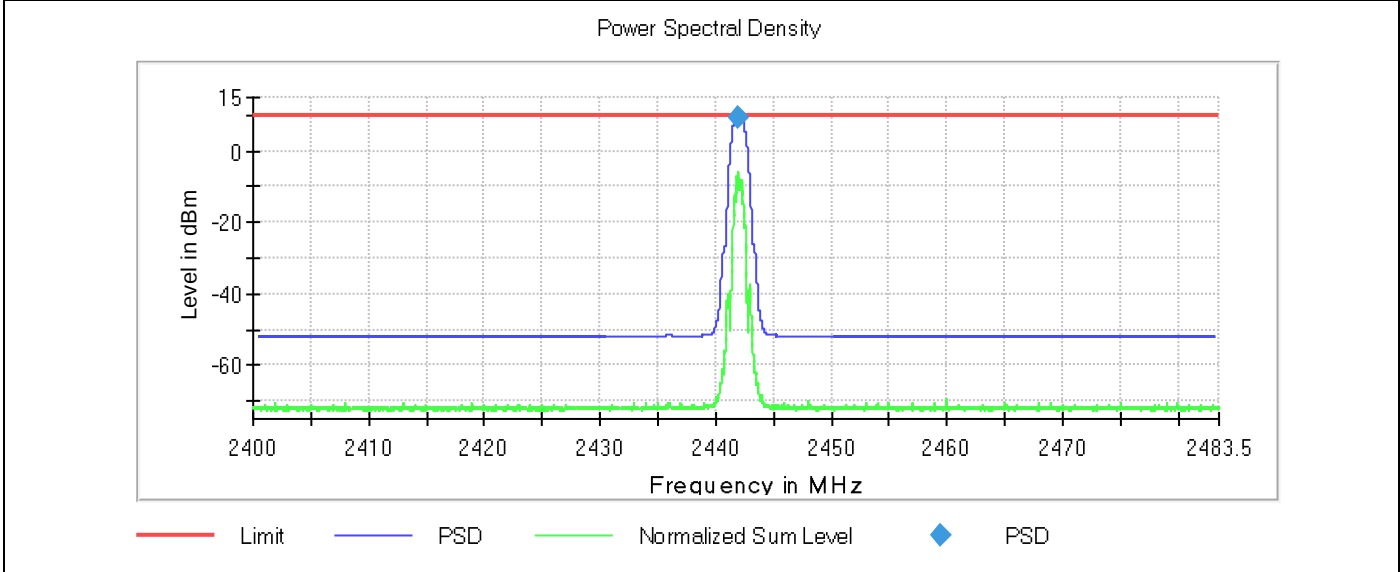


PSD – 2480 MHz

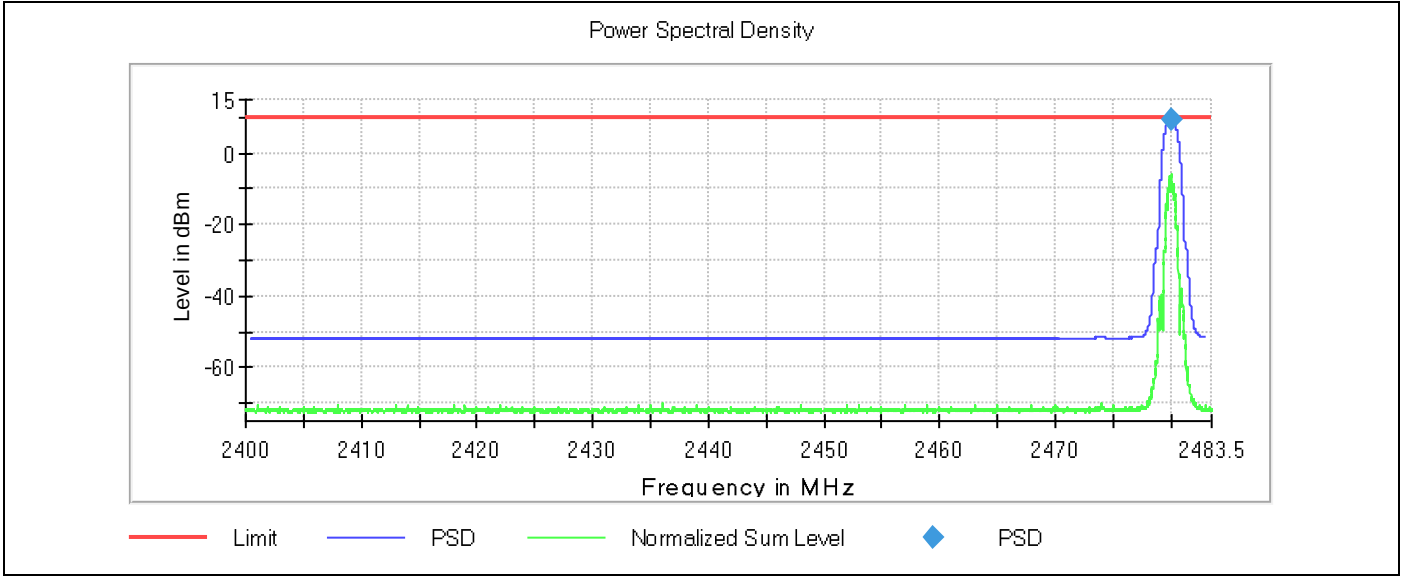


BLE 2M


PSD – 2402 MHz

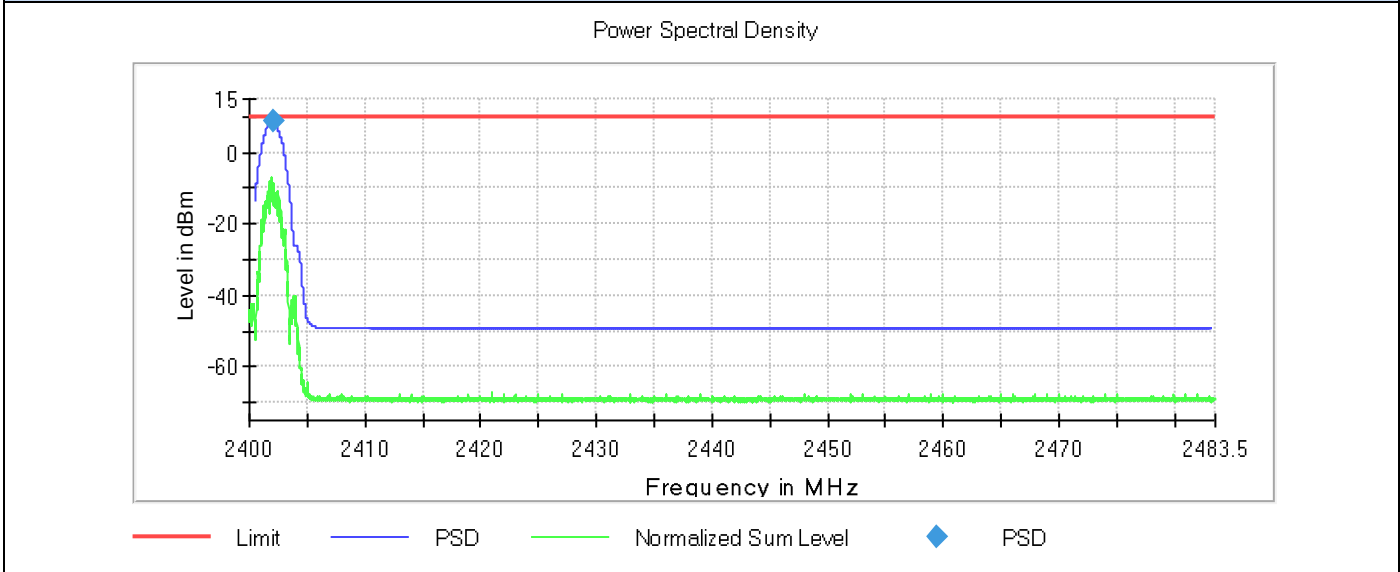

PSD – 2442 MHz

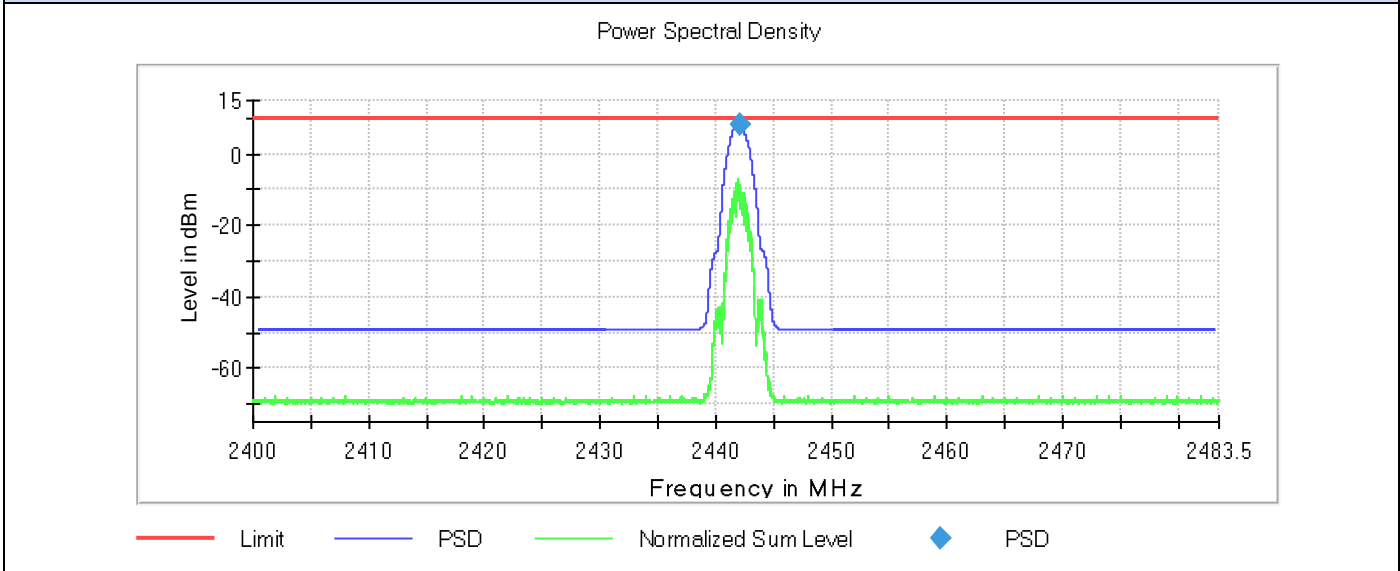

PSD – 2480 MHz

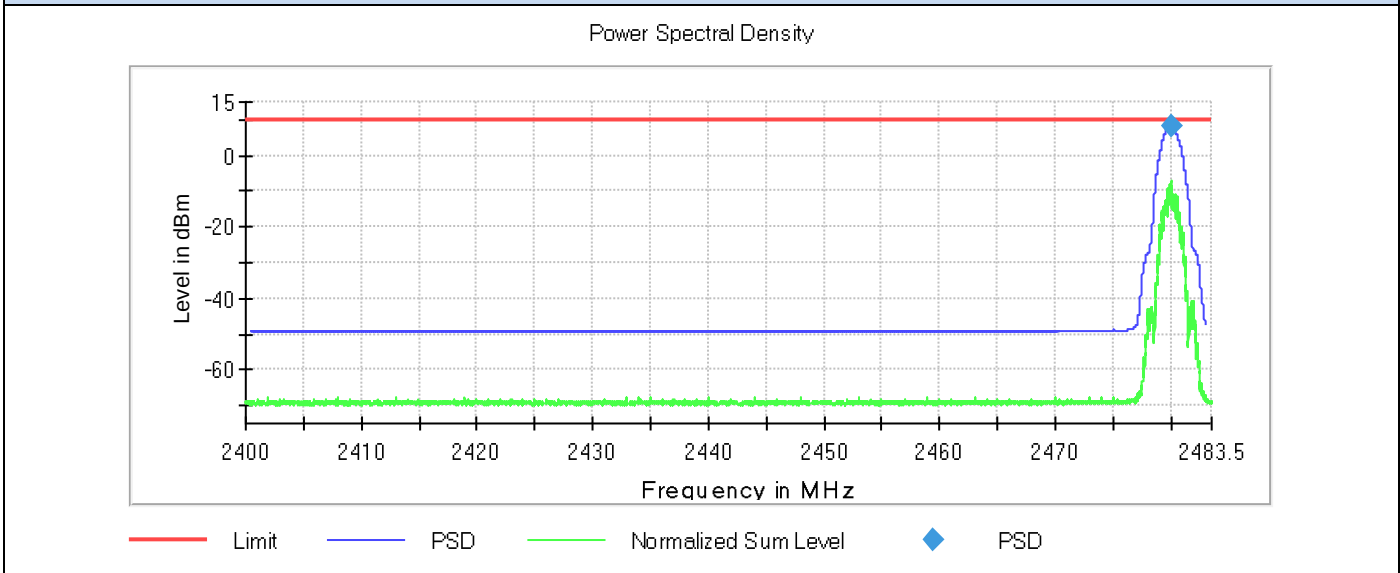

B.4 Occupied Channel Bandwidth

Tests limits

ETSI clause	Limits						
4.3.2.7.3	The Occupied Channel Bandwidth shall fall completely within the band given in Table 1 (2.4 GHz to 2.4835 GHz). Table 1: Service frequency bands <table> <tr> <th></th><th>Service frequency bands</th></tr> <tr> <td>Transmit</td><td>2 400 MHz to 2 483,5 MHz</td></tr> <tr> <td>Receive</td><td>2 400 MHz to 2 483,5 MHz</td></tr> </table> In addition, for non-adaptive equipment using wide band modulations other than FHSS and with e.i.r.p greater than 10 dBm, the occupied channel bandwidth shall be less than 20 MHz.		Service frequency bands	Transmit	2 400 MHz to 2 483,5 MHz	Receive	2 400 MHz to 2 483,5 MHz
	Service frequency bands						
Transmit	2 400 MHz to 2 483,5 MHz						
Receive	2 400 MHz to 2 483,5 MHz						

Test conditions

ETSI clause	Conditions
5.4.7.1	These measurements shall only be performed at normal test conditions. In case of conducted measurements on smart antenna systems (equipment with multiple transmit chains) measurements need only to be performed on one of the active transmit chains (antenna outputs). The measurement shall be performed only on the lowest and the highest frequency within the stated frequency range. If the equipment can operate with different Nominal Channel Bandwidths (e.g. 20 MHz and 40 MHz), then each channel bandwidth shall be tested separately.


Test procedure

The conducted setup shown in section *Test & System Description* was used to measure the occupied bandwidth accordingly to the test method described in ETSI EN 300 328 v2.2.2 §5.4.7.2.1. The antenna terminal of the EUT is connected to the OSP120 through a 10 dB attenuator and a cable, the spectrum analyzer is connected to the receiver port on the OSP. System connection cable loss is compensated by the EMC32 software on measured parameters.

Results tables

Mode	Frequency [MHz]	Channel Nominal Bandwidth (MHz)	Channel Center Frequency (MHz)	Occupied Channel Bandwidth (MHz)	Lower Band Edge (MHz)	Upper Band Edge (MHz)
BLE 1M	2402	1.00	2402.000000	1.015	2401.502488	2402.517413
	2480	1.00	2480.000000	1.015	2479.502488	2480.517413
BLE 2M	2402	2.00	2402.000000	2.037	2401.006211	2403.043478
	2480	2.00	2480.000000	2.037	2479.006211	2481.043478


Results screenshot

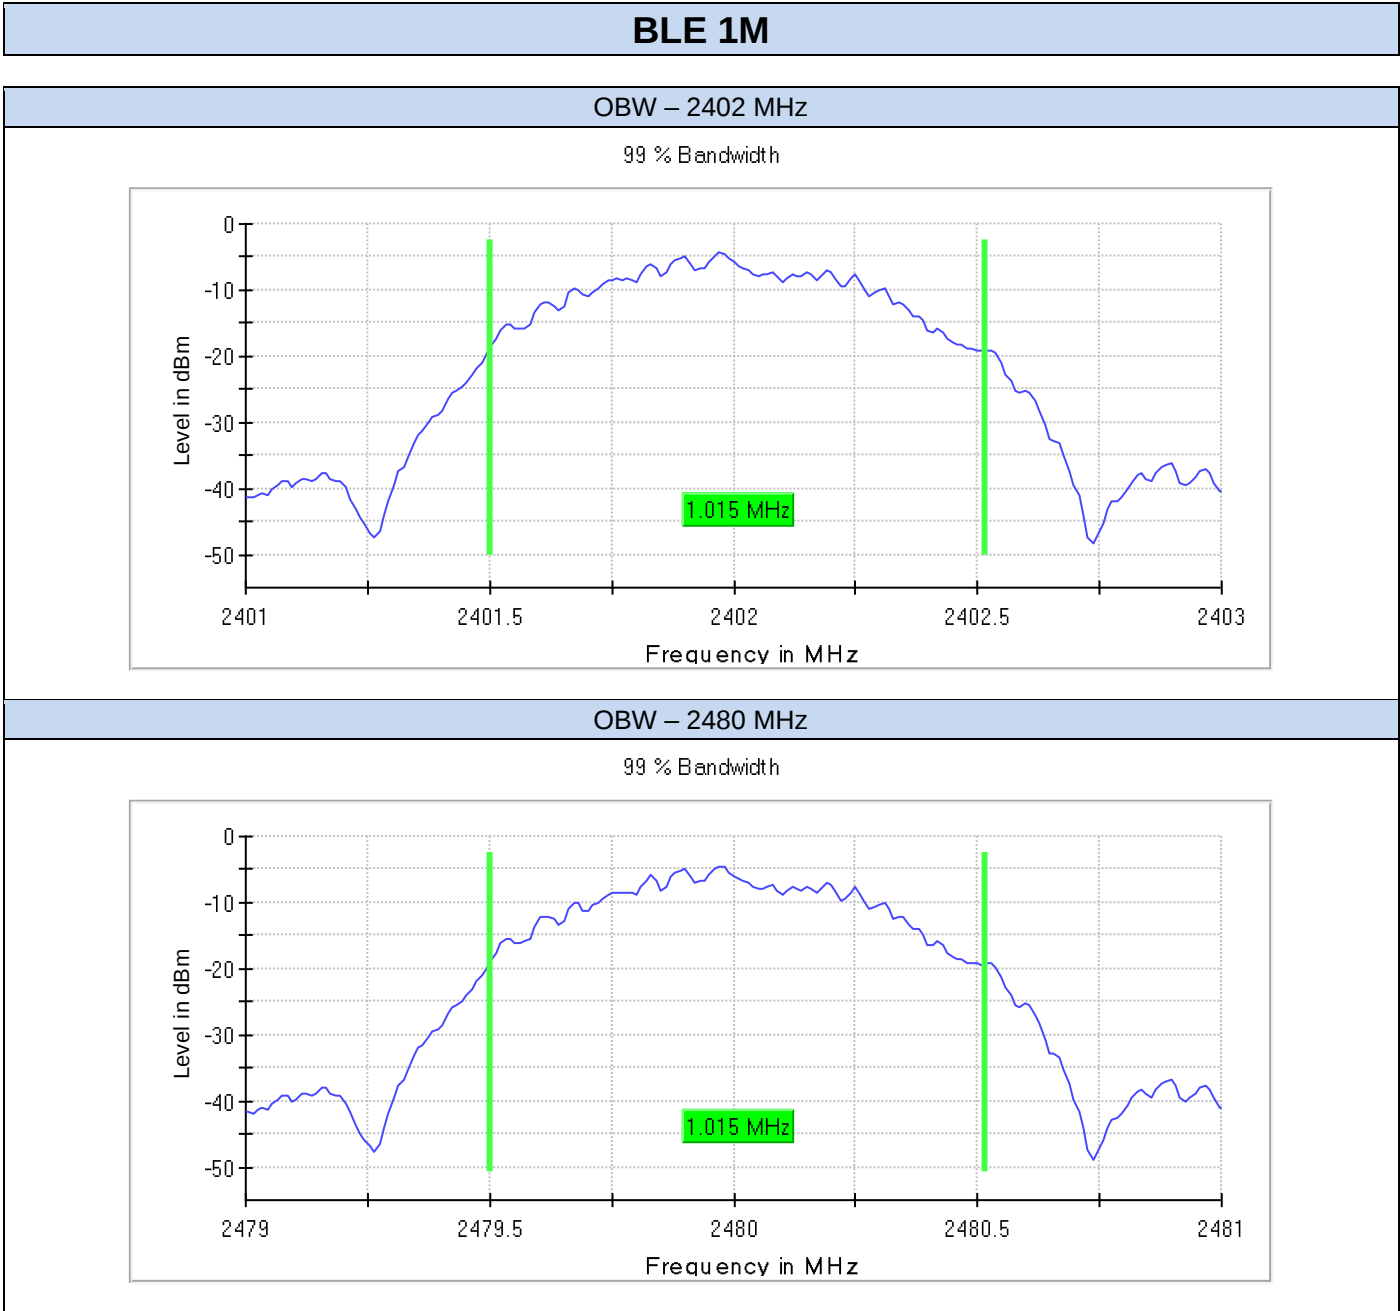

BLE 2M


OBW – 2402 MHz

99 % Bandwidth

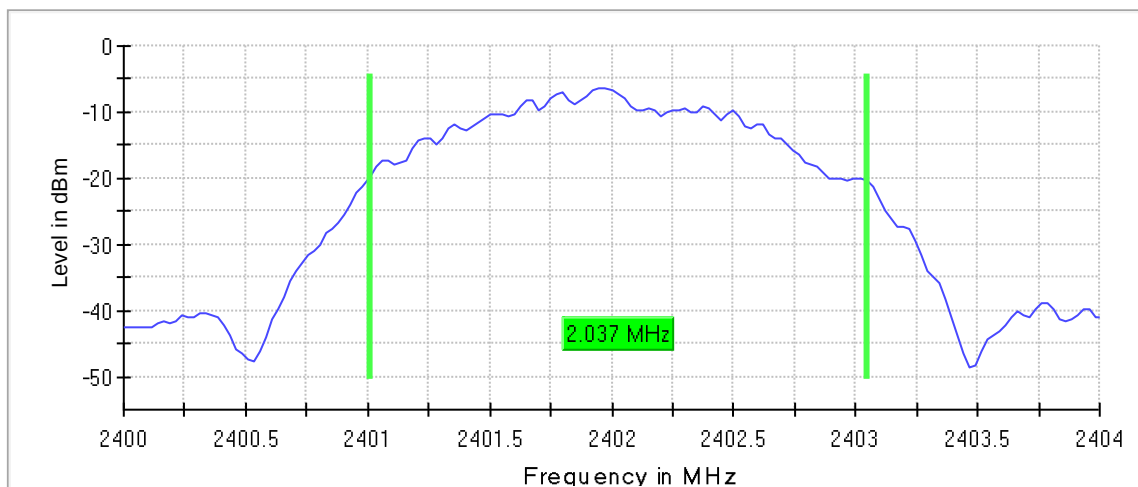

OBW – 2480 MHz

99 % Bandwidth

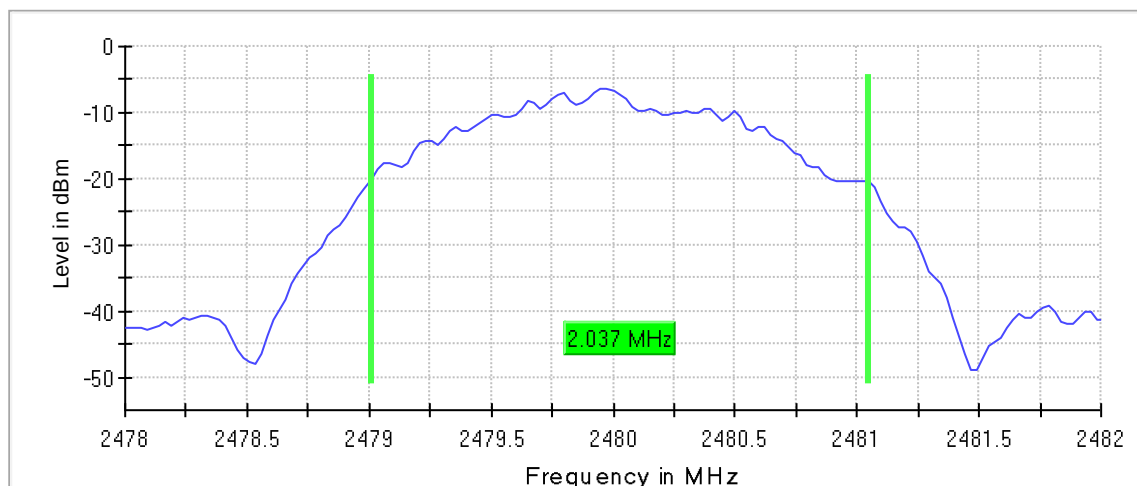

B.5 Transmitter unwanted emission in the out-of-band domain

Test limits Test limits

ETSI clause	Limits
4.3.2.8.3	The transmitter unwanted emissions in the out-of-band domain but outside the allocated band, shall not exceed the values provided by the mask below A: -10 dBm/MHz e.i.r.p. B: -20 dBm/MHz e.i.r.p. C: Spurious Domain limits BW = Occupied Channel Bandwidth in MHz or 1 MHz whichever is greater

Test conditions

ETSI clause	Conditions
5.4.8.1	These measurements shall only be performed at normal test conditions. For non-FHSS equipment, the measurement shall be performed at the lowest and the highest channel on which the equipment can operate. These operating channels shall be recorded. The equipment shall be configured to operate under its worst case situation with respect to output power. If the equipment can operate with different Nominal Channel Bandwidths (e.g. 20 MHz and 40 MHz), then each channel bandwidth shall be tested separately.


Test procedure


The conducted setup shown in section *Test & System Description* was used to measure the unwanted emissions in the out of band domain accordingly to the test method described in ETSI EN 300 328 v2.2.2 §5.4.8.2.1. The antenna terminal of the EUT is connected to the OSP120 through a 10dB attenuator and a cable, the spectrum analyzer is connected to the receiver port on the OSP. System connection cable loss is compensated by the EMC32 software on measured parameters.

Antenna gain is taken into account and added by the software to the measurements.

EMC32 provides the mask and the frequency limits based in the measured channel bandwidth. Maximum values for each limit level (-10dBm and -20dBm) are pointed using markers.


Results Screenshot

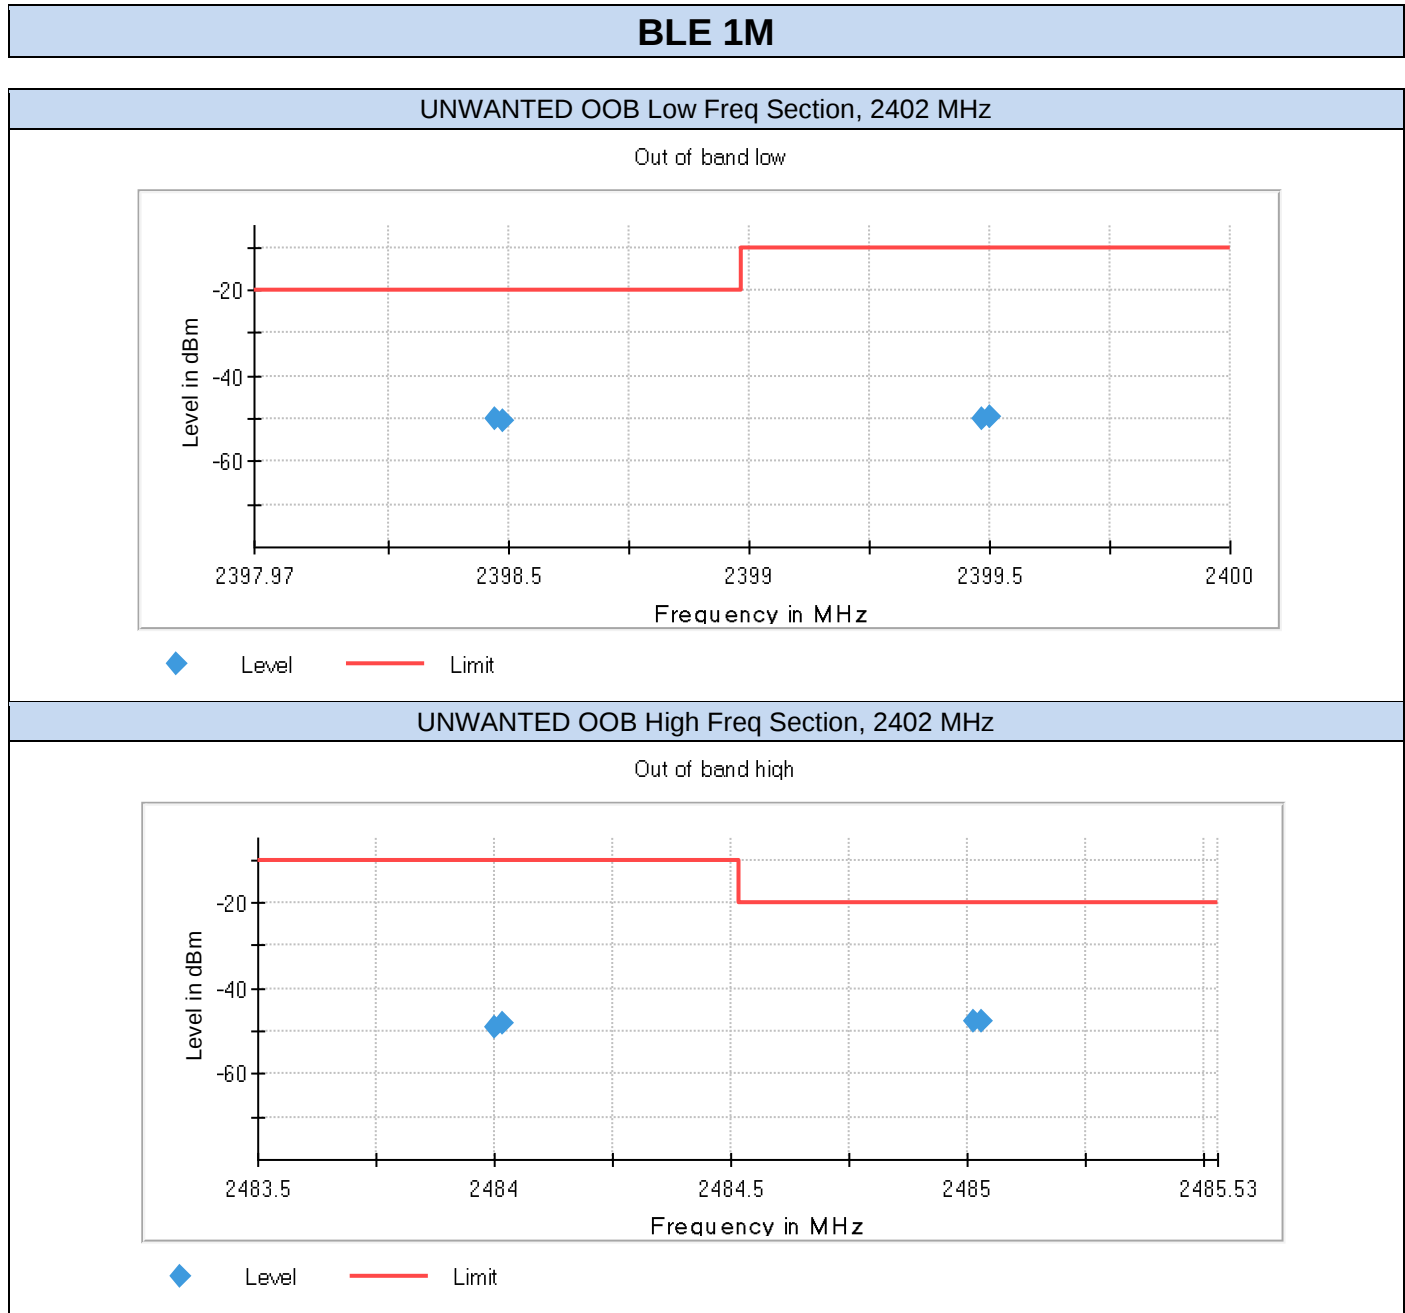

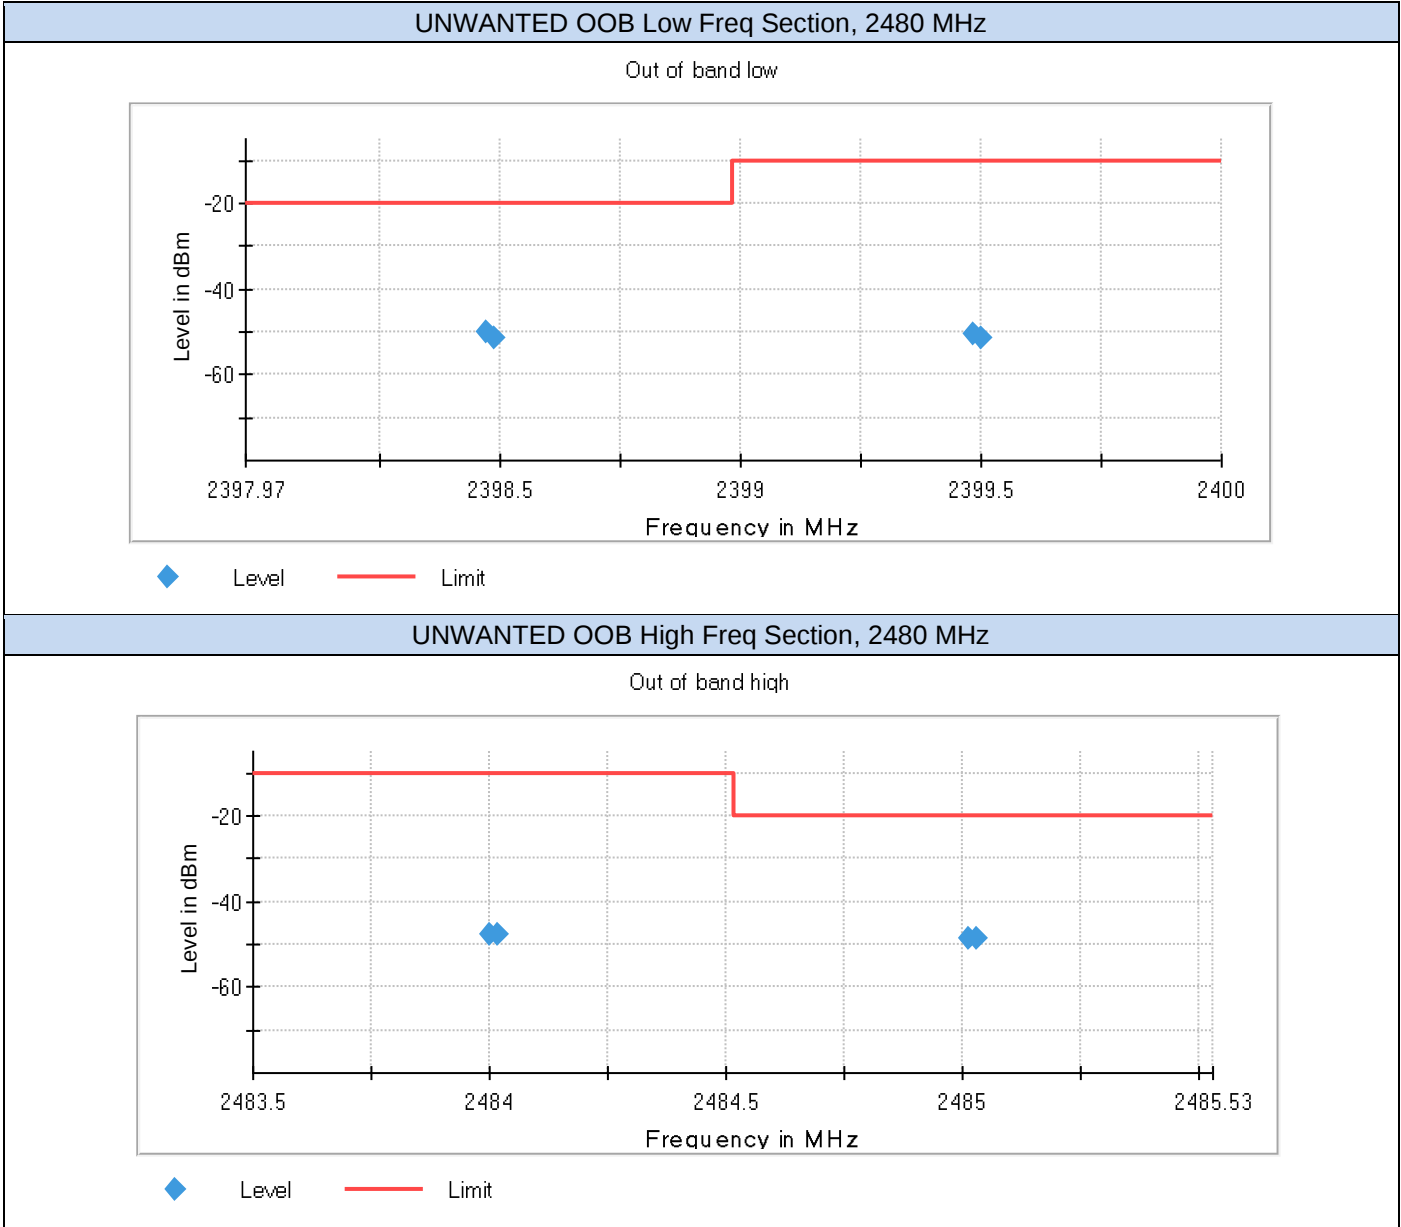


BLE 2M


UNWANTED OOB Low Freq Section, 2402 MHz

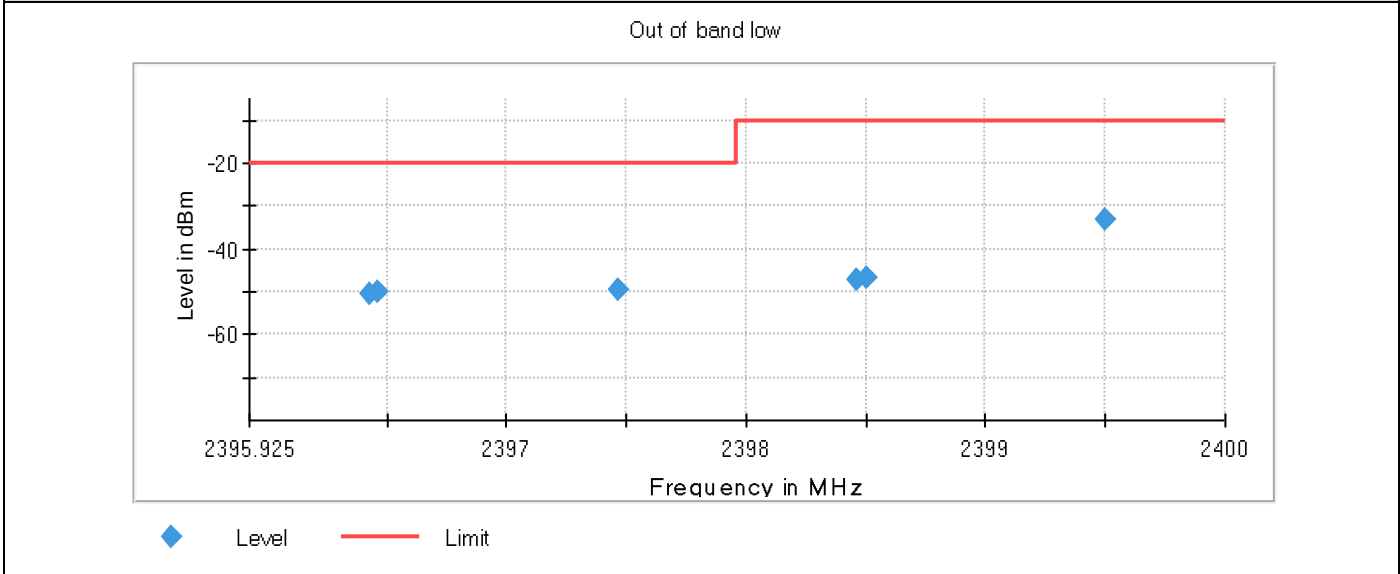


UNWANTED OOB High Freq Section, 2402 MHz

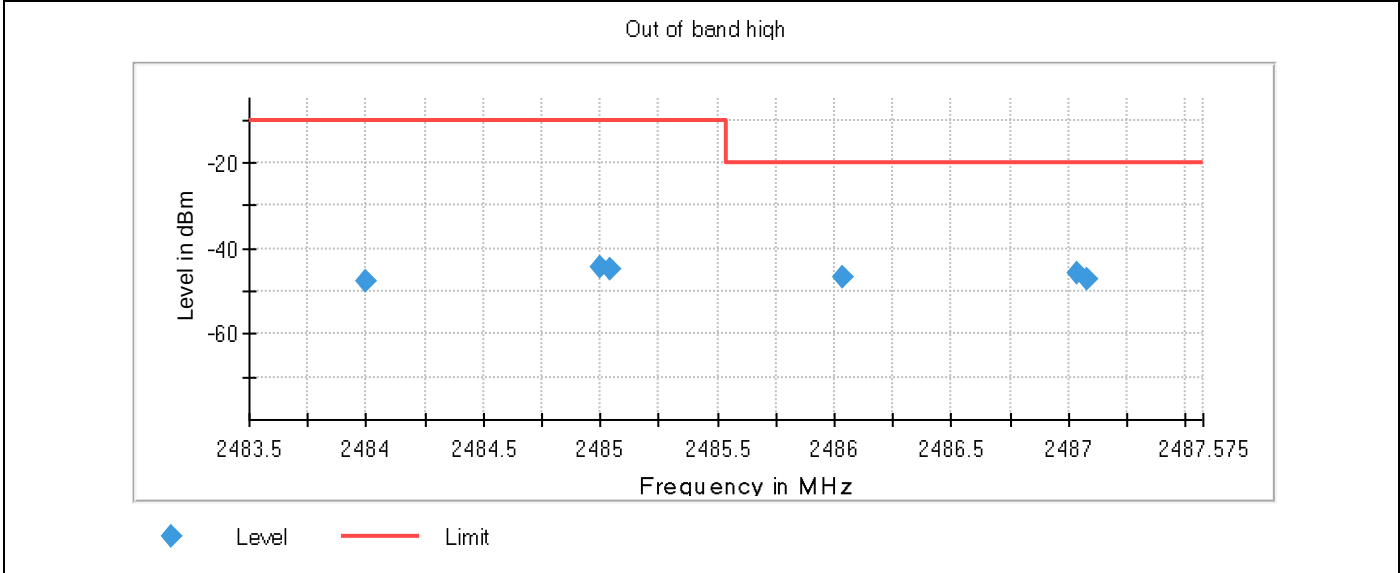

UNWANTED OOB Low Freq Section, 2480 MHz

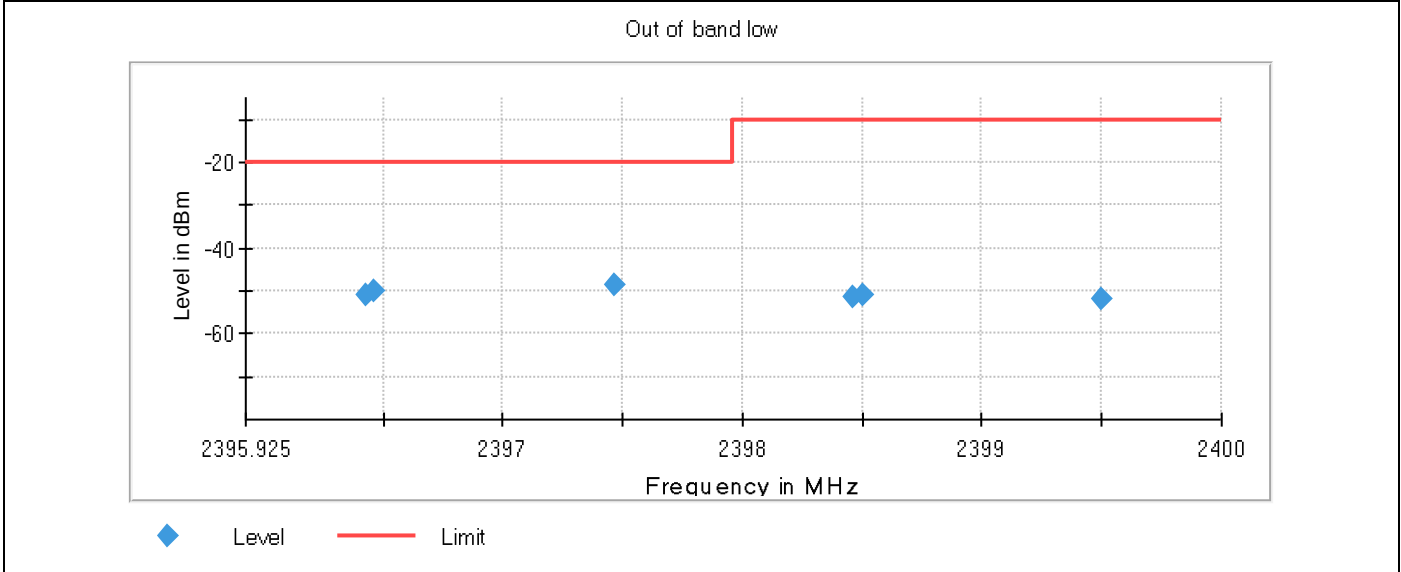

UNWANTED OOB High Freq Section, 2480 MHz

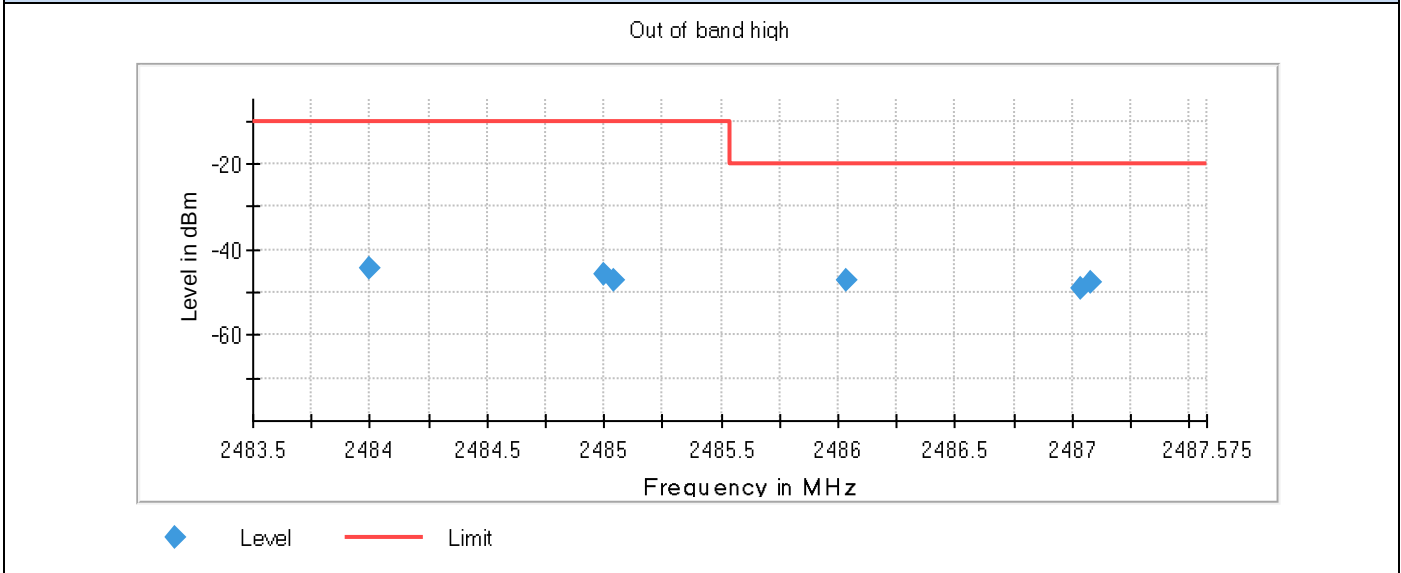

B.6 Transmitter unwanted emissions in the spurious domain

Test limits

ETSI clause	Limits
4.3.2.9.3	The transmitter unwanted emissions in the spurious domain shall not exceed the values given in table below. For emissions radiated by the cabinet or emissions radiated by integral antenna equipment (without antenna connectors), these limits are e.r.p. for emissions up to 1 GHz and as e.i.r.p. for emissions above 1 GHz

Test conditions

ETSI clause	Conditions
5.4.9.1	These measurements shall only be performed at normal test conditions. For non-FHSS equipment, the measurement shall be performed at the lowest and the highest channel on which the equipment can operate. The equipment shall be configured to operate under its worst case situation with respect to output power. If the equipment can operate with different Nominal Channel Bandwidths (e.g. 20 MHz and 40 MHz), then the equipment shall be configured to operate under its worst case situation with respect to spurious emissions.

Test procedure

The radiated setups (transmitter) shown in section *Test & System Description* were used to measure the transmission spurious emissions accordingly with ETSI EN 300 328 v2.2.2 § 5.4.9.2.2. Depending of the frequency range and bands being tested, different antennas and filters were used; in consequence different setups are employed.

The final measurement is done by varying the antenna height from 1 to 4 meters, the EUT azimuth over 360° and for both Vertical and Horizontal polarizations.

The radiated spurious emission was measured on the worst case configuration on the low and high channel for each transmission mode.

Test Results**Tx Spurious Emissions – 30MHz to 12.75GHz****Tx Spurious Emissions – Bluetooth BLE , 2402 MHz**

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBm	---	dBm	dB	---
562.5	-71.2	RMS	-51.9	19.3	V
10039.8	-46.3	RMS	-30.0	16.3	V
10202.7	-46.1	RMS	-30.0	16.1	V
12047.8	-60.1	RMS	-30.0	30.1	V

Tx Spurious Emissions – Bluetooth BLE , 2480 MHz

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBm	---	dBm	dB	---
50.0	-70.2	RMS	-51.9	18.3	V
10023.5	-46.4	RMS	-30.0	16.4	V
12039.1	-59.8	RMS	-30.0	29.8	V

B.7 Receiver spurious emissions**Test limits**

ETSI clause	Limits								
4.3.2.10.3	The spurious emissions of the receiver shall not exceed the values given in table 13.								
	For emissions radiated by the cabinet or for emissions radiated by integral antenna equipment (without antenna connectors), these limits are e.r.p. for emissions up to 1 GHz and e.i.r.p. for emissions above 1 GHz.								
	Table 13: Spurious emission limits for receivers								
	<table><tr><th>Frequency range</th><th>Maximum power</th><th>Bandwidth</th></tr><tr><td>30 MHz to 1GHz</td><td>-57 dBm</td><td>100 kHz</td></tr><tr><td>1GHz to 12.75 GHz</td><td>-47 dBm</td><td>1 MHz</td></tr></table>	Frequency range	Maximum power	Bandwidth	30 MHz to 1GHz	-57 dBm	100 kHz	1GHz to 12.75 GHz	-47 dBm
Frequency range	Maximum power	Bandwidth							
30 MHz to 1GHz	-57 dBm	100 kHz							
1GHz to 12.75 GHz	-47 dBm	1 MHz							

Test conditions

ETSI clause	Conditions
5.3.10.1	These measurements shall only be performed at normal test conditions. Testing shall be performed when the equipment is in a receive-only mode. For non-FHSS equipment, the measurement shall be performed at the lowest and the highest channel on which the equipment can operate

Test procedure

The radiated setups (receiver) shown in section *Test & System Description* were used to measure receiver spurious emissions accordingly with ETSI EN 300 328 v2.2.2 § 5.4.10.2.2. Depending of the frequency range and bands being tested, different antennas and filters were used.

The final measurement is done by varying the antenna height from 1 to 4 meters, the EUT azimuth over 360° and for both Vertical and Horizontal polarizations.

The radiated spurious emission was measured on the worst case configuration and on the low and high channel for each transmission mode.

Test Results

Rx Spurious Emissions – 30MHz to 12.75GHz

Rx Spurious Emissions – Bluetooth BLE , 2402 MHz

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBm	---	dBm	dB	---
170.3	-68.5	RMS	-54.9	13.6	V
10499.9	-49.2	RMS	-47.0	2.2	V

Rx Spurious Emissions – Bluetooth BLE , 2480 MHz

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBm	---	dBm	dB	---
170.4	-68.6	RMS	-54.9	13.7	H
10500.7	-51.7	RMS	-47.0	4.7	V

B.8 Receiver Blocking

Test limits

ETSI clause	Limits								
4.3.2.11.3	For equipment that supports a PER or FER test to be performed, the minimum performance criterion shall be a PER or FER less than or equal to 10 %.								
4.3.2.11.4	While maintaining the minimum performance criteria as defined in clause 4.3.2.11.3, the blocking levels at specified frequency offsets shall be equal to or greater than the limits defined for the applicable receiver category provided in table below. Receiver blocking parameters for Receiver Category 2 equipment <table><tr><th>Wanted signal mean power from companion device (dBm) (see notes 1 and 3)</th><th>Blocking signal frequency (MHz)</th><th>Blocking signal power (dBm) (see note 3)</th><th>Type of blocking signal</th></tr><tr><td>(-139 dBm + 10 × log₁₀(OCBW) + 10 dB) or (-74 dBm + 10 dB) whichever is less (see note 2)</td><td>2380 2504 2300 2584</td><td>-34</td><td>CW</td></tr></table> NOTE 1: OCBW is in Hz NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P_{min} + 26 dB where P_{min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal. NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.	Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal	(-139 dBm + 10 × log ₁₀ (OCBW) + 10 dB) or (-74 dBm + 10 dB) whichever is less (see note 2)	2380 2504 2300 2584	-34	CW
Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal						
(-139 dBm + 10 × log ₁₀ (OCBW) + 10 dB) or (-74 dBm + 10 dB) whichever is less (see note 2)	2380 2504 2300 2584	-34	CW						

Test conditions

ETSI clause	Conditions
5.4.11.1	These measurements shall only be performed at normal test conditions. For non-FHSS equipment, having more than one operating channel, the operating channels on which the testing has to be performed shall be selected as follows: • For testing blocking frequencies less than 2400 MHz, the equipment shall operate on the lowest operating channel. • For testing blocking frequencies greater than 2500 MHz, the equipment shall operate on the highest operating channel. Equipment which can change their operating channel automatically (adaptive channel allocation), and where this function cannot be disabled, shall be tested as a FHSS equipment. If the equipment can be configured to operate with different Nominal Channel Bandwidths (e.g. 20 MHz and 40 MHz) and different data rates, then the combination of the smallest channel bandwidth and the lowest data rate for this channel bandwidth which still allows the equipment to operate as intended shall be used. This mode of operation shall be aligned with the performance criteria defined in clause 4.3.1.12.3 or clause 4.3.2.11.3 and shall be described in the test report..

Test procedure

The receiver blocking setup shown in section *Test & System Description* was used to measure receiver blocking signal. The signaling Unit is a CMW500.


The packet error rate (PER) is measured with the CMW500. The blocking signal is emulated by the Signal generator SMB100A. Antenna gain and insertion loss are taken into account.

Test results

Configuration	99% Occupied bandwidth [MHz]	Wanted signal mean power from companion device (dBm)	PER [%] Without blocking signal	Blocking signal [MHz]	Blocking signal Power at DUT input [dBm]	PER [%] With Blocking signal	Verdict
		Without blocking signal		With blocking signal			
BLE Chain A 2402MHz	1.01	-70.91	1.09	2300	-36.00	1.03	Pass
				2380	-36.00	0.85	Pass
BLE Chain A 2480MHz	1.01	-70.91	0.89	2504	-36.00	1.45	Pass
				2584	-36.00	1.31	Pass

Annex C. Photographs


C.1 Test Setup

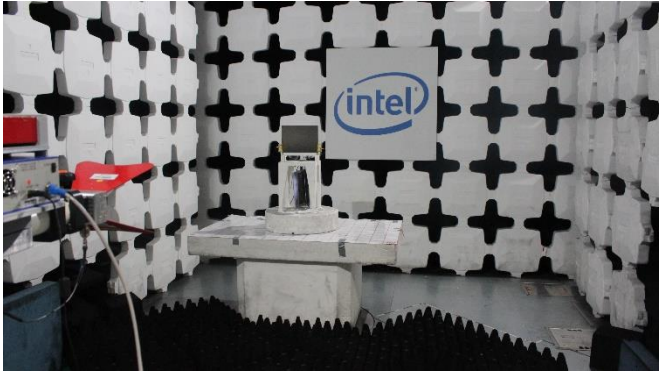Radiated Setup 30 MHz – 1 GHz (Transmitter tests) 	Radiated Setup 1 GHz – 11 GHz (Transmitter tests) 
Radiated Setup 11 GHz – 12.75 GHz (Transmitter tests) 	


Radiated Setup 30 MHz – 1 GHz (Receiver tests)	Radiated Setup 1 GHz – 12.75 GHz (Receiver tests)
	

C.2 Test Sample







Sample #01



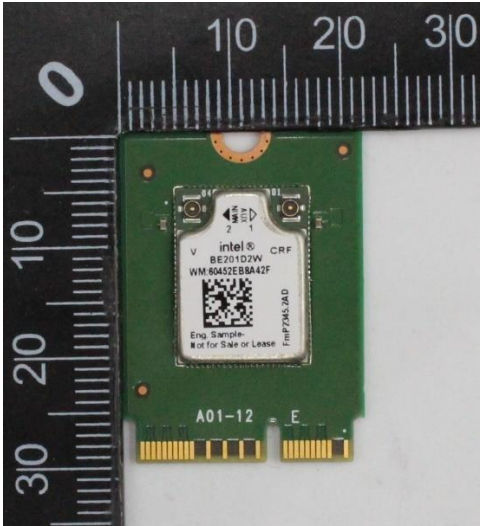
Module Front	Module Back
	
Extender board	Laptop
	

Sample #02

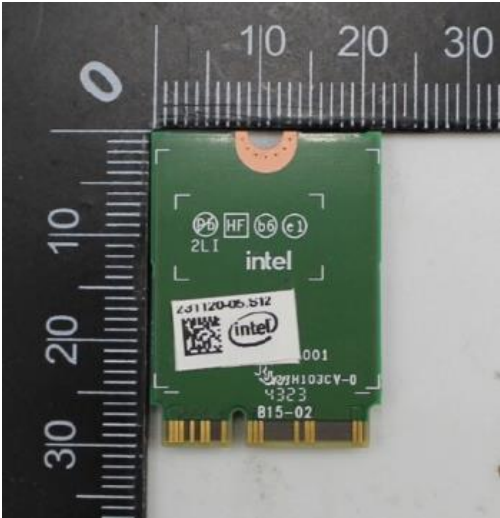Module Front	Module Back
	
Extender board	Laptop
	




Sample #03

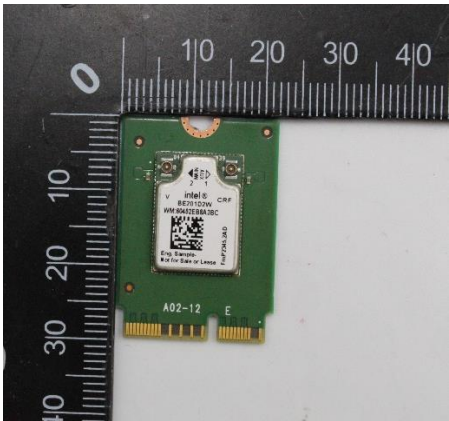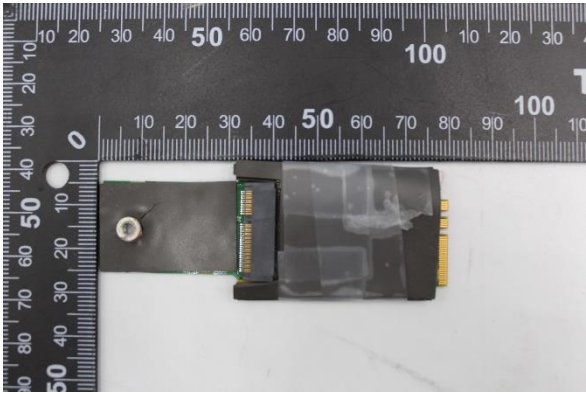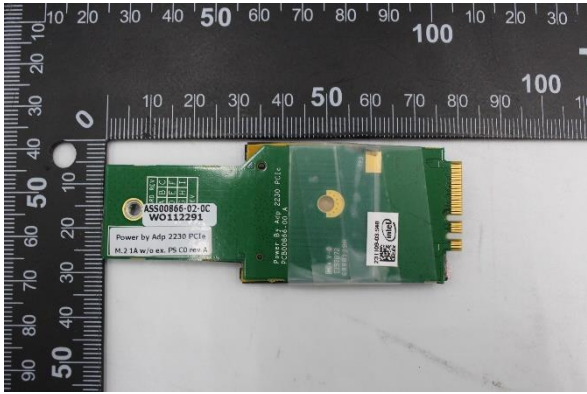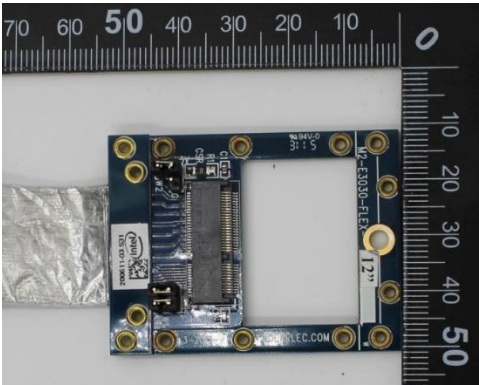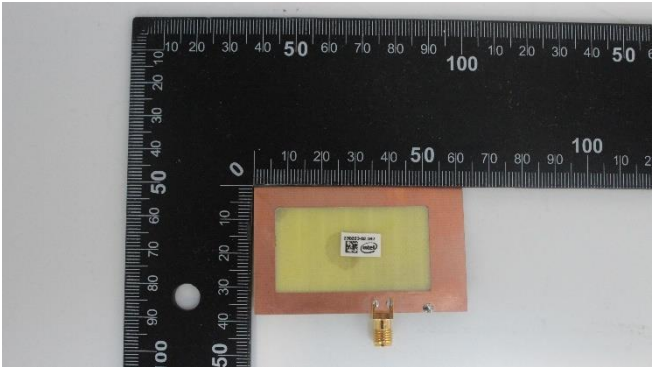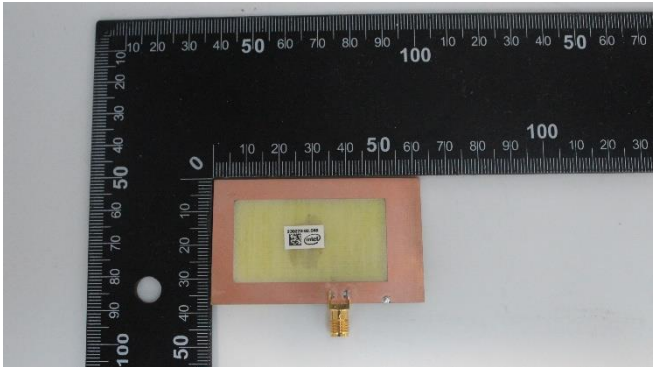Module Front 	Module Back 
Adaptor Front 	Adaptor Back 
Extender board 	Laptop 
Main antenna 	Aux antenna 

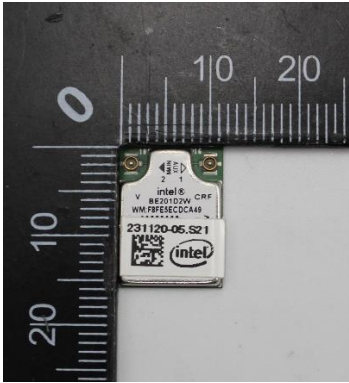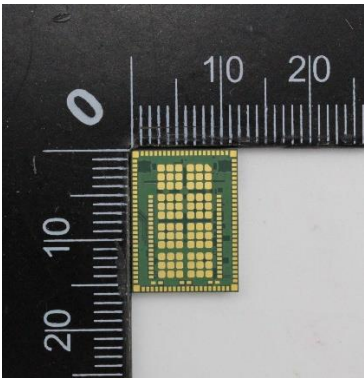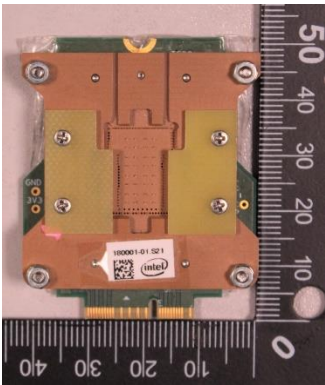Module Front	Module back
	
Socket Front	Socket Back
	

Sample #04

Module Front	Module Back
Adaptor Front	Adaptor Back
Extender board	Laptop
Main antenna	Aux antenna

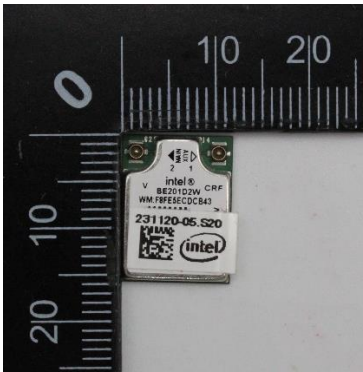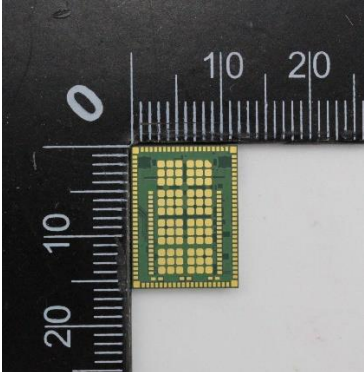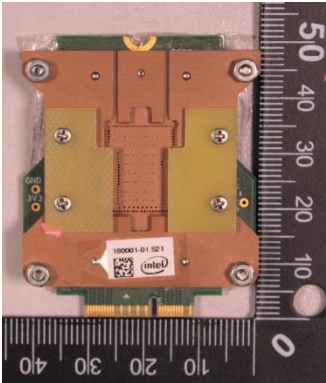Module Front	Module back
	
Socket Front	Socket Back
	

End of the report

This page is left intentionally blank and marks the last page of the test report.