

EN 301 893 RF Test Report (WLAN)

Report No.: RE200522E04-1

Test Model: RTL8852AE

Received Date: May 22, 2020

Test Date: June 22 to Sep. 17, 2020

Issued Date: Oct. 05, 2020

Applicant: Realtek Semiconductor Corp.

Address: No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Test Instruments	7
2.2 Measurement Uncertainty	14
2.3 Maximum Measurement Uncertainty	14
2.4 Modification Record	14
3 General Information	15
3.1 General Description of EUT (WLAN)	15
3.2 Description of Test Modes	18
3.2.1 Test Mode Applicability and Tested Channel Detail	19
3.3 Description of Support Units	28
3.3.1 Configuration of System under Test	28
3.4 General Description of Applied Standards	29
4 Test Procedure and Results	30
4.1 Carrier Frequencies	30
4.1.1 Limits of Carrier Frequencies	30
4.1.2 Test Procedures	30
4.1.3 Deviation from Test Standard	30
4.1.4 Test Setup	30
4.1.5 Test Results (Mode 1)	31
4.1.6 Test Results (Mode 2)	31
4.2 Nominal and Occupied Channel Bandwidth Measurement	32
4.2.1 Limit of Nominal and Occupied Channel Bandwidth Measurement	32
4.2.2 Test Procedure	32
4.2.3 Deviation from Test Standard	32
4.2.4 Test Setup	32
4.2.5 Test Results (Mode 1)	33
4.2.6 Test Results (Mode 2)	35
4.3 RF Output Power and Transmit Power Control (TPC)	37
4.3.1 Limits of RF output power	37
4.3.2 Limits of RF Output Power at Lowest Power Level	37
4.3.3 Test Procedure	37
4.3.4 Deviation from Test Standard	37
4.3.5 Test Setup	37
4.3.6 Test Results for RF Output Power at the Highest Power Level (Mode 1)	38
4.3.7 Test Results for RF Output Power at the Highest Power Level (Mode 2)	43
4.3.8 Test Results for RF Output Power at the Lowest Power Level (Mode 1)	46
4.3.9 Test Results for RF Output Power at the Lowest Power Level (Mode 2)	48
4.4 Power Density	50
4.4.1 Limit of Power Density	50
4.4.2 Test Procedure	50
4.4.3 Deviation from Test Standard	50
4.4.4 Test Setup	50
4.4.5 Test Results (Mode 1)	51
4.4.6 Test Results (Mode 2)	56
4.5 Transmitter Unwanted Emissions outside the 5 GHz RLAN Bands	59
4.5.1 Limits of Transmitter Unwanted Emission outside the 5 GHz RLAN Bands	59
4.5.2 Test Procedure	59
4.5.3 Deviation from Test Standard	59
4.5.4 Test Setup	59
4.5.5 Test Results (Mode 1)	60
4.5.6 Test Results (Mode 2)	66

4.6	Transmitter Unwanted Emissions within the 5 GHz RLAN Bands	72
4.6.1	Limits of Transmitter Unwanted Emissions within the 5 GHz RLAN Bands	72
4.6.2	Test Procedure	72
4.6.3	Deviation from Test Standard	72
4.6.4	Test Setup	72
4.6.5	Test Results for unwanted emissions within the 5 GHz RLAN bands (Mode 1)	73
4.6.6	Test Results for unwanted emissions within the 5 GHz RLAN bands (Mode 2)	87
4.7	Receiver Spurious Radiation	101
4.7.1	Limit of Receiver Spurious Radiation	101
4.7.2	Test Procedure	101
4.7.3	Deviation from Test Standard	101
4.7.4	Test Setup	101
4.7.5	Test Results (Mode 1)	102
4.8	Adaptivity	104
4.8.1	Product information for Adaptivity (Channel Access Mechanism)	104
4.8.2	Requirements and Limits of Adaptive	105
4.8.3	Test Procedure	108
4.8.4	Deviation from Test Standard	108
4.8.5	Test Setup Configuration	108
4.8.6	List of Measurement	108
4.8.7	Interference Signals used for Adaptivity tests	109
4.8.8	Test Result	111
4.8.8.1	Adaptive Test Result	111
4.8.8.2	Test Results of Channel Access Mechanism	114
4.8.8.3	Short Control Signalling Transmissions Result	116
4.9	Receiver Blocking	117
4.9.1	Limit of Receiver Blocking	117
4.9.2	Test Procedure	117
4.9.3	Deviation from Test Standard	117
4.9.4	Test Setup Configuration	118
4.9.5	Test Results	119
4.10	User Access Restrictions	120
4.10.1	Definition	120
4.10.2	Requirement	120
5	Photographs of the Test Configuration	121
	Appendix - Information of the Testing Laboratories	123

Release Control Record

Issue No.	Description	Date Issued
RE200522E04-1	Original release.	Oct. 05, 2020

1 Certificate of Conformity

Product: 11ax RTL8852AE Combo module

Brand: REALTEK

Test Model: RTL8852AE

Sample Status: ENGINEERING SAMPLE

Applicant: Realtek Semiconductor Corp.

Test Date: June 22 to Sep. 17, 2020

Standards: EN 301 893 V2.1.1 (2017-05)

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Joyce Kuo , **Date:** Oct. 05, 2020
Joyce Kuo / Specialist

Approved by : Clark Lin , **Date:** Oct. 05, 2020
Clark Lin / Technical Manager

2 Summary of Test Results

The EUT has been tested according to the following specifications:

EN 301 893 V2.1.1		
Clause	Test Parameter	Result
4.2.1	Carrier Frequencies	Pass
4.2.2	Nominal, and Occupied, Channel Bandwidth	Pass
4.2.3	RF Output Power	Pass
4.2.3	Transmit Power Control (TPC)	Pass
4.2.3	Power Density	Pass
4.2.4.1	Transmitter unwanted emissions outside the 5 GHz RLAN bands	Pass
4.2.4.2	Transmitter unwanted emissions within the 5 GHz RLAN bands	Pass
4.2.5	Receiver Spurious Emissions	Pass
4.2.6.2	Dynamic Frequency Selection	See Note 2
4.2.7	Adaptivity	Pass
4.2.8	Receiver Blocking	Pass
4.2.9	User Access Restrictions	Pass
4.2.10	Geo-location capability	Not Applicable

Note:

1. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
2. The "Dynamic Frequency Selection" was recorded in another test report.

2.1 Test Instruments

For spurious emissions test: (below 1GHz)

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer Keysight	N9030A	MY54490570	June 16, 2020	June 15, 2021
Pre_Amplifier Agilent	8447D	2944A10663	Apr. 28, 2020	Apr. 27, 2021
TRILOG Antenna SCHWARZBECK	VULB9168	9168-162	Nov. 11, 2019	Nov. 10, 2020
Software	ADT_Radiated_V7.6.15.9.5	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208411	NA	NA
Power meter Anritsu	ML2495A	1529002	July 26, 2019	July 25, 2020
Power sensor Anritsu	MA2411B	1339443	July 26, 2019	July 25, 2020
Power meter Anritsu	ML2496A	1529003	Aug. 07, 2019	Aug. 06, 2020
Power sensor Anritsu	MA2411B	1339442	Aug. 07, 2019	Aug. 06, 2020
ESG Vector signal generator Agilent	E4438C	MY45094468/005 506 602 UK6 UNJ	Nov. 14, 2019	Nov. 13, 2020

- NOTE:**
1. The test was performed in RF Fully Chamber No. 1.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: July 10, 2020

For spurious emissions test: (above 1GHz)

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer Keysight	N9030A	MY54490570	June 16, 2020	June 15, 2021
Pre_Amplifier HP	8449B	3008A01281	Jan. 09, 2020	Jan. 08, 2021
Preamplifier EMCi	EMC184045	980143	Jan. 09, 2020	Jan. 08, 2021
Horn_Antenna SCHWARZBECK	BBHA9120-D1	D124	Nov. 24, 2019	Nov. 23, 2020
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 24, 2019	Nov. 23, 2020
Software	ADT_Radiated_V7.6.15.9.5	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208411	NA	NA
Power meter Anritsu	ML2495A	1529002	July 26, 2019	July 25, 2020
Power sensor Anritsu	MA2411B	1339443	July 26, 2019	July 25, 2020
Power meter Anritsu	ML2496A	1529003	Aug. 07, 2019	Aug. 06, 2020
Power sensor Anritsu	MA2411B	1339442	Aug. 07, 2019	Aug. 06, 2020
ESG Vector signal generator Agilent	E4438C	MY45094468/005 506 602 UK6 UNJ	Nov. 14, 2019	Nov. 13, 2020

- NOTE:**
1. The test was performed in RF Fully Chamber No. 1.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: June 22 to July 06, 2020

For spurious emissions test (for TX emission for RU mode):

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer Keysight	N9030A	MY55410176	June 30, 2020	June 29, 2021
Pre_Amplifier HP	8449B	3008A01923	Oct. 09, 2019	Oct. 08, 2020
Pre_Amplifier EMCi	EMC184045	980143	Jan. 09, 2020	Jan. 08, 2021
Horn_Antenna SCHWARZBECK	BBHA 9120 D	9120D-1592	Nov. 24, 2019	Nov. 23, 2020
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 24, 2019	Nov. 23, 2020
Software	ADT_Radiated_V7.6.15.9.5	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208542	NA	NA
Power meter Anritsu	ML2495A	1529002	July 22, 2020	July 21, 2021
Power sensor Anritsu	MA2411B	1339443	July 22, 2020	July 21, 2021
Power meter Anritsu	ML2496A	1529003	Aug. 07, 2019	Aug. 06, 2020
Power sensor Anritsu	MA2411B	1339442	Aug. 07, 2019	Aug. 06, 2020
ESG Vector signal generator Agilent	E4438C	MY45094468/005 506 602 UK6 UNJ	Nov. 14, 2019	Nov. 13, 2020

- NOTE:**
1. The test was performed in RF Fully Chamber No. 2.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: July 23, 2020

For spurious emissions test (for TX emission above 1GHz):

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer Keysight	N9030A	MY55410176	July 03, 2019	July 02, 2020
Pre_Amplifier HP	8449B	3008A01923	Oct. 09, 2019	Oct. 08, 2020
Pre_Amplifier EMCi	EMC184045	980143	Jan. 09, 2020	Jan. 08, 2021
Horn_Antenna SCHWARZBECK	BBHA 9120 D	9120D-1592	Nov. 24, 2019	Nov. 23, 2020
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 24, 2019	Nov. 23, 2020
Software	ADT_Radiated_V7.6.15.9.5	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208542	NA	NA
Power meter Anritsu	ML2495A	1529002	July 26, 2019	July 25, 2020
Power sensor Anritsu	MA2411B	1339443	July 26, 2019	July 25, 2020
Power meter Anritsu	ML2496A	1529003	Aug. 07, 2019	Aug. 06, 2020
Power sensor Anritsu	MA2411B	1339442	Aug. 07, 2019	Aug. 06, 2020
ESG Vector signal generator Agilent	E4438C	MY45094468/005 506 602 UK6 UNJ	Nov. 14, 2019	Nov. 13, 2020

- NOTE:**
1. The test was performed in RF Fully Chamber No. 2.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: June 24, 2020

For receiver blocking & adaptivity test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer Keysight	N9030A	MY55410176	June 30, 2020	June 29, 2021
AD1AD191XA one box tester	MT8860C	1705001	Feb. 15, 2020	Feb. 14, 2021
Bluetooth Simulator Anritsu	MT8852B	1218002	May 19, 2020	May 18, 2021
ESG Vector signal generator Agilent	E4438C	MY45094468/005 506 602 UK6 UNJ	Nov. 14, 2019	Nov. 13, 2020
Upgrade the software license on current E4438C ESG Agilent	E4438CK-403	ESG E4_010001	NA	NA
MXG X-Series RF Vector Signal Generator Agilent	N5182B	MY53052700	July 14, 2020	July 13, 2021
Direct Coupler EMCI	CS20-18-436/16	1139	NA	NA
Power Splitter/combiner Mini-Circuits	ZN4PD-642W-S+	408501327_03	Oct. 04, 2019	Oct. 03, 2020
Power Splitter/combiner Mini-Circuits	ZN4PD-642W-S+	408501327_04	Oct. 04, 2019	Oct. 03, 2020

- NOTE:**
1. The test was performed in Adaptivity room.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: Sep. 10 to 17, 2020

For other test items (For RU mode):

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSV40	100964	May 29, 2020	May 28, 2021
Spectrum Analyzer Keysight	N9030A	MY54490570	June 16, 2020	June 15, 2021
AC Power Source Extech Electronics	6502	1140503	NA	NA
Temperature & Humidity Chamber TERCHY	MHU-225AU	911033	Nov. 26, 2019	Nov. 25, 2020
DC Power Supply GOOD WILL INSTRUMENT CO., LTD.	GPC - 3030D	7700087	NA	NA
ESG Vector signal generator Agilent	E4438C	MY45094468/005 506 602 UK6 UNJ	Nov. 14, 2019	Nov. 13, 2020
Power meter Anritsu	ML2495A	0824006	Apr. 28, 2020	Apr. 27, 2021
Software	ADT_RF Test Software V6.6.5.4	NA	NA	NA
MXG X-Series RF Vector Signal Generator Agilent	N5182B	MY53052700	July 14, 2020	July 13, 2021
MIMO Powermeasurement Test set (4X4) Agilent	U2021XA	U2021XA_01	Sep. 18, 2019	Sep. 17, 2020
MIMO Powermeasurement Test set (4X4) Agilent	U2021XA	U2021XA_02	Nov. 14, 2019	Nov. 13, 2020
Switch Box Agilent	PS-X10-100	PS-X10-100_01	Sep. 18, 2019	Sep. 17, 2020

- NOTE:**
1. The test was performed in Oven room 1.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: July 25, 2020

For other test items:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSV40	100964	May 29, 2020	May 28, 2021
Spectrum Analyzer Keysight	N9030A	MY54490570	June 16, 2020	June 15, 2021
AC Power Source Extech Electronics	6502	1140503	NA	NA
Temperature & Humidity Chamber TERCHY	MHU-225AU	911033	Nov. 26, 2019	Nov. 25, 2020
DC Power Supply GOOD WILL INSTRUMENT CO., LTD.	GPC - 3030D	7700087	NA	NA
ESG Vector signal generator Agilent	E4438C	MY45094468/005 506 602 UK6 UNJ	Nov. 14, 2019	Nov. 13, 2020
Power meter Anritsu	ML2495A	0824006	Apr. 28, 2020	Apr. 27, 2021
Software	ADT_RF Test Software V6.6.5.4	NA	NA	NA
MXG X-Series RF Vector Signal Generator Agilent	N5182B	MY53052700	July 17, 2019	July 16, 2020
MIMO Powermeasurement Test set (4X4) Agilent	U2021XA	U2021XA_01	Sep. 18, 2019	Sep. 17, 2020
MIMO Powermeasurement Test set (4X4) Agilent	U2021XA	U2021XA_02	Nov. 14, 2019	Nov. 13, 2020
Switch Box Agilent	PS-X10-100	PS-X10-100_01	Sep. 18, 2019	Sep. 17, 2020

- NOTE:**
1. The test was performed in Oven room 1.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: July 08 to 09, 2020

2.2 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Parameter	Uncertainty
RF frequency	± 1.132 ppm
RF power conducted	± 1.207 dB
RF power radiated	± 4.925 dB
Spurious emissions, conducted	± 3 dB
Spurious emissions, radiated	± 4.925 dB
Humidity	± 5 %
Temperature	± 0.6 °C
Time	± 5 %

2.3 Maximum Measurement Uncertainty

For the test methods, according to ETSI EN 301 893 standard, the measurement uncertainty figures shall be calculated and shall correspond to an expansion factor (coverage factor) $k = 1,96$ or $k = 2$ (which provide confidence levels of respectively 95 % and 95,45 % in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian)). Principles for the calculation of measurement uncertainty are contained in ETSI TR 100 028-1 [i.6] and ETSI TR 100 028-2 [i.7], in particular in annex D of the ETSI TR 100 028-2 [i.7].

Maximum measurement uncertainty

Parameter	Uncertainty
RF frequency	± 10 ppm
RF power conducted	$\pm 1,5$ dB
RF power radiated	± 6 dB
Spurious emissions, conducted	± 3 dB
Spurious emissions, radiated	± 6 dB
Humidity	± 5 %
Temperature	± 1 °C
Time	± 10 %

2.4 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT (WLAN)

Product	11ax RTL8852AE Combo module
Brand	REALTEK
Test Model	RTL8852AE
Status of EUT	ENGINEERING SAMPLE
Nominal Voltage	3.3Vdc from host equipment
Normal Testing Voltage	Vnom= 3.3Vdc
Temperature Operating Range	-20°C ~ 70°C
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode and VHT (20/40) mode in 2.4GHz 1024QAM for OFDMA in 11ax HE mode
Modulation Technology	DSSS, OFDM, OFDMA
Transfer Rate	802.11b: up to 11 Mbps 802.11a/g: up to 54 Mbps 802.11n: up to 300 Mbps 802.11ac: up to 866.7 Mbps 802.11ax: up to 1201 Mbps
Operating Frequency	2.4GHz: 2.412 ~ 2.472GHz 5GHz: 5.18 ~ 5.24 GHz, 5.26 ~ 5.32 GHz, 5.50 ~ 5.70 GHz, 5.745 ~ 5.825 GHz
Number of Channel	2.4GHz: 802.11b, 802.11g, 802.11n (HT20), VHT20, 802.11ax (HE20): 13, 802.11n (HT40), VHT40, 802.11ax (HE40): 9 5GHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20): 24 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40): 11 802.11ac (VHT80), 802.11ax (HE80): 5
EIRP Power (Measured Max. Average)	For 2TX CDD Mode: 2.4 GHz: 19.98 dBm 5.18 ~ 5.24 GHz: 22.97 dBm 5.26 ~ 5.32 GHz: 22.90 dBm 5.5 ~ 5.70 GHz: 22.96 dBm 5.745 ~ 5.825 GHz: 13.96 dBm Beamforming Mode: 2.4 GHz: 19.98 dBm 5.18 ~ 5.24 GHz: 22.84 dBm 5.26 ~ 5.32 GHz: 22.94 dBm 5.5 ~ 5.70 GHz: 22.92 dBm 5.745 ~ 5.825 GHz: 13.96 dBm For 1TX 2.4 GHz: 19.90 dBm 5.18 ~ 5.24 GHz: 22.96 dBm 5.26 ~ 5.32 GHz: 22.90 dBm 5.5 ~ 5.70 GHz: 22.97 dBm 5.745 ~ 5.825 GHz: 13.95 dBm
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Beamforming Factor	3 dB by manufacturer's declaration

Accessory Device	NA
Data Cable Supplied	NA

Note:

1. The EUT has below HW SKU configuration, as below table:

SKU No.	Interface	Description
1	PCIe + USB	Single antenna port
2	PCIe + USB	Dual antenna port
3	PCIe + UART	Dual antenna port

Note: From the above HW SKUs, **SKU No.: 3** was selected as representative model for the test and its data was recorded in this report.

2. Simultaneously transmission condition.

Condition	Technology		
1	WLAN 2.4GHz	WLAN 5GHz	Bluetooth
2	WLAN 2.4GHz	WLAN 5GHz	-
3	WLAN 5GHz	Bluetooth	-

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

3. The antennas provided to the EUT, please refer to the following table:

Antenna Set	Chain NO.	Brand	Model	Antenna Gain (dBi)	Frequency range (GHz)	Antenna Type	Connector Type	Cable Length (mm)
1	Chain 0	LYNwave	ALA110-222050-300011	3.5	2.4~2.5	PIFA	i-pex(MHF)	300
				5	5.15~5.85			
	Chain 1	LYNwave	ALA110-222050-300011	3.5	2.4~2.5	PIFA	i-pex(MHF)	300
				5	5.15~5.85			
2	Chain 0	PSA	RFDPA171320EMLB301	3.14	2.4~2.5	Dipole	i-pex(MHF)	200
				5	5.15~5.85			
	Chain 1	PSA	RFDPA171320EMLB301	3.14	2.4~2.5	Dipole	i-pex(MHF)	200
				5	5.15~5.85			

Note:

- From the above transmission chains, the worse case was found in transmission on Chain 1 for 1TX mode. Therefore only the test data of the mode was recorded in this report.
- The Bluetooth technology will fix transmission on Chain 1.
- From the above antennas, antenna set 1 and 2 was selected as representative antenna for the test.

4. The EUT incorporates a MIMO function:

2.4GHZ BAND		
MODULATION MODE	TX & RX CONFIGURATION	
802.11b	2TX/1TX Diversity	2RX
802.11g	2TX/1TX Diversity	2RX
802.11n (HT20)	2TX/1TX Diversity	2RX
802.11n (HT40)	2TX/1TX Diversity	2RX
VHT20	2TX/1TX Diversity	2RX
VHT40	2TX/1TX Diversity	2RX
802.11ax (HE20)	2TX/1TX Diversity	2RX
802.11ax (HE40)	2TX/1TX Diversity	2RX
5GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11a	2TX/1TX Diversity	2RX
802.11n (HT20)	2TX/1TX Diversity	2RX
802.11n (HT40)	2TX/1TX Diversity	2RX
802.11ac (VHT20)	2TX/1TX Diversity	2RX
802.11ac (VHT40)	2TX/1TX Diversity	2RX
802.11ac (VHT80)	2TX/1TX Diversity	2RX
802.11ax (HE20)	2TX/1TX Diversity	2RX
802.11ax (HE40)	2TX/1TX Diversity	2RX
802.11ax (HE80)	2TX/1TX Diversity	2RX

Note:

1. All of modulation mode support beamforming function except 802.11a/b/g modulation mode.
 2. The EUT support Beamforming and CDD mode, therefore both mode were investigated and the worst case scenario was identified. The worst case data were presented in test report.
 3. The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz), 802.11ac mode for 20MHz (40MHz, 80MHz) and 802.11ax mode for 20MHz (40MHz, 80MHz), therefore the manufacturer will control the power for 802.11n mode as same as the 802.11ac mode and ax mode or more lower than it and investigated worst case to representative mode in test report. (Final test mode refer to section 3.2.1)
5. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.
6. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

3.2 Description of Test Modes

For 5180 ~ 5320MHz

8 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	52	5260 MHz
40	5200 MHz	56	5280 MHz
44	5220 MHz	60	5300 MHz
48	5240 MHz	64	5320 MHz

4 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	54	5270 MHz
46	5230 MHz	62	5310 MHz

2 channels are provided for 802.11ac (VHT80), 802.11ax (HE80):

Channel	Frequency	Channel	Frequency
42	5210 MHz	58	5290 MHz

For 5500 ~ 5700MHz

11 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
100	5500 MHz	124	5620 MHz
104	5520 MHz	128	5640 MHz
108	5540 MHz	132	5660 MHz
112	5560 MHz	136	5680 MHz
116	5580 MHz	140	5700 MHz
120	5600 MHz		

5 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
102	5510 MHz	126	5630 MHz
110	5550 MHz	134	5670 MHz
118	5590 MHz		

2 channels are provided for 802.11ac (VHT80), 802.11ax (HE80):

Channel	Frequency	Channel	Frequency
106	5530 MHz	122	5610 MHz

1TX						
Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	RU Configuration
802.11a	36 to 64	36	OFDM	BPSK	6Mb/s	-
	100 to 140	140	OFDM	BPSK	6Mb/s	-
802.11ax (HE20)	36 to 64	36	OFDMA	BPSK	MCS0	-
	100 to 140	140	OFDMA	BPSK	MCS0	-
802.11ax (HE40)	38 to 62	38	OFDMA	BPSK	MCS0	-
	102 to 134	102	OFDMA	BPSK	MCS0	-
802.11ax (HE80)	42 to 58	58	OFDMA	BPSK	MCS0	-
	106 to 122	122	OFDMA	BPSK	MCS0	-
802.11ax (RU26)	36 to 64	36, 64	OFDMA	BPSK	MCS0	26/0, 26/8
	100 to 140	100, 140	OFDMA	BPSK	MCS0	26/0, 26/8
802.11ax (RU52)	36 to 64	36, 64	OFDMA	BPSK	MCS0	52/37, 52/40
	100 to 140	100, 140	OFDMA	BPSK	MCS0	52/37, 52/40
802.11ax (RU106)	36 to 64	36, 64	OFDMA	BPSK	MCS0	106/53, 106/54
	100 to 140	100, 140	OFDMA	BPSK	MCS0	106/53, 106/54

RF Output Power:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, RU configurations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

2TX (CDD Mode)						
Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	RU Configuration
802.11a	36 to 64	36, 64	OFDM	BPSK	6Mb/s	-
	100 to 140	100, 140	OFDM	BPSK	6Mb/s	-
802.11ac (VHT20)	36 to 64	36, 64	OFDM	BPSK	MCS0	-
	100 to 140	100, 140	OFDM	BPSK	MCS0	-
802.11ac (VHT40)	38 to 62	38, 62	OFDM	BPSK	MCS0	-
	102 to 134	102, 134	OFDM	BPSK	MCS0	-
802.11ac (VHT80)	42 to 58	42, 58	OFDM	BPSK	MCS0	-
	106 to 122	106, 122	OFDM	BPSK	MCS0	-
802.11ax (HE20)	36 to 64	36, 64	OFDMA	BPSK	MCS0	-
	100 to 140	100, 140	OFDMA	BPSK	MCS0	-
802.11ax (HE40)	38 to 62	38, 62	OFDMA	BPSK	MCS0	-
	102 to 134	102, 134	OFDMA	BPSK	MCS0	-
802.11ax (HE80)	42 to 58	42, 58	OFDMA	BPSK	MCS0	-
	106 to 122	106, 122	OFDMA	BPSK	MCS0	-
802.11ax (RU26)	36 to 64	36, 64	OFDMA	BPSK	MCS0	26/0, 26/8
	100 to 140	100, 140	OFDMA	BPSK	MCS0	26/0, 26/8
802.11ax (RU52)	36 to 64	36, 64	OFDMA	BPSK	MCS0	52/37, 52/40
	100 to 140	100, 140	OFDMA	BPSK	MCS0	52/37, 52/40
802.11ax (RU106)	36 to 64	36, 64	OFDMA	BPSK	MCS0	106/53, 106/54
	100 to 140	100, 140	OFDMA	BPSK	MCS0	106/53, 106/54

2TX (Beamforming Mode)						
Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	
802.11ac (VHT20)	36 to 64	36, 64	OFDM	BPSK	MCS0	
	100 to 140	100, 140	OFDM	BPSK	MCS0	
802.11ac (VHT40)	38 to 62	38, 62	OFDM	BPSK	MCS0	
	102 to 134	102, 134	OFDM	BPSK	MCS0	
802.11ac (VHT80)	42 to 58	42, 58	OFDM	BPSK	MCS0	
	106 to 122	106, 122	OFDM	BPSK	MCS0	
802.11ax (HE20)	36 to 64	36, 64	OFDMA	BPSK	MCS0	
	100 to 140	100, 140	OFDMA	BPSK	MCS0	
802.11ax (HE40)	38 to 62	38, 62	OFDMA	BPSK	MCS0	
	102 to 134	102, 134	OFDMA	BPSK	MCS0	
802.11ax (HE80)	42 to 58	42, 58	OFDMA	BPSK	MCS0	
	106 to 122	106, 122	OFDMA	BPSK	MCS0	
1TX						
Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	RU Configuration
802.11a	36 to 64	36, 64	OFDM	BPSK	6Mb/s	-
	100 to 140	100, 140	OFDM	BPSK	6Mb/s	-
802.11ac (VHT20)	36 to 64	36, 64	OFDM	BPSK	MCS0	-
	100 to 140	100, 140	OFDM	BPSK	MCS0	-
802.11ac (VHT40)	38 to 62	38, 62	OFDM	BPSK	MCS0	-
	102 to 134	102, 134	OFDM	BPSK	MCS0	-
802.11ac (VHT80)	42 to 58	42, 58	OFDM	BPSK	MCS0	-
	106 to 122	106, 122	OFDM	BPSK	MCS0	-
802.11ax (HE20)	36 to 64	36, 64	OFDMA	BPSK	MCS0	-
	100 to 140	100, 140	OFDMA	BPSK	MCS0	-
802.11ax (HE40)	38 to 62	38, 62	OFDMA	BPSK	MCS0	-
	102 to 134	102, 134	OFDMA	BPSK	MCS0	-
802.11ax (HE80)	42 to 58	42, 58	OFDMA	BPSK	MCS0	-
	106 to 122	106, 122	OFDMA	BPSK	MCS0	-
802.11ax (RU26)	36 to 64	36, 64	OFDMA	BPSK	MCS0	26/0, 26/8
	100 to 140	100, 140	OFDMA	BPSK	MCS0	26/0, 26/8
802.11ax (RU52)	36 to 64	36, 64	OFDMA	BPSK	MCS0	52/37, 52/40
	100 to 140	100, 140	OFDMA	BPSK	MCS0	52/37, 52/40
802.11ax (RU106)	36 to 64	36, 64	OFDMA	BPSK	MCS0	106/53, 106/54
	100 to 140	100, 140	OFDMA	BPSK	MCS0	106/53, 106/54

Transmit Power Control (TPC):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, RU configurations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

2TX (CDD Mode)					
Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter
802.11a	52 to 64	64	OFDM	BPSK	6Mb/s
	100 to 140	100, 140	OFDM	BPSK	6Mb/s
802.11ac (VHT20)	52 to 64	64	OFDM	BPSK	MCS0
	100 to 140	100, 140	OFDM	BPSK	MCS0
802.11ac (VHT40)	54 to 62	62	OFDM	BPSK	MCS0
	102 to 134	102, 134	OFDM	BPSK	MCS0
802.11ac (VHT80)	58	58	OFDM	BPSK	MCS0
	106 to 122	106, 122	OFDM	BPSK	MCS0
802.11ax (HE20)	52 to 64	64	OFDMA	BPSK	MCS0
	100 to 140	100, 140	OFDMA	BPSK	MCS0
802.11ax (HE40)	54 to 62	62	OFDMA	BPSK	MCS0
	102 to 134	102, 134	OFDMA	BPSK	MCS0
802.11ax (HE80)	58	58	OFDMA	BPSK	MCS0
	106 to 122	106, 122	OFDMA	BPSK	MCS0
1TX					
Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter
802.11a	52 to 64	64	OFDM	BPSK	6Mb/s
	100 to 140	100, 140	OFDM	BPSK	6Mb/s
802.11ac (VHT20)	52 to 64	64	OFDM	BPSK	MCS0
	100 to 140	100, 140	OFDM	BPSK	MCS0
802.11ac (VHT40)	54 to 62	62	OFDM	BPSK	MCS0
	102 to 134	102, 134	OFDM	BPSK	MCS0
802.11ac (VHT80)	58	58	OFDM	BPSK	MCS0
	106 to 122	106, 122	OFDM	BPSK	MCS0
802.11ax (HE20)	52 to 64	64	OFDMA	BPSK	MCS0
	100 to 140	100, 140	OFDMA	BPSK	MCS0
802.11ax (HE40)	54 to 62	62	OFDMA	BPSK	MCS0
	102 to 134	102, 134	OFDMA	BPSK	MCS0
802.11ax (HE80)	58	58	OFDMA	BPSK	MCS0
	106 to 122	106, 122	OFDMA	BPSK	MCS0

Power Density:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, RU configurations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

2TX (CDD Mode)						
Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	RU Configuration
802.11a	36 to 64	36, 64	OFDM	BPSK	6Mb/s	-
	100 to 140	100, 140	OFDM	BPSK	6Mb/s	-
802.11ac (VHT20)	36 to 64	36, 64	OFDM	BPSK	MCS0	-
	100 to 140	100, 140	OFDM	BPSK	MCS0	-
802.11ac (VHT40)	38 to 62	38, 62	OFDM	BPSK	MCS0	-
	102 to 134	102, 134	OFDM	BPSK	MCS0	-
802.11ac (VHT80)	42 to 58	42, 58	OFDM	BPSK	MCS0	-
	106 to 122	106, 122	OFDM	BPSK	MCS0	-
802.11ax (HE20)	36 to 64	36, 64	OFDMA	BPSK	MCS0	-
	100 to 140	100, 140	OFDMA	BPSK	MCS0	-
802.11ax (HE40)	38 to 62	38, 62	OFDMA	BPSK	MCS0	-
	102 to 134	102, 134	OFDMA	BPSK	MCS0	-
802.11ax (HE80)	42 to 58	42, 58	OFDMA	BPSK	MCS0	-
	106 to 122	106, 122	OFDMA	BPSK	MCS0	-
802.11ax (RU26)	36 to 64	36, 64	OFDMA	BPSK	MCS0	26/0, 26/8
	100 to 140	100, 140	OFDMA	BPSK	MCS0	26/0, 26/8
802.11ax (RU52)	36 to 64	36, 64	OFDMA	BPSK	MCS0	52/37, 52/40
	100 to 140	100, 140	OFDMA	BPSK	MCS0	52/37, 52/40
802.11ax (RU106)	36 to 64	36, 64	OFDMA	BPSK	MCS0	106/53, 106/54
	100 to 140	100, 140	OFDMA	BPSK	MCS0	106/53, 106/54
2TX (Beamforming Mode)						
Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	
802.11ac (VHT20)	36 to 64	36, 64	OFDM	BPSK	MCS0	
	100 to 140	100, 140	OFDM	BPSK	MCS0	
802.11ac (VHT40)	38 to 62	38, 62	OFDM	BPSK	MCS0	
	102 to 134	102, 134	OFDM	BPSK	MCS0	
802.11ac (VHT80)	42 to 58	42, 58	OFDM	BPSK	MCS0	
	106 to 122	106, 122	OFDM	BPSK	MCS0	
802.11ax (HE20)	36 to 64	36, 64	OFDMA	BPSK	MCS0	
	100 to 140	100, 140	OFDMA	BPSK	MCS0	
802.11ax (HE40)	38 to 62	38, 62	OFDMA	BPSK	MCS0	
	102 to 134	102, 134	OFDMA	BPSK	MCS0	
802.11ax (HE80)	42 to 58	42, 58	OFDMA	BPSK	MCS0	
	106 to 122	106, 122	OFDMA	BPSK	MCS0	

1TX						
Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	RU Configuration
802.11a	36 to 64	36, 64	OFDM	BPSK	6Mb/s	-
	100 to 140	100, 140	OFDM	BPSK	6Mb/s	-
802.11ac (VHT20)	36 to 64	36, 64	OFDM	BPSK	MCS0	-
	100 to 140	100, 140	OFDM	BPSK	MCS0	-
802.11ac (VHT40)	38 to 62	38, 62	OFDM	BPSK	MCS0	-
	102 to 134	102, 134	OFDM	BPSK	MCS0	-
802.11ac (VHT80)	42 to 58	42, 58	OFDM	BPSK	MCS0	-
	106 to 122	106, 122	OFDM	BPSK	MCS0	-
802.11ax (HE20)	36 to 64	36, 64	OFDMA	BPSK	MCS0	-
	100 to 140	100, 140	OFDMA	BPSK	MCS0	-
802.11ax (HE40)	38 to 62	38, 62	OFDMA	BPSK	MCS0	-
	102 to 134	102, 134	OFDMA	BPSK	MCS0	-
802.11ax (HE80)	42 to 58	42, 58	OFDMA	BPSK	MCS0	-
	106 to 122	106, 122	OFDMA	BPSK	MCS0	-
802.11ax (RU26)	36 to 64	36, 64	OFDMA	BPSK	MCS0	26/0, 26/8
	100 to 140	100, 140	OFDMA	BPSK	MCS0	26/0, 26/8
802.11ax (RU52)	36 to 64	36, 64	OFDMA	BPSK	MCS0	52/37, 52/40
	100 to 140	100, 140	OFDMA	BPSK	MCS0	52/37, 52/40
802.11ax (RU106)	36 to 64	36, 64	OFDMA	BPSK	MCS0	106/53, 106/54
	100 to 140	100, 140	OFDMA	BPSK	MCS0	106/53, 106/54

Adaptivity Test:

☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology
802.11ax (HE20)	36 to 64, 100 to 140	100	OFDMA
802.11ax (HE40)	38 to 62, 102 to 134	102	OFDMA

Spurious Emissions Test (Below 1 GHz):

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, RU configurations and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

2TX (CDD Mode)					
Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter
802.11ax (HE40)	38 to 62, 102 to 134	102	OFDMA	BPSK	MCS0
Receiver	36 to 64 100 to 140	102	-	-	-
1TX					
Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter
802.11ax (HE40)	38 to 62, 102 to 134	102	OFDMA	BPSK	MCS0

Spurious Emissions Test (Above 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, RU configurations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

2TX (CDD Mode)						
Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	RU Configuration
802.11ax (HE40)	38 to 62 102 to 134	38, 102	OFDMA	BPSK	MCS0	-
802.11ax (RU26)	36 to 64 100 to 140	36, 100	OFDMA	BPSK	MCS0	26/0, 26/0
Receiver	36 to 64 100 to 140	36, 100	-	-	-	-
1TX						
Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	RU Configuration
802.11ax (HE40)	38 to 62 102 to 134	38, 102	OFDMA	BPSK	MCS0	-
802.11ax (RU26)	36 to 64 100 to 140	36, 100	OFDMA	BPSK	MCS0	26/0, 26/0

Transmitter Unwanted Emissions within the 5GHz RLAN Bands (Signal under Spectrum Mask):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, RU configurations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

2TX (CDD Mode)						
Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	RU Configuration
802.11a	36 to 64	36, 64	OFDM	BPSK	6Mb/s	-
	100 to 140	100, 140	OFDM	BPSK	6Mb/s	-
802.11ax (HE20)	36 to 64	36, 64	OFDMA	BPSK	MCS0	-
	100 to 140	100, 140	OFDMA	BPSK	MCS0	-
802.11ax (HE40)	38 to 62	38, 62	OFDMA	BPSK	MCS0	-
	102 to 134	102, 134	OFDMA	BPSK	MCS0	-
802.11ax (HE80)	42 to 58	42, 58	OFDMA	BPSK	MCS0	-
	106 to 122	106, 122	OFDMA	BPSK	MCS0	-
802.11ax (RU26)	36 to 64	36, 64	OFDMA	BPSK	MCS0	26/0, 26/8
	100 to 140	100, 140	OFDMA	BPSK	MCS0	26/0, 26/8
802.11ax (RU52)	36 to 64	36, 64	OFDMA	BPSK	MCS0	52/37, 52/40
	100 to 140	100, 140	OFDMA	BPSK	MCS0	52/37, 52/40
802.11ax (RU106)	36 to 64	36, 64	OFDMA	BPSK	MCS0	106/53, 106/54
	100 to 140	100, 140	OFDMA	BPSK	MCS0	106/53, 106/54
1TX						
Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	RU Configuration
802.11a	36 to 64	36, 64	OFDM	BPSK	6Mb/s	-
	100 to 140	100, 140	OFDM	BPSK	6Mb/s	-
802.11ax (HE20)	36 to 64	36, 64	OFDMA	BPSK	MCS0	-
	100 to 140	100, 140	OFDMA	BPSK	MCS0	-
802.11ax (HE40)	38 to 62	38, 62	OFDMA	BPSK	MCS0	-
	102 to 134	102, 134	OFDMA	BPSK	MCS0	-
802.11ax (HE80)	42 to 58	42, 58	OFDMA	BPSK	MCS0	-
	106 to 122	106, 122	OFDMA	BPSK	MCS0	-
802.11ax (RU26)	36 to 64	36, 64	OFDMA	BPSK	MCS0	26/0, 26/8
	100 to 140	100, 140	OFDMA	BPSK	MCS0	26/0, 26/8
802.11ax (RU52)	36 to 64	36, 64	OFDMA	BPSK	MCS0	52/37, 52/40
	100 to 140	100, 140	OFDMA	BPSK	MCS0	52/37, 52/40
802.11ax (RU106)	36 to 64	36, 64	OFDMA	BPSK	MCS0	106/53, 106/54
	100 to 140	100, 140	OFDMA	BPSK	MCS0	106/53, 106/54

Receiver Blocking Test:

☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter
802.11a	36 to 64	36	OFDM	BPSK	6Mb/s
	100 to 140	100	OFDM	BPSK	6Mb/s

Test Condition:

Applicable to	Environmental conditions	Input Power	Tested By
CF	25deg. C, 60%RH	3.3Vdc	Angus Peng
OB	25deg. C, 60%RH	3.3Vdc	Angus Peng
TPC	25deg. C, 60%RH	3.3Vdc	Angus Peng
PD	25deg. C, 60%RH	3.3Vdc	Angus Peng
AD	25deg. C, 60%RH	3.3Vdc	Zoey Peng
SE<1G	23deg. C, 62%RH	230Vac, 50Hz (System)	Angus Peng
SE≥1G	23deg. C, 62%RH	230Vac, 50Hz (System)	Angus Peng
SSM	25deg. C, 60%RH	3.3Vdc	Angus Peng
RB	23deg. C, 62%RH	3.3Vdc	Zoey Peng

3.3 Description of Support Units


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	DELL	P88G	G1WJL42	NA	Provided by Lab
B.	Test Tool	Realtek	NA	NA	NA	Supplied by client
C.	Adapter	DELL	FA65NE0-00	NA	NA	Provided by Lab

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	DC Cable	1	1.6	No	1	Provided by Lab
2	AC Cable	1	1	No	0	Provided by Lab

Note: The core(s) is(are) originally attached to the cable(s).

3.3.1 Configuration of System under Test

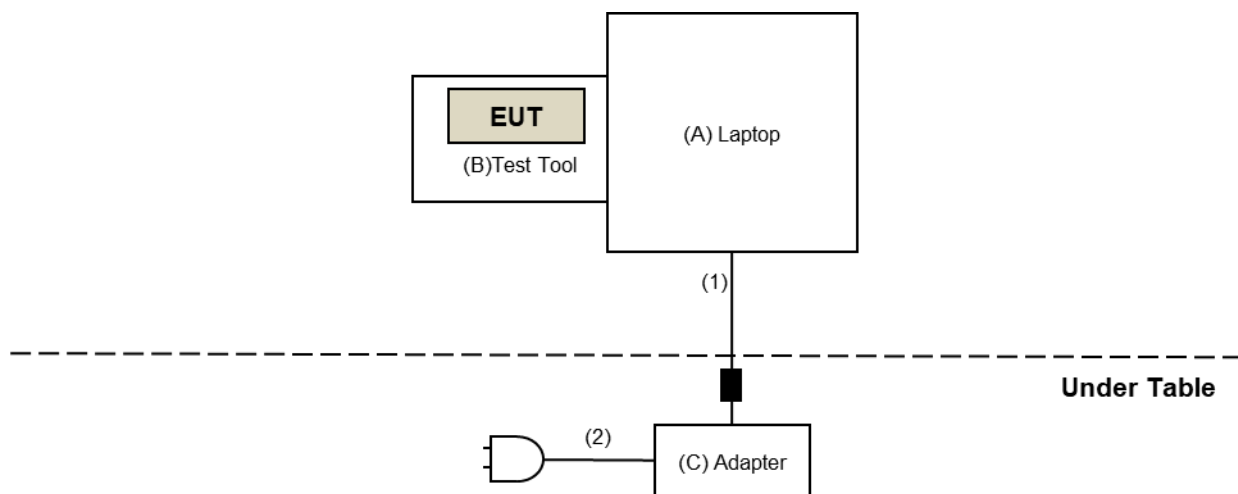

3.4 General Description of Applied Standards

The EUT is a RF Product. According to the specification of the EUT declared by the manufacturer, it must comply with the requirements of the following standard:

EN 301 893 V2.1.1 (2017-05)

All test items have been performed and recorded as per the above standard.

4 Test Procedure and Results

4.1 Carrier Frequencies

4.1.1 Limits of Carrier Frequencies

The actual centre frequency for any given channel shall be maintained within the range $f_c \pm 20$ ppm.

4.1.2 Test Procedures

Refer to EN 301 893 V2.1.1 clause 5.4.2.

4.1.3 Deviation from Test Standard

No deviation

4.1.4 Test Setup

The measurement was performed at normal and extreme environmental conditions. The measurement channels were performed in accordance with EN 301 893 clause 5.3.2. The equipment was configured to operate under its worst case situation with respect to output power. The EUT shall be connected to spectrum analyzer. (In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator.).

4.1.5 Test Results (Mode 1)

802.11a

Test Condition			Carrier Centre Frequencies f_c (MHz)	
			(CH100) 5500 MHz	
			Reading	ppm
$T_{nom}(^{\circ}C)$	25	$V_{nom}(V)$	5500.0085	1.5455
$T_{min}(^{\circ}C)$	-20	$V_{nom}(V)$	5499.9956	-0.8
$T_{max}(^{\circ}C)$	70	$V_{nom}(V)$	5499.9956	-0.8

4.1.6 Test Results (Mode 2)

802.11a

Test Condition			Carrier Centre Frequencies f_c (MHz)	
			(CH140) 5700 MHz	
			Reading	ppm
$T_{nom}(^{\circ}C)$	25	$V_{nom}(V)$	5700.0138	2.4211
$T_{min}(^{\circ}C)$	-20	$V_{nom}(V)$	5699.9998	-0.0351
$T_{max}(^{\circ}C)$	70	$V_{nom}(V)$	5700.0007	0.1228

4.2 Nominal and Occupied Channel Bandwidth Measurement

4.2.1 Limit of Nominal and Occupied Channel Bandwidth Measurement

The Nominal Channel Bandwidth for a single Operating Channel shall be 20 MHz. Alternatively, equipment may implement a lower Nominal Channel Bandwidth with a minimum of 5 MHz, providing they still comply with the Nominal Centre Frequencies defined in clause 4.2.1.

The Occupied Channel Bandwidth shall be between 80 % and 100 % of the Nominal Channel Bandwidth. In case of smart antenna systems (devices with multiple transmit chains) each of the transmit chains shall meet this requirement. The Occupied Channel Bandwidth might change with time/payload. During a Channel Occupancy Time (COT), equipment may operate temporarily with an Occupied Channel Bandwidth of less than 80 % of its Nominal Channel Bandwidth with a minimum of 2 MHz.

4.2.2 Test Procedure

Refer to EN 301 893 V2.1.1 clause 5.4.3

Measurement Method	
☒ Conducted measurement	☐ Radiated measurement

4.2.3 Deviation from Test Standard

No deviation.

4.2.4 Test Setup

The measurement was performed at normal environmental conditions only. The measurement channels were performed in accordance with EN 301 893 clause 5.3.2. The equipment was configured to operate under its worst case situation with respect to output power. (In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator.) Controlling software (RT8852A MP Toolkit V1.0.21) has been activated to set the EUT on specific status.

4.2.5 Test Results (Mode 1)

CDD Mode

802.11a

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)	Minimum limit (MHz)	Maximum limit (MHz)	Pass / Fail
36	5180	16.36	16	20	Pass
100	5500	16.36	16	20	Pass

802.11ax (HE20)

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)	Minimum limit (MHz)	Maximum limit (MHz)	Pass / Fail
64	5320	18.8	16	20	Pass
100	5500	18.84	16	20	Pass

802.11ax (HE40)

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)	Minimum limit (MHz)	Maximum limit (MHz)	Pass / Fail
38	5190	37.52	32	40	Pass
102	5510	37.52	32	40	Pass

802.11ax (HE80)

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)	Minimum limit (MHz)	Maximum limit (MHz)	Pass / Fail
42	5210	76.32	64	80	Pass
122	5610	76.48	64	80	Pass

802.11ax (RU26)

Channel	Channel Frequency (MHz)	RU Configuration	Occupied Bandwidth (MHz)	Minimum limit (MHz)	Maximum limit (MHz)	Pass / Fail
36	5180	26/0	15.88	2	20	Pass
64	5320	26/8	15.84	2	20	Pass
100	5500	26/0	15.88	2	20	Pass
140	5700	26/8	15.84	2	20	Pass

802.11ax (RU52)

Channel	Channel Frequency (MHz)	RU Configuration	Occupied Bandwidth (MHz)	Minimum limit (MHz)	Maximum limit (MHz)	Pass / Fail
36	5180	52/37	15.36	2	20	Pass
64	5320	52/40	15.68	2	20	Pass
100	5500	52/37	15.64	2	20	Pass
140	5700	52/40	15.68	2	20	Pass

802.11ax (RU106)

Channel	Channel Frequency (MHz)	RU Configuration	Occupied Bandwidth (MHz)	Minimum limit (MHz)	Maximum limit (MHz)	Pass / Fail
36	5180	106/53	15.76	2	20	Pass
64	5320	106/54	15.76	2	20	Pass
100	5500	106/53	15.76	2	20	Pass
140	5700	106/54	15.76	2	20	Pass

4.2.6 Test Results (Mode 2)

802.11a

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)	Minimum limit (MHz)	Maximum limit (MHz)	Pass / Fail
36	5180	16.36	16	20	Pass
140	5700	16.36	16	20	Pass

802.11ax (HE20)

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)	Minimum limit (MHz)	Maximum limit (MHz)	Pass / Fail
36	5180	18.8	16	20	Pass
140	5700	18.8	16	20	Pass

802.11ax (HE40)

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)	Minimum limit (MHz)	Maximum limit (MHz)	Pass / Fail
38	5190	37.52	32	40	Pass
102	5510	37.52	32	40	Pass

802.11ax (HE80)

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)	Minimum limit (MHz)	Maximum limit (MHz)	Pass / Fail
58	5290	76.48	64	80	Pass
122	5610	76.48	64	80	Pass

802.11ax (RU26)

Channel	Channel Frequency (MHz)	RU Configuration	Occupied Bandwidth (MHz)	Minimum limit (MHz)	Maximum limit (MHz)	Pass / Fail
36	5180	26/0	16.12	2	20	Pass
64	5320	26/8	15.84	2	20	Pass
100	5500	26/0	15.88	2	20	Pass
140	5700	26/8	16	2	20	Pass

802.11ax (RU52)

Channel	Channel Frequency (MHz)	RU Configuration	Occupied Bandwidth (MHz)	Minimum limit (MHz)	Maximum limit (MHz)	Pass / Fail
36	5180	52/37	15.72	2	20	Pass
64	5320	52/40	15.68	2	20	Pass
100	5500	52/37	15.76	2	20	Pass
140	5700	52/40	15.72	2	20	Pass

802.11ax (RU106)

Channel	Channel Frequency (MHz)	RU Configuration	Occupied Bandwidth (MHz)	Minimum limit (MHz)	Maximum limit (MHz)	Pass / Fail
36	5180	106/53	15.72	2	20	Pass
64	5320	106/54	15.76	2	20	Pass
100	5500	106/53	15.76	2	20	Pass
140	5700	106/54	15.76	2	20	Pass

4.3 RF Output Power and Transmit Power Control (TPC)

4.3.1 Limits of RF output power

Frequency Range (MHz)	Mean e.i.r.p. Limit (dBm)	
	☒ With TPC	☐ Without TPC
5150 to 5350	23	20 / 23 (see note 1)
5470 to 5725	30 (see note 2)	27 (see note 2)

Note 1: The applicable limit is 20 dBm, except for transmissions whose nominal bandwidth falls completely within the band 5 150 MHz to 5 250 MHz, in which case the applicable limit is 23 dBm.

Note 2: Slave devices without a Radar Interference Detection function shall comply with the limits for the band 5 250 MHz to 5 350 MHz.

4.3.2 Limits of RF Output Power at Lowest Power Level

Frequency Range (MHz)	Average EIRP (dBm)
5250 to 5350	17
5470 to 5725	24(see note)

Note: Slave devices without a Radar Interference Detection function shall comply with the limits for the band 5 250 MHz to 5 350 MHz.

4.3.3 Test Procedure

Refer to EN 301 893 V2.1.1 clause 5.4.4

Measurement	
☒ Conducted measurement	☐ Radiated measurement
☒ Option 1: For equipment with continuous transmission capability or for equipment operating (or with the capability to operate) with a constant duty cycle (e.g. Frame Based equipment).	
☐ Option 2: For equipment without continuous transmission capability and operating (or with the capability to operate) in only one sub-band.	
☐ Option 3: For equipment without continuous transmission capability and having simultaneous transmissions in both sub-bands.	

4.3.4 Deviation from Test Standard

No deviation.

4.3.5 Test Setup

The measurements were performed at both normal environmental conditions and at the extremes of the operating temperature range. The measurement channels were performed in accordance with EN 301 893 clause 5.3.2. The equipment was configured to operate under its worst case situation with respect to output power. (In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator.) The RF power as defined in EN 301 893 clause 4.2.3 shall be measured and recorded. Controlling software (RT8852A MP Toolkit V1.0.21) has been activated to set the EUT on specific status.

4.3.6 Test Results for RF Output Power at the Highest Power Level (Mode 1)

CDD Mode

802.11a

Test Condition			Transmitter Power (dBm)			
			(CH36) 5180 MHz	(CH64) 5320 MHz	(CH100) 5500 MHz	(CH140) 5700 MHz
T _{nom} (°C)	25	V _{nom} (V)	21.02	21.01	21.35	21.33
T _{min} (°C)	-20	V _{nom} (V)	20.63	20.58	21.01	21.12
T _{max} (°C)	70	V _{nom} (V)	21.17	21.36	21.61	21.55

802.11ac (VHT20)

Test Condition			Transmitter Power (dBm)			
			(CH36) 5180 MHz	(CH64) 5320 MHz	(CH100) 5500 MHz	(CH140) 5700 MHz
T _{nom} (°C)	25	V _{nom} (V)	21.01	21.10	21.47	21.40
T _{min} (°C)	-20	V _{nom} (V)	20.62	20.67	21.13	21.19
T _{max} (°C)	70	V _{nom} (V)	21.16	21.45	21.73	21.62

802.11ac (VHT40)

Test Condition			Transmitter Power (dBm)			
			(CH38) 5190 MHz	(CH62) 5310 MHz	(CH102) 5510 MHz	(CH134) 5670 MHz
T _{nom} (°C)	25	V _{nom} (V)	22.63	22.55	22.59	22.57
T _{min} (°C)	-20	V _{nom} (V)	22.21	22.26	22.44	22.21
T _{max} (°C)	70	V _{nom} (V)	22.91	22.82	22.92	22.74

802.11ac (VHT80)

Test Condition			Transmitter Power (dBm)			
			(CH42) 5210 MHz	(CH58) 5290 MHz	(CH106) 5530 MHz	(CH122) 5610 MHz
T _{nom} (°C)	25	V _{nom} (V)	22.72	22.60	22.59	22.68
T _{min} (°C)	-20	V _{nom} (V)	22.48	22.42	22.27	22.58
T _{max} (°C)	70	V _{nom} (V)	22.86	22.88	22.72	22.83

802.11ax (HE20)

Test Condition			Transmitter Power (dBm)			
			(CH36) 5180 MHz	(CH64) 5320 MHz	(CH100) 5500 MHz	(CH140) 5700 MHz
T _{nom} (°C)	25	V _{nom} (V)	21.06	21.41	21.49	21.45
T _{min} (°C)	-20	V _{nom} (V)	20.74	21.05	21.22	21.31
T _{max} (°C)	70	V _{nom} (V)	21.14	21.69	21.68	21.60

802.11ax (HE40)

Test Condition			Transmitter Power (dBm)			
			(CH38) 5190 MHz	(CH62) 5310 MHz	(CH102) 5510 MHz	(CH134) 5670 MHz
T _{nom} (°C)	25	V _{nom} (V)	22.79	22.73	22.70	22.68
T _{min} (°C)	-20	V _{nom} (V)	22.41	22.47	22.60	22.40
T _{max} (°C)	70	V _{nom} (V)	22.97	22.90	22.96	22.84

802.11ax (HE80)

Test Condition			Transmitter Power (dBm)			
			(CH42) 5210 MHz	(CH58) 5290 MHz	(CH106) 5530 MHz	(CH122) 5610 MHz
T _{nom} (°C)	25	V _{nom} (V)	22.76	22.74	22.61	22.69
T _{min} (°C)	-20	V _{nom} (V)	22.45	22.49	22.22	22.52
T _{max} (°C)	70	V _{nom} (V)	22.83	22.75	22.67	22.72

802.11ax (RU26)

Test Condition			Transmitter Power (dBm)			
			(CH36) 5180 MHz	(CH64) 5320 MHz	(CH100) 5500 MHz	(CH140) 5700 MHz
RU Configuration			26/0	26/8	26/0	26/8
T _{nom} (°C)	25	V _{nom} (V)	12.27	12.51	12.70	12.84
T _{min} (°C)	-20	V _{nom} (V)	12.24	12.71	12.86	12.81
T _{max} (°C)	70	V _{nom} (V)	12.97	12.82	13.04	13.46

802.11ax (RU52)

Test Condition			Transmitter Power (dBm)			
			(CH36) 5180 MHz	(CH64) 5320 MHz	(CH100) 5500 MHz	(CH140) 5700 MHz
RU Configuration			52/37	52/40	52/37	52/40
T _{nom} (°C)	25	V _{nom} (V)	15.03	14.94	15.20	15.42
T _{min} (°C)	-20	V _{nom} (V)	15.15	15.12	15.24	15.68
T _{max} (°C)	70	V _{nom} (V)	15.45	15.50	15.61	16.05

802.11ax (RU106)

Test Condition			Transmitter Power (dBm)			
			(CH36) 5180 MHz	(CH64) 5320 MHz	(CH100) 5500 MHz	(CH140) 5700 MHz
RU Configuration			106/53	106/54	106/53	106/54
T _{nom} (°C)	25	V _{nom} (V)	18.59	18.69	18.70	18.67
T _{min} (°C)	-20	V _{nom} (V)	18.85	18.69	18.70	18.67
T _{max} (°C)	70	V _{nom} (V)	19.17	18.69	18.70	18.67

Beamforming Mode

802.11ac (VHT20)

Test Condition			Transmitter Power (dBm)			
			(CH36) 5180 MHz	(CH64) 5320 MHz	(CH100) 5500 MHz	(CH140) 5700 MHz
T _{nom} (°C)	25	V _{nom} (V)	21.00	21.06	21.36	21.39
T _{min} (°C)	-20	V _{nom} (V)	20.81	20.93	21.09	21.34
T _{max} (°C)	70	V _{nom} (V)	21.06	21.24	21.39	21.64

802.11ac (VHT40)

Test Condition			Transmitter Power (dBm)			
			(CH38) 5190 MHz	(CH62) 5310 MHz	(CH102) 5510 MHz	(CH134) 5670 MHz
T _{nom} (°C)	25	V _{nom} (V)	22.59	22.54	22.58	22.52
T _{min} (°C)	-20	V _{nom} (V)	22.44	22.45	22.35	22.51
T _{max} (°C)	70	V _{nom} (V)	22.71	22.77	22.69	22.74

802.11ac (VHT80)

Test Condition			Transmitter Power (dBm)			
			(CH42) 5210 MHz	(CH58) 5290 MHz	(CH106) 5530 MHz	(CH122) 5610 MHz
T _{nom} (°C)	25	V _{nom} (V)	22.66	22.52	22.57	22.58
T _{min} (°C)	-20	V _{nom} (V)	22.49	22.41	22.32	22.55
T _{max} (°C)	70	V _{nom} (V)	22.80	22.80	22.70	22.91

802.11ax (HE20)

Test Condition			Transmitter Power (dBm)			
			(CH36) 5180 MHz	(CH64) 5320 MHz	(CH100) 5500 MHz	(CH140) 5700 MHz
T _{nom} (°C)	25	V _{nom} (V)	21.02	21.40	21.45	21.40
T _{min} (°C)	-20	V _{nom} (V)	20.82	21.16	21.30	21.38
T _{max} (°C)	70	V _{nom} (V)	21.18	21.58	21.60	21.48

802.11ax (HE40)

Test Condition			Transmitter Power (dBm)			
			(CH38) 5190 MHz	(CH62) 5310 MHz	(CH102) 5510 MHz	(CH134) 5670 MHz
T _{nom} (°C)	25	V _{nom} (V)	22.75	22.71	22.69	22.60
T _{min} (°C)	-20	V _{nom} (V)	22.59	22.61	22.45	22.58
T _{max} (°C)	70	V _{nom} (V)	22.79	22.89	22.77	22.73

802.11ax (HE80)

Test Condition			Transmitter Power (dBm)			
			(CH42) 5210 MHz	(CH58) 5290 MHz	(CH106) 5530 MHz	(CH122) 5610 MHz
T _{nom} (°C)	25	V _{nom} (V)	22.72	22.68	22.60	22.59
T _{min} (°C)	-20	V _{nom} (V)	22.51	22.53	22.31	22.52
T _{max} (°C)	70	V _{nom} (V)	22.84	22.94	22.71	22.92

4.3.7 Test Results for RF Output Power at the Highest Power Level (Mode 2)

802.11a

Test Condition			Transmitter Power (dBm)			
			(CH36) 5180 MHz	(CH64) 5320 MHz	(CH100) 5500 MHz	(CH140) 5700 MHz
T _{nom} (°C)	25	V _{nom} (V)	21.06	21.02	21.29	21.30
T _{min} (°C)	-20	V _{nom} (V)	20.75	20.77	20.90	21.13
T _{max} (°C)	70	V _{nom} (V)	21.24	21.34	21.46	21.69

802.11ac (VHT20)

Test Condition			Transmitter Power (dBm)			
			(CH36) 5180 MHz	(CH64) 5320 MHz	(CH100) 5500 MHz	(CH140) 5700 MHz
T _{nom} (°C)	25	V _{nom} (V)	21.02	21.01	21.31	21.30
T _{min} (°C)	-20	V _{nom} (V)	20.76	20.81	20.97	21.18
T _{max} (°C)	70	V _{nom} (V)	21.19	21.32	21.47	21.68

802.11ac (VHT40)

Test Condition			Transmitter Power (dBm)			
			(CH38) 5190 MHz	(CH62) 5310 MHz	(CH102) 5510 MHz	(CH134) 5670 MHz
T _{nom} (°C)	25	V _{nom} (V)	22.63	22.59	22.80	22.75
T _{min} (°C)	-20	V _{nom} (V)	22.37	22.39	22.46	22.63
T _{max} (°C)	70	V _{nom} (V)	22.80	22.90	22.90	22.94

802.11ac (VHT80)

Test Condition			Transmitter Power (dBm)			
			(CH42) 5210 MHz	(CH58) 5290 MHz	(CH106) 5530 MHz	(CH122) 5610 MHz
T _{nom} (°C)	25	V _{nom} (V)	22.56	22.52	22.58	22.55
T _{min} (°C)	-20	V _{nom} (V)	22.17	22.36	22.38	22.16
T _{max} (°C)	70	V _{nom} (V)	22.78	22.63	22.83	22.71

802.11ax (HE20)

Test Condition			Transmitter Power (dBm)			
			(CH36) 5180 MHz	(CH64) 5320 MHz	(CH100) 5500 MHz	(CH140) 5700 MHz
T _{nom} (°C)	25	V _{nom} (V)	21.23	21.15	21.47	21.49
T _{min} (°C)	-20	V _{nom} (V)	20.86	21.00	21.15	21.30
T _{max} (°C)	70	V _{nom} (V)	21.39	21.51	21.74	21.72

802.11ax (HE40)

Test Condition			Transmitter Power (dBm)			
			(CH38) 5190 MHz	(CH62) 5310 MHz	(CH102) 5510 MHz	(CH134) 5670 MHz
T _{nom} (°C)	25	V _{nom} (V)	22.71	22.68	22.81	22.78
T _{min} (°C)	-20	V _{nom} (V)	22.30	22.34	22.51	22.49
T _{max} (°C)	70	V _{nom} (V)	22.96	22.89	22.97	22.90

802.11ax (HE80)

Test Condition			Transmitter Power (dBm)			
			(CH42) 5210 MHz	(CH58) 5290 MHz	(CH106) 5530 MHz	(CH122) 5610 MHz
T _{nom} (°C)	25	V _{nom} (V)	22.54	22.55	22.60	22.62
T _{min} (°C)	-20	V _{nom} (V)	22.47	22.24	22.28	22.21
T _{max} (°C)	70	V _{nom} (V)	22.73	22.67	22.66	22.87

802.11ax (RU26)

Test Condition			Transmitter Power (dBm)			
			(CH36) 5180 MHz	(CH64) 5320 MHz	(CH100) 5500 MHz	(CH140) 5700 MHz
RU Configuration			26/0	26/8	26/0	26/8
T _{nom} (°C)	25	V _{nom} (V)	12.66	13.03	12.33	13.08
T _{min} (°C)	-20	V _{nom} (V)	12.85	12.91	12.54	13.09
T _{max} (°C)	70	V _{nom} (V)	13.11	13.37	12.82	13.63

802.11ax (RU52)

Test Condition			Transmitter Power (dBm)			
			(CH36) 5180 MHz	(CH64) 5320 MHz	(CH100) 5500 MHz	(CH140) 5700 MHz
RU Configuration			52/37	52/40	52/37	52/40
T _{nom} (°C)	25	V _{nom} (V)	15.19	15.53	15.47	15.59
T _{min} (°C)	-20	V _{nom} (V)	15.09	15.66	15.56	15.49
T _{max} (°C)	70	V _{nom} (V)	15.76	15.71	15.68	16.08

802.11ax (RU106)

Test Condition			Transmitter Power (dBm)			
			(CH36) 5180 MHz	(CH64) 5320 MHz	(CH100) 5500 MHz	(CH140) 5700 MHz
RU Configuration			106/53	106/54	106/53	106/54
T _{nom} (°C)	25	V _{nom} (V)	18.79	18.65	18.58	18.78
T _{min} (°C)	-20	V _{nom} (V)	18.84	18.53	18.79	18.79
T _{max} (°C)	70	V _{nom} (V)	19.08	18.99	19.07	19.33

4.3.8 Test Results for RF Output Power at the Lowest Power Level (Mode 1)

CDD Mode

802.11a

Test Condition			Transmitter Power (dBm)		
			(CH64) 5320 MHz	(CH100) 5500 MHz	(CH140) 5700 MHz
$T_{nom}(^{\circ}C)$	25	$V_{nom}(V)$	16.01	16.35	16.33
$T_{min}(^{\circ}C)$	-20	$V_{nom}(V)$	15.58	16.01	16.12
$T_{max}(^{\circ}C)$	70	$V_{nom}(V)$	16.36	16.61	16.55

802.11ac (VHT20)

Test Condition			Transmitter Power (dBm)		
			(CH64) 5320 MHz	(CH100) 5500 MHz	(CH140) 5700 MHz
$T_{nom}(^{\circ}C)$	25	$V_{nom}(V)$	16.10	16.47	16.40
$T_{min}(^{\circ}C)$	-20	$V_{nom}(V)$	15.67	16.13	16.19
$T_{max}(^{\circ}C)$	70	$V_{nom}(V)$	16.45	16.73	16.62

802.11ac (VHT40)

Test Condition			Transmitter Power (dBm)		
			(CH62) 5310 MHz	(CH102) 5510 MHz	(CH134) 5670 MHz
$T_{nom}(^{\circ}C)$	25	$V_{nom}(V)$	16.55	16.59	16.57
$T_{min}(^{\circ}C)$	-20	$V_{nom}(V)$	16.26	16.44	16.21
$T_{max}(^{\circ}C)$	70	$V_{nom}(V)$	16.82	16.92	16.74

802.11ac (VHT80)

Test Condition			Transmitter Power (dBm)		
			(CH58) 5290 MHz	(CH106) 5530 MHz	(CH122) 5610 MHz
$T_{nom}(^{\circ}C)$	25	$V_{nom}(V)$	16.60	16.59	16.68
$T_{min}(^{\circ}C)$	-20	$V_{nom}(V)$	16.42	16.27	16.58
$T_{max}(^{\circ}C)$	70	$V_{nom}(V)$	16.88	16.72	16.83

802.11ax (HE20)

Test Condition			Transmitter Power (dBm)		
			(CH64) 5320 MHz	(CH100) 5500 MHz	(CH140) 5700 MHz
T _{nom} (°C)	25	V _{nom} (V)	16.41	16.49	16.45
T _{min} (°C)	-20	V _{nom} (V)	16.05	16.22	16.31
T _{max} (°C)	70	V _{nom} (V)	16.69	16.68	16.60

802.11ax (HE40)

Test Condition			Transmitter Power (dBm)		
			(CH62) 5310 MHz	(CH102) 5510 MHz	(CH134) 5670 MHz
T _{nom} (°C)	25	V _{nom} (V)	16.73	16.70	16.68
T _{min} (°C)	-20	V _{nom} (V)	16.47	16.60	16.40
T _{max} (°C)	70	V _{nom} (V)	16.90	16.96	16.84

802.11ax (HE80)

Test Condition			Transmitter Power (dBm)		
			(CH58) 5290 MHz	(CH106) 5530 MHz	(CH122) 5610 MHz
T _{nom} (°C)	25	V _{nom} (V)	16.74	16.61	16.69
T _{min} (°C)	-20	V _{nom} (V)	16.49	16.22	16.52
T _{max} (°C)	70	V _{nom} (V)	16.75	16.67	16.72

4.3.9 Test Results for RF Output Power at the Lowest Power Level (Mode 2)

802.11a

Test Condition			Transmitter Power (dBm)		
			(CH64) 5320 MHz	(CH100) 5500 MHz	(CH140) 5700 MHz
T _{nom} (°C)	25	V _{nom} (V)	16.02	16.29	16.30
T _{min} (°C)	-20	V _{nom} (V)	15.77	15.90	16.13
T _{max} (°C)	70	V _{nom} (V)	16.34	16.46	16.69

802.11ac (VHT20)

Test Condition			Transmitter Power (dBm)		
			(CH64) 5320 MHz	(CH100) 5500 MHz	(CH140) 5700 MHz
T _{nom} (°C)	25	V _{nom} (V)	16.01	16.31	16.30
T _{min} (°C)	-20	V _{nom} (V)	15.81	15.97	16.18
T _{max} (°C)	70	V _{nom} (V)	16.32	16.47	16.68

802.11ac (VHT40)

Test Condition			Transmitter Power (dBm)		
			(CH62) 5310 MHz	(CH102) 5510 MHz	(CH134) 5670 MHz
T _{nom} (°C)	25	V _{nom} (V)	16.59	16.80	16.75
T _{min} (°C)	-20	V _{nom} (V)	16.39	16.46	16.63
T _{max} (°C)	70	V _{nom} (V)	16.90	16.90	16.94

802.11ac (VHT80)

Test Condition			Transmitter Power (dBm)		
			(CH58) 5290 MHz	(CH106) 5530 MHz	(CH122) 5610 MHz
T _{nom} (°C)	25	V _{nom} (V)	16.52	16.58	16.55
T _{min} (°C)	-20	V _{nom} (V)	16.36	16.38	16.16
T _{max} (°C)	70	V _{nom} (V)	16.63	16.83	16.71

802.11ax (HE20)

Test Condition			Transmitter Power (dBm)		
			(CH64) 5320 MHz	(CH100) 5500 MHz	(CH140) 5700 MHz
T _{nom} (°C)	25	V _{nom} (V)	16.15	16.47	16.49
T _{min} (°C)	-20	V _{nom} (V)	16.00	16.15	16.30
T _{max} (°C)	70	V _{nom} (V)	16.51	16.74	16.72

802.11ax (HE40)

Test Condition			Transmitter Power (dBm)		
			(CH62) 5310 MHz	(CH102) 5510 MHz	(CH134) 5670 MHz
T _{nom} (°C)	25	V _{nom} (V)	16.68	16.81	16.78
T _{min} (°C)	-20	V _{nom} (V)	16.34	16.51	16.49
T _{max} (°C)	70	V _{nom} (V)	16.89	16.97	16.90

802.11ax (HE80)

Test Condition			Transmitter Power (dBm)		
			(CH58) 5290 MHz	(CH106) 5530 MHz	(CH122) 5610 MHz
T _{nom} (°C)	25	V _{nom} (V)	16.55	16.60	16.62
T _{min} (°C)	-20	V _{nom} (V)	16.24	16.28	16.21
T _{max} (°C)	70	V _{nom} (V)	16.67	16.66	16.87

4.4 Power Density

4.4.1 Limit of Power Density

Frequency Band (MHz)	Mean e.i.r.p. Density Limit (dBm/MHz)	
	☒ With TPC	☐ Without TPC
5150 to 5350	10	7 / 10 (see note 1)
5470 to 5725	17 (see note 2)	14 (see note 2)

Note 1: The applicable limit is 7 dBm/MHz, except for transmissions whose nominal bandwidth falls completely within the band 5 150 MHz to 5 250 MHz, in which case the applicable limit is 10 dBm/MHz.

Note 2: Slave devices without a Radar Interference Detection function shall comply with the limits for the band 5 250 MHz to 5 350 MHz.

4.4.2 Test Procedure

Refer to EN 301 893 V2.1.1 clause 5.4.4

Measurement	
☒ Conducted measurement	☐ Radiated measurement
☒ Option 1: For equipment with continuous transmission capability or for equipment operating (or with the capability to operate) with a constant duty cycle (e.g. Frame Based equipment)	
☐ Option 2: For equipment without continuous transmission capability and without the capability to transmit with a constant duty cycle	

4.4.3 Deviation from Test Standard

No deviation.

4.4.4 Test Setup

The measurement was performed at normal environmental conditions only. The measurement channels were performed in accordance with EN 301 893 clause 5.3.2. The equipment was configured to operate under its worst case situation with respect to output power. (In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator.). Controlling software (RT8852A MP Toolkit V1.0.21) has been activated to set the EUT on specific status.

4.4.5 Test Results (Mode 1)

CDD Mode

802.11a

Channel Number	Channel Frequency (MHz)	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass / Fail
36	5180	9.84	10	Pass
64	5320	9.66	10	Pass
100	5500	9.94	10	Pass
140	5700	9.79	10	Pass

802.11ac (VHT20)

Channel Number	Channel Frequency (MHz)	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass / Fail
36	5180	9.65	10	Pass
64	5320	9.76	10	Pass
100	5500	9.96	10	Pass
140	5700	9.79	10	Pass

802.11ac (VHT40)

Channel Number	Channel Frequency (MHz)	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass / Fail
38	5190	8.18	10	Pass
62	5310	8.51	10	Pass
102	5510	8.07	10	Pass
134	5670	8.29	10	Pass

802.11ac (VHT80)

Channel Number	Channel Frequency (MHz)	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass / Fail
42	5210	5.50	10	Pass
58	5290	5.34	10	Pass
106	5530	5.21	10	Pass
122	5610	5.18	10	Pass

802.11ax (HE20)

Channel Number	Channel Frequency (MHz)	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass / Fail
36	5180	9.67	10	Pass
64	5320	9.81	10	Pass
100	5500	9.64	10	Pass
140	5700	9.54	10	Pass

802.11ax (HE40)

Channel Number	Channel Frequency (MHz)	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass / Fail
38	5190	8.23	10	Pass
62	5310	8.26	10	Pass
102	5510	7.96	10	Pass
134	5670	7.95	10	Pass

802.11ax (HE80)

Channel Number	Channel Frequency (MHz)	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass / Fail
42	5210	5.12	10	Pass
58	5290	5.07	10	Pass
106	5530	4.96	10	Pass
122	5610	4.98	10	Pass

802.11ax (RU26)

Channel Number	Channel Frequency (MHz)	RU Configuration	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass / Fail
36	5180	26/0	9.29	10	Pass
64	5320	26/8	9.38	10	Pass
100	5500	26/0	9.44	10	Pass
140	5700	26/8	9.55	10	Pass

802.11ax (RU52)

Channel Number	Channel Frequency (MHz)	RU Configuration	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass / Fail
36	5180	52/37	9.95	10	Pass
64	5320	52/40	9.47	10	Pass
100	5500	52/37	9.95	10	Pass
140	5700	52/40	9.72	10	Pass

802.11ax (RU106)

Channel Number	Channel Frequency (MHz)	RU Configuration	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass / Fail
36	5180	106/53	9.85	10	Pass
64	5320	106/54	9.93	10	Pass
100	5500	106/53	9.91	10	Pass
140	5700	106/54	9.75	10	Pass

Beamforming Mode

802.11ac (VHT20)

Channel Number	Channel Frequency (MHz)	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass / Fail
36	5180	9.64	10	Pass
64	5320	9.75	10	Pass
100	5500	9.94	10	Pass
140	5700	9.78	10	Pass

802.11ac (VHT40)

Channel Number	Channel Frequency (MHz)	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass / Fail
38	5190	8.17	10	Pass
62	5310	8.49	10	Pass
102	5510	8.06	10	Pass
134	5670	8.08	10	Pass

802.11ac (VHT80)

Channel Number	Channel Frequency (MHz)	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass / Fail
42	5210	5.48	10	Pass
58	5290	5.31	10	Pass
106	5530	5.19	10	Pass
122	5610	5.16	10	Pass

802.11ax (HE20)

Channel Number	Channel Frequency (MHz)	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass / Fail
36	5180	9.73	10	Pass
64	5320	9.79	10	Pass
100	5500	9.62	10	Pass
140	5700	9.53	10	Pass

802.11ax (HE40)

Channel Number	Channel Frequency (MHz)	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass / Fail
38	5190	8.21	10	Pass
62	5310	8.24	10	Pass
102	5510	7.95	10	Pass
134	5670	7.94	10	Pass

802.11ax (HE80)

Channel Number	Channel Frequency (MHz)	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass / Fail
42	5210	5.08	10	Pass
58	5290	5.05	10	Pass
106	5530	4.87	10	Pass
122	5610	4.96	10	Pass

4.4.6 Test Results (Mode 2)

802.11a

Channel Number	Channel Frequency (MHz)	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass / Fail
36	5180	9.90	10	Pass
64	5320	9.82	10	Pass
100	5500	9.88	10	Pass
140	5700	9.69	10	Pass

802.11ac (VHT20)

Channel Number	Channel Frequency (MHz)	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass / Fail
36	5180	9.74	10	Pass
64	5320	9.57	10	Pass
100	5500	9.55	10	Pass
140	5700	9.47	10	Pass

802.11ac (VHT40)

Channel Number	Channel Frequency (MHz)	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass / Fail
38	5190	8.64	10	Pass
62	5310	8.44	10	Pass
102	5510	8.43	10	Pass
134	5670	8.65	10	Pass

802.11ac (VHT80)

Channel Number	Channel Frequency (MHz)	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass / Fail
42	5210	5.48	10	Pass
58	5290	5.33	10	Pass
106	5530	5.21	10	Pass
122	5610	5.24	10	Pass

802.11ax (HE20)

Channel Number	Channel Frequency (MHz)	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass / Fail
36	5180	9.90	10	Pass
64	5320	9.70	10	Pass
100	5500	9.73	10	Pass
140	5700	9.52	10	Pass

802.11ax (HE40)

Channel Number	Channel Frequency (MHz)	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass / Fail
38	5190	8.24	10	Pass
62	5310	8.18	10	Pass
102	5510	7.96	10	Pass
134	5670	8.00	10	Pass

802.11ax (HE80)

Channel Number	Channel Frequency (MHz)	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass / Fail
42	5210	5.29	10	Pass
58	5290	5.24	10	Pass
106	5530	5.29	10	Pass
122	5610	5.29	10	Pass

802.11ax (RU26)

Channel Number	Channel Frequency (MHz)	RU Configuration	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass / Fail
36	5180	26/0	9.69	10	Pass
64	5320	26/8	9.85	10	Pass
100	5500	26/0	9.54	10	Pass
140	5700	26/8	9.79	10	Pass

802.11ax (RU52)

Channel Number	Channel Frequency (MHz)	RU Configuration	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass / Fail
36	5180	52/37	9.84	10	Pass
64	5320	52/40	9.87	10	Pass
100	5500	52/37	9.65	10	Pass
140	5700	52/40	9.62	10	Pass

802.11ax (RU106)

Channel Number	Channel Frequency (MHz)	RU Configuration	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass / Fail
36	5180	106/53	9.97	10	Pass
64	5320	106/54	9.92	10	Pass
100	5500	106/53	9.78	10	Pass
140	5700	106/54	9.78	10	Pass

4.5 Transmitter Unwanted Emissions outside the 5 GHz RLAN Bands

4.5.1 Limits of Transmitter Unwanted Emission outside the 5 GHz RLAN Bands

Frequency Range (MHz)	Maximum power, ERP (dBm)	Bandwidth (kHz)
30 to 47	-36	100
47 to 74	-54	100
74 to 87.5	-36	100
87.5 to 118	-54	100
118 to 174	-36	100
174 to 230	-54	100
230 to 470	-36	100
470 to 862	-54	100
862 to 1000	-36	100
Frequency Range (GHz)	Maximum power, EIRP (dBm)	Bandwidth (MHz)
1 to 26	-30	1

4.5.2 Test Procedure

Refer to EN 301 893 V2.1.1 clause 5.4.5

Measurement	
☐ Conducted measurement	☒ Radiated measurement
<u>For Conducted measurement:</u> The level of unwanted emissions shall be measured as their power in a specified load (conducted spurious emissions) and their effective radiated power when radiated by the cabinet or structure of the equipment with the antenna connector(s) terminated by a specified load (cabinet radiation). <u>Conducted measurement (For equipment with multiple transmit chains):</u> ☐ Option 1: The results for each of the transmit chains for the corresponding 1 MHz segments shall be added and compared with the limits. ☐ Option 2: The results for each of the transmit chains shall be individually compared with the limits after these limits have been reduced by $10 \times \log_{10} (T_{CH})$ (number of active transmit chains).	

4.5.3 Deviation from Test Standard

No deviation

4.5.4 Test Setup

1. For the actual test configuration, please refer to the related Item in this test report (Photographs of the Test Configuration).
2. The measurement was performed at normal environmental conditions only. Controlling software (RT8852A MP Toolkit V1.0.21) has been activated to set the EUT on specific status.
3. The equipment was configured to operate under its worst case situation with respect to output power.
4. The measurement channels were performed in accordance with EN 301 893 clause 5.3.2.

4.5.5 Test Results (Mode 1)

Dipole Antenna

Below 1GHz worst-Case Data:

802.11ax (HE40)

SPURIOUS EMISSION FREQUENCY RANGE	30MHz ~ 1GHz	OPERATING CHANNEL	102
--	--------------	------------------------------	-----

Spurious Emission Level				
Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
47.95	V	-66.29	-54.00	-12.29
62.45	V	-58.36	-54.00	-4.36
99.65	H	-63.96	-54.00	-9.96
99.65	V	-61.30	-54.00	-7.30
199.15	H	-63.21	-54.00	-9.21
298.80	H	-47.58	-36.00	-11.58
499.85	H	-66.83	-54.00	-12.83
563.00	V	-70.99	-54.00	-16.99
599.75	H	-66.41	-54.00	-12.41
600.00	V	-66.41	-54.00	-12.41
622.40	H	-64.31	-54.00	-10.31
624.25	V	-65.93	-54.00	-11.93
666.45	H	-62.30	-54.00	-8.30
666.45	V	-64.06	-54.00	-10.06
697.00	V	-60.94	-54.00	-6.94
699.80	H	-58.24	-54.00	-4.24
726.95	V	-66.71	-54.00	-12.71
733.60	H	-66.11	-54.00	-12.11
755.50	V	-63.50	-54.00	-9.50
809.00	H	-65.86	-54.00	-11.86

Above 1GHz worst-Case Data:

802.11ax (HE40)

SPURIOUS EMISSION FREQUENCY RANGE	1GHz ~ 26GHz	OPERATING CHANNEL	38, 102
--	--------------	------------------------------	---------

Spurious Emission Level					
Channel	Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
38	10380.00	H	-52.15	-30.00	-22.15
	10380.00	V	-51.41	-30.00	-21.41
	15560.00	V	-45.60	-30.00	-15.60
	15573.00	H	-45.45	-30.00	-15.45
	20760.00	H	-53.15	-30.00	-23.15
	20760.00	V	-53.27	-30.00	-23.27
102	11020.00	H	-50.02	-30.00	-20.02
	11020.00	V	-52.10	-30.00	-22.10
	16520.00	H	-45.56	-30.00	-15.56
	16531.00	V	-43.47	-30.00	-13.47
	22040.00	H	-54.40	-30.00	-24.40
	22040.00	V	-53.11	-30.00	-23.11

802.11ax (RU26)

SPURIOUS EMISSION FREQUENCY RANGE	1GHz ~ 26GHz	OPERATING CHANNEL	36
		RU CONFIGURATION	26/0

SPURIOUS EMISSION LEVEL					
Channel	Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
36	10343.60	H	-51.40	-30.00	-21.40
	10343.60	V	-46.66	-30.00	-16.66
	15513.72	H	-43.39	-30.00	-13.39
	15515.13	V	-36.74	-30.00	-6.74
	20686.40	H	-54.79	-30.00	-24.79
	20686.40	V	-53.70	-30.00	-23.70

SPURIOUS EMISSION FREQUENCY RANGE	1GHz ~ 26GHz	OPERATING CHANNEL	100
		RU CONFIGURATION	26/0

SPURIOUS EMISSION LEVEL					
Channel	Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
100	10982.70	H	-47.04	-30.00	-17.04
	10982.70	V	-48.19	-30.00	-18.19
	16474.53	H	-44.20	-30.00	-14.20
	16475.55	V	-36.00	-30.00	-6.00
	21968.40	H	-54.45	-30.00	-24.45
	21968.40	V	-53.34	-30.00	-23.34

PIFA Antenna

Below 1GHz worst-Case Data:

802.11ax (HE40)

SPURIOUS EMISSION FREQUENCY RANGE	30MHz ~ 1GHz	OPERATING CHANNEL	102
--	--------------	------------------------------	-----

Spurious Emission Level				
Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
99.60	V	-60.12	-54.00	-6.12
99.95	H	-63.77	-54.00	-9.77
199.20	H	-62.50	-54.00	-8.50
199.90	V	-65.78	-54.00	-11.78
298.75	H	-47.22	-36.00	-11.22
499.80	V	-66.90	-54.00	-12.90
528.00	V	-68.56	-54.00	-14.56
569.80	V	-68.21	-54.00	-14.21
600.00	V	-65.36	-54.00	-11.36
622.35	H	-63.91	-54.00	-9.91
663.85	V	-64.19	-54.00	-10.19
666.45	H	-62.03	-54.00	-8.03
697.00	V	-61.34	-54.00	-7.34
697.05	H	-58.20	-54.00	-4.20
709.35	H	-64.69	-54.00	-10.69
767.85	H	-64.52	-54.00	-10.52
770.10	V	-64.65	-54.00	-10.65
782.25	V	-65.26	-54.00	-11.26
785.00	H	-63.30	-54.00	-9.30
813.90	H	-65.33	-54.00	-11.33

Above 1GHz worst-Case Data:

802.11ax (HE40)

SPURIOUS EMISSION FREQUENCY RANGE	1GHz ~ 26GHz	OPERATING CHANNEL	38, 102
--	--------------	------------------------------	---------

Spurious Emission Level					
Channel	Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
38	10380.00	H	-50.59	-30.00	-20.59
	10380.00	V	-50.48	-30.00	-20.48
	15580.00	H	-37.76	-30.00	-7.76
	15581.00	V	-39.76	-30.00	-9.76
	20760.00	H	-51.84	-30.00	-21.84
	20760.00	V	-53.33	-30.00	-23.33
102	11020.00	H	-50.72	-30.00	-20.72
	11026.00	V	-46.48	-30.00	-16.48
	16535.00	H	-40.78	-30.00	-10.78
	16538.00	V	-44.07	-30.00	-14.07
	22040.00	H	-53.26	-30.00	-23.26
	22040.00	V	-52.39	-30.00	-22.39

802.11ax (RU26)

SPURIOUS EMISSION FREQUENCY RANGE	1GHz ~ 26GHz	OPERATING CHANNEL	36
		RU CONFIGURATION	26/0

SPURIOUS EMISSION LEVEL					
Channel	Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
36	10342.00	H	-50.25	-30.00	-20.25
	10342.27	V	-47.08	-30.00	-17.08
	15513.60	V	-41.48	-30.00	-11.48
	15514.11	H	-43.10	-30.00	-13.10
	20686.40	H	-53.90	-30.00	-23.90
	20686.40	V	-53.94	-30.00	-23.94

SPURIOUS EMISSION FREQUENCY RANGE	1GHz ~ 26GHz	OPERATING CHANNEL	100
		RU CONFIGURATION	26/0

SPURIOUS EMISSION LEVEL					
Channel	Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
100	10982.72	V	-45.75	-30.00	-15.75
	10984.00	H	-48.09	-30.00	-18.09
	16474.91	V	-43.68	-30.00	-13.68
	16475.17	H	-45.70	-30.00	-15.70
	21968.40	H	-52.65	-30.00	-22.65
	21968.40	V	-53.71	-30.00	-23.71

4.5.6 Test Results (Mode 2)

Dipole Antenna

Below 1GHz worst-Case Data:

802.11ax (HE40)

SPURIOUS EMISSION FREQUENCY RANGE	30MHz ~ 1GHz	OPERATING CHANNEL	102
--	--------------	------------------------------	-----

Spurious Emission Level				
Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
73.70	H	-67.41	-54.00	-13.41
94.50	V	-67.78	-54.00	-13.78
99.60	V	-60.26	-54.00	-6.26
99.95	H	-64.01	-54.00	-10.01
199.20	H	-61.96	-54.00	-7.96
199.20	V	-66.73	-54.00	-12.73
298.75	H	-47.41	-36.00	-11.41
497.90	V	-67.25	-54.00	-13.25
497.95	H	-65.15	-54.00	-11.15
600.00	H	-65.62	-54.00	-11.62
609.15	V	-65.06	-54.00	-11.06
624.85	H	-64.01	-54.00	-10.01
663.85	V	-64.13	-54.00	-10.13
663.90	H	-61.25	-54.00	-7.25
697.05	V	-61.83	-54.00	-7.83
699.80	H	-57.94	-54.00	-3.94
721.10	V	-67.53	-54.00	-13.53
761.70	V	-64.40	-54.00	-10.40
778.25	V	-65.70	-54.00	-11.70
811.95	H	-63.98	-54.00	-9.98

Above 1GHz worst-Case Data:

802.11ax (HE40)

SPURIOUS EMISSION FREQUENCY RANGE	1GHz ~ 26GHz	OPERATING CHANNEL	38, 102
--	--------------	------------------------------	---------

Spurious Emission Level					
Channel	Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
38	10380.00	H	-50.15	-30.00	-20.15
	10380.00	V	-51.59	-30.00	-21.59
	15570.00	H	-52.08	-30.00	-22.08
	15570.00	V	-52.19	-30.00	-22.19
	20760.00	H	-52.24	-30.00	-22.24
	20760.00	V	-53.36	-30.00	-23.36
102	11020.00	H	-50.33	-30.00	-20.33
	11020.00	V	-50.82	-30.00	-20.82
	16530.00	H	-51.92	-30.00	-21.92
	16530.00	V	-50.42	-30.00	-20.42
	22040.00	H	-53.34	-30.00	-23.34
	22040.00	V	-53.67	-30.00	-23.67

802.11ax (RU26)

SPURIOUS EMISSION FREQUENCY RANGE	1GHz ~ 26GHz	OPERATING CHANNEL	36
		RU CONFIGURATION	26/0

Spurious Emission Level					
Channel	Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
36	10342.70	H	-50.89	-30.00	-20.89
	10342.87	V	-45.87	-30.00	-15.87
	15514.23	V	-44.39	-30.00	-14.39
	15514.36	H	-45.04	-30.00	-15.04
	20686.40	H	-53.29	-30.00	-23.29
	20686.40	V	-54.11	-30.00	-24.11

SPURIOUS EMISSION FREQUENCY RANGE	1GHz ~ 26GHz	OPERATING CHANNEL	100
		RU CONFIGURATION	26/0

Spurious Emission Level					
Channel	Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
100	10982.70	H	-49.87	-30.00	-19.87
	10982.70	V	-49.13	-30.00	-19.13
	16474.79	V	-44.08	-30.00	-14.08
	16475.17	H	-43.79	-30.00	-13.79
	21968.40	H	-53.68	-30.00	-23.68
	21968.40	V	-53.56	-30.00	-23.56

PIFA Antenna

Below 1GHz worst-Case Data:

802.11ax (HE40)

SPURIOUS EMISSION FREQUENCY RANGE	30MHz ~ 1GHz	OPERATING CHANNEL	102
--	--------------	------------------------------	-----

Spurious Emission Level				
Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
55.90	V	-57.62	-54.00	-3.62
99.60	V	-60.46	-54.00	-6.46
99.90	H	-63.07	-54.00	-9.07
199.20	V	-65.71	-54.00	-11.71
199.90	H	-63.15	-54.00	-9.15
528.00	V	-69.08	-54.00	-15.08
537.40	H	-68.80	-54.00	-14.80
576.40	H	-68.17	-54.00	-14.17
624.85	V	-65.82	-54.00	-11.82
666.45	V	-63.65	-54.00	-9.65
666.50	H	-62.10	-54.00	-8.10
697.05	V	-60.57	-54.00	-6.57
699.75	H	-57.89	-54.00	-3.89
737.15	V	-61.54	-54.00	-7.54
740.90	H	-63.96	-54.00	-9.96
753.65	V	-64.60	-54.00	-10.60
768.65	H	-63.30	-54.00	-9.30
781.00	V	-65.22	-54.00	-11.22
789.40	H	-59.09	-54.00	-5.09
832.55	H	-64.71	-54.00	-10.71

Above 1GHz worst-Case Data:

802.11ax (HE40)

SPURIOUS EMISSION FREQUENCY RANGE	1GHz ~ 26GHz	OPERATING CHANNEL	38, 102
--	--------------	------------------------------	---------

Spurious Emission Level					
Channel	Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
38	10380.00	H	-51.28	-30.00	-21.28
	10380.00	V	-50.23	-30.00	-20.23
	15570.00	H	-51.10	-30.00	-21.10
	15570.00	V	-52.21	-30.00	-22.21
	20760.00	H	-53.60	-30.00	-23.60
	20760.00	V	-52.70	-30.00	-22.70
102	11020.00	H	-51.22	-30.00	-21.22
	11020.00	V	-50.26	-30.00	-20.26
	16530.00	H	-50.58	-30.00	-20.58
	16530.00	V	-52.35	-30.00	-22.35
	22040.00	H	-53.08	-30.00	-23.08
	22040.00	V	-51.92	-30.00	-21.92

802.11ax (RU26)

SPURIOUS EMISSION FREQUENCY RANGE	1GHz ~ 26GHz	OPERATING CHANNEL	36
		RU CONFIGURATION	26/0

Spurious Emission Level					
Channel	Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
36	10342.87	H	-50.43	-30.00	-20.43
	10342.87	V	-45.95	-30.00	-15.95
	15513.85	H	-40.87	-30.00	-10.87
	15515.51	V	-44.49	-30.00	-14.49
	20686.40	H	-53.04	-30.00	-23.04
	20686.40	V	-53.52	-30.00	-23.52


SPURIOUS EMISSION FREQUENCY RANGE	1GHz ~ 26GHz	OPERATING CHANNEL	100
		RU CONFIGURATION	26/0

Spurious Emission Level					
Channel	Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
100	10982.72	H	-45.77	-30.00	-15.77
	10982.72	V	-47.67	-30.00	-17.67
	16473.51	V	-45.48	-30.00	-15.48
	16474.53	H	-45.89	-30.00	-15.89
	21968.40	H	-52.82	-30.00	-22.82
	21968.40	V	-53.86	-30.00	-23.86

4.6 Transmitter Unwanted Emissions within the 5 GHz RLAN Bands

4.6.1 Limits of Transmitter Unwanted Emissions within the 5 GHz RLAN Bands

The average level of the transmitted spectrum shall not exceed the limits given in the following figure:

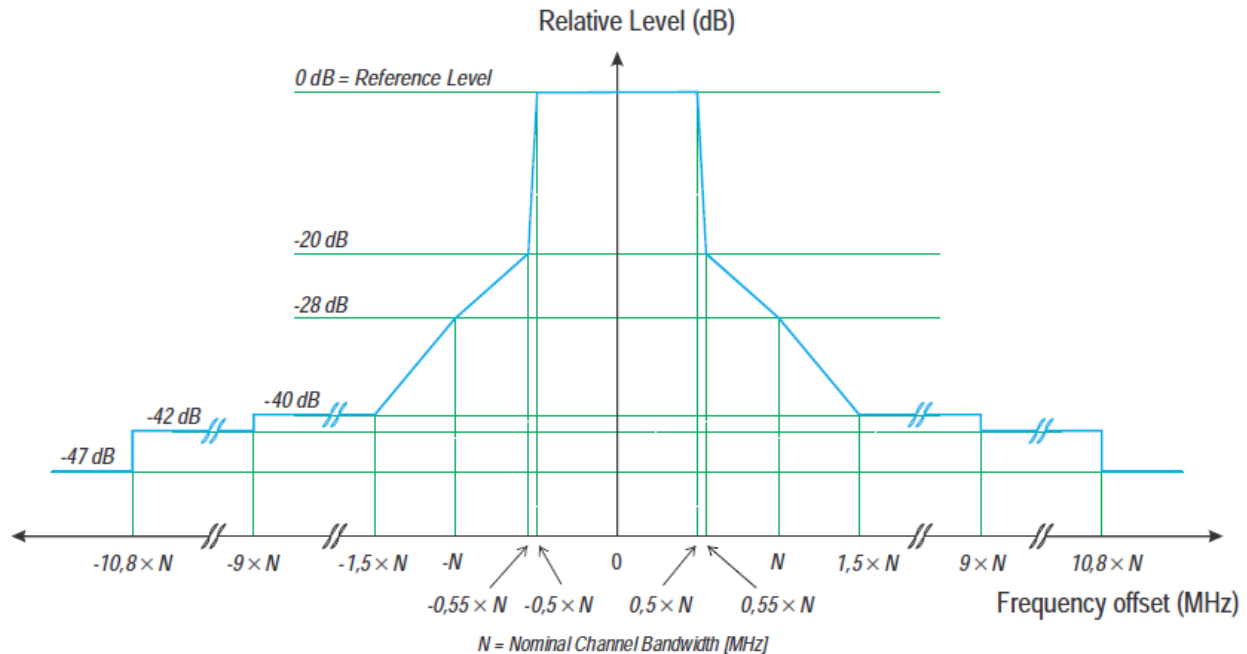

The mean Power Density (measured with a 1 MHz measurement bandwidth) of transmitter unwanted emissions within the 5 GHz RLAN bands shall not exceed the limit of the mask provided above figure or an absolute level of -30 dBm /MHz , whichever is greater.

4.6.2 Test Procedure

Refer to EN 301 893 V2.1.1 clause 5.4.6

Measurement Method	
☒ Conducted measurement	☐ Radiated measurement
☐ Option 1: For equipment with continuous transmission capability	
☒ Option 2: For equipment without continuous transmission capability	

4.6.3 Deviation from Test Standard

No deviation.


4.6.4 Test Setup

The measurement was performed at normal environmental conditions only. The measurement channels were performed in accordance with EN 301 893 clause 5.3.2. The equipment was configured to operate under its worst case situation with respect to output power. (In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator.). Controlling software (RT8852A MP Toolkit V1.0.21) has been activated to set the EUT on specific status.


4.6.5 Test Results for unwanted emissions within the 5 GHz RLAN bands (Mode 1)

CDD Mode






802.11a

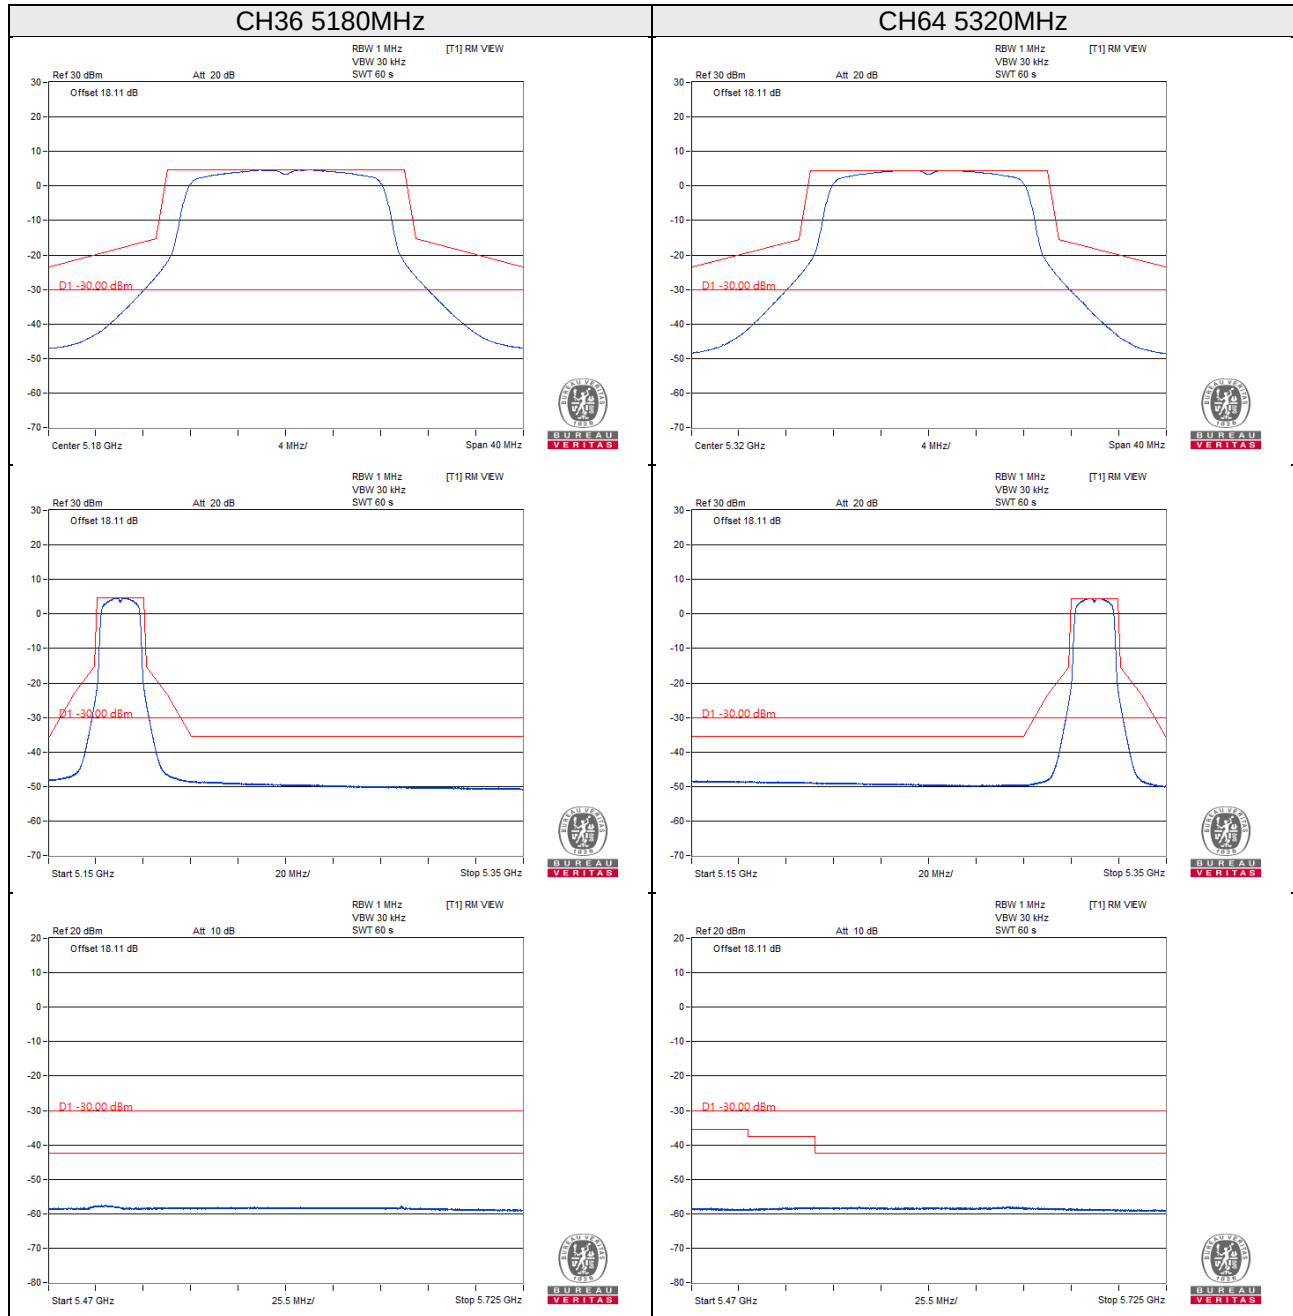

CH100 5500MHz



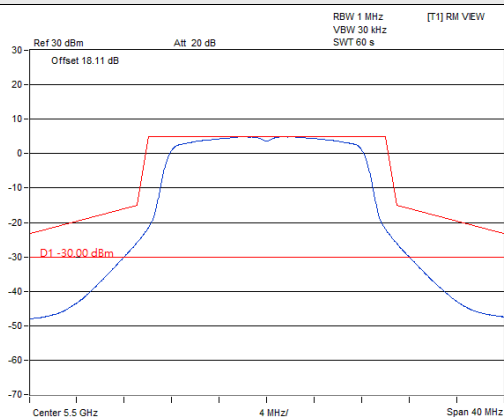


CH140 5700MHz

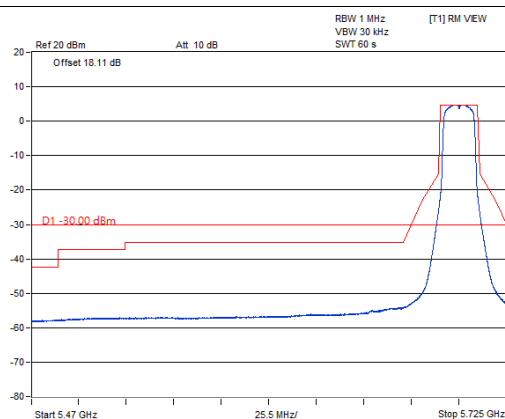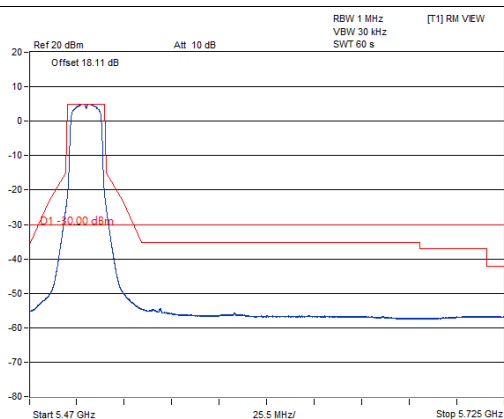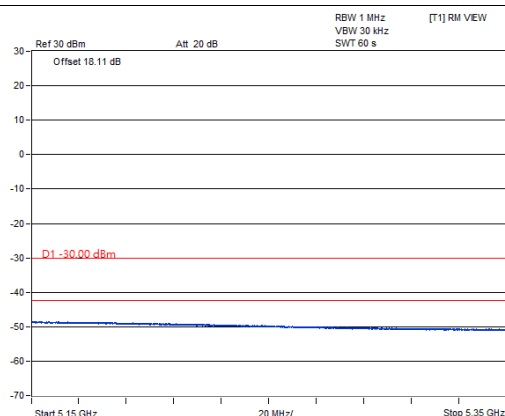
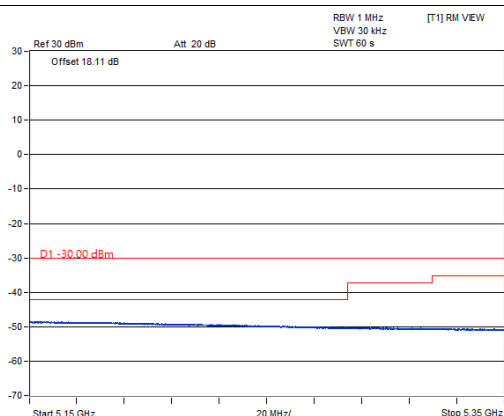
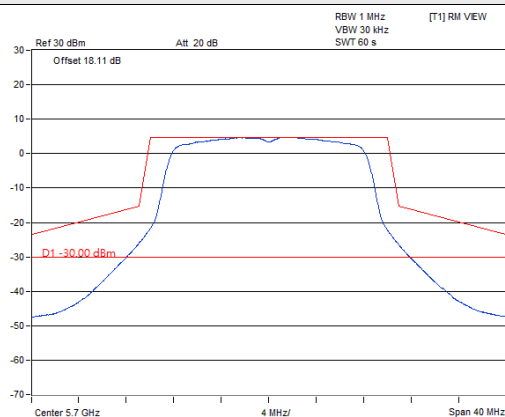


802.11ax (HE20)


CH36 5180MHz

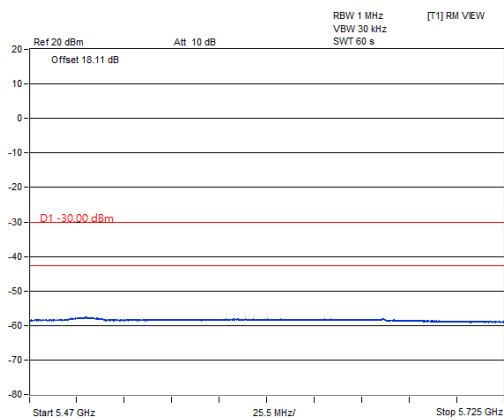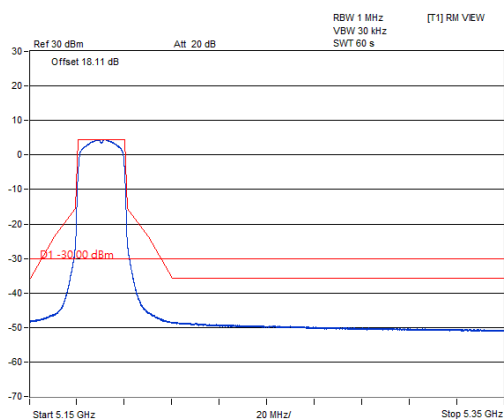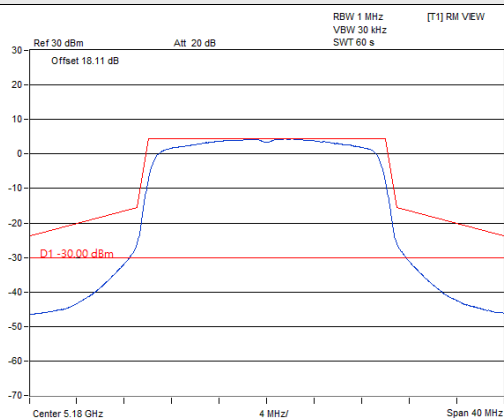






CH64 5320MHz

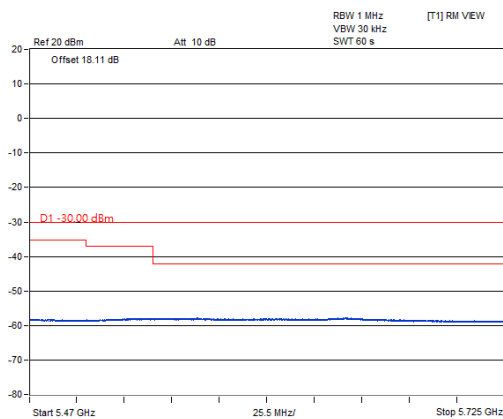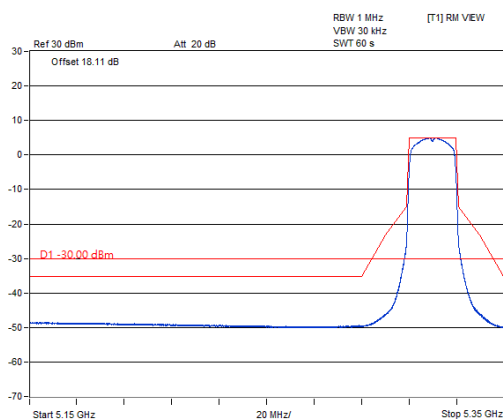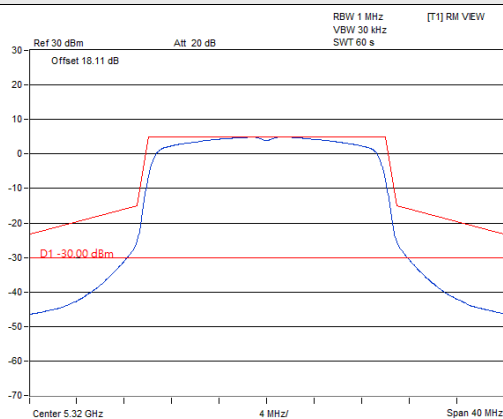

CH100 5500MHz



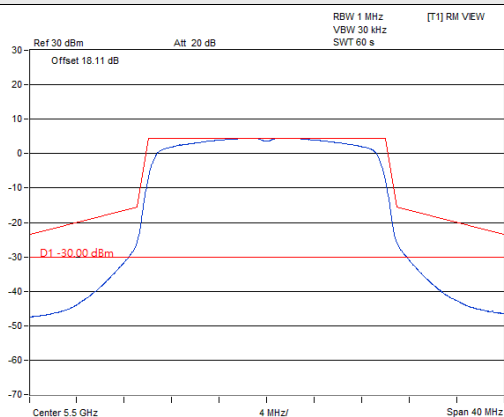


CH140 5700MHz

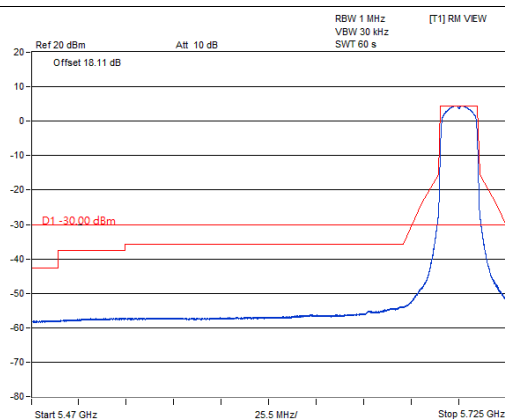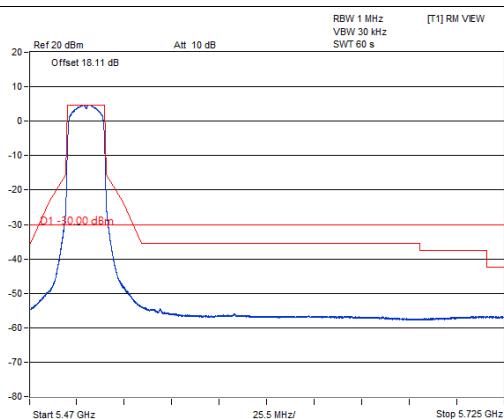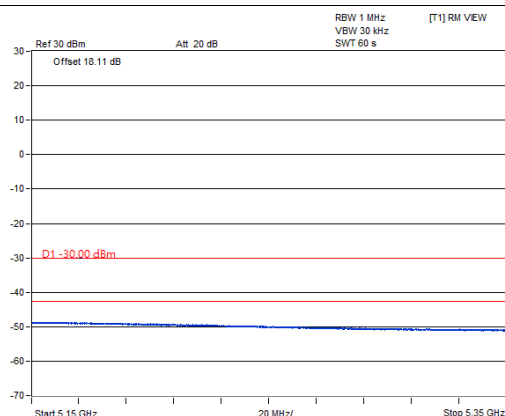
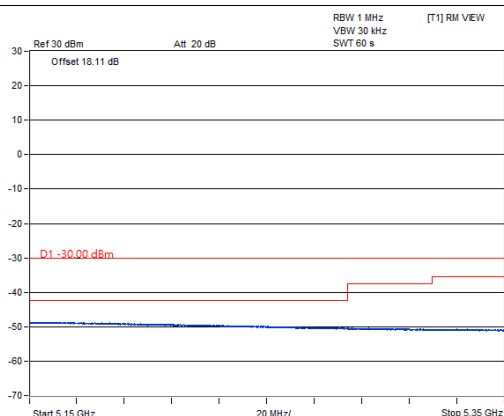
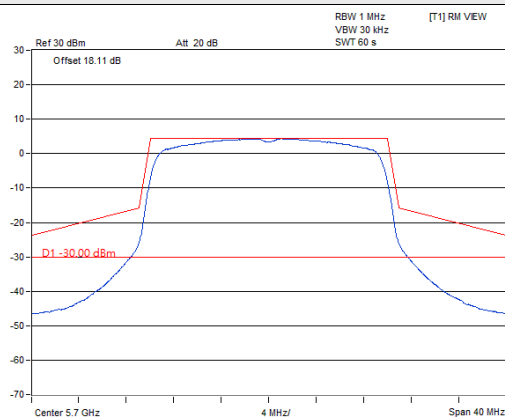


802.11ax (HE40)


CH38 5190MHz

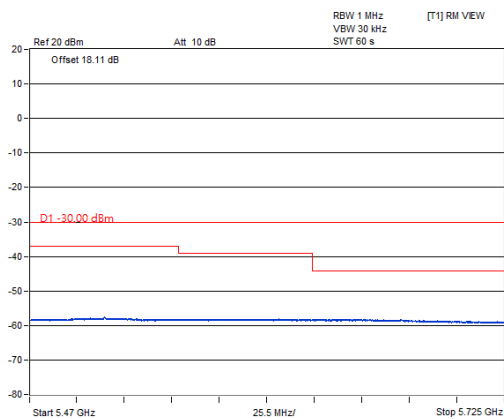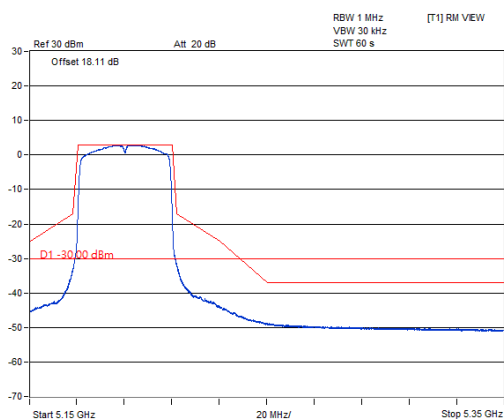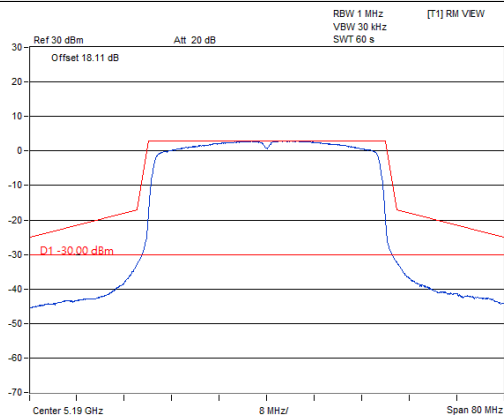






CH62 5310MHz

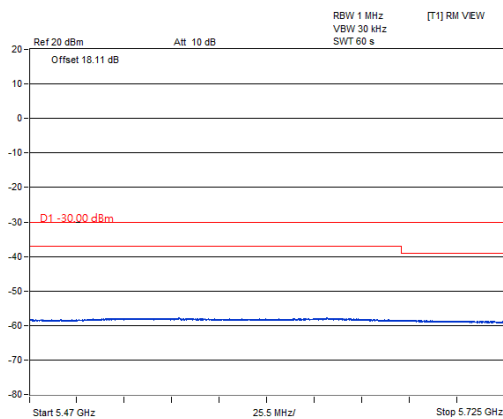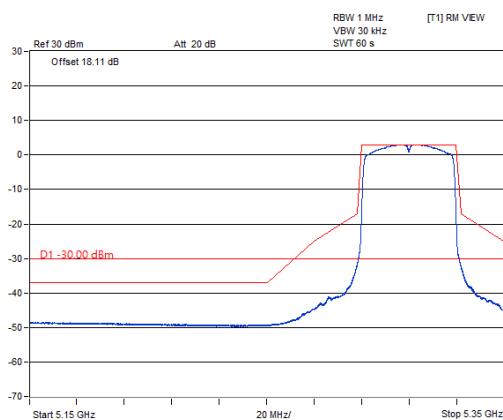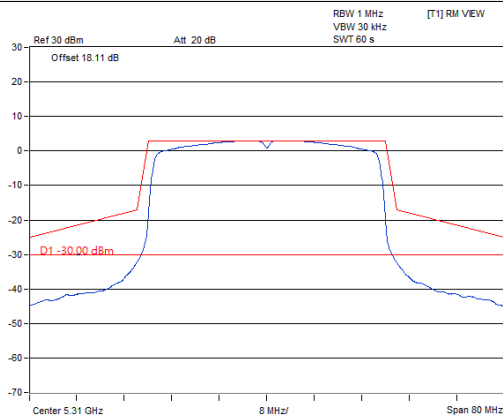

CH102 5510MHz

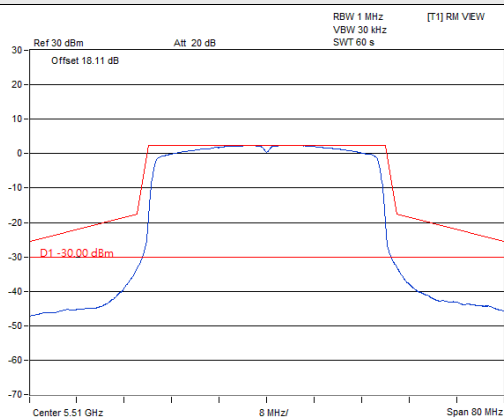


CH134 5670MHz

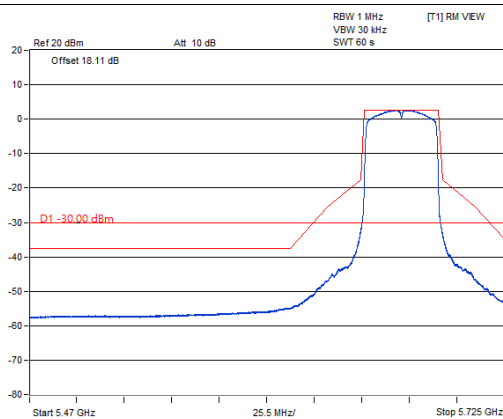
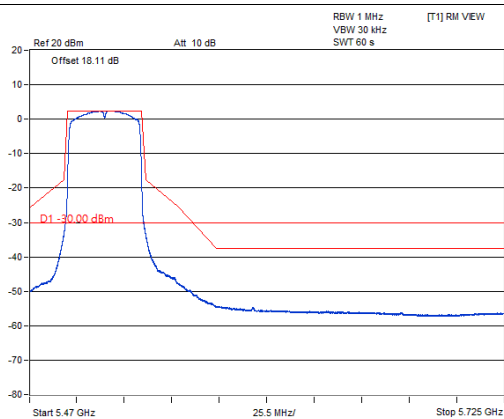
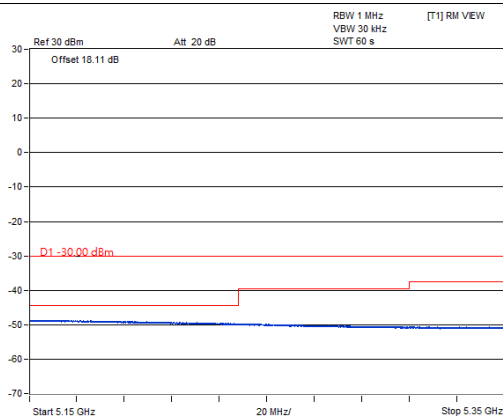
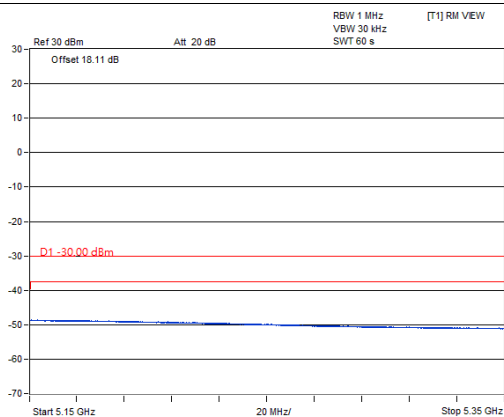
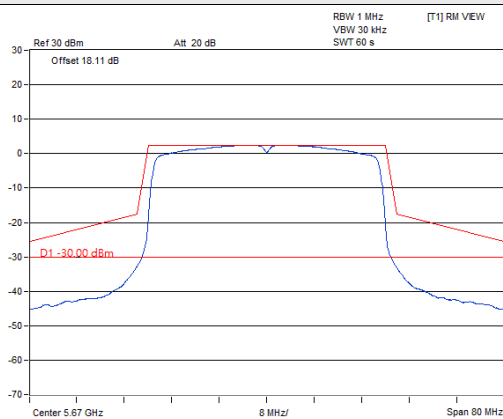


802.11ax (HE80)




CH42 5210MHz

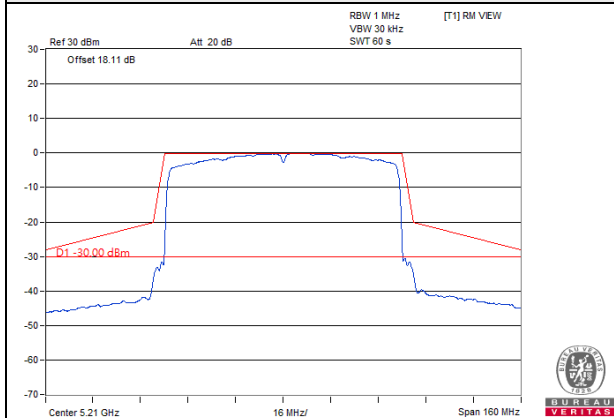




CH58 5290MHz

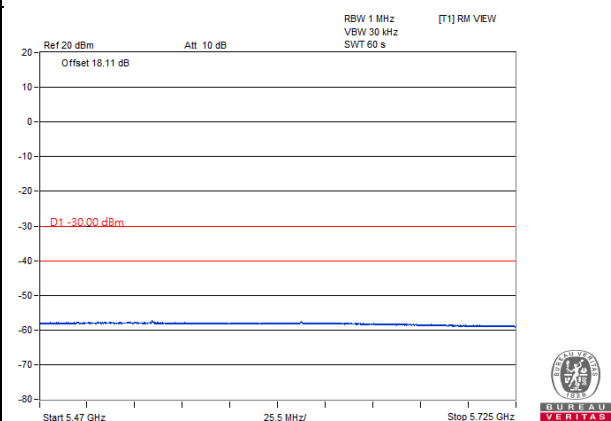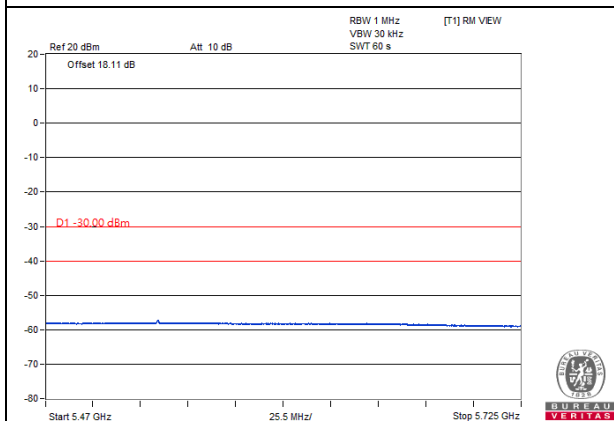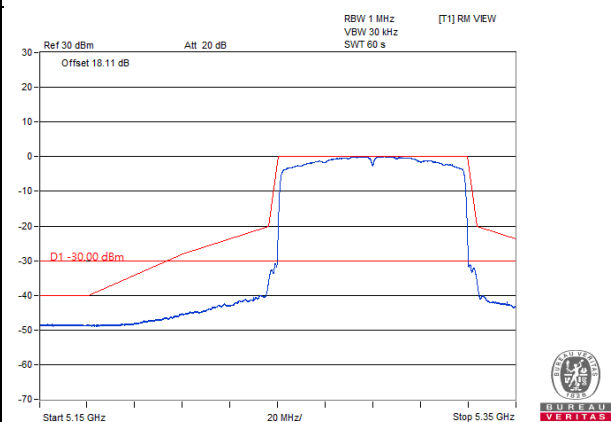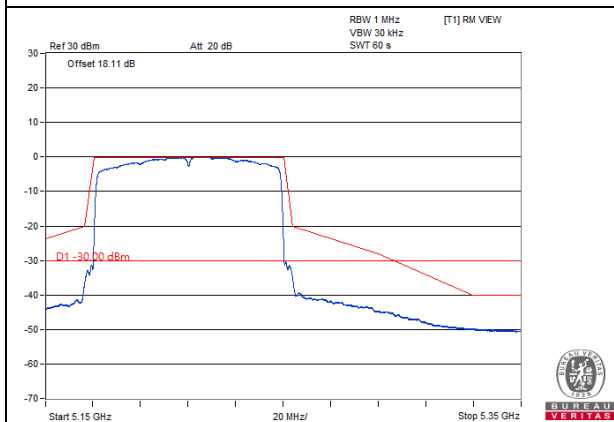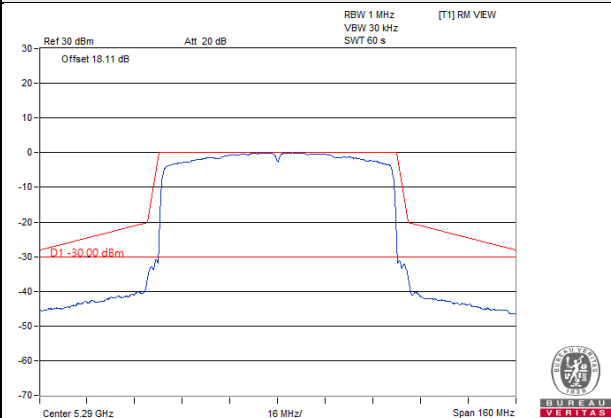


CH106 5530MHz

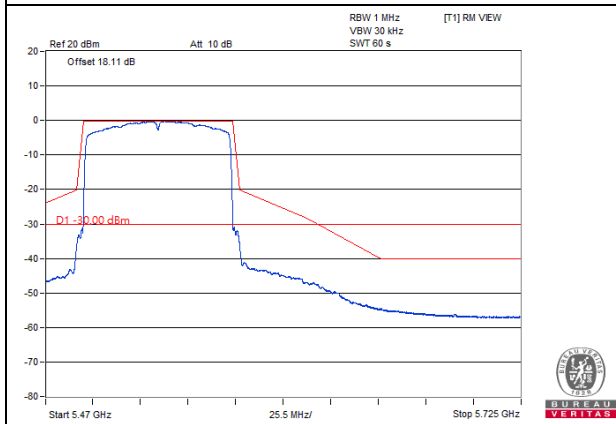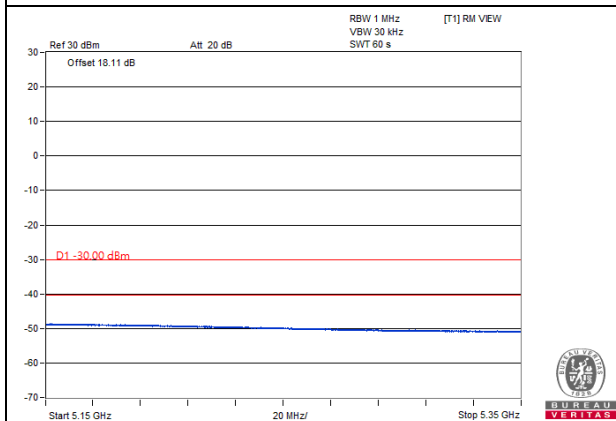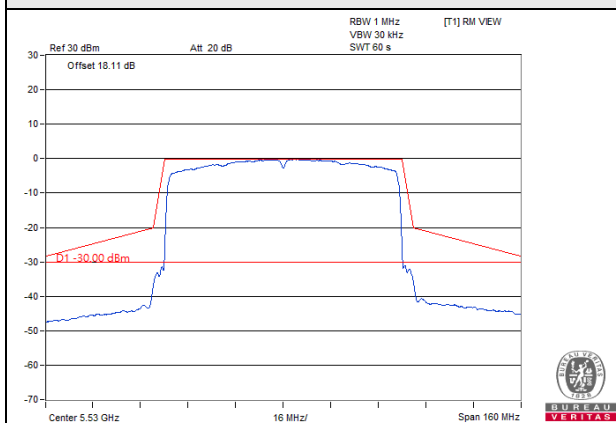


CH122 5610MHz

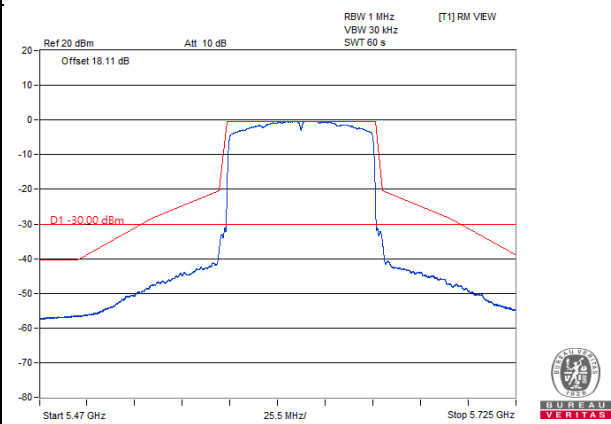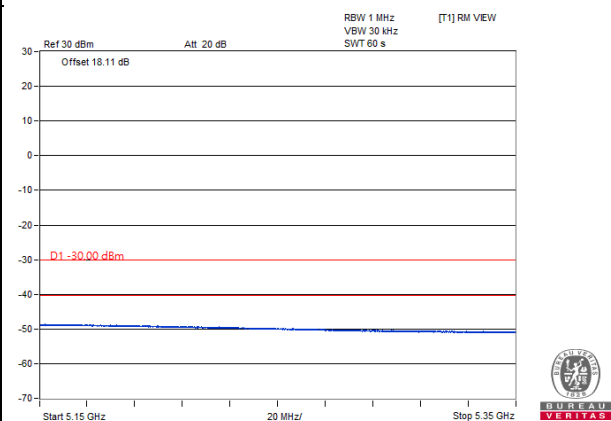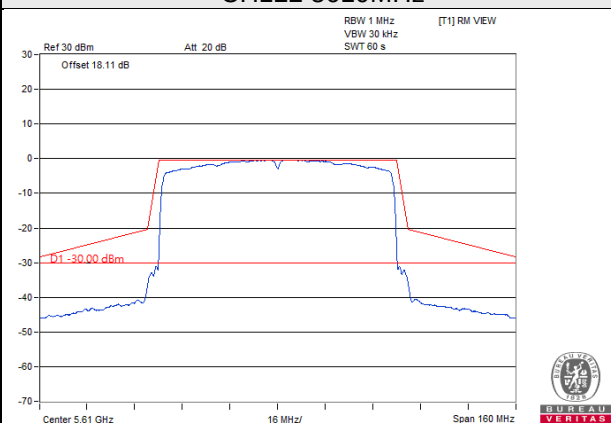






802.11ax (RU26)

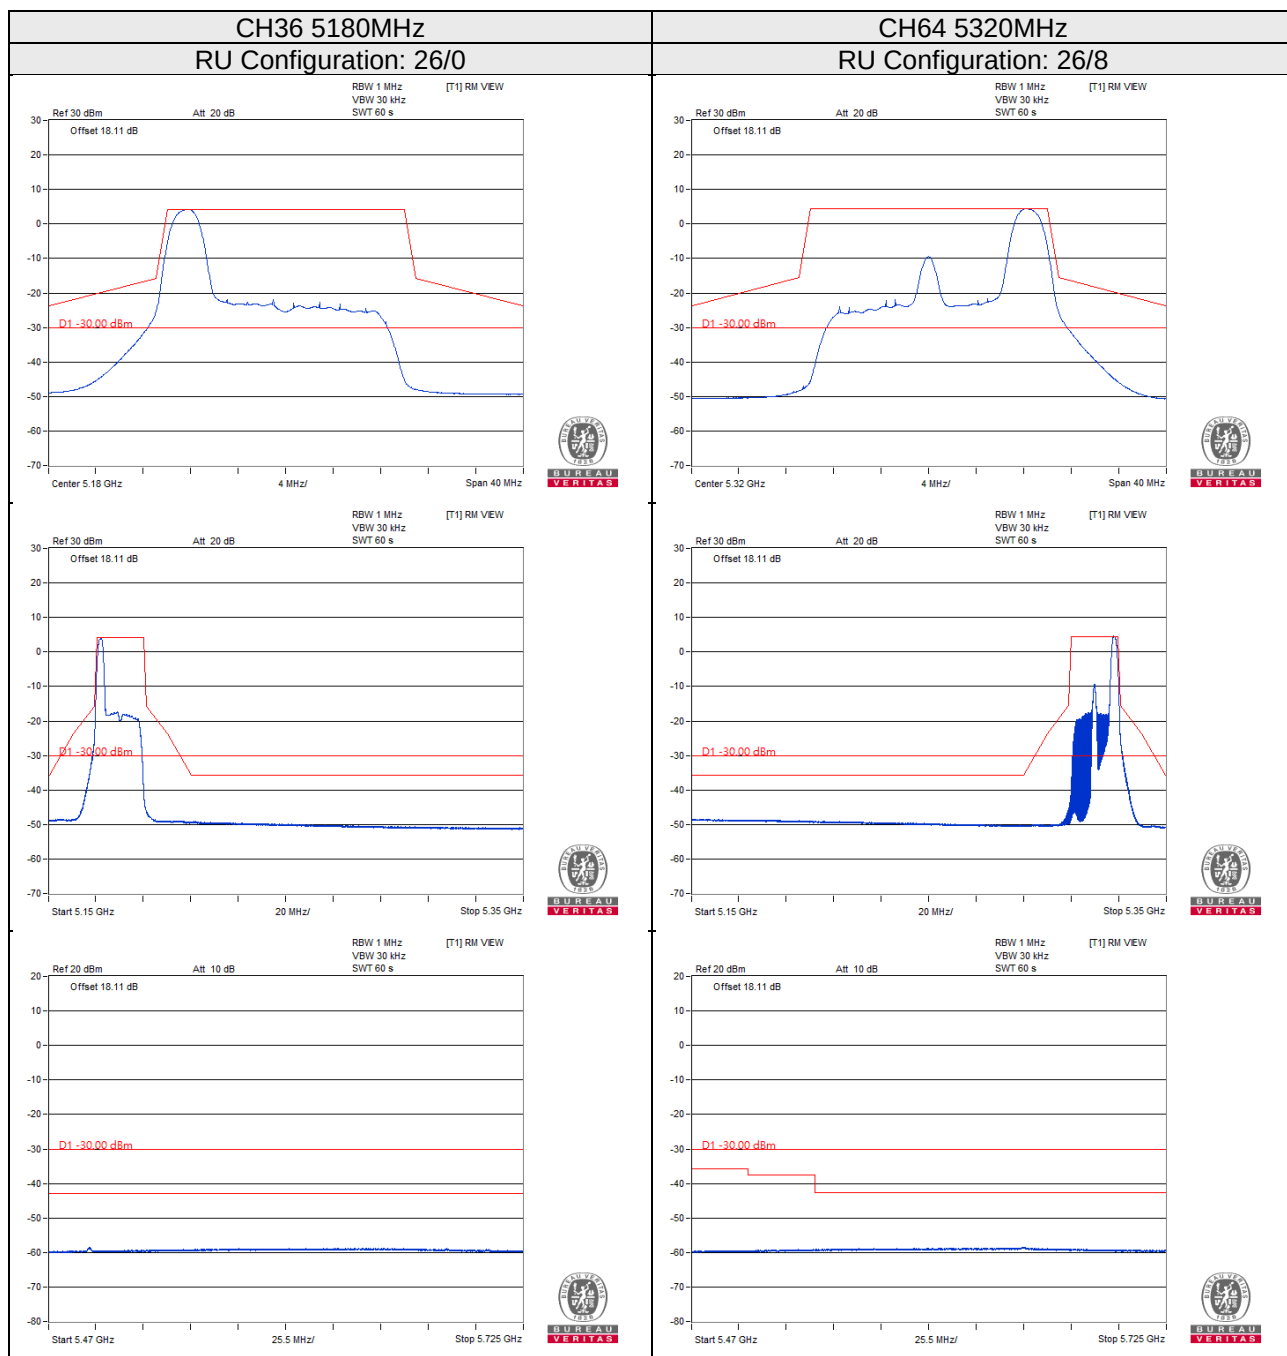


CH100 5500MHz RU Configuration: 26/0

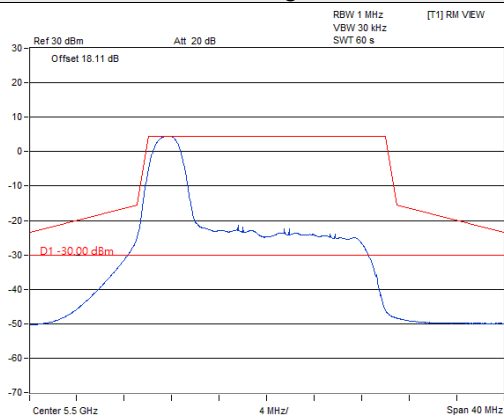


CH140 5700MHz RU Configuration: 26/8

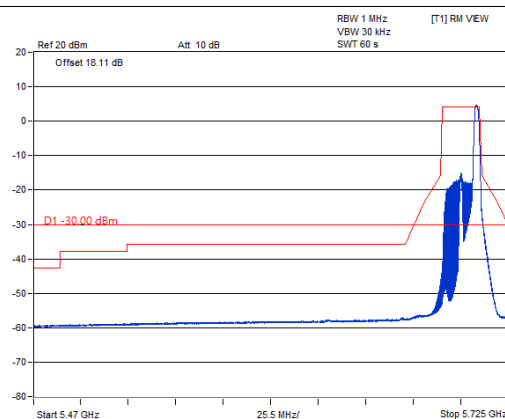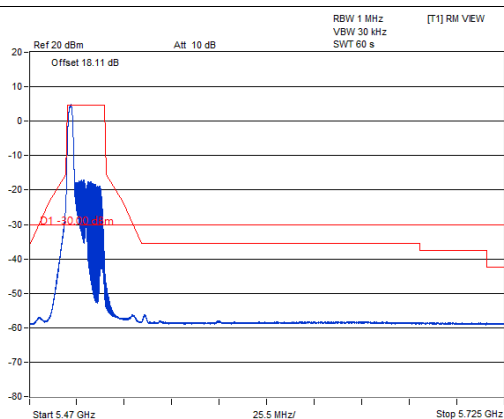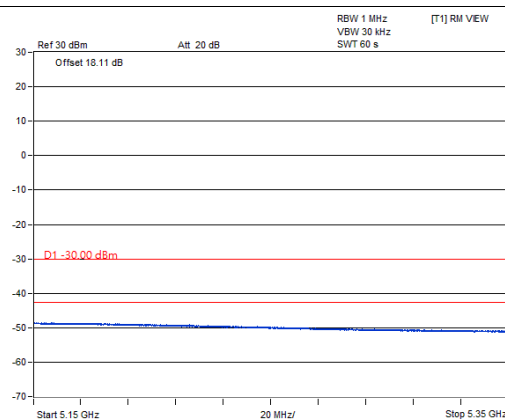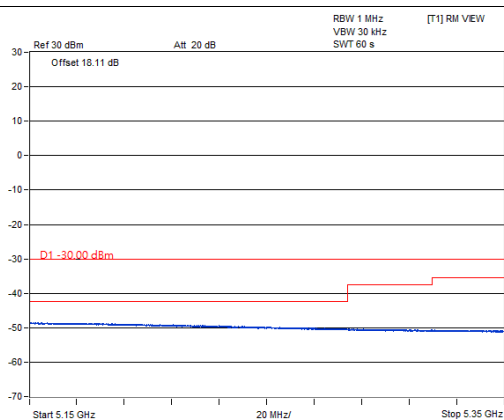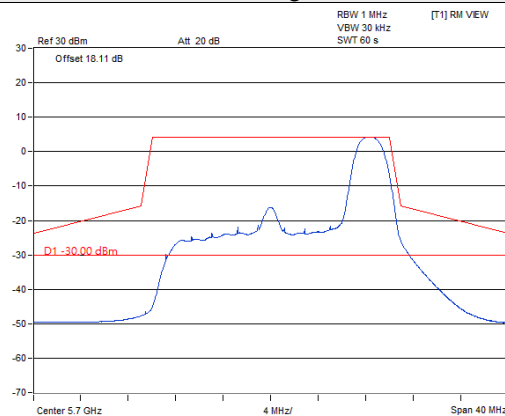






802.11ax (RU52)

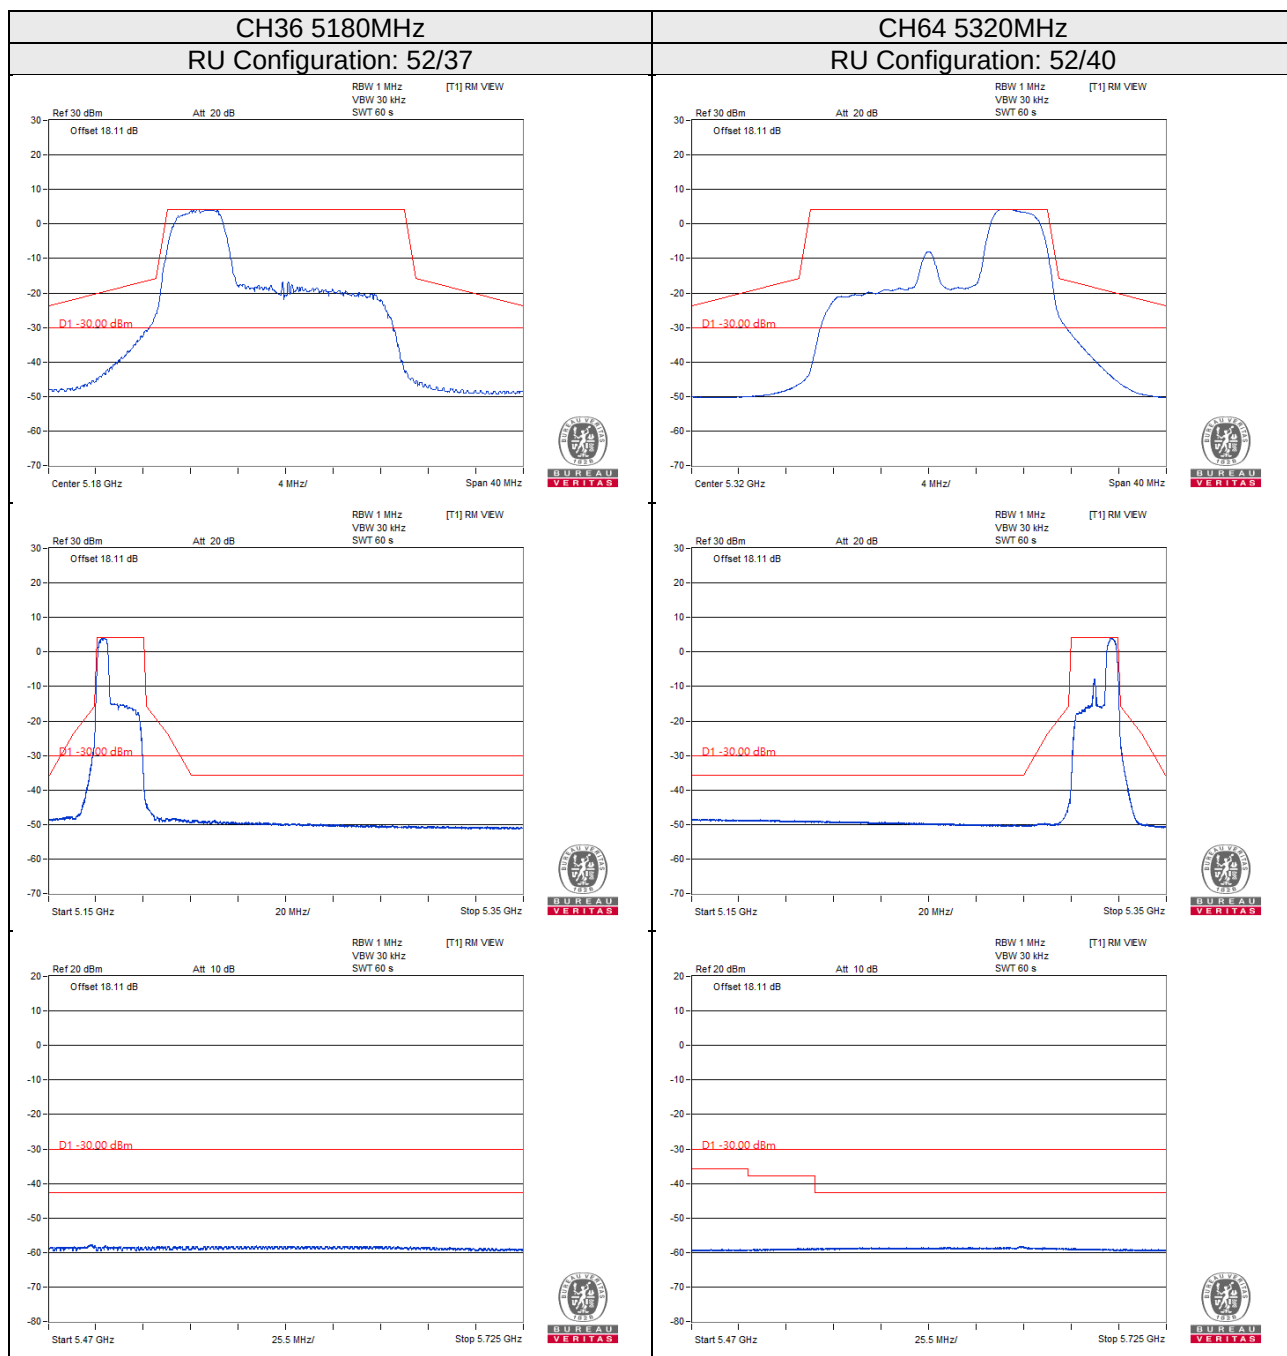


CH100 5500MHz RU Configuration: 52/37

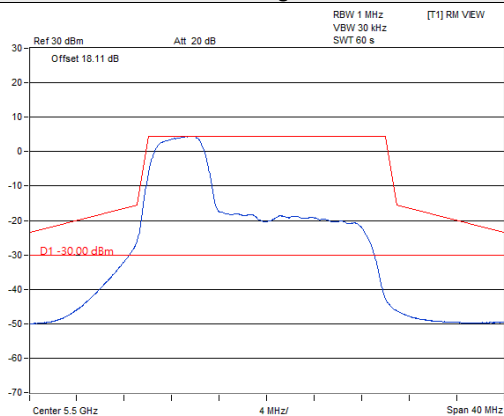


CH140 5700MHz RU Configuration: 52/40

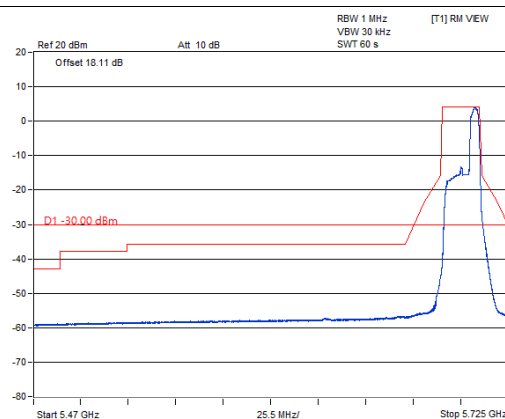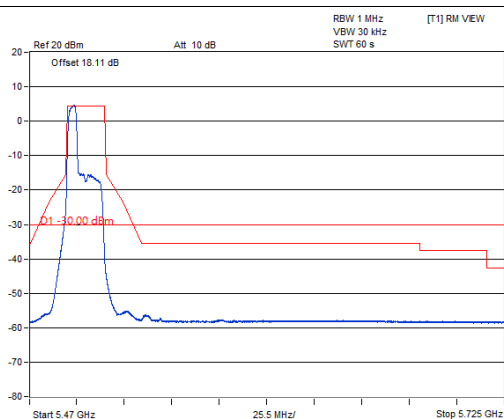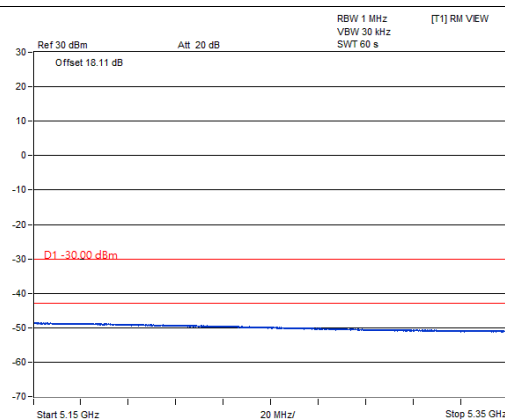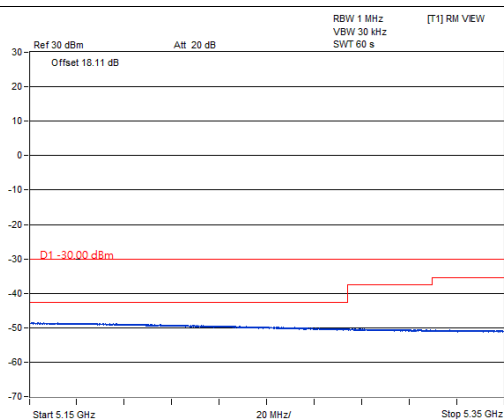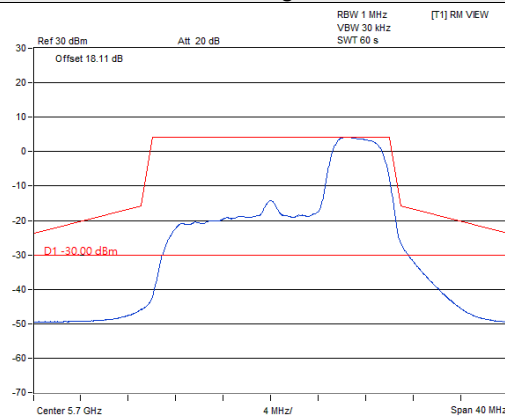


802.11ax (RU106)

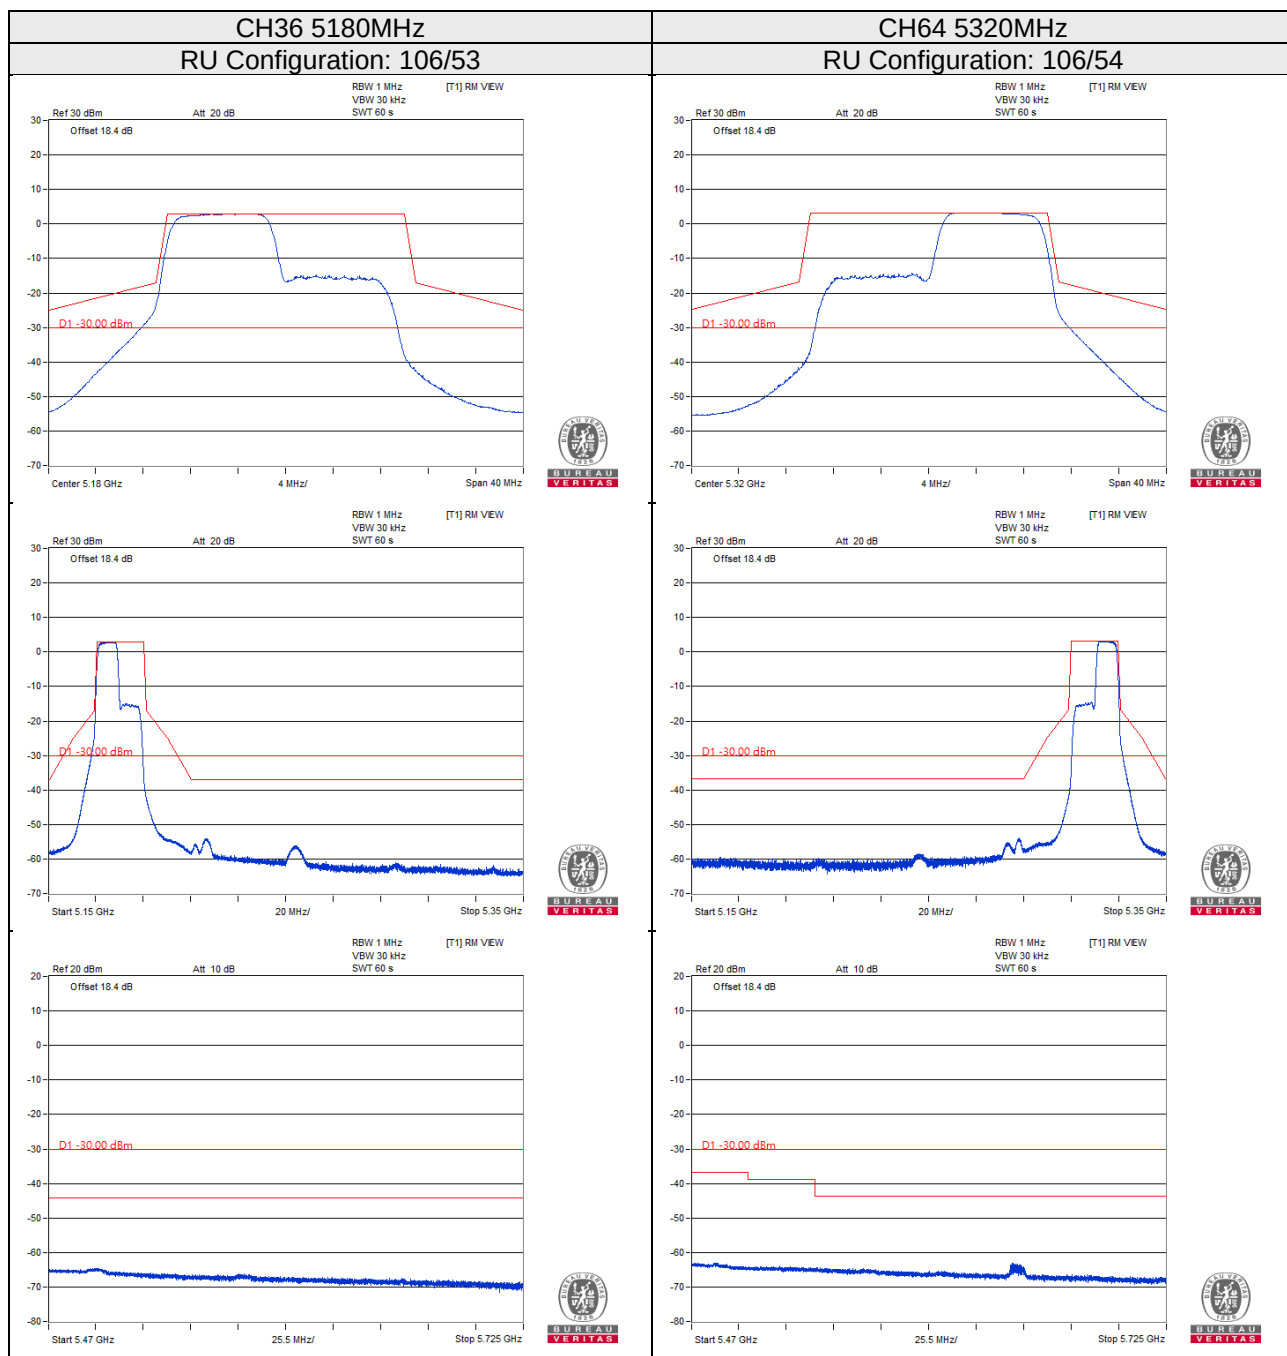

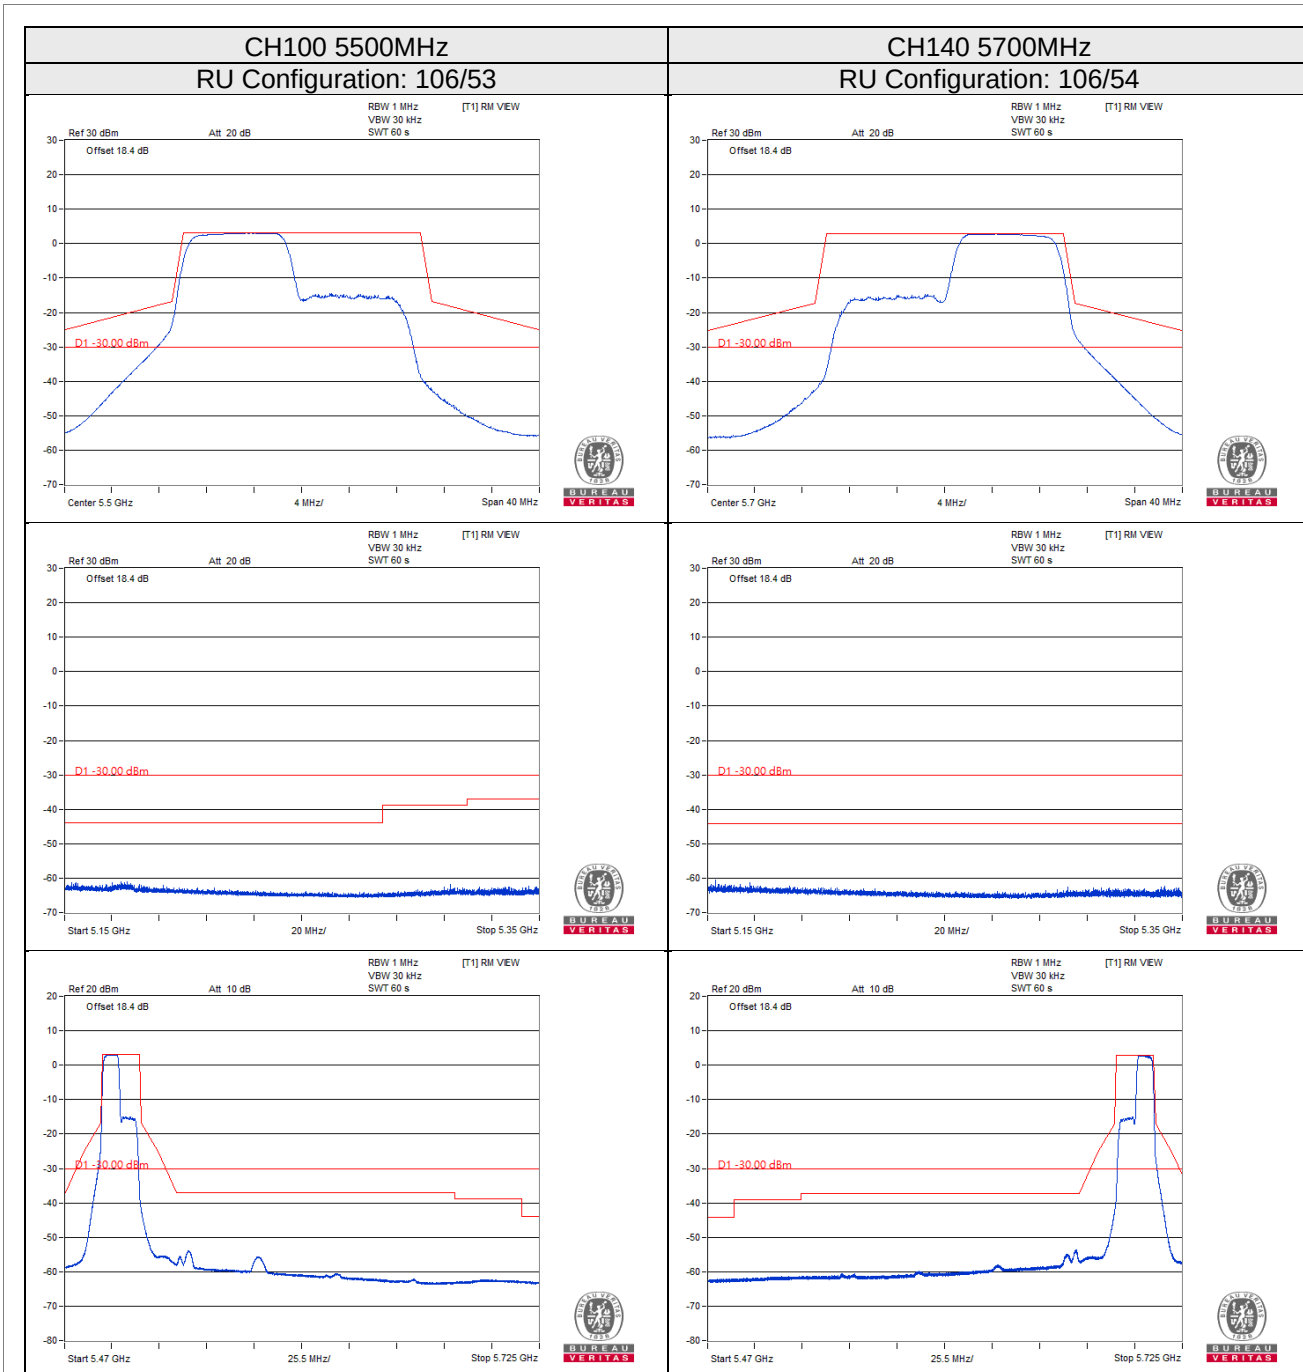


4.6.6 Test Results for unwanted emissions within the 5 GHz RLAN bands (Mode 2)






802.11a

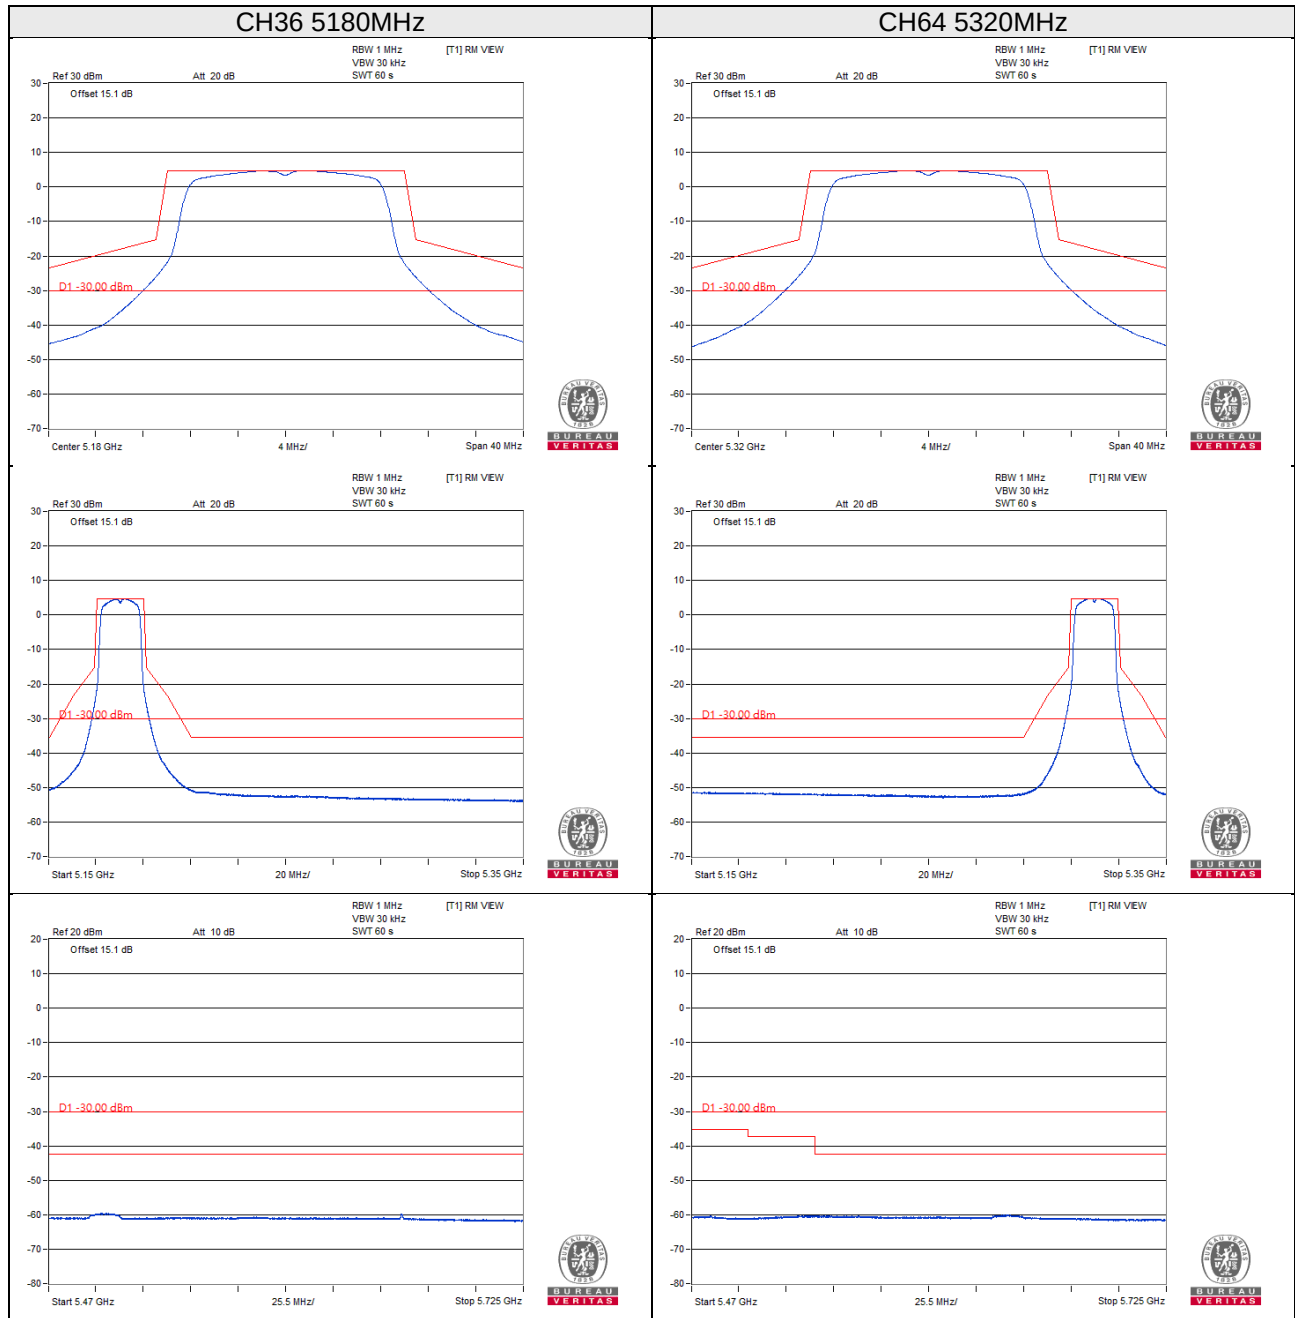

CH100 5500MHz



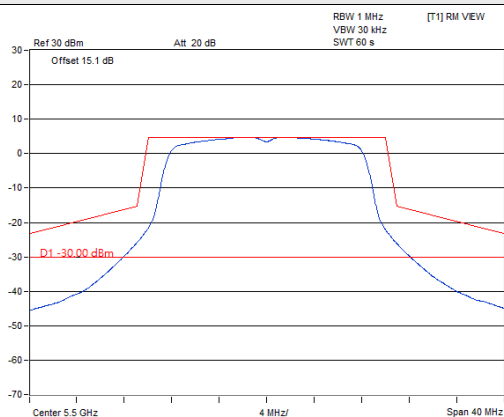


CH140 5700MHz

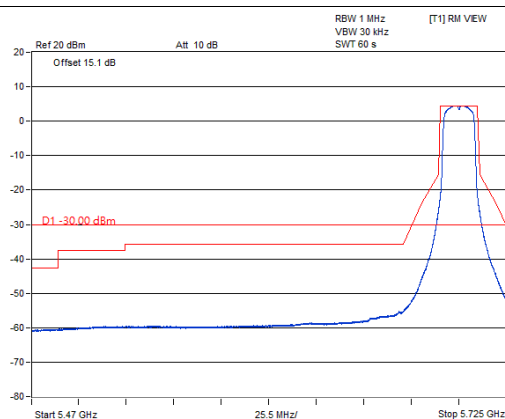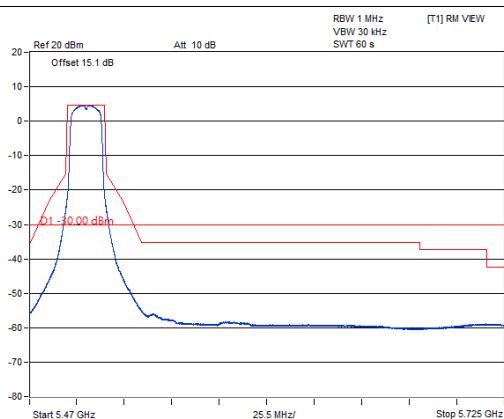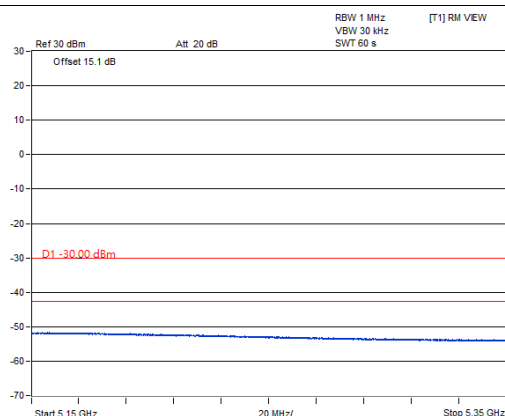
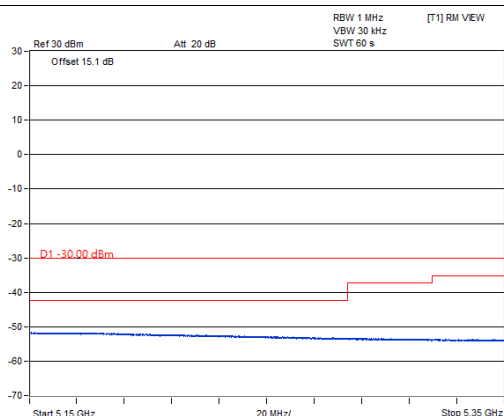
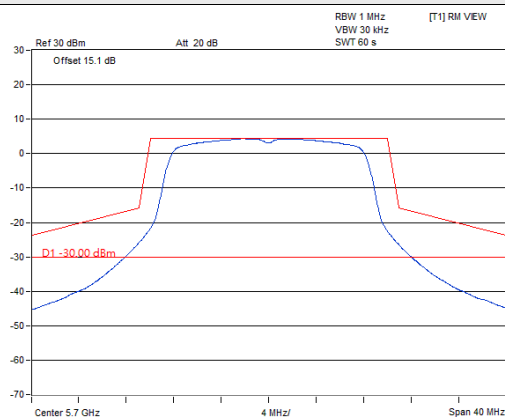


802.11ax (HE20)


CH36 5180MHz

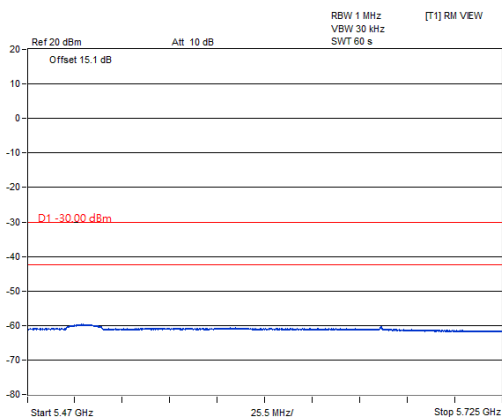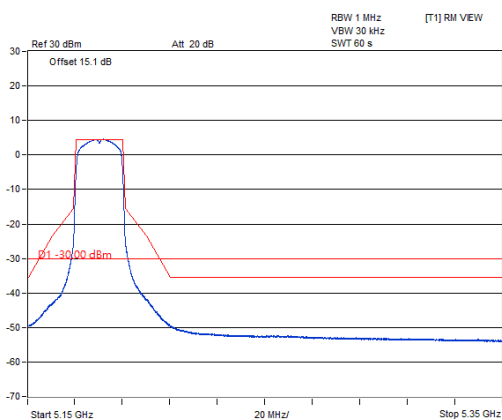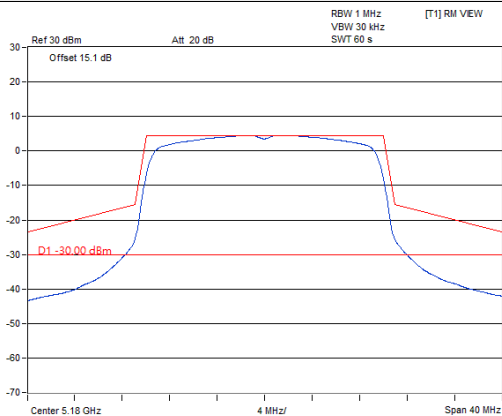






CH64 5320MHz

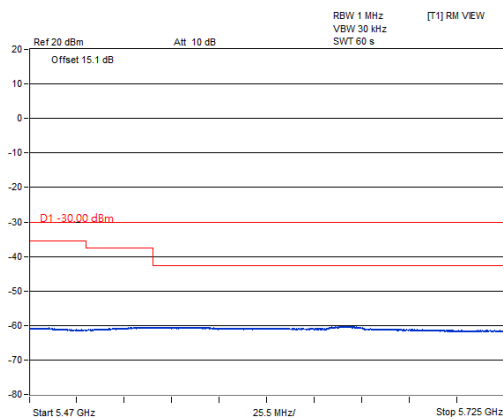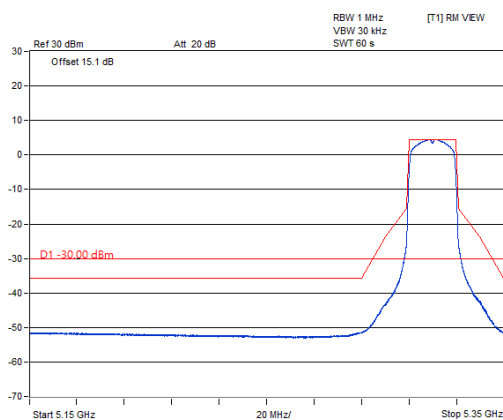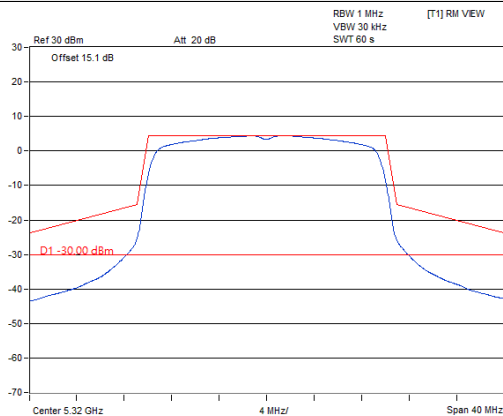

CH100 5500MHz



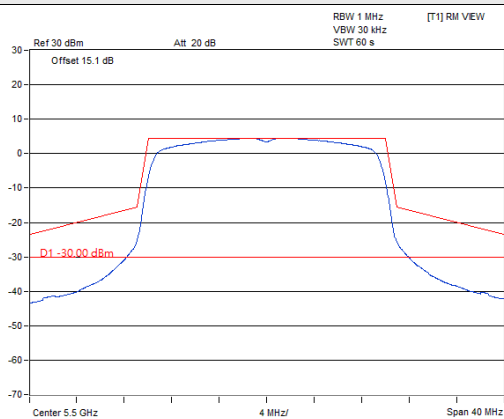


CH140 5700MHz

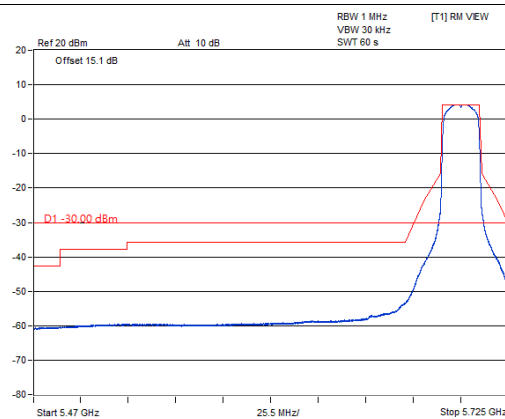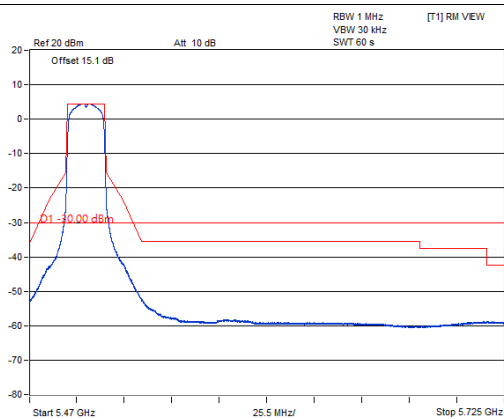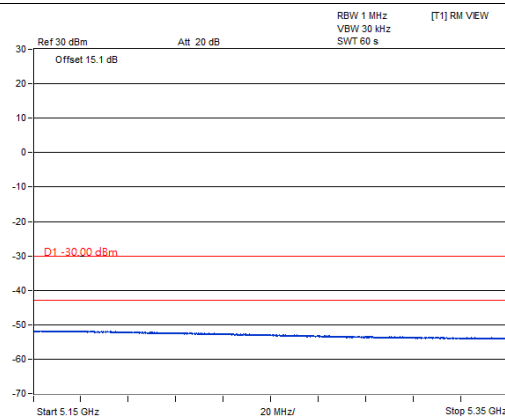
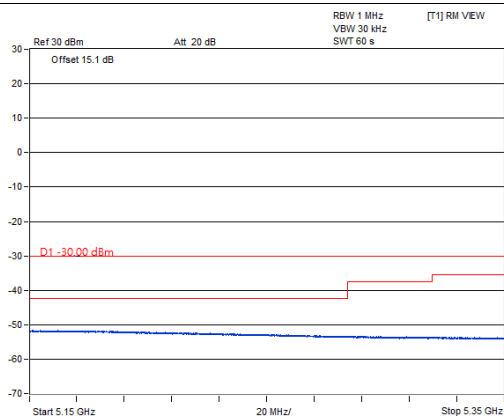
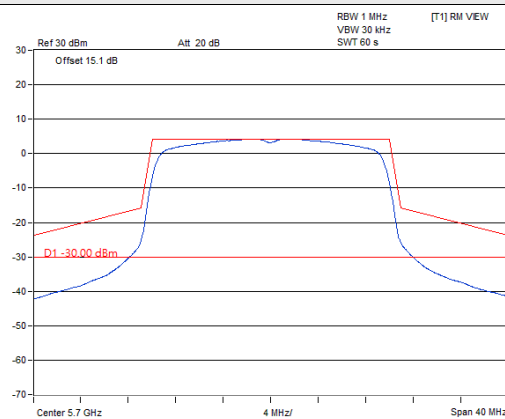


802.11ax (HE40)


CH38 5190MHz

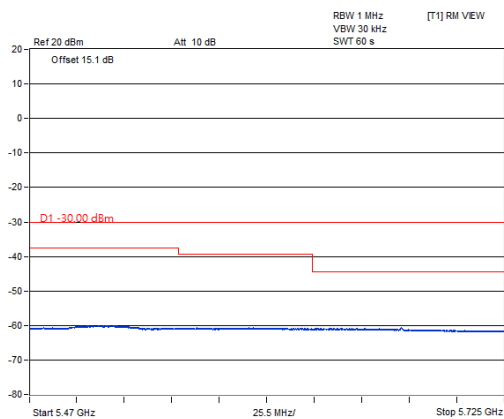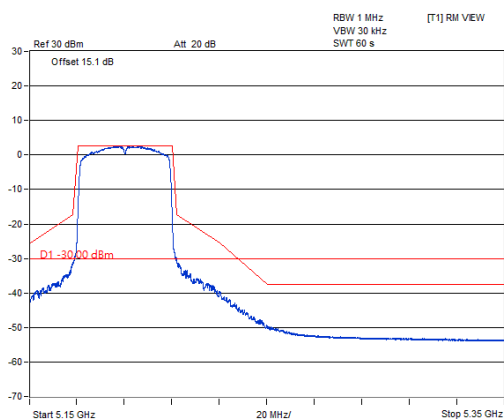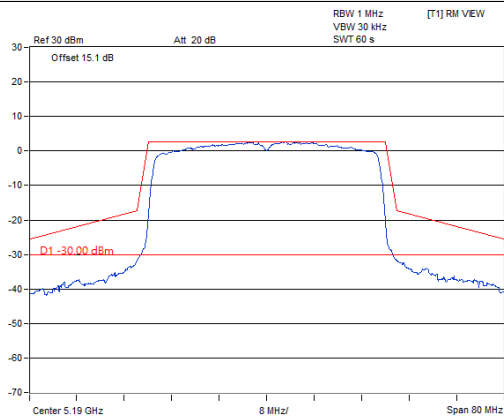






CH62 5310MHz

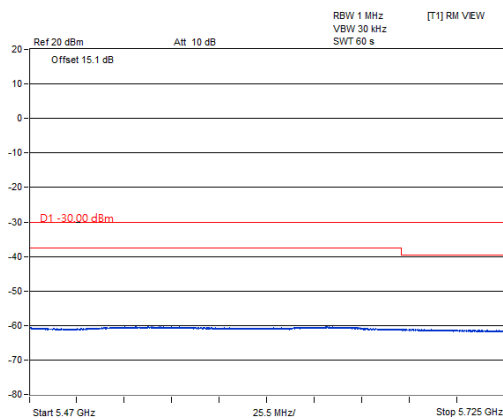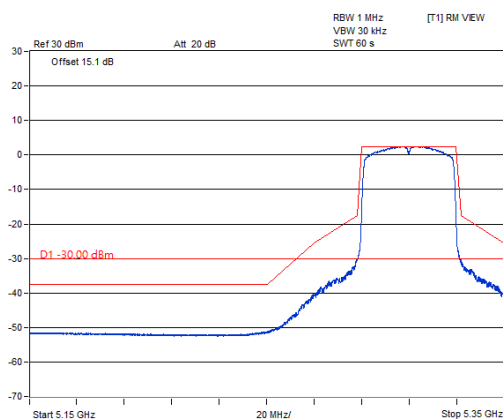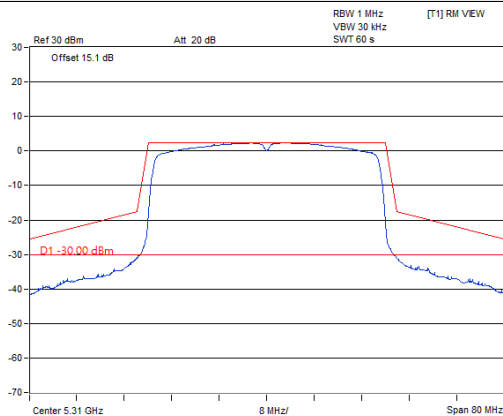

CH102 5510MHz



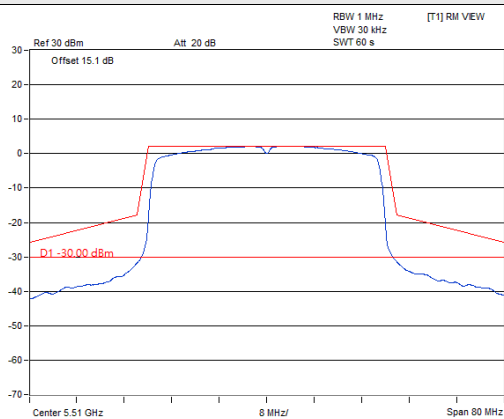


CH134 5670MHz

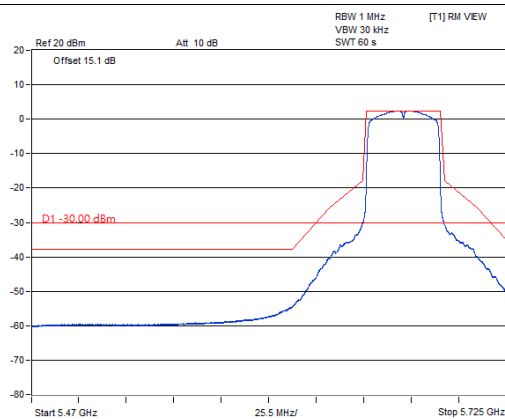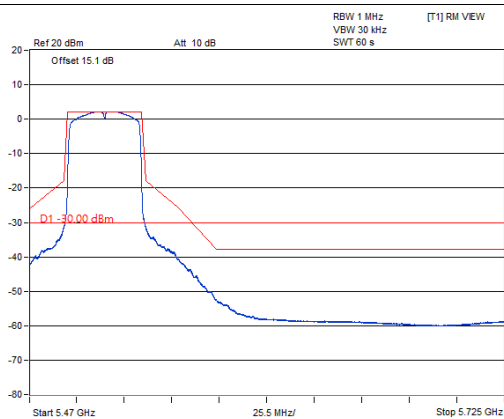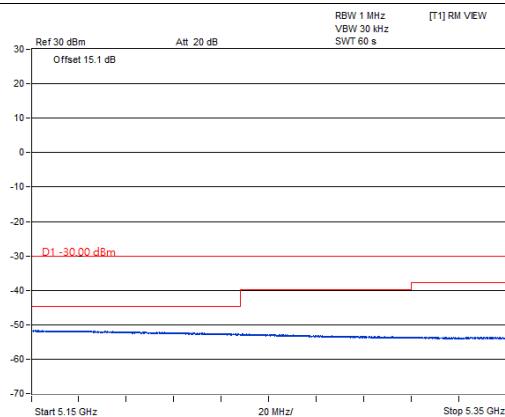
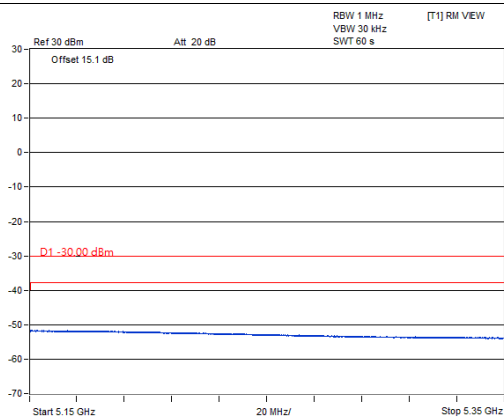
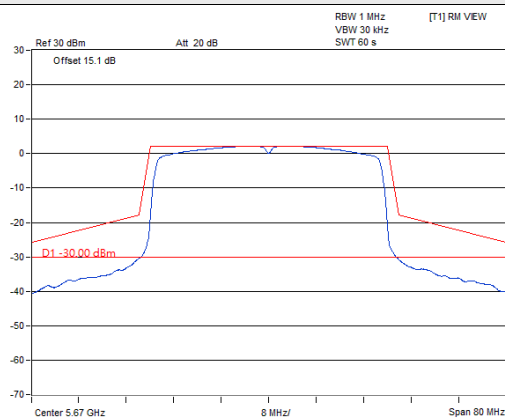


802.11ax (HE80)


CH42 5210MHz

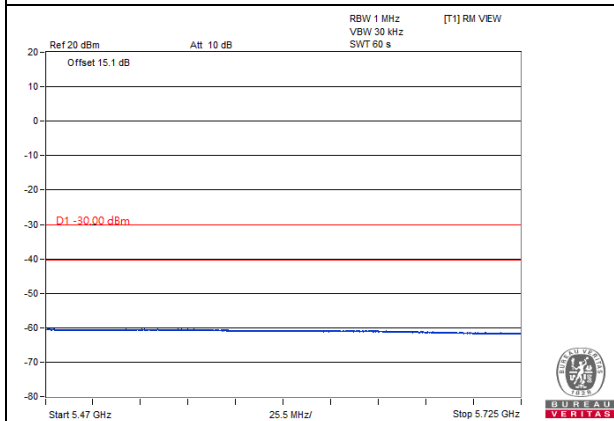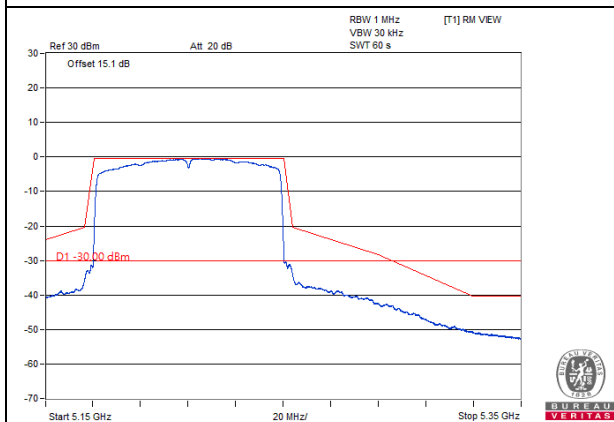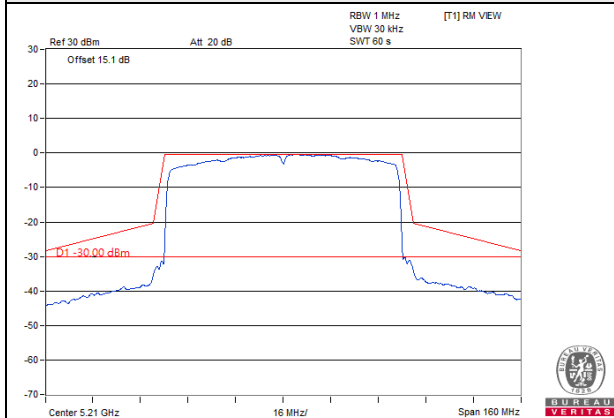






CH58 5290MHz

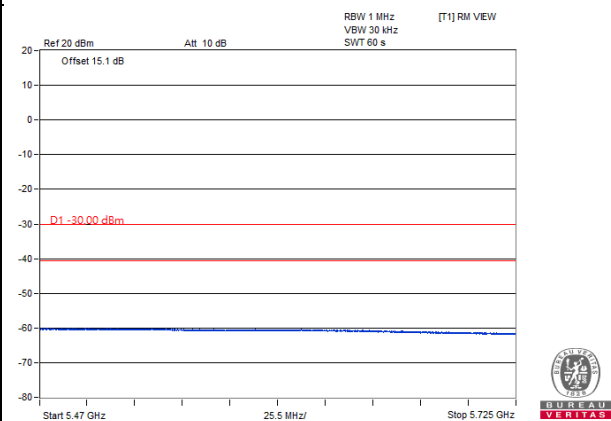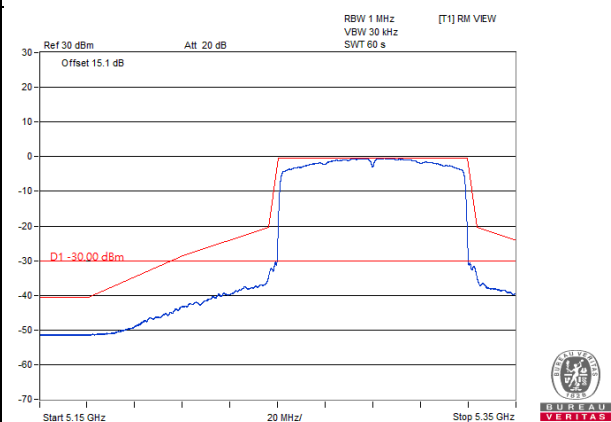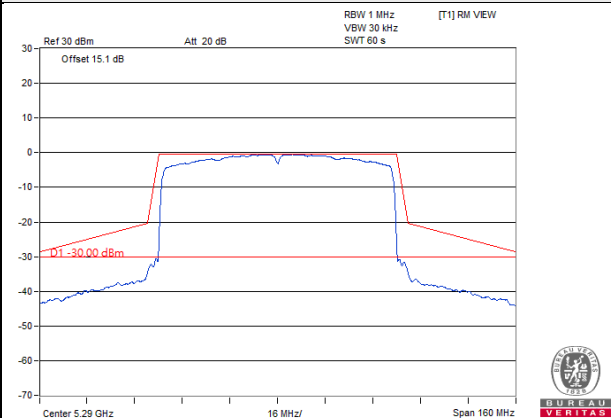


CH106 5530MHz

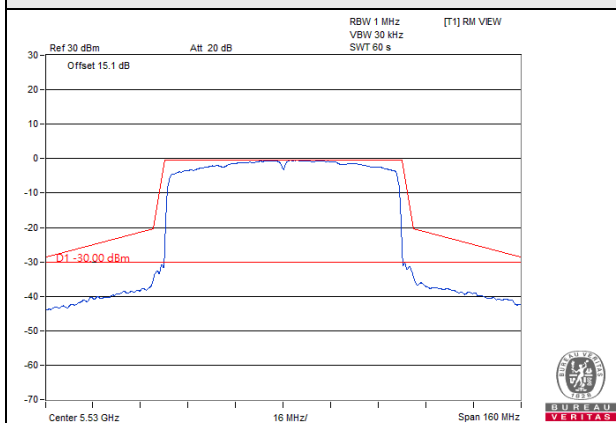


CH122 5610MHz

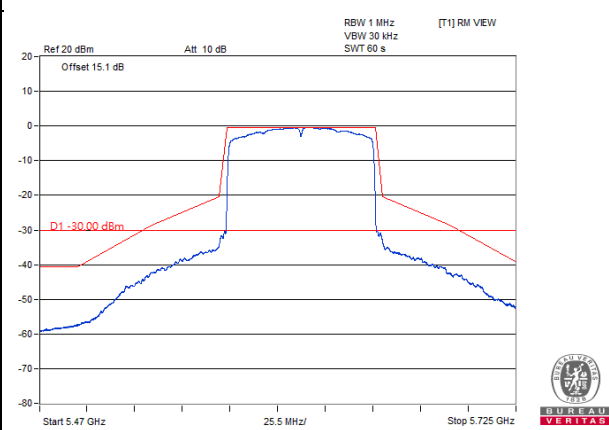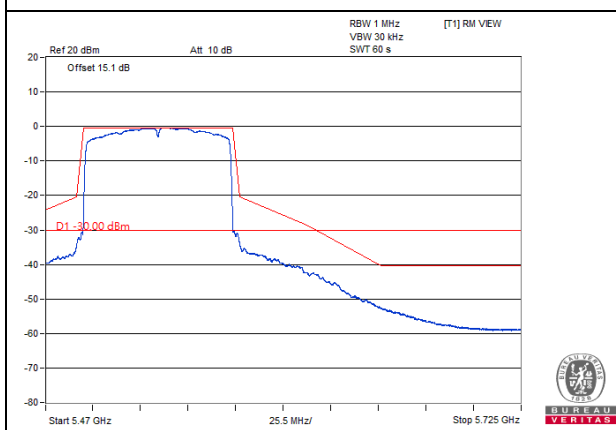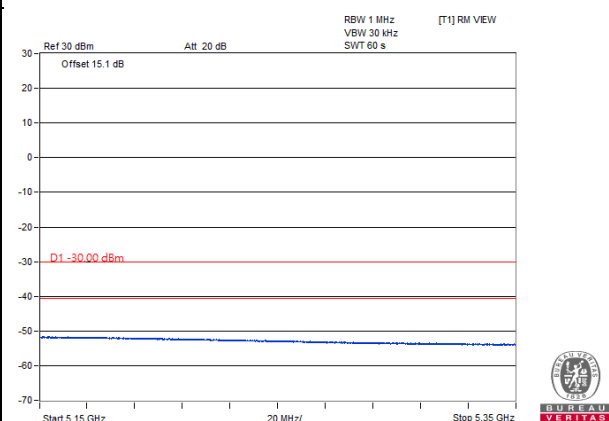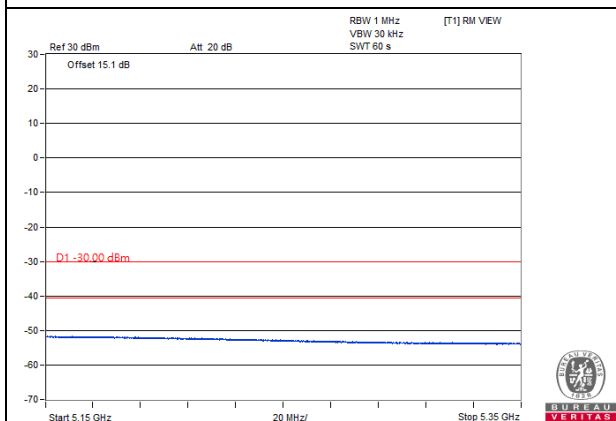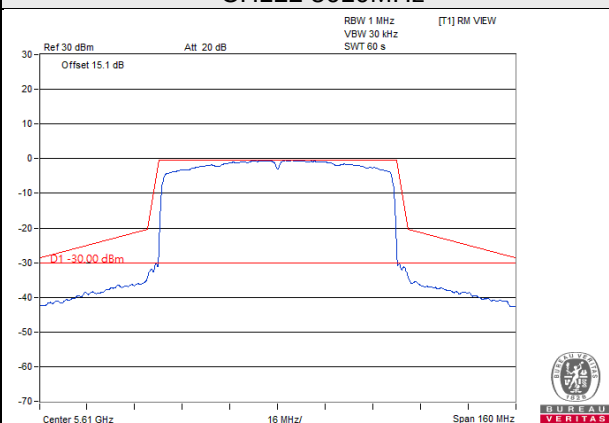






802.11ax (RU26)

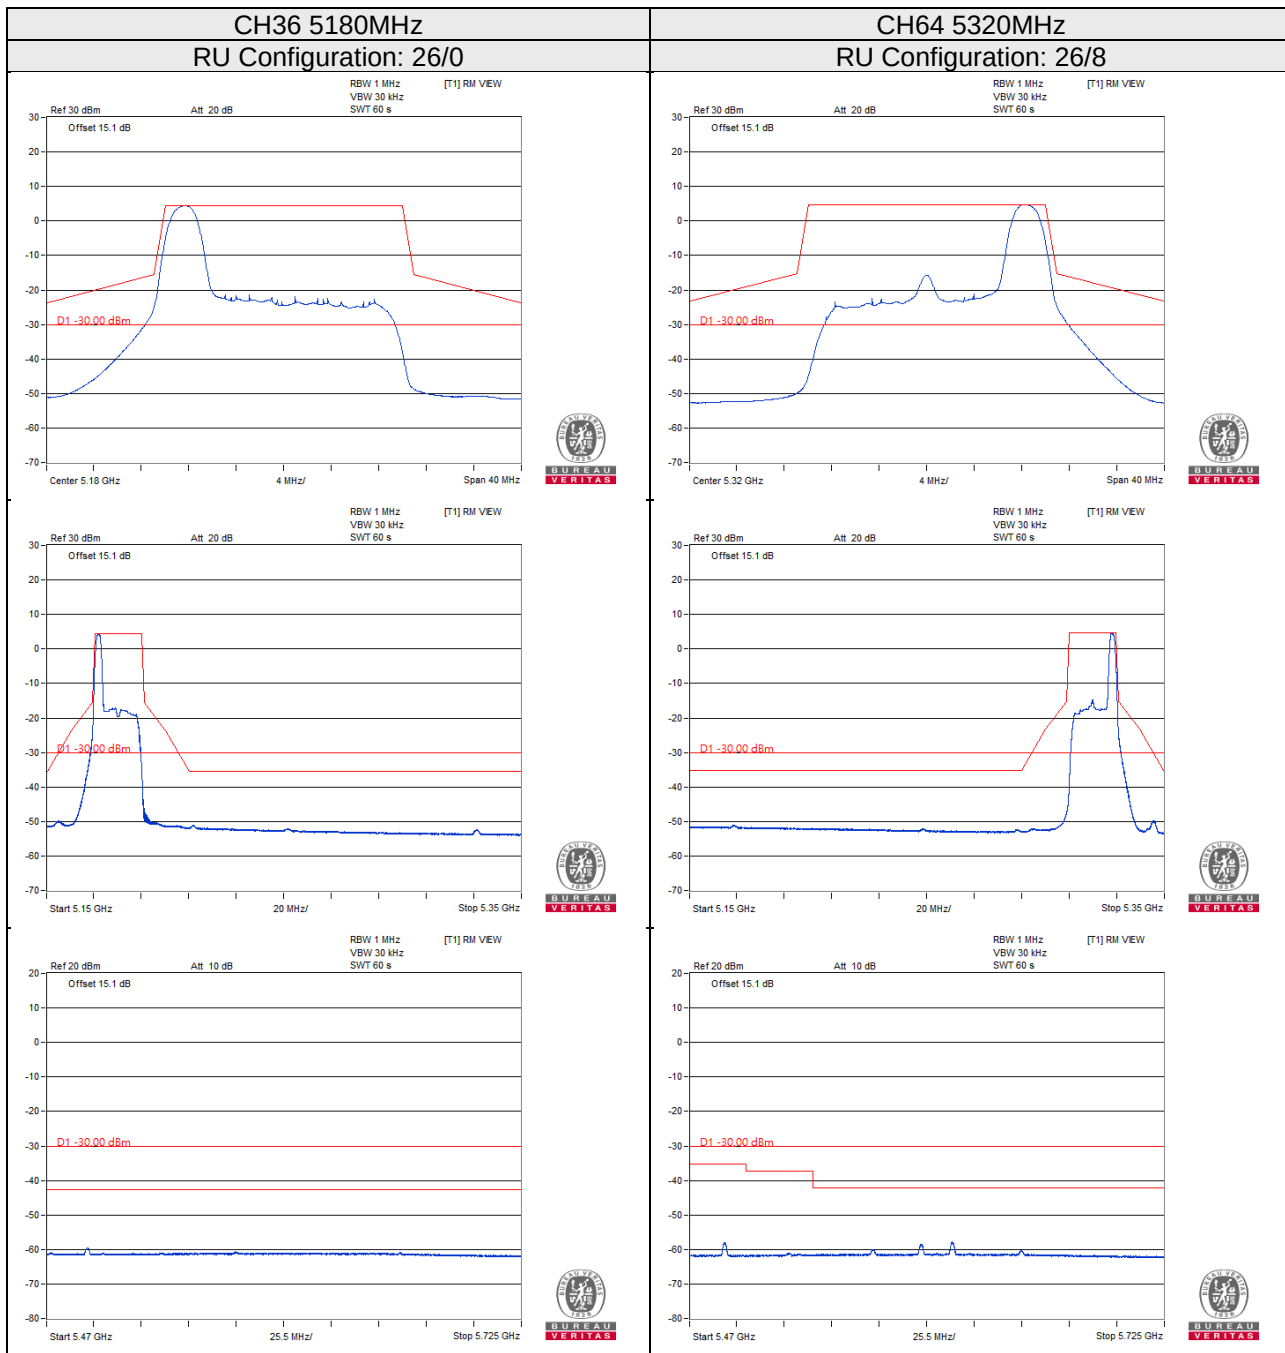


CH100 5500MHz RU Configuration: 26/0

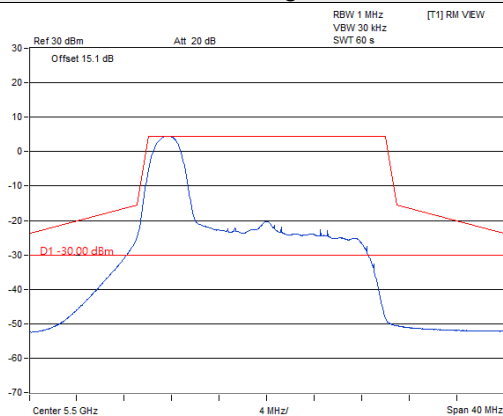


CH140 5700MHz RU Configuration: 26/8

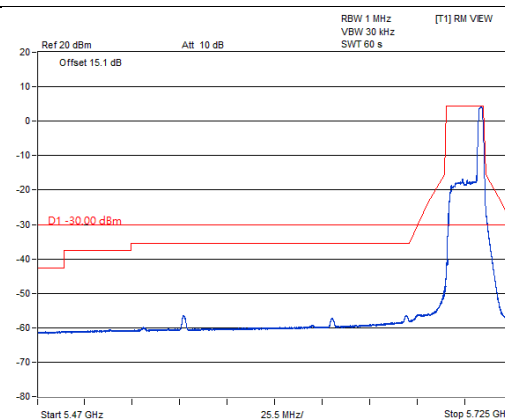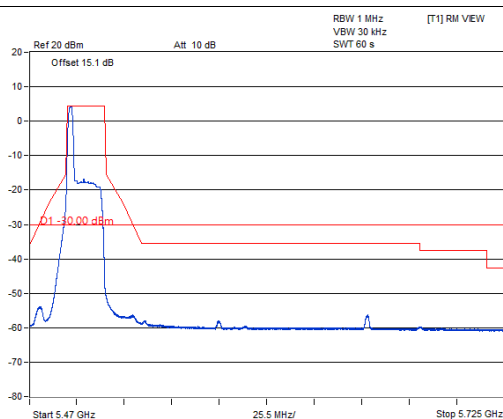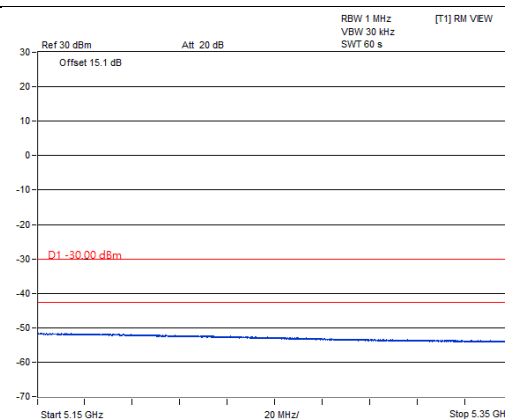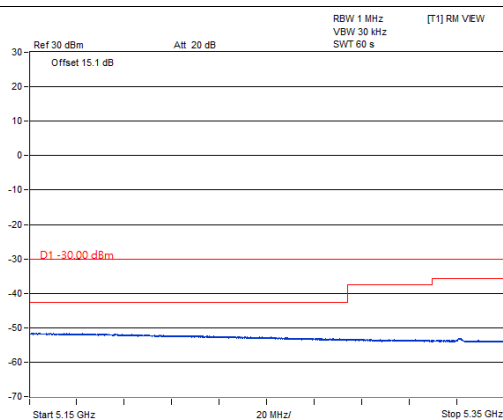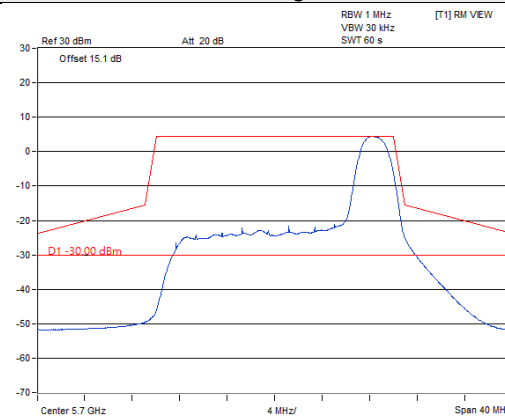






802.11ax (RU52)

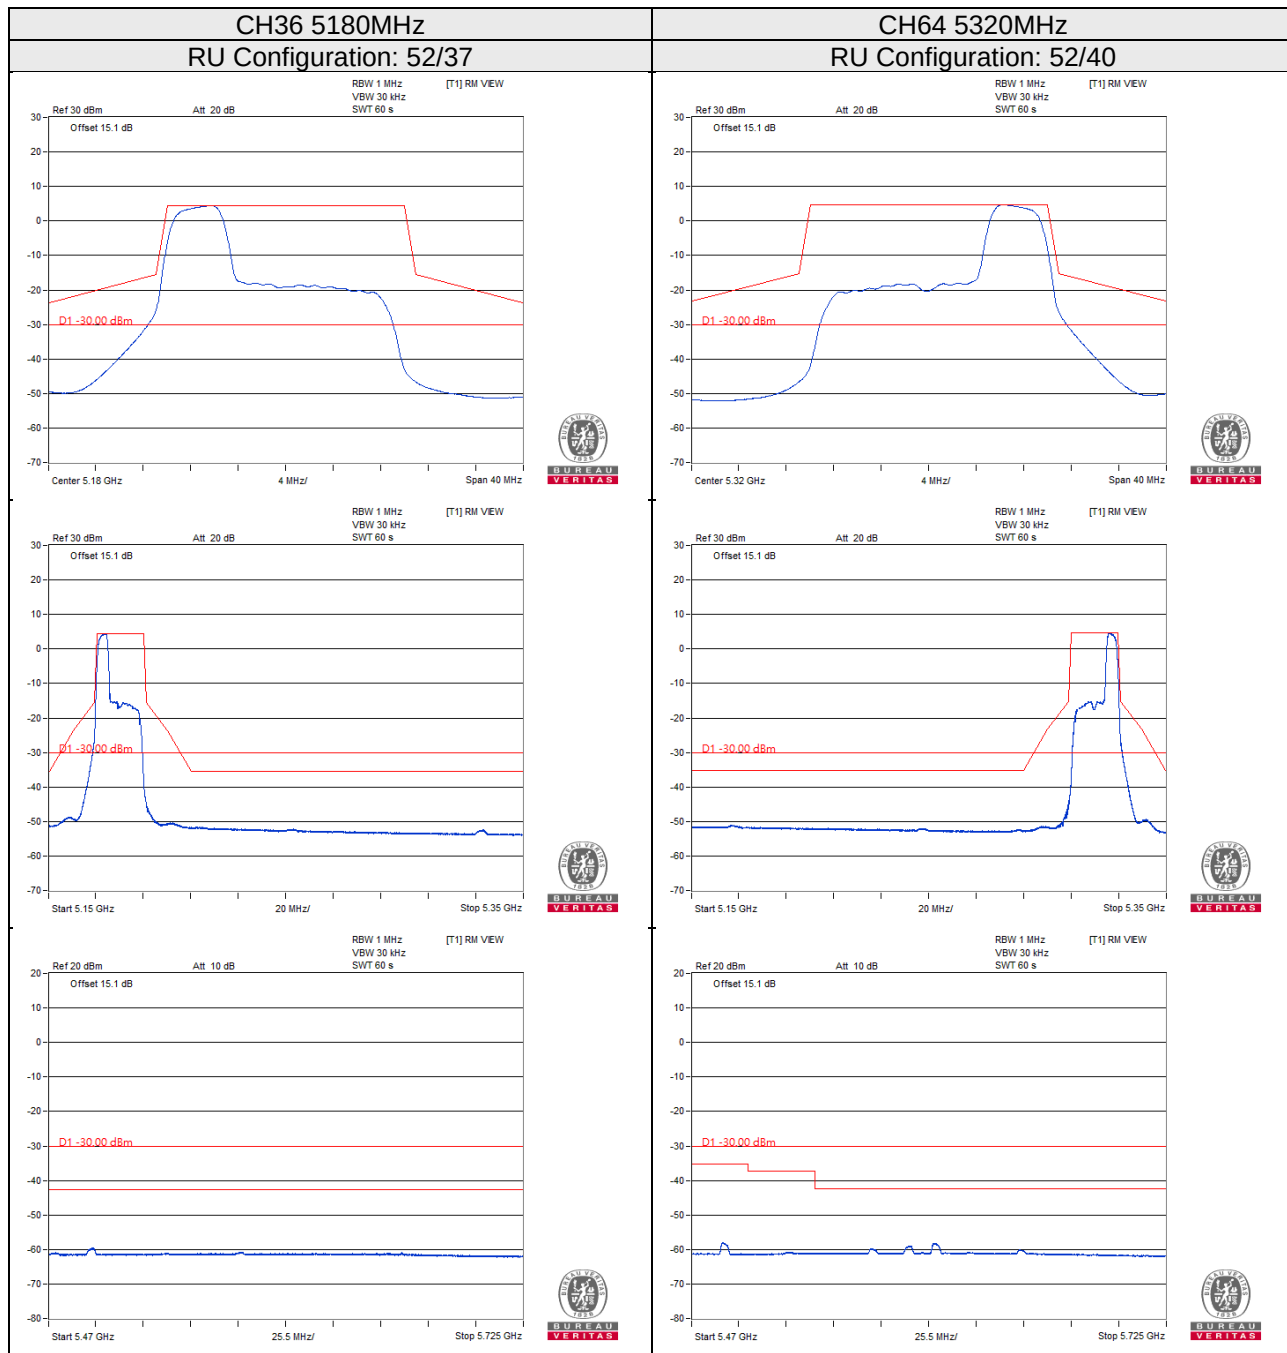


CH100 5500MHz RU Configuration: 52/37

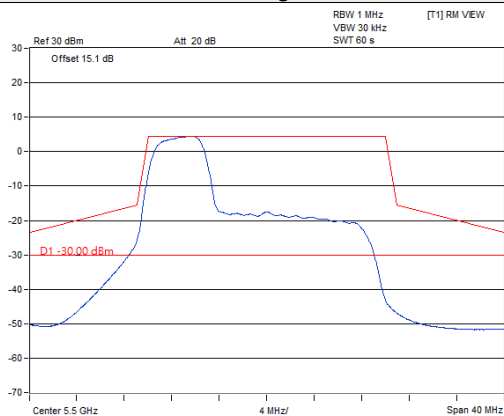


CH140 5700MHz RU Configuration: 52/40

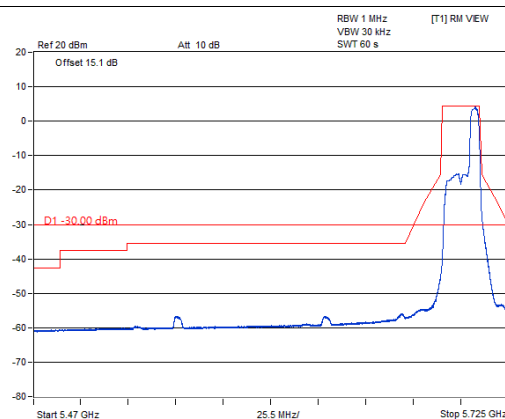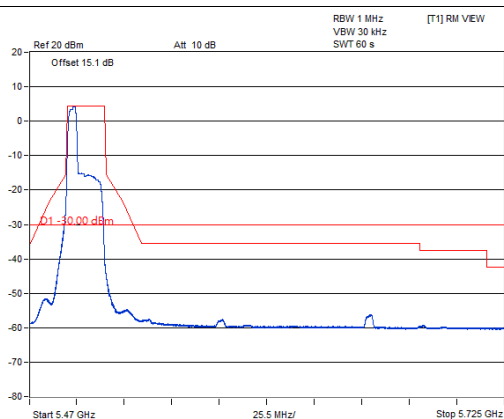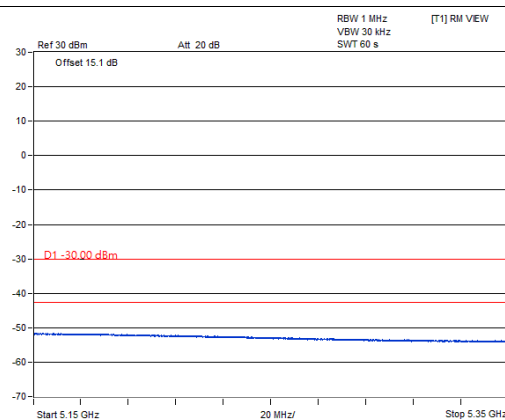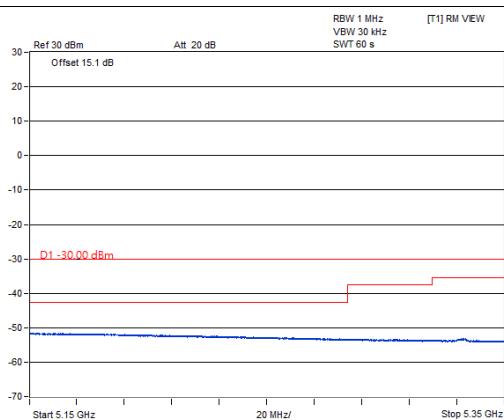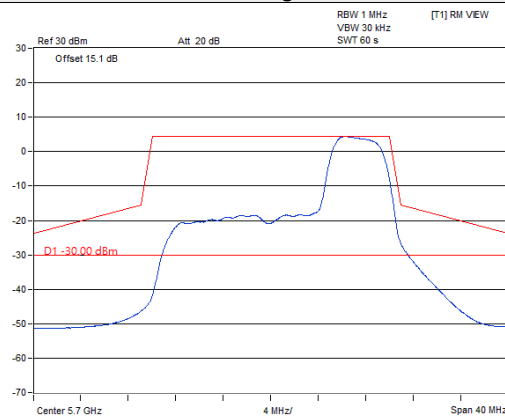

802.11ax (RU106)

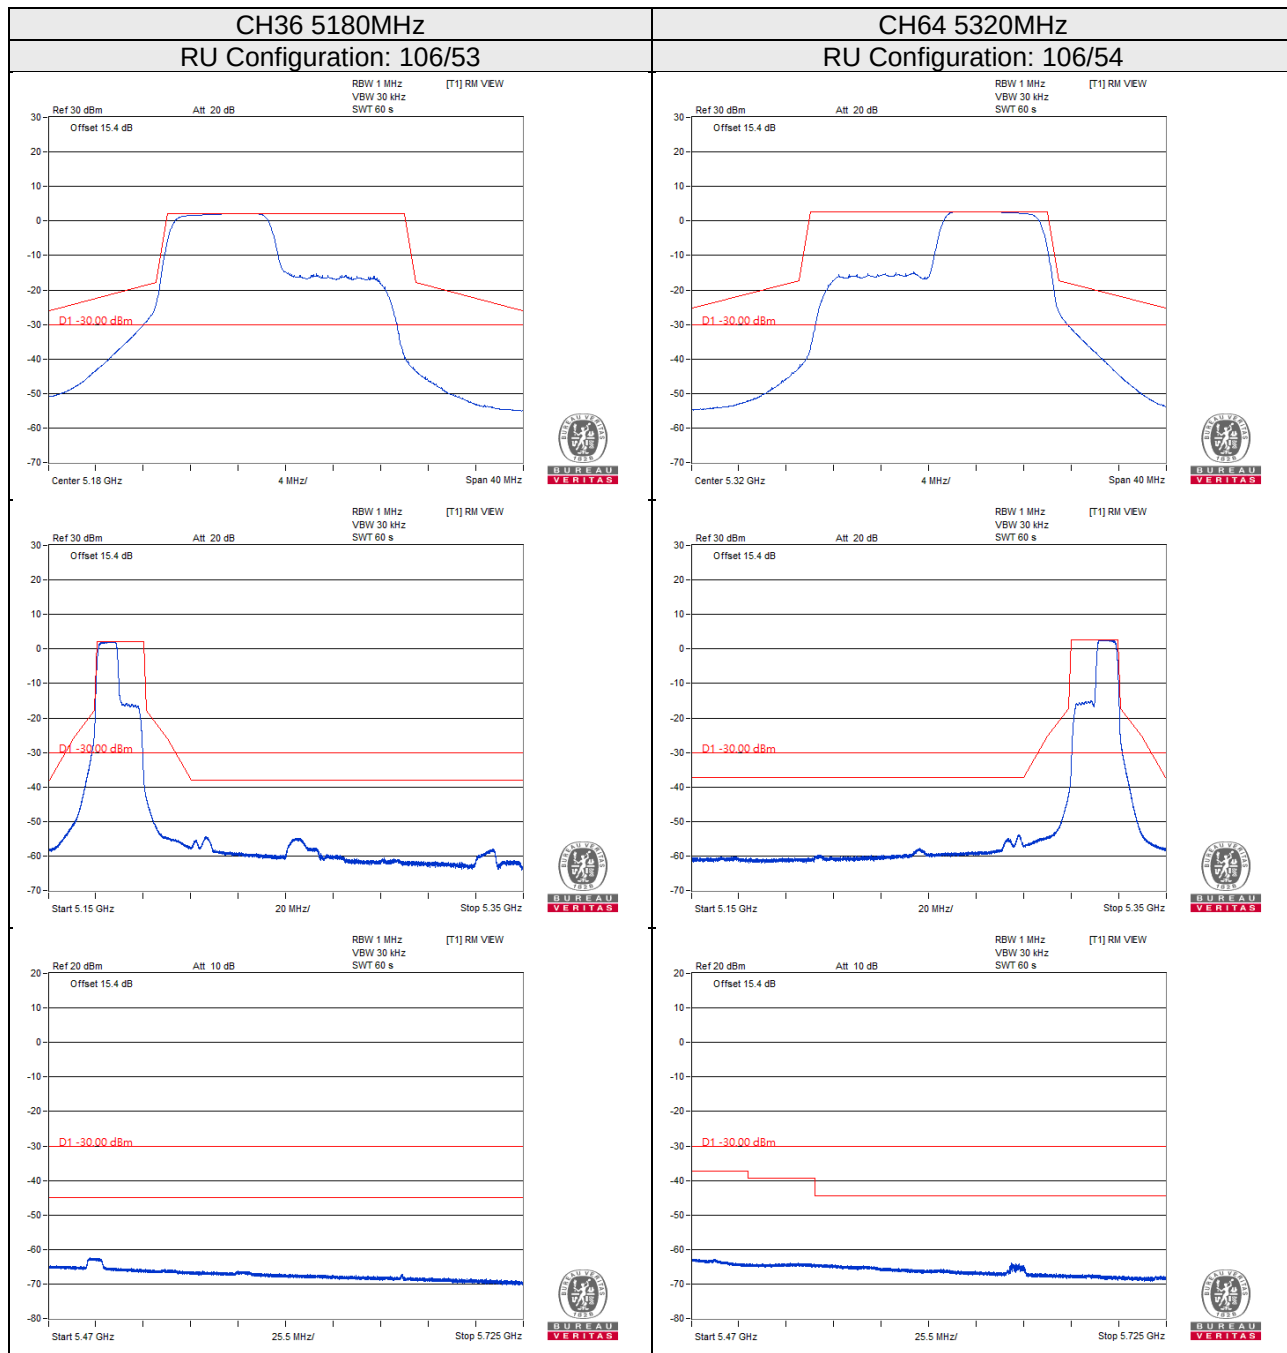

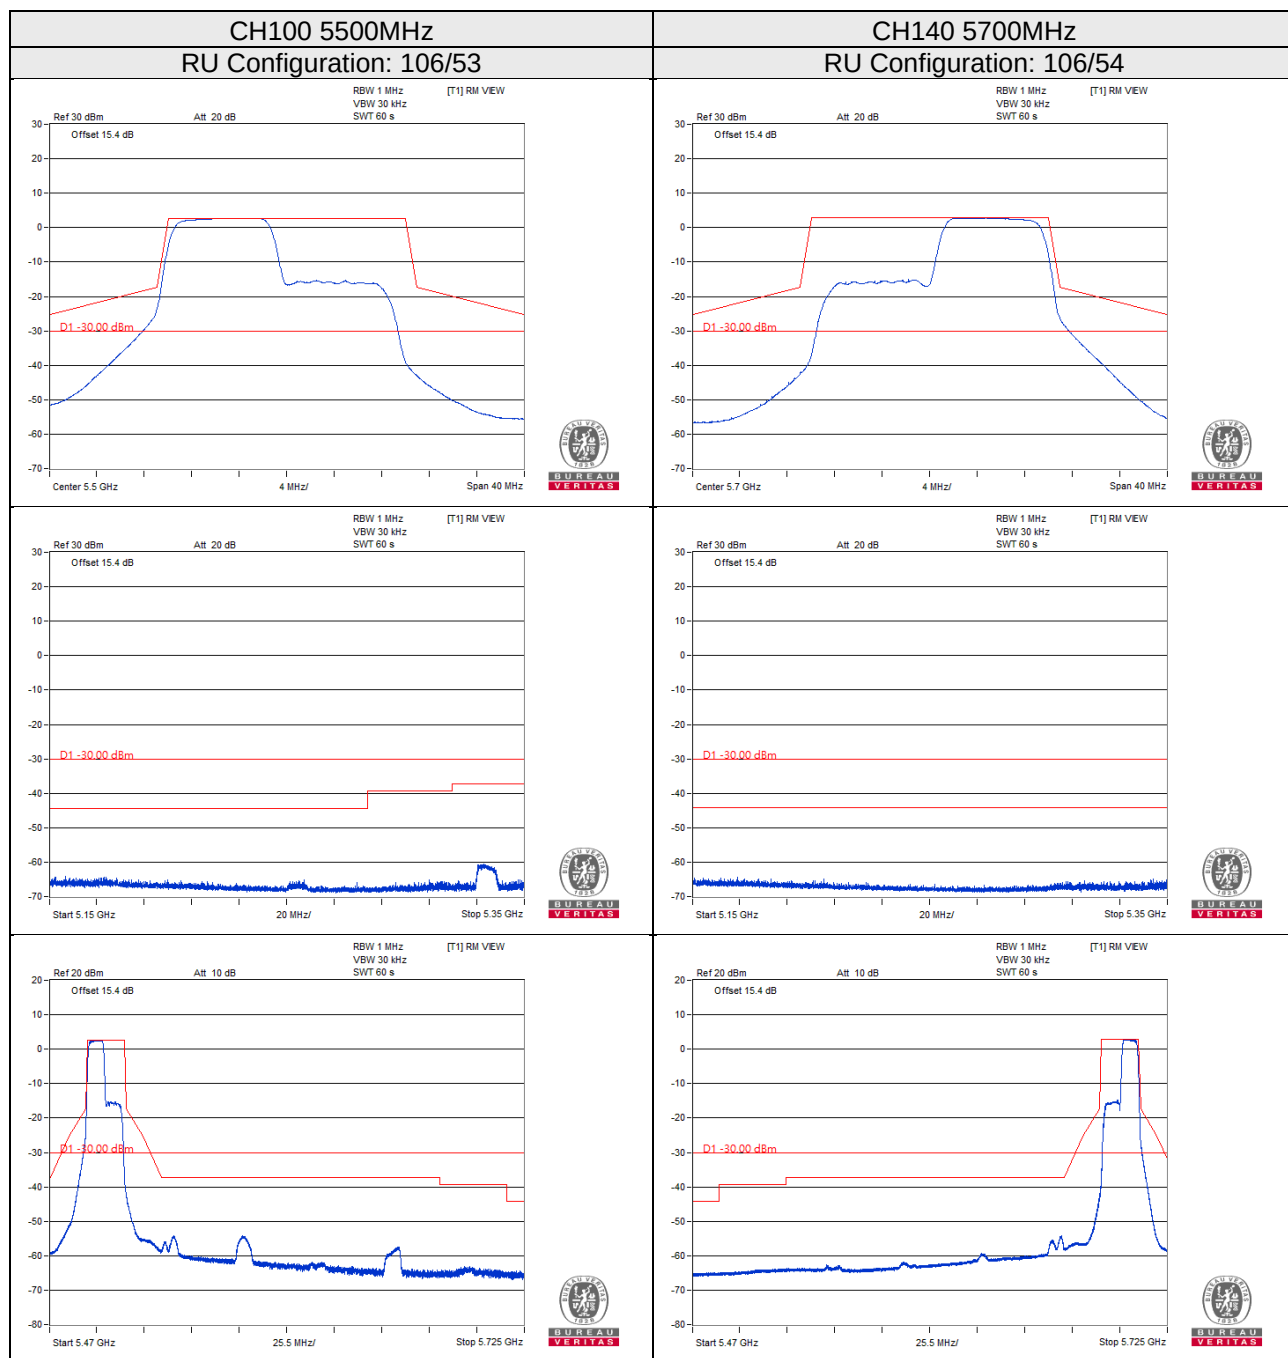

4.7 Receiver Spurious Radiation

4.7.1 Limit of Receiver Spurious Radiation

Frequency Range	Maximum Power Limit ERP (≤ 1 GHz) EIRP (>1 GHz)	Measurement Bandwidth
30 MHz ~ 1 GHz	-57dBm	100 kHz
1 GHz ~ 26 GHz	-47dBm	1 MHz

4.7.2 Test Procedure

Refer to EN 301 893 V2.1.1 clause 5.4.7

Measurement Method	
☐ Conducted measurement	☒ Radiated measurement

For Conducted measurement:
 The level of unwanted emissions shall be measured as their power in a specified load (conducted spurious emissions) and their effective radiated power when radiated by the cabinet or structure of the equipment with the antenna connector(s) terminated by a specified load (cabinet radiation).

Conducted measurement (For equipment with multiple transmit chains):
☐ Option 1: The results for each of the transmit chains for the corresponding 1MHz segments shall be added and compared with the limits.
☐ Option 2: The results for each of the transmit chains shall be individually compared with the limits after these limits have been reduced by $10 \times \log(N)$ (number of active transmit chains)

4.7.3 Deviation from Test Standard

No deviation.

4.7.4 Test Setup

1. For the actual test configuration, please refer to the related Item in this test report (Photographs of the Test Configuration).
2. Testing was performed when the equipment was in a receive-only mode.
3. The measurement was performed at normal environmental conditions only. Controlling software (RT8852A MP Toolkit V1.0.21) has been activated to set the EUT on specific status.
4. The measurement channels were performed in accordance with EN 301 893 clause 5.3.2.

4.7.5 Test Results (Mode 1)

Dipole Antenna

Below 1GHz worst-Case Data:

SPURIOUS EMISSION FREQUENCY RANGE	30MHz ~ 1GHz	OPERATING CHANNEL	102
--	--------------	------------------------------	-----

Spurious Emission Level				
Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
99.95	V	-60.34	-57.00	-3.34
108.35	H	-61.62	-57.00	-4.62
143.95	H	-62.19	-57.00	-5.19
199.15	H	-61.64	-57.00	-4.64
243.40	V	-65.78	-57.00	-8.78
374.15	V	-63.34	-57.00	-6.34
374.25	H	-61.16	-57.00	-4.16
424.10	V	-70.77	-57.00	-13.77
497.95	H	-63.70	-57.00	-6.70
499.80	V	-66.78	-57.00	-9.78
551.95	V	-70.91	-57.00	-13.91
576.30	H	-67.02	-57.00	-10.02
624.80	H	-64.41	-57.00	-7.41
624.80	V	-65.03	-57.00	-8.03
663.85	H	-61.15	-57.00	-4.15
663.85	V	-64.67	-57.00	-7.67
697.05	V	-61.49	-57.00	-4.49
762.30	H	-62.61	-57.00	-5.61
778.50	V	-66.49	-57.00	-9.49
797.60	H	-63.95	-57.00	-6.95

Above 1GHz worst-Case Data:

SPURIOUS EMISSION FREQUENCY RANGE	1GHz ~ 26GHz	OPERATING CHANNEL	36, 100
--	--------------	------------------------------	---------

Spurious Emission Level					
Channel	Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
36	10359.68	V	-51.79	-47.00	-4.79
	10360.73	H	-51.64	-47.00	-4.64
100	10999.62	H	-51.73	-47.00	-4.73
	11000.34	V	-51.79	-47.00	-4.79

PIFA Antenna

Below 1GHz worst-Case Data:

SPURIOUS EMISSION FREQUENCY RANGE	30MHz ~ 1GHz	OPERATING CHANNEL	102
--	--------------	------------------------------	-----

Spurious Emission Level				
Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
99.60	H	-63.38	-57.00	-6.38
99.95	V	-60.24	-57.00	-3.24
144.00	H	-61.64	-57.00	-4.64
161.70	H	-63.92	-57.00	-6.92
199.15	H	-62.16	-57.00	-5.16
373.80	H	-61.20	-57.00	-4.20
374.90	V	-62.89	-57.00	-5.89
497.90	V	-66.52	-57.00	-9.52
499.85	H	-64.66	-57.00	-7.66
571.10	V	-67.98	-57.00	-10.98
622.40	V	-64.93	-57.00	-7.93
624.80	H	-63.25	-57.00	-6.25
666.40	V	-63.63	-57.00	-6.63
666.45	H	-62.09	-57.00	-5.09
697.05	V	-61.30	-57.00	-4.30
741.35	V	-64.63	-57.00	-7.63
744.70	H	-63.38	-57.00	-6.38
747.45	V	-62.71	-57.00	-5.71
792.10	H	-63.26	-57.00	-6.26
874.80	V	-64.80	-57.00	-7.80

Above 1GHz worst-Case Data:

SPURIOUS EMISSION FREQUENCY RANGE	1GHz ~ 26GHz	OPERATING CHANNEL	36, 100
--	--------------	------------------------------	---------

Spurious Emission Level					
Channel	Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
36	10359.78	H	-51.40	-47.00	-4.40
	10359.86	V	-52.34	-47.00	-5.34
100	11000.35	H	-52.25	-47.00	-5.25
	11000.36	V	-50.84	-47.00	-3.84

4.8 Adaptivity

4.8.1 Product information for Adaptivity (Channel Access Mechanism)

Adaptivity (Channel Access Mechanism)	
☐ Frame Based Equipment	☐ The Frame Based Equipment operates as an Initiating Device
	☐ The Frame Based Equipment operates as an Responding Device
	☐ The Frame Based Equipment can operate as an Initiating Device and as a Responding Device
☒ Load Based Equipment	☐ The Load Based Equipment operates as a Supervising Device
	☒ The Load Based Equipment operates as a Supervised Device
	☐ The Load Based Equipment can operate as a Supervising and as a Supervised Device

Priority Classes implemented by the Load Based Equipment	
☐ Operating as a Supervising Device	☐ Priority Class 4 (Highest priority)
	☐ Priority Class 3
	☐ Priority Class 2 ☐ Note 1 ☐ Note 2
	☐ Priority Class 1 (Lowest priority) ☐ Note 1
☒ Operating as a Supervised Device	☐ Priority Class 4 (Highest priority)
	☐ Priority Class 3
	☒ Priority Class 2 ☐ Note 1
	☐ Priority Class 1 (Lowest priority) ☐ Note 1

Energy Detection Threshold Level (TL)	
☐ Frame Based Equipment	For $P_H \leq 13$ dBm : TL = -75 dBm/MHz For $13 \text{ dBm} < P_H < 23 \text{ dBm}$: TL = -85 dBm/MHz + (23 dBm - P_H) For $P_H \geq 23$ dBm : TL = -85 dBm/MHz (assumes a 0 dBi receive antenna and P_H to be specified in dBm e.i.r.p)
☒ Load Based Equipment	☒ Option 1: TL = -75 dBm/MHz (assumes a 0 dBi receive antenna) ☐ Option 2: For $P_H \leq 13$ dBm : TL = -75 dBm/MHz For $13 \text{ dBm} < P_H < 23 \text{ dBm}$: TL = -85 dBm/MHz + (23 dBm - P_H) For $P_H \geq 23$ dBm : TL = -85 dBm/MHz (assumes a 0 dBi receive antenna and P_H to be specified in dBm e.i.r.p)

4.8.2 Requirements and Limits of Adaptive

Channel Access Mechanism		
Requirement	Frame Based Equipment	Load Based Equipment
Minimum Clear Channel Assessment (CCA) Time	9 μs	9 μs
Maximum Channel Occupancy (COT) Time	95 % of the Fixed Frame Period (Note 1)	2 ~ 10 ms(See Table 1 & 2)
Minimum Idle Period	5% COT, with a min of 100 μs	25μs
Extended CCA check	NA	NA
Short Control Signalling Transmissions	Maximum duty cycle of 5 % within an observation period of 50 ms	
Note 1: The Fixed Frame Periods supported by the equipment shall be declared by the manufacturer and shall be within the range of 1 ms to 10 ms.		

Table 1: Priority Class dependent Channel Access parameters for Supervising Devices

Class #	p_0	CW_{min}	CW_{max}	Maximum Channel Occupancy Time (COT)
4	1	3	7	2 ms
3	1	7	15	4 ms
2	3	15	63	6 ms (see note 1 and note 2)
1	7	15	1 023	6 ms (see note 1)
NOTE 1: The maximum <i>Channel Occupancy Time</i> (COT) of 6 ms may be increased to 8 ms by inserting one or more pauses. The minimum duration of a pause shall be 100 μ s. The maximum duration (Channel Occupancy) before including any such pause shall be 6 ms. Pause duration is not included in the channel occupancy time.				
NOTE 2: The maximum Channel Occupancy Time (COT) of 6 ms may be increased to 10 ms by extending CW to $CW \times 2 + 1$ when selecting the random number q for any backoff(s) that precede the Channel Occupancy that may exceed 6 ms or which follow the Channel Occupancy that exceeded 6 ms. The choice between preceding or following a Channel Occupancy shall remain unchanged during the operation time of the device.				
NOTE 3: The values for p_0 , CW_{min} , CW_{max} are minimum values. Greater values are allowed.				

Table 2: Priority Class dependent Channel Access parameters for Supervised Devices

Class #	p_0	CW_{min}	CW_{max}	Maximum Channel Occupancy Time (COT)
4	2	3	7	2 ms
3	2	7	15	4 ms
2	3	15	1 023	6 ms (see note 1)
1	7	15	1 023	6 ms (see note 1)
NOTE 1: The maximum <i>Channel Occupancy Time</i> (COT) of 6 ms may be increased to 8 ms by inserting one or more pauses. The minimum duration of a pause shall be 100 μ s. The maximum duration (Channel Occupancy) before including any such pause shall be 6 ms. Pause duration is not included in the channel occupancy time.				
NOTE 2: The values for p_0 , CW_{min} , CW_{max} are minimum values. Greater values are allowed.				

Table 3: Classification of Idle Periods dependent Priority Class for Supervising Devices

Class #	Idle Periods Classification
4	$B_n = \begin{cases} [0, 23[\mu s, & n = 0 \\ [23 + 9 \times (n - 1), 23 + 9 \times n[\mu s, & 1 \leq n \leq 3 \\ [50, \infty[\mu s, & n = 4 \end{cases}$
3	$B_n = \begin{cases} [0, 23[\mu s, & n = 0 \\ [23 + 9 \times (n - 1), 23 + 9 \times n[\mu s, & 1 \leq n \leq 7 \\ [86, \infty[\mu s, & n = 8 \end{cases}$
2	$B_n = \begin{cases} [0, 41[\mu s, & n = 0 \\ [41 + 9 \times (n - 1), 41 + 9 \times n[\mu s, & 1 \leq n \leq 31 \text{ (use of note 2 in table 1)} \\ [320, \infty[\mu s, & n = 32 \\ [0, 41[\mu s, & n = 0 \\ [41 + 9 \times (n - 1), 41 + 9 \times n[\mu s, & 1 \leq n \leq 15 \text{ (not use of note 2 in table 1)} \\ [176, \infty[\mu s, & n = 16 \end{cases}$
1	$B_n = \begin{cases} [0, 77[\mu s, & n = 0 \\ [77 + 9 \times (n - 1), 77 + 9 \times n[\mu s, & 1 \leq n \leq 15 \\ [212, \infty[\mu s, & n = 16 \end{cases}$

Table 4: Classification of Idle Periods dependent Priority Class for Supervised Devices

Class #	Idle Periods Classification
4	$B_n = \begin{cases} [0, 32[\mu s, & n = 0 \\ [32 + 9 \times (n - 1), 32 + 9 \times n[\mu s, & 1 \leq n \leq 3 \\ [59, \infty[\mu s, & n = 4 \end{cases}$
3	$B_n = \begin{cases} [0, 32[\mu s, & n = 0 \\ [32 + 9 \times (n - 1), 32 + 9 \times n[\mu s, & 1 \leq n \leq 7 \\ [95, \infty[\mu s, & n = 8 \end{cases}$
2	$B_n = \begin{cases} [0, 41[\mu s, & n = 0 \\ [41 + 9 \times (n - 1), 41 + 9 \times n[\mu s, & 1 \leq n \leq 15 \\ [176, \infty[\mu s, & n = 16 \end{cases}$
1	$B_n = \begin{cases} [0, 77[\mu s, & n = 0 \\ [77 + 9 \times (n - 1), 77 + 9 \times n[\mu s, & 1 \leq n \leq 15 \\ [212, \infty[\mu s, & n = 16 \end{cases}$

Table 5: Idle Periods probability dependent Priority Class

Class #	Idle Periods probability
4	$p(n) \leq \begin{cases} 0,05, & n = 0 \\ 0,05 + n \times 0,25, & 1 \leq n \leq 3 \\ 1, & n > 3 \end{cases}$
3	$p(n) \leq \begin{cases} 0,05, & n = 0 \\ 0,18, & n = 1 \\ 0,18 + (n - 1) \times 0,125, & 2 \leq n \leq 6 \\ 1, & n > 6 \end{cases}$
2	$p(n) \leq \begin{cases} 0,05, & n = 0 \\ 0,12, & n = 1 \\ 0,12 + (n - 1) \times 0,03125, & 2 \leq n \leq 29 \text{ (use of note 2 in table 1)} \\ 1, & n > 29 \end{cases}$ $p(n) \leq \begin{cases} 0,05, & n = 0 \\ 0,12, & n = 1 \\ 0,12 + (n - 1) \times 0,0625, & 2 \leq n \leq 15 \text{ (not use of note 2 in table 1)} \\ 1, & n > 15 \end{cases}$ $p(n) \leq \begin{cases} 0,05, & n = 0 \\ 0,09 + (n - 1) \times 0,03125, & 1 \leq n \leq 7 \\ 0,59 + (n - 1) \times 0,03125, & 8 \leq n \leq 14 \text{ (use of note 1 in table 1 & table 2)} \\ 1, & n > 14 \end{cases}$
1	$p(n) \leq \begin{cases} 0,05, & n = 0 \\ 0,12, & n = 1 \\ 0,12 + (n - 1) \times 0,0625, & 2 \leq n \leq 15 \\ 1, & n > 15 \end{cases}$
1. E define the total number of Idle Periods observed. Then E is the sum of events in all bins: $E = \sum_{n=0}^k H(B_n)$ 2. p(n) define the probability that idle periods of duration less than the upper limit specified for bin B_n occurred, p(n) = p (Idle Period < upper limit of bin B_n) $p(n) = \frac{\sum_{i=0}^n H(B_i)}{E}$	

4.8.3 Test Procedure


Refer to EN 301 893 V2.1.1 clause 5.4.9

Measurement Method	
☒ Conducted measurement	☐ Radiated measurement

4.8.4 Deviation from Test Standard

No deviation.

4.8.5 Test Setup Configuration

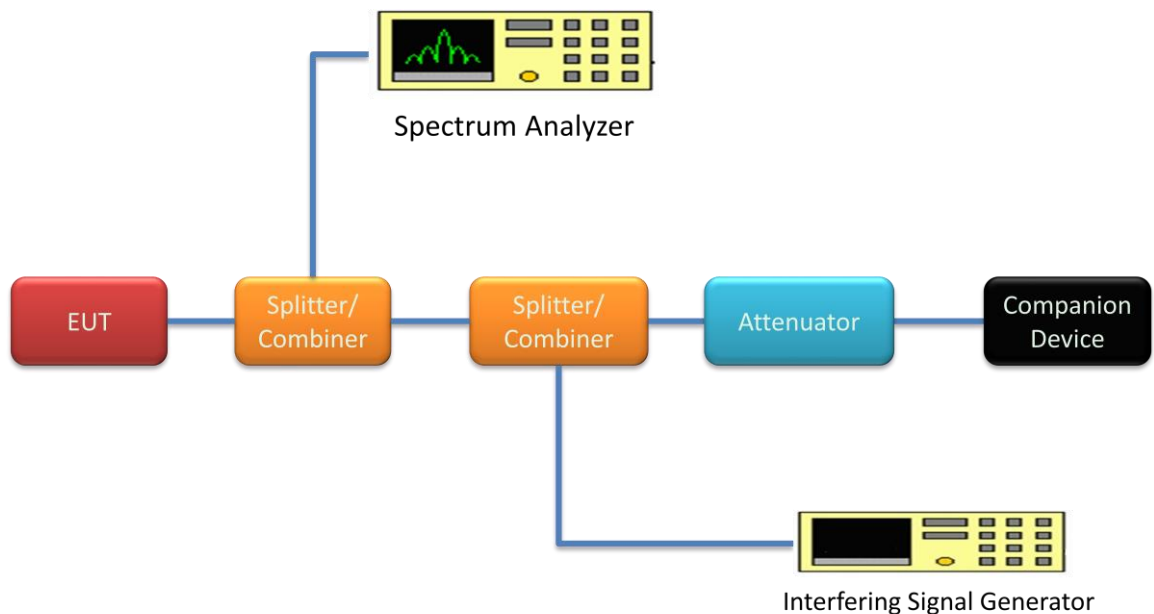

Companion Device information

Product	Brand	Model No.	Software/Firmware Version
Wireless-AX6000 Dual Band Gigabit Router	ASUS	RT-AX88U	3.0.0.4.384

4.8.6 List of Measurement

Clause	Test Parameter	Remarks	Pass/Fail
4.2.7.3.1	Adaptive (Frame Based Equipment)	Not Applicable	NA
4.2.7.3.2	Adaptive (Load Based Equipment)	Applicable	Pass
4.2.7.3.3	Short Control Signalling Transmissions	Applicable	Pass

4.8.7 Interference Signals used for Adaptivity tests

Energy Detection Threshold Level (TL)



Option 1: TL = -75 dBm/MHz (assumes a 0 dBi receive antenna)

UUT antenna Gain(G) : 5 dBi


The ED Threshold level (TL) = -75 dBm/MHz + G (5dBi) = -70 dBm/MHz

- ☒ at the antenna connector
☐ in front of the antenna


Additive White Gaussian Noise (AWGN) test signal

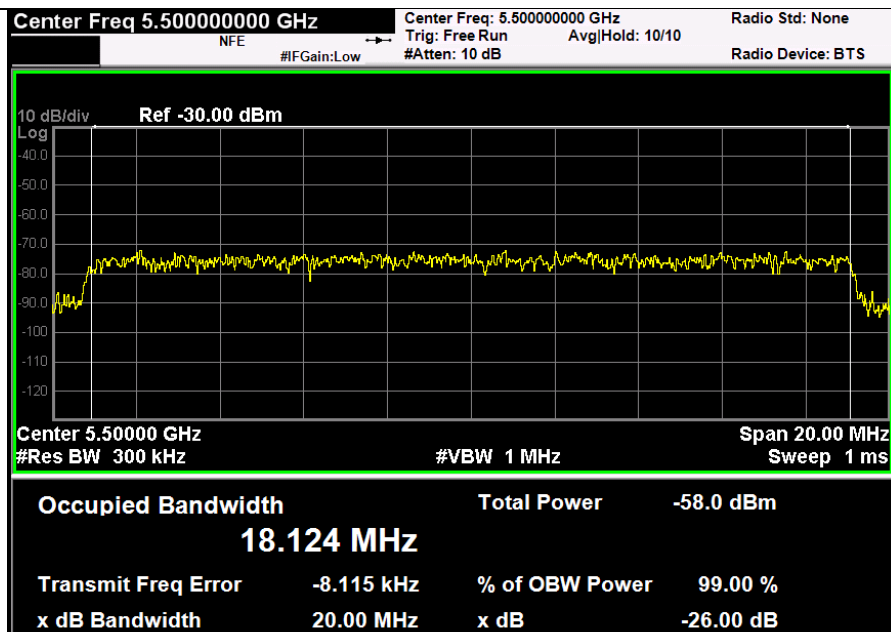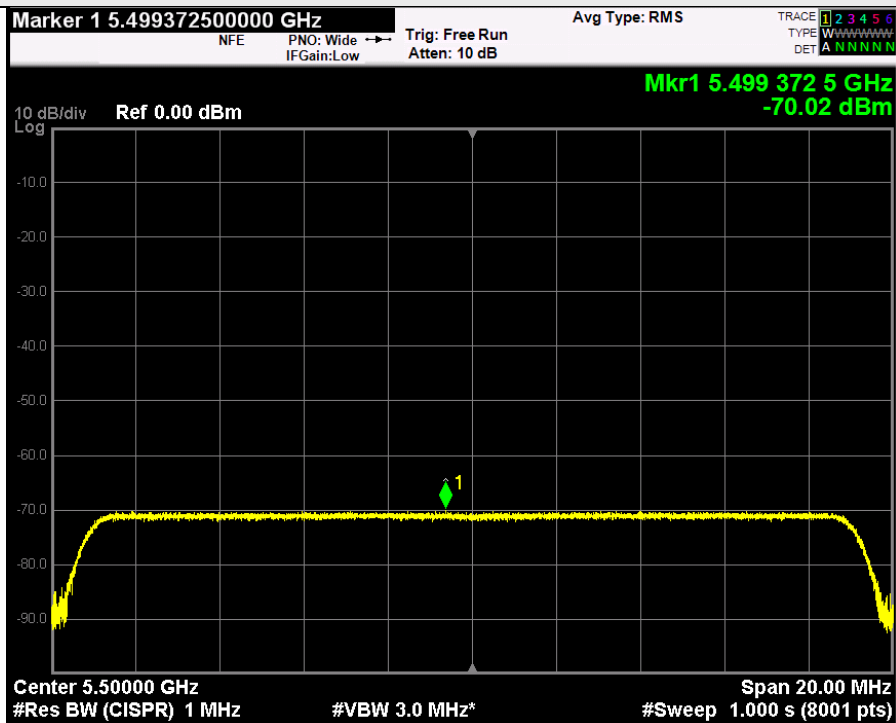

OFDM test signal

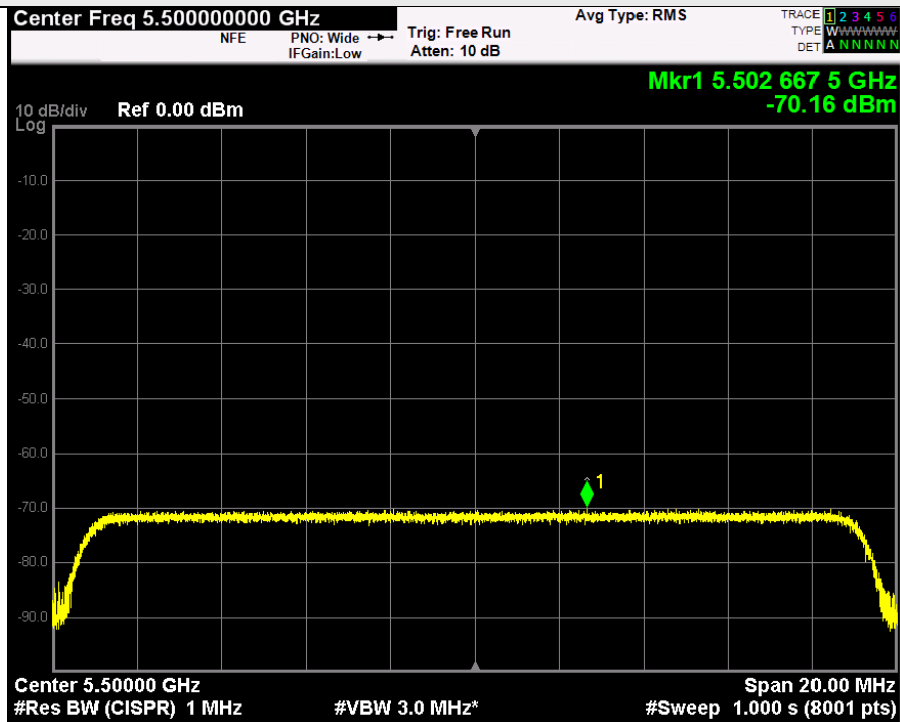

LTE test signal

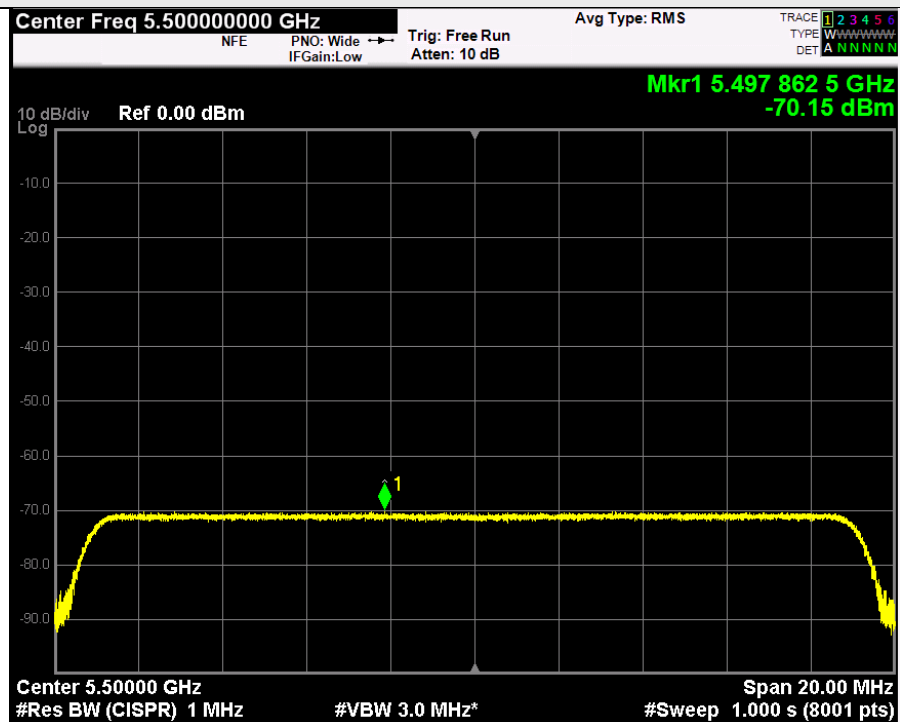

4.8.8 Test Result


4.8.8.1 Adaptive Test Result

Channel Operation of EUT Device type


☐ Frame Based Equipment	☐ Single Channel Operation
	☐ Multi-Channel Operation
☒ Load Based Equipment	☒ Single Channel Operation
	☐ Option 1 for Multi-Channel Operation
	☒ Option 2 for Multi-Channel Operation

Operating Frequency Bands and Mode of EUT


Operational Mode	Operating Frequency (MHz)	Test Result
802.11ax (HE20)	5500	Pass

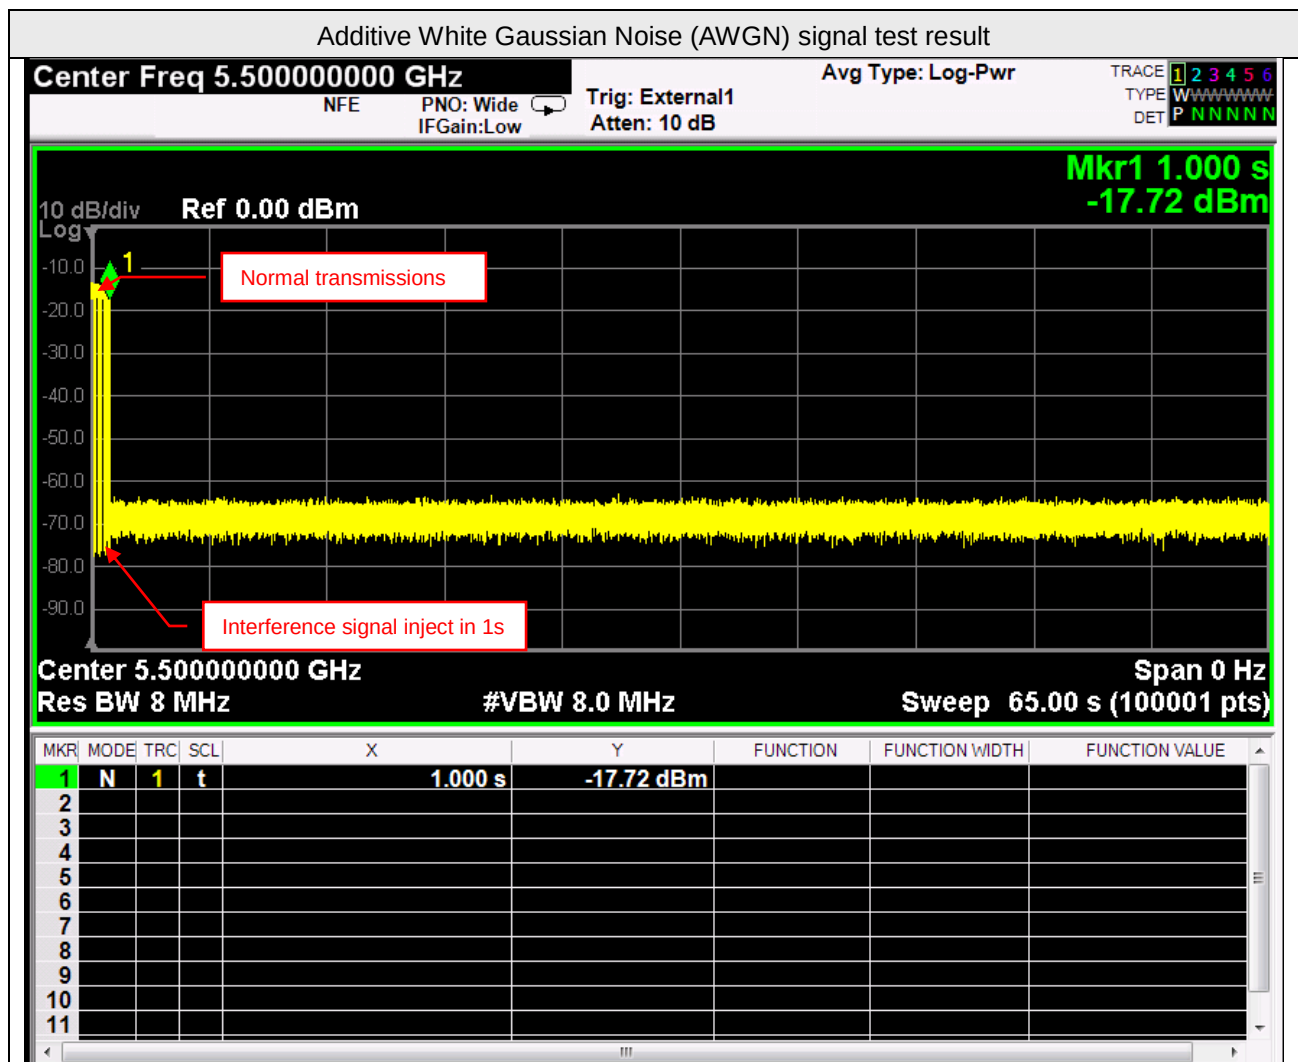

OFDM signal test result

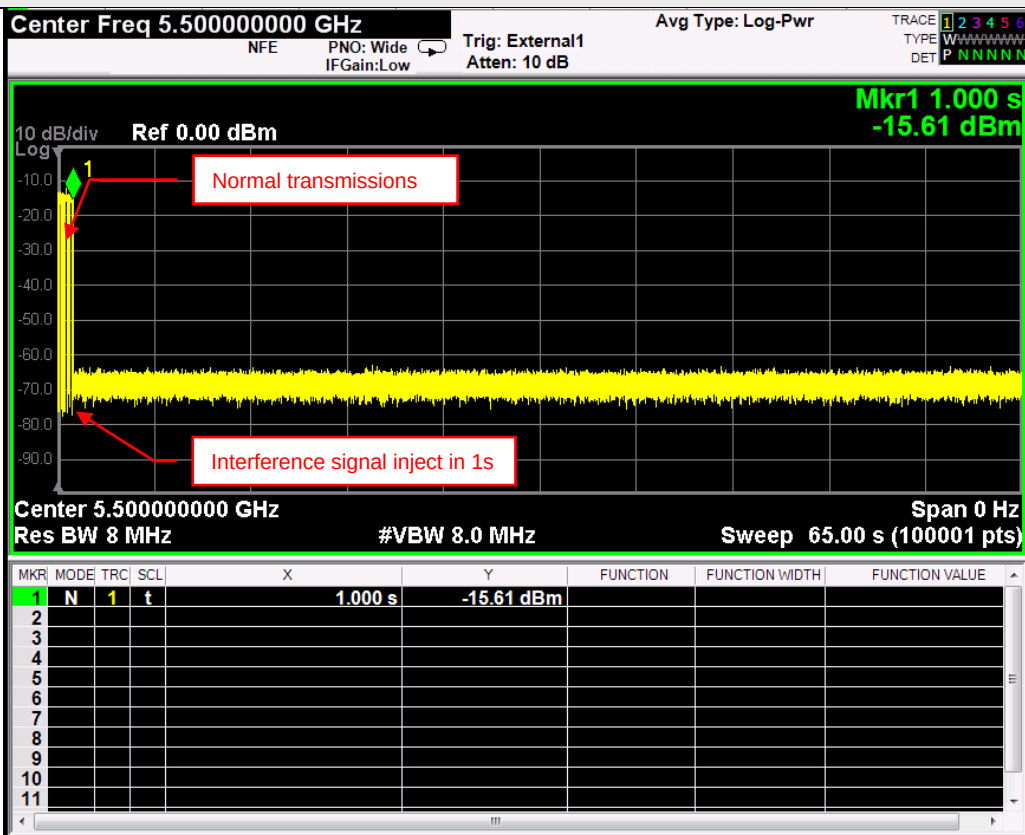

LTE test signal

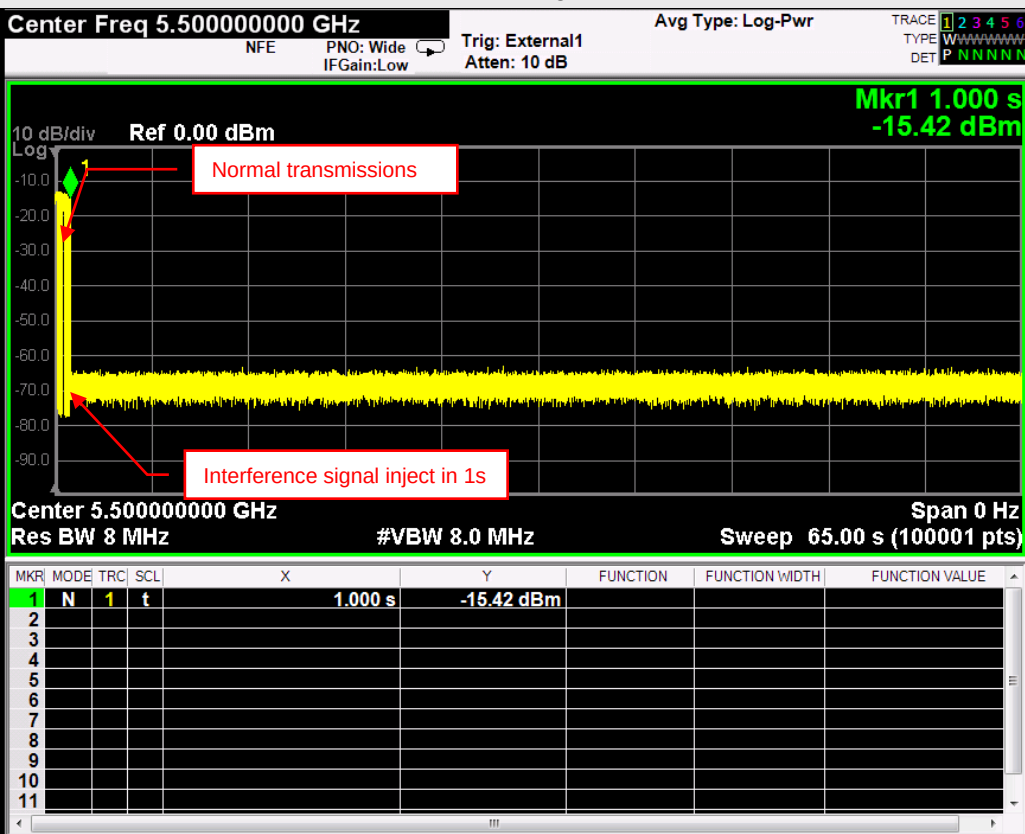


4.8.8.2 Test Results of Channel Access Mechanism

Channel Access Mechanism of EUT Type

☐ Frame Based Equipment	
☒ Load Based Equipment	☒ Option A : verify channel access mechanism
	☐ Option B : declaration by manufacturer

Operating Frequency Bands and Mode of EUT


Operational Mode	Operating Frequency (MHz)	Maximum Channel Occupancy Time (ms)	Minimum Idle Period (μs)	Test Result
802.11ax (HE40)	5510	5.484	27.344	Pass

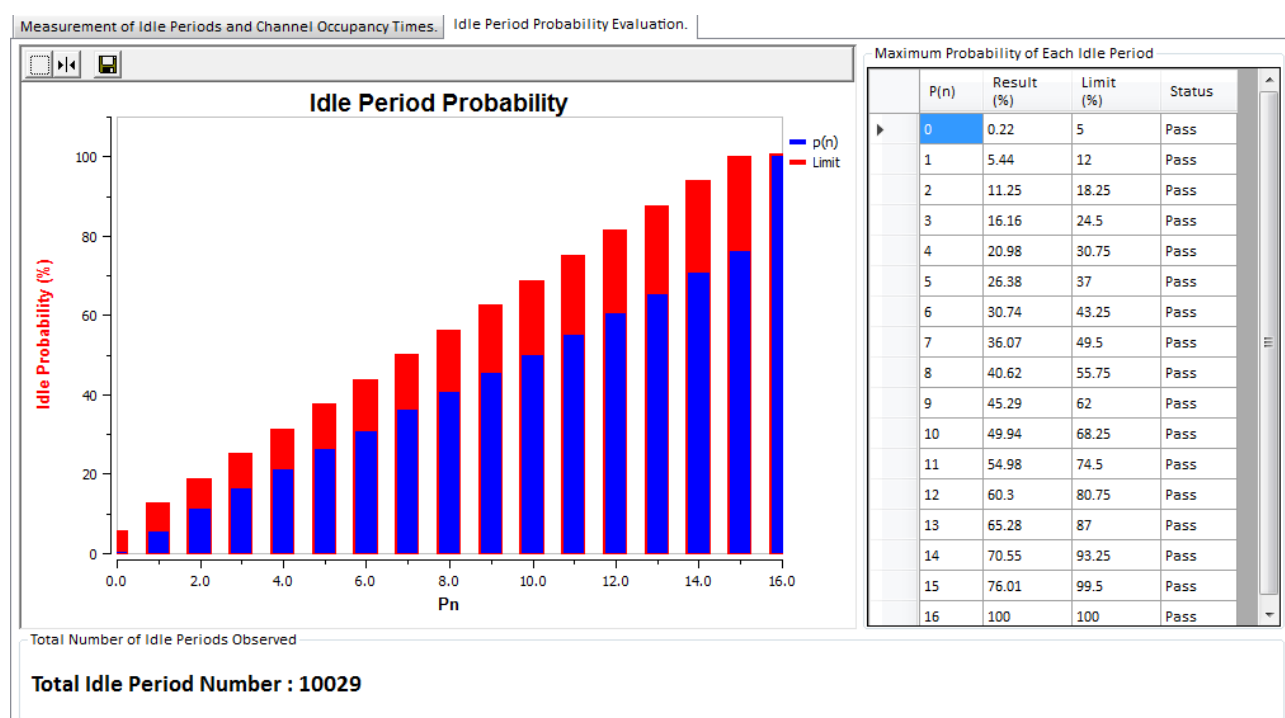

Maximum Channel Occupancy Time

Measurement of Idle Periods and Channel Occupancy Times. Idle Period Probability Evaluation.

Maximum Channel Occupancy Time Minimum Idle Time

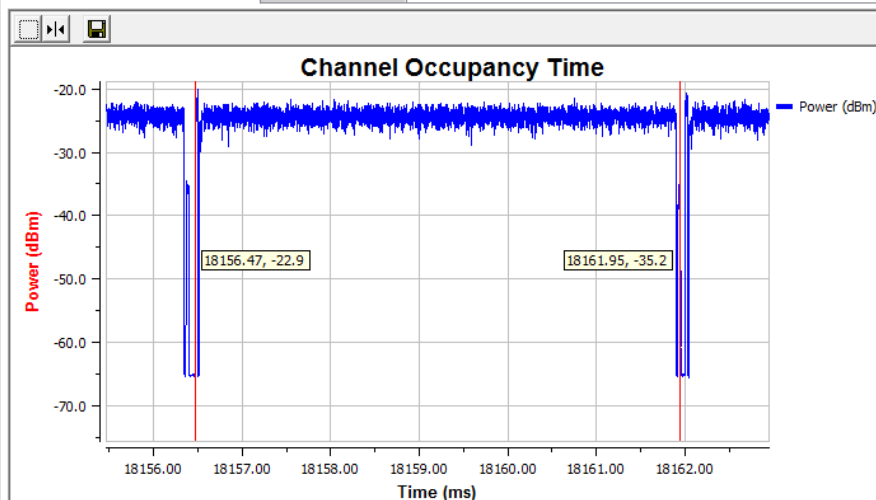

B(n=0) = 22
B(n=1) = 524
B(n=2) = 582
B(n=3) = 493
B(n=4) = 483
B(n=5) = 542
B(n=6) = 437
B(n=7) = 534
B(n=8) = 457
B(n=9) = 468
B(n=10) = 466
B(n=11) = 506
B(n=12) = 533
B(n=13) = 500
B(n=14) = 528
B(n=15) = 548
B(n=16) = 2406

Classification of Idle Period
COT Data
Idle Data
Raw Data

Channel Occupancy Information

COT Number : 10041

Maximum COT (ms) : 5.484


Minimum Idle Time (us) : 27.344

Priority Class dependent Channel Access parameters : 2

Minimum Idle Period

Measurement of Idle Periods and Channel Occupancy Times. Idle Period Probability Evaluation.

Maximum Channel Occupancy Time Minimum Idle Time

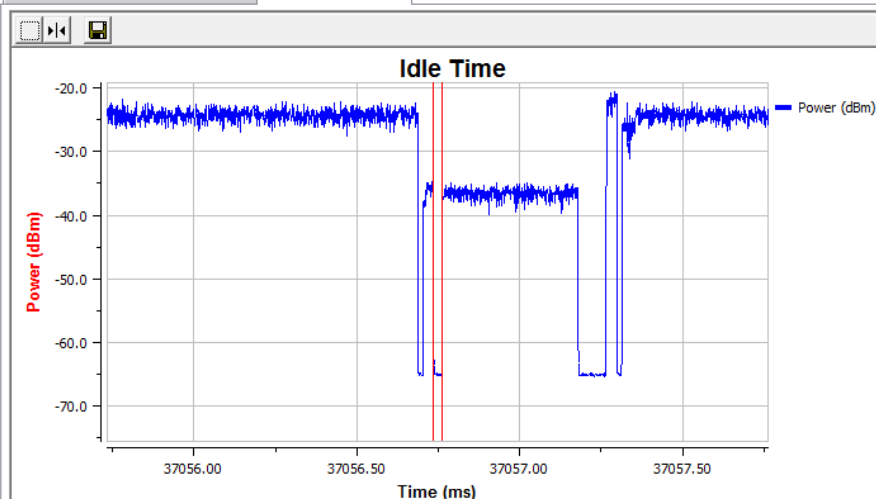

B(n=0) = 22
B(n=1) = 524
B(n=2) = 582
B(n=3) = 493
B(n=4) = 483
B(n=5) = 542
B(n=6) = 437
B(n=7) = 534
B(n=8) = 457
B(n=9) = 468
B(n=10) = 466
B(n=11) = 506
B(n=12) = 533
B(n=13) = 500
B(n=14) = 528
B(n=15) = 548
B(n=16) = 2406

Classification of Idle Period
COT Data
Idle Data
Raw Data

Channel Occupancy Information

COT Number : 10041

Maximum COT (ms) : 5.484

Minimum Idle Time (us) : 27.344

Priority Class dependent Channel Access parameters : 2

4.8.8.3 Short Control Signalling Transmissions Result

802.11ax (HE20) mode CH100 5500MHz

Short Control Signalling Transmission Result			
Interference signal	Total duration of SCST(ms)	Limit (ms)	Pass/Fail
AWGN signal	0	2.5	Pass
OFDM signal	0	2.5	Pass
LTE signal	0	2.5	Pass

802.11ax (HE40) mode CH102 5510MHz

Short Control Signalling Transmission Result			
Interference of signal	Total duration of SCST(ms)	Limit (ms)	Pass/Fail
AWGN signal	0	2.5	PASS

4.9 Receiver Blocking

4.9.1 Limit of Receiver Blocking

Receiver Blocking Criterion	
Minimum performance criterion	☒ PER $\leq 10\%$
	☐ Alternative performance criteria (See note)
Note: The manufacturer was declared performance criteria is x% for the intended use of the equipment.	

Receiver Blocking Parameters				
Wanted signal mean power from companion device (dBm)	Blocking Signal Frequency (MHz)	Blocking Signal Power (dBm) (See note 2)		Type of blocking signal
		Master or Slave with radar detection (see note 3)	Slave without radar detection (see note 3)	
$P_{\min} + 6 \text{ dB}$	5100	-53	-59	Continuous Wave
$P_{\min} + 6 \text{ dB}$	4900 5000 5975	-47	-53	Continuous Wave
Note 1: $P_{\min}$ is the minimum level of the wanted signal (in dBm) required to meet the minimum performance criteria as defined in clause 4.2.8.3 in the absence of any blocking signal. Note 2: The levels specified are levels in front of the UUT antenna. In case of conducted measurements, the same levels should be used at the antenna connector irrespective of antenna gain. Note 3: Slave devices with a maximum e.i.r.p. of less than 23 dBm do not have to implement radar detection unless these devices are used in fixed outdoor point to point or fixed outdoor point to multipoint applications				

4.9.2 Test Procedure


Refer to EN 301 893 V2.1.1 clause 5.4.10

Measurement Method	
☒ Conducted measurement	☐ Radiated measurement

4.9.3 Deviation from Test Standard

No deviation.

4.9.4 Test Setup Configuration

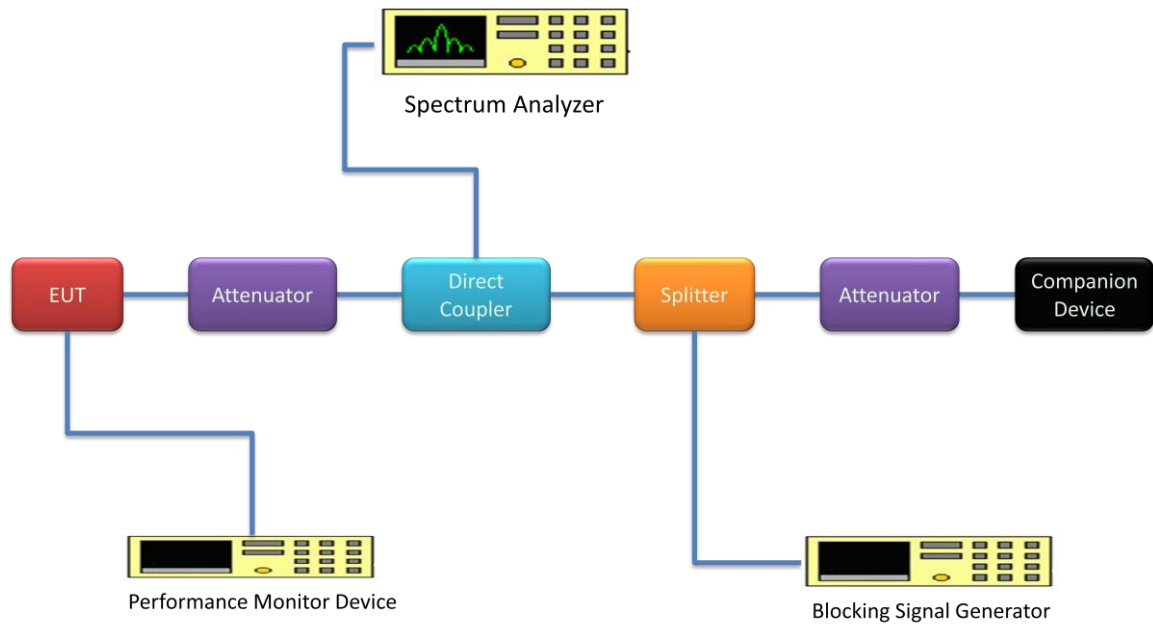

4.9.5 Test Results

Receiver blocking performance when operating at the lower sub-band						
P _{min} : -90 dBm						
The actual blocking signal power(Note1)				☒ at the antenna connector		
				☐ in front of the antenna		
Note1: For the conducted measurements, the same levels should be used at the antenna connector irrespective of antenna gain.						
Operation Mode	Channel	Wanted signal mean power from companion device (dBm)	Blocking signal frequency (MHz)	The actual blocking signal power (dBm)	The highest level at which the performance criteria are met (dBm)	Pass/Fail
802.11a	36	-84	5100	-59	-11	Pass
			4900	-53	-7	Pass
			5000	-53	-7	Pass
			5975	-53	-16	Pass

Receiver blocking performance when operating at the higher sub-band						
P _{min} : -90 dBm						
The actual blocking signal power(Note1)				☒ at the antenna connector		
				☐ in front of the antenna		
Note1: For the conducted measurements, the same levels should be used at the antenna connector irrespective of antenna gain.						
Operation Mode	Channel	Wanted signal mean power from companion device (dBm)	Blocking signal frequency (MHz)	The actual blocking signal power (dBm)	The highest level at which the performance criteria are met (dBm)	Pass/Fail
802.11a	100	-84	5100	-59	-33	Pass
			4900	-53	-9	Pass
			5000	-53	-11	Pass
			5975	-53	-15	Pass

4.10 User Access Restrictions

4.10.1 Definition

User Access Restrictions are constraints implemented in the RLAN device to restrict access of the user to any hardware and/or software settings of the equipment, including software replacement(s), which may impact (directly or indirectly) the compliance of the equipment with the requirements in the present document.

NOTE: The user should be understood as the end user, the operator or any person not responsible for the compliance of the equipment against the requirements in the present document.

4.10.2 Requirement

The equipment shall be so constructed that settings (hardware and/or software) related to DFS shall not be accessible to the user if changing those settings result in the equipment no longer being compliant with the DFS requirements in clause 4.2.6.

The above requirement includes the prevention of indirect access to any setting that impacts DFS.

Manufacturer provides declaration form to meet this requirement.

5 Photographs of the Test Configuration

TX / RX Spurious Emission Test Dipole Antenna



PIFA Antenna



Appendix - Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---