

EN 300 328 RF Test Report (BT-EDR)

Report No.: RE200522E04-3

Test Model: RTL8852AE

Received Date: May 22, 2020

Test Date: July 03 to Sep. 29, 2020

Issued Date: Oct. 05, 2020

Applicant: Realtek Semiconductor Corp.

Address: No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Test Instruments	7
2.2 Measurement Uncertainty	11
2.3 Maximum Measurement Uncertainty	11
2.4 Modification Record	11
3 General Information	12
3.1 General Description of EUT (BT-EDR).....	12
3.2 Description of Test Modes	14
3.2.1 Test Mode Applicability and Tested Channel Detail	15
3.3 Description of Support Units	18
3.3.1 Configuration of System under Test	18
3.4 General Description of Applied Standards	19
4 Test Procedure and Results.....	20
4.1 RF Output Power.....	20
4.1.1 Limits of RF Output Power	20
4.1.2 Test Procedures.....	20
4.1.3 Deviation from Test Standard	20
4.1.4 Test Setup.....	20
4.1.5 Test Results (Mode 1).....	21
4.1.6 Test Results (Mode 2).....	21
4.2 Accumulated Transmit Time, Frequency Occupation and Hopping Sequence	22
4.2.1 Limits of Dwell time, Minimum Frequency Occupation and Hopping Sequence.....	22
4.2.2 Test Procedure	22
4.2.3 Deviation from Test Standard	22
4.2.4 Test Setup.....	22
4.2.5 Test Results (Mode 1).....	23
4.2.6 Test Results (Mode 2).....	31
4.3 Hopping Frequency Separation	39
4.3.1 Limits of Hopping Frequency Separation	39
4.3.2 Test Procedure	39
4.3.3 Deviation from Test Standard	39
4.3.4 Test Setup.....	39
4.3.5 Test Results (Mode 1).....	40
4.3.6 Test Results (Mode 2).....	42
4.4 Adaptivity (Adaptive Frequency Hopping).....	44
4.4.1 Limit of Adaptive	44
4.4.2 Test Procedure	45
4.4.3 Deviation from Test Standard	45
4.4.4 Test Setup Configuration	46
4.4.5 List of Measurements	47
4.4.6 Interference Threshold Level.....	48
4.4.7 Test Result.....	50
4.4.7.1 Adaptive Result.....	50
4.4.7.2 The Channel Occupancy Time Result	52
4.5 Occupied Channel Bandwidth.....	55
4.5.1 Limit of Occupied Channel Bandwidth	55
4.5.2 Test Procedure	55
4.5.3 Deviation from Test Standard	55
4.5.4 Test Setup.....	55
4.5.5 Test Results (Mode 1).....	56
4.5.1 Test Results (Mode 2).....	56

4.6	Transmitter Unwanted Emissions in the Out-of-Band Domain	57
4.6.1	Limits of Transmitter Unwanted Emission in the Out-of-Band Domain	57
4.6.2	Test Procedure	57
4.6.3	Deviation from Test Standard	57
4.6.4	Test Setup.....	57
4.6.5	Test Results (Mode 1).....	58
4.6.6	Test Results (Mode 2).....	59
4.7	Transmitter Unwanted Emissions in the Spurious Domain	60
4.7.1	Limits of Transmitter Unwanted Emissions in the Spurious Domain.....	60
4.7.2	Test Procedure	60
4.7.3	Deviation from Test Standard	60
4.7.4	Test Setup.....	60
4.7.5	Test Results	61
4.8	Receiver Spurious Emissions	65
4.9	Limit of Receiver Spurious Radiation	65
4.9.1	Test Procedure	65
4.9.2	Deviation from Test Standard	65
4.9.3	Test Setup.....	65
4.9.4	Test Results	66
4.10	Receiver Blocking.....	68
4.10.1	Limit of Receiver Blocking	68
4.10.2	Test Procedure	70
4.10.3	Deviation from Test Standard	70
4.10.4	Test Setup Configuration	70
4.10.5	Test Results	71
5	Photographs of the Test Configuration	72
	Appendix A- Information of the Testing Laboratories.....	74
	Appendix B- Test Results for reference by client's requirement.....	75

Release Control Record

Issue No.	Description	Date Issued
RE200522E04-3	Original release.	Oct. 05, 2020

1 Certificate of Conformity

Product: 11ax RTL8852AE Combo module

Brand: REALTEK

Test Model: RTL8852AE

Sample Status: ENGINEERING SAMPLE

Applicant: Realtek Semiconductor Corp.

Test Date: July 03 to Sep. 29, 2020

Standards: EN 300 328 V2.2.2 (2019-07)

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Vivian Huang , **Date:** Oct. 05, 2020
Vivian Huang / Specialist

Approved by : Clark Lin , **Date:** Oct. 05, 2020
Clark Lin / Technical Manager

2 Summary of Test Results

The EUT has been tested according to the following specifications:

EN 300 328 V2.2.2		
Clause	Test Parameter	Results
4.3.1.2	RF Output Power	Pass
4.3.1.3	Duty cycle, Tx-sequence, Tx-gap (Only for non-Adaptive equipment)	Not Applicable
4.3.1.4	Accumulated Transmit Time, Frequency Occupation and Hopping Sequence (Only for FHSS equipment)	Pass
4.3.1.5	Hopping Frequency Separation (Only for FHSS equipment)	Pass
4.3.1.6	Medium Utilisation (Only for non-Adaptive Equipment)	Not Applicable
4.3.1.7	Adaptivity (Adaptive Equipment)	Pass
4.3.1.8	Occupied Channel Bandwidth	Pass
4.3.1.9	Transmitter Unwanted Emission in the OOB Domain	Pass
4.3.1.10	Transmitter Unwanted Emissions in the Spurious Domain	Pass
4.3.1.11	Receiver Spurious Emissions	Pass
4.3.1.12	Receiver Blocking	Pass
4.3.1.13	Geo-location capability (Only for equipment with geo-location capability)	Not Applicable

Note:

1. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Test Instruments

For spurious emissions test (except RX emission above 1GHz for Dipole Antenna):

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer Keysight	N9030A	MY54490570	June 16, 2020	June 15, 2021
Pre_Amplifier Agilent	8447D	2944A10663	Apr. 28, 2020	Apr. 27, 2021
Pre_Amplifier HP	8449B	3008A01281	Jan. 09, 2020	Jan. 08, 2021
Pre_Amplifier EMC	EMC184045	980143	Jan. 09, 2020	Jan. 08, 2021
TRILOG Antenna SCHWARZBECK	VULB9168	9168-162	Nov. 11, 2019	Nov. 10, 2020
Horn_Antenna SCHWARZBECK	BBHA9120-D1	D124	Nov. 24, 2019	Nov. 23, 2020
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 24, 2019	Nov. 23, 2020
Software	ADT_Radiated_V7.6.15.9.5	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208411	NA	NA
Power meter Anritsu	ML2495A	1529002	July 26, 2019	July 25, 2020
Power sensor Anritsu	MA2411B	1339443	July 26, 2019	July 25, 2020
Power meter Anritsu	ML2496A	1529003	Aug. 07, 2019	Aug. 06, 2020
Power sensor Anritsu	MA2411B	1339442	Aug. 07, 2019	Aug. 06, 2020
ESG Vector signal generator Agilent	E4438C	MY45094468/005 506 602 UK6 UNJ	Nov. 14, 2019	Nov. 13, 2020

- NOTE:**
1. The test was performed in RF Fully Chamber No. 1.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: July 10, 2020

For RX emission above 1GHz for Dipole Antenna:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer Keysight	N9030A	MY54490570	June 16, 2020	June 15, 2021
Pre_Amplifier HP	8449B	3008A01281	Jan. 09, 2020	Jan. 08, 2021
Pre_Amplifier EMCi	EMC184045	980143	Jan. 09, 2020	Jan. 08, 2021
Horn_Antenna SCHWARZBECK	BBHA9120-D1	D124	Nov. 24, 2019	Nov. 23, 2020
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 24, 2019	Nov. 23, 2020
Software	ADT_Radiated_V7.6.15.9.5	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208411	NA	NA
Power meter Anritsu	ML2495A	1529002	July 22, 2020	July 21, 2021
Power sensor Anritsu	MA2411B	1339443	July 22, 2020	July 21, 2021
Power meter Anritsu	ML2496A	1529003	Aug. 05, 2020	Aug. 04, 2021
Power sensor Anritsu	MA2411B	1339442	Aug. 05, 2020	Aug. 04, 2021
ESG Vector signal generator Agilent	E4438C	MY45094468/005 506 602 UK6 UNJ	Nov. 14, 2019	Nov. 13, 2020

- NOTE:**
1. The test was performed in RF Fully Chamber No. 1.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: Sep. 29, 2020

For receiver blocking and adaptivity test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer Keysight	N9030A	MY55410176	June 30, 2020	June 29, 2021
Bluetooth Simulator Anritsu	MT8852B	1218002	May 19, 2020	May 18, 2021
ESG Vector signal generator Agilent	E4438C	MY45094468/005 506 602 UK6 UNJ	Nov. 14, 2019	Nov. 13, 2020
Upgrade the software license on current E4438C ESG Agilent	E4438CK-403	ESG E4_010001	NA	NA
MXG X-Series RF Vector Signal Generator Agilent	N5182B	MY53052700	July 14, 2020	July 13, 2021
Direct Coupler EMCI	CS20-18-436/16	1139	NA	NA
Power Splitter/combiner Mini-Circuits	ZN4PD-642W-S+	408501327_03	Oct. 04, 2019	Oct. 03, 2020
Power Splitter/combiner Mini-Circuits	ZN4PD-642W-S+	408501327_04	Oct. 04, 2019	Oct. 03, 2020

- NOTE:**
1. The test was performed in Adaptivity room.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: Sep. 17, 2020

For other test items:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSV40	100964	May 29, 2020	May 28, 2021
Spectrum Analyzer Keysight	N9030A	MY54490570	June 16, 2020	June 15, 2021
AC Power Source Extech Electronics	6502	1140503	NA	NA
Temperature & Humidity Chamber TERCHY	MHU-225AU	911033	Nov. 26, 2019	Nov. 25, 2020
DC Power Supply GOOD WILL INSTRUMENT CO., LTD.	GPC - 3030D	7700087	NA	NA
ESG Vector signal generator Agilent	E4438C	MY45094468/005 506 602 UK6 UNJ	Nov. 14, 2019	Nov. 13, 2020
Power meter Anritsu	ML2495A	0824006	Apr. 28, 2020	Apr. 27, 2021
Software	ADT_RF Test Software V6.6.5.4	NA	NA	NA
MXG X-Series RF Vector Signal Generator Agilent	N5182B	MY53052700	July 17, 2019	July 16, 2020
MIMO Powermeasurement Test set (4X4) Agilent	U2021XA	U2021XA_01	Sep. 18, 2019	Sep. 17, 2020
MIMO Powermeasurement Test set (4X4) Agilent	U2021XA	U2021XA_02	Nov. 14, 2019	Nov. 13, 2020
Switch Box Agilent	PS-X10-100	PS-X10-100_01	Sep. 18, 2019	Sep. 17, 2020

- NOTE:**
1. The test was performed in Oven room 1.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: July 04 to 08, 2020

2.2 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Parameter	Uncertainty
Occupied Channel Bandwidth	$\pm 0.14 \times 10^{-4} \%$
RF output power, conducted	$\pm 1.2 \text{ dB}$
Power Spectral Density, conducted	$\pm 1.2 \text{ dB}$
Unwanted Emissions, conducted	$\pm 2.5 \text{ dB}$
All emissions, radiated	$\pm 4.9 \text{ dB}$
Temperature	$\pm 0.4 \text{ }^{\circ}\text{C}$
Supply voltages	$\pm 0.05 \%$
Time	$\pm 5 \%$

2.3 Maximum Measurement Uncertainty

For the test methods, according to ETSI EN 300 328 standard, the measurement uncertainty figures shall be calculated and shall correspond to an expansion factor (coverage factor) $k = 1,96$ or $k = 2$ (which provide confidence levels of respectively 95 % and 95,45 % in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian)). Principles for the calculation of measurement uncertainty are contained in ETSI TR 100 028-1, in particular in annex D of the ETSI TR 100 028-2.

Maximum measurement uncertainty

Parameter	Uncertainty
Occupied Channel Bandwidth	$\pm 5 \%$
RF output power, conducted	$\pm 1,5 \text{ dB}$
Power Spectral Density, conducted	$\pm 3 \text{ dB}$
Unwanted Emissions, conducted	$\pm 3 \text{ dB}$
All emissions, radiated	$\pm 6 \text{ dB}$
Temperature	$\pm 1 \text{ }^{\circ}\text{C}$
Supply voltages	$\pm 3 \%$
Time	$\pm 5 \%$

2.4 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT (BT-EDR)

Product	11ax RTL8852AE Combo module
Brand	REALTEK
Test Model	RTL8852AE
Status of EUT	ENGINEERING SAMPLE
Nominal Voltage	3.3Vdc from host equipment
Normal Testing Voltage	Vnom= 3.3Vdc
Temperature Operating Range	-20°C ~ 70°C
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8DPSK
Modulation Technology	FHSS
Transfer Rate	Up to 3Mbps
Operating Frequency	2.402 ~ 2.480GHz
Number of Channel	79
Adaptive/Non-Adaptive	☐ non-adaptive Equipment ☒ adaptive Equipment without the possibility to switch to a non-adaptive mode ☐ adaptive Equipment which can also operate in a non-adaptive mode
EIRP Power (Measured Max. Average)	16.28 dBm
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	NA
Data Cable Supplied	NA

Note:

1. The EUT has below HW SKU configuration, as below table:

SKU No.	Interface	Description
1	PCIe + USB	Single antenna port
2	PCIe + USB	Dual antenna port
3	PCIe + UART	Dual antenna port

Note: From the above HW SKUs, **SKU No.: 3** was selected as representative model for the test and its data was recorded in this report.

2. Simultaneously transmission condition.

Condition	Technology		
1	WLAN 2.4GHz	WLAN 5GHz	Bluetooth
2	WLAN 2.4GHz	WLAN 5GHz	-
3	WLAN 5GHz	Bluetooth	-

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

3. The antennas provided to the EUT, please refer to the following table:

Antenna Set	Chain NO.	Brand	Model	Antenna Gain (dBi)	Frequency range (GHz)	Antenna Type	Connector Type	Cable Length (mm)
1	Chain 0	LYNwave	ALA110-222050-300011	3.5	2.4~2.5	PIFA	i-pex(MHF)	300
				5	5.15~5.85			
	Chain 1	LYNwave	ALA110-222050-300011	3.5	2.4~2.5	PIFA	i-pex(MHF)	300
				5	5.15~5.85			
2	Chain 0	PSA	RFDPA171320EMLB301	3.14	2.4~2.5	Dipole	i-pex(MHF)	200
				5	5.15~5.85			
	Chain 1	PSA	RFDPA171320EMLB301	3.14	2.4~2.5	Dipole	i-pex(MHF)	200
				5	5.15~5.85			

Note:

1. The Bluetooth technology will fix transmission on Chain 1.

4. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

5. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

3.2 Description of Test Modes

79 channels are provided for BT-EDR mode:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable to											Description
	ROP	DC/TS/TG	ATT/FO/HS	HFS	MU	AD	OCB	EOB	SE< 1G	SE≥ 1G	RB	
1	√	-	√	√	-	√	√	√	√	√	√	High power
2	√	-	√	√	-	-	√	√	√	√	√	Low power

Where **ROP**: RF Output Power
ATT/FO/HS: Accumulated Transmit Time / Frequency Occupation/ Hopping Sequence
MU: Medium Utilisation
OCB: Occupied Channel Bandwidth
SE<1G: Spurious Emissions below 1GHz
RB: Receiver Blocking

DC/TS/TG: Duty Cycle/ Tx-Sequence / Tx-gap
HFS: Hopping Frequency Separation
AD: Adaptivity (Channel Access Mechanism)
EOB: Transmitter unwanted emission in the out-of-band domain
SE≥1G: Spurious Emissions above 1GHz

Note: The EUT's PIFA antenna had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on Y-plane.

RF Output Power:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, packet type, data rates and antenna ports (if EUT with antenna diversity architecture).

Available Channel	Tested Channel	Modulation Technology	Modulation Type	Packet Type
0 to 78	Hopping mode	FHSS	GFSK	DH5
0 to 78	Hopping mode	FHSS	8DPSK	3DH5

Accumulated Transmit Time / Frequency Occupation / Hopping Sequence:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, packet type, data rates and antenna ports (if EUT with antenna diversity architecture).

Available Channel	Tested Channel	Modulation Technology	Modulation Type	Packet Type
0 to 78	Hopping mode	FHSS	GFSK	DH1, DH3, DH5
0 to 78	Hopping mode	FHSS	8DPSK	3DH1, 3DH3, 3DH5

Hopping Frequency Separation:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, packet type, data rates and antenna ports (if EUT with antenna diversity architecture).

Available Channel	Tested Channel	Modulation Technology	Modulation Type	Packet Type
0 to 78	0, 78	FHSS	GFSK	DH5
0 to 78	0, 78	FHSS	8DPSK	3DH5

Adaptivity Test:

- ☒ Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology
0 to 78	0, 78	FHSS

Occupied Channel Bandwidth:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, packet type, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type	Packet Type
0 to 78	0, 78	FHSS	GFSK	DH5
0 to 78	0, 78	FHSS	8DPSK	3DH5

Transmitter unwanted emission in the out-of-band domain:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, packet type, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type	Packet Type
0 to 78	0, 78	FHSS	GFSK	DH5
0 to 78	0, 78	FHSS	8DPSK	3DH5

Spurious Emissions Test (Below 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, packet type, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type	Packet Type
0 to 78	39	FHSS	GFSK	DH5
Receiver	39	-	-	-

Spurious Emissions Test (Above 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, packet type, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type	Packet Type
0 to 78	0, 78	FHSS	GFSK	DH5
Receiver	0, 78	-	-	-

Receiver Blocking Test:

- ☒ Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Technology	Modulation Type	Packet Type
0 to 78	0, 78	FHSS	GFSK	DH1

Test Condition:

Applicable to	Environmental Conditions	Input Power	Tested by
ROP	25deg. C, 60%RH	3.3Vdc	Dolly Chung
ATT/FO/HS	25deg. C, 60%RH	3.3Vdc	Dolly Chung
AD	25deg. C, 60%RH	3.3Vdc	Zoey Peng
HFS	25deg. C, 60%RH	3.3Vdc	Dolly Chung
OCB	25deg. C, 60%RH	3.3Vdc	Dolly Chung
EOB	25deg. C, 60%RH	3.3Vdc	Dolly Chung
SE<1G	23deg. C, 62%RH	230Vac, 50Hz (System)	Angus Peng
SE≥1G	23deg. C, 62%RH	230Vac, 50Hz (System)	Angus Peng
RB	25deg. C, 60%RH	3.3Vdc	Zoey Peng

3.3 Description of Support Units


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	DELL	P88G	G1WJL42	NA	Provided by Lab
B.	Test Tool	Realtek	NA	NA	NA	Supplied by client
C.	Adapter	DELL	FA65NE0-00	NA	NA	Provided by Lab

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	DC Cable	1	1.6	No	1	Provided by Lab
2	AC Cable	1	1	No	0	Provided by Lab

Note: The core(s) is(are) originally attached to the cable(s).

3.3.1 Configuration of System under Test

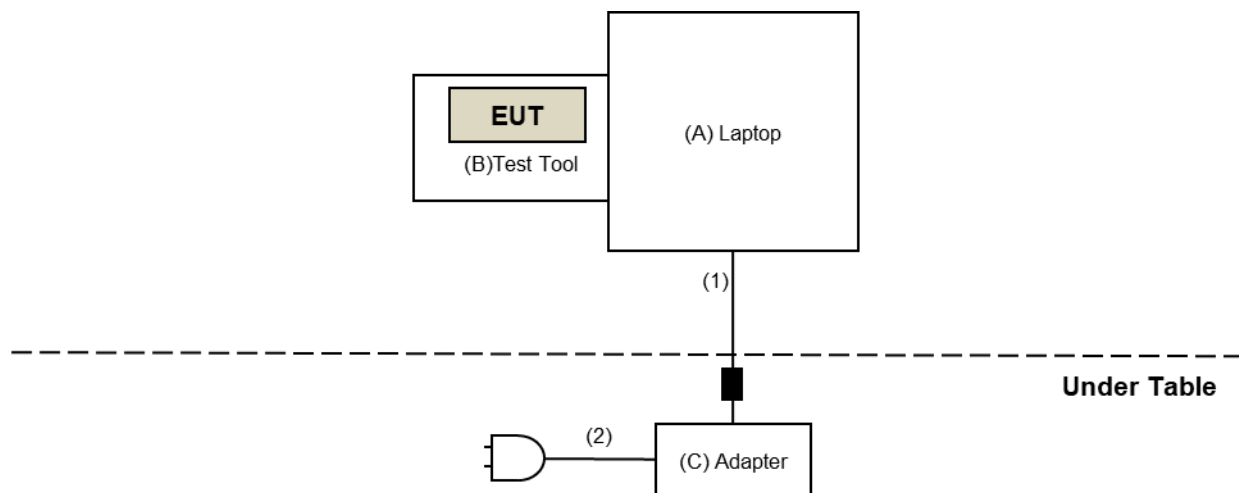

3.4 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standard:

EN 300 328 V2.2.2 (2019-07)

All test items have been performed and recorded as per the above standard.

4 Test Procedure and Results

4.1 RF Output Power

4.1.1 Limits of RF Output Power

Condition	Frequency Band	Limit (e.i.r.p.)
Under all test conditions	2400 ~ 2483.5 MHz	AV: 20dBm

4.1.2 Test Procedures

Refer to chapter 5.4.2 of EN 300 328 V2.2.2.

Measurement Method	
☒ Conducted measurement	☐ Radiated measurement

For extreme test condition refer to chapter Annex B.4 and procedure follow Annex B.4.3.

4.1.3 Deviation from Test Standard

No deviation.

4.1.4 Test Setup

The measurement was performed at both normal environmental conditions and at the extremes of the operating temperature. This measurement was performed during normal operation (hopping) and operating on all hopping positions. The equipment was configured to operate under its worst case situation with respect to output power. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator. Controlling software (Bluetooth RF test tool.exe (5.3.1.42)) has been activated to set the EUT on specific channel and power level.

4.1.5 Test Results (Mode 1)

Test Condition			EIRP Power (dBm)
GFSK			
Tnom(°C)	25	Vnom(v)	15.90
Tmin(°C)	-20	Vnom(v)	16.28
Tmax(°C)	70	Vnom(v)	15.36
8DPSK			
Tnom(°C)	25	Vnom(v)	13.36
Tmin(°C)	-20	Vnom(v)	13.84
Tmax(°C)	70	Vnom(v)	13.06

4.1.6 Test Results (Mode 2)

Test Condition			EIRP Power (dBm)
GFSK			
Tnom(°C)	25	Vnom(v)	9.53
Tmin(°C)	-20	Vnom(v)	9.91
Tmax(°C)	70	Vnom(v)	8.99
8DPSK			
Tnom(°C)	25	Vnom(v)	9.52
Tmin(°C)	-20	Vnom(v)	9.66
Tmax(°C)	70	Vnom(v)	9.08

4.2 Accumulated Transmit Time, Frequency Occupation and Hopping Sequence

4.2.1 Limits of Dwell time, Minimum Frequency Occupation and Hopping Sequence

Accumulated Transmit Time	
Condition	Limit
☐ Non-adaptive frequency hopping systems	≤ 15 ms
☒ Adaptive frequency hopping systems	≤ 400 ms

Frequency Occupation	
Condition	Limit
☐ Non-adaptive frequency hopping systems	☒ Option 1: Each hopping frequency of the hopping sequence shall be occupied at least once within a period not exceeding four times the product of the dwell time and the number of hopping frequencies in use. ☐ Option 2: The occupation probability for each frequency shall be between $((1 / U) \times 25 \%)$ and 77 % where U is the number of hopping frequencies in use.
☒ Adaptive frequency hopping systems	

hopping Sequence(s)	
Condition	Limit
☐ Non-adaptive frequency hopping systems	≥5 hopping frequencies or 15MHz/minimum Hopping Frequency Separation in MHz , whichever is the greater.
☒ Adaptive frequency hopping systems	Operating frequency band ≥58.45MHz (Operating over a minimum of 70 % of the operating in the band 2,4 GHz to 2,4835 GHz)
	≥15 hopping frequencies or 15MHz/minimum Hopping Frequency Separation in MHz, whichever is the greater.

4.2.2 Test Procedure

Refer to chapter 5.4.4 of EN 300 328 V2.2.2.

Measurement	
☒ Conducted measurement	☐ Radiated measurement

4.2.3 Deviation from Test Standard

No deviation

4.2.4 Test Setup

The measurement was performed at normal environmental conditions only. The equipment was configured to operate at its maximum Dwell Time and maximum Duty Cycle. The measurement was performed on a minimum of 2 hopping frequencies chosen arbitrary from the actual hopping sequence. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator. Controlling software (Bluetooth RF test tool.exe (5.3.1.42)) has been activated to set the EUT on specific status.

4.2.5 Test Results (Mode 1)


GFSK:

Accumulated Transmit Time							
Mode	Minimum Number of Hopping Channel	NTP* (Sec)	Number of Hop in NTP*	Dwell Time per Hop (msec)	Dwell Time in NTP* (msec)	Limit (msec)	Pass / Fail
DH1	79	31.6	316	0.443	139.988	400	Pass
DH3	79	31.6	158	1.681	265.598	400	Pass
DH5	79	31.6	102.7	2.928	300.7056	400	Pass


*NTP: Number of transmission in a period (channel number *0.4sec)

NOTE: Test plots of the transmitting time slot are shown as below.


DH1

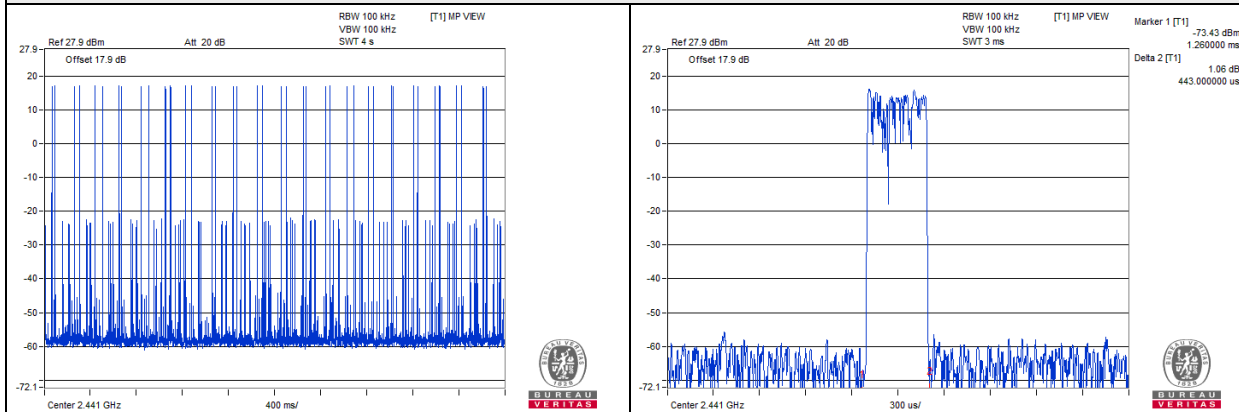

DH3

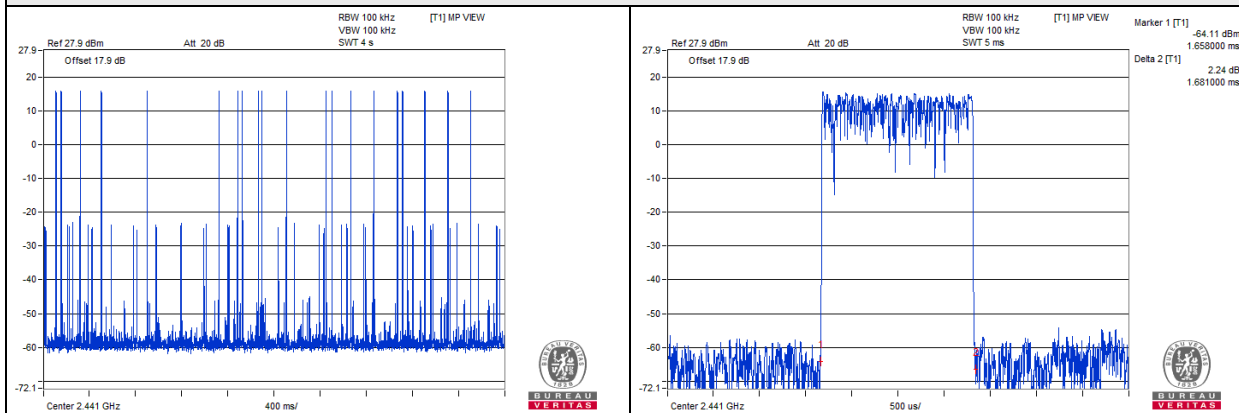

DH5

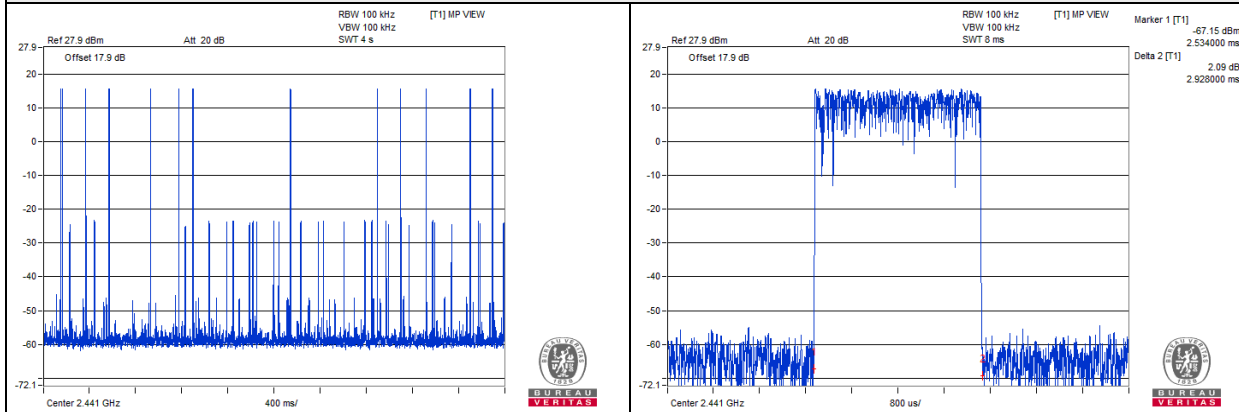



8DPSK:

Accumulated Transmit Time							
Mode	Minimum Number of Hopping Channel	NTP* (Sec)	Number of Hop in NTP*	Dwell Time per Hop (msec)	Dwell Time in NTP* (msec)	Limit (msec)	Pass / Fail
3DH1	79	31.6	323.9	0.418	135.3902	400	Pass
3DH3	79	31.6	158	1.767	279.186	400	Pass
3DH5	79	31.6	94.8	2.936	278.3328	400	Pass



*NTP: Number of transmission in a period (channel number *0.4sec)

NOTE: Test plots of the transmitting time slot are shown as below.



3DH1

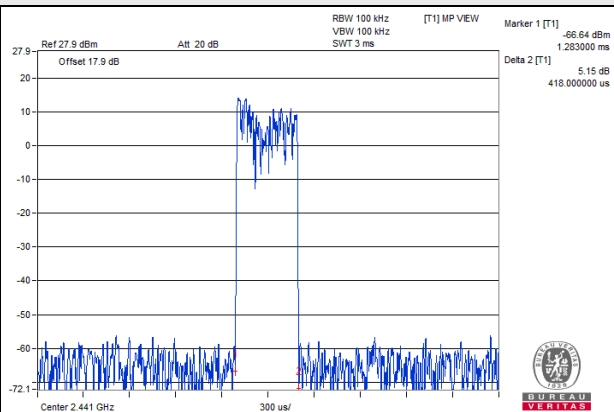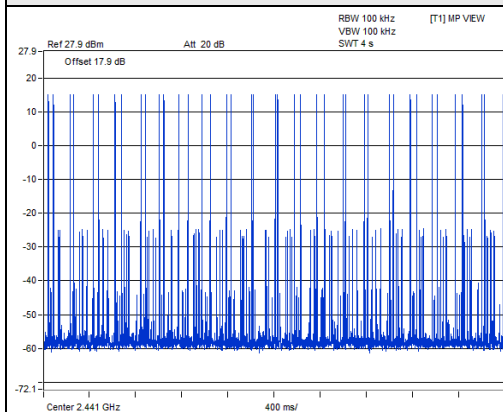

3DH3

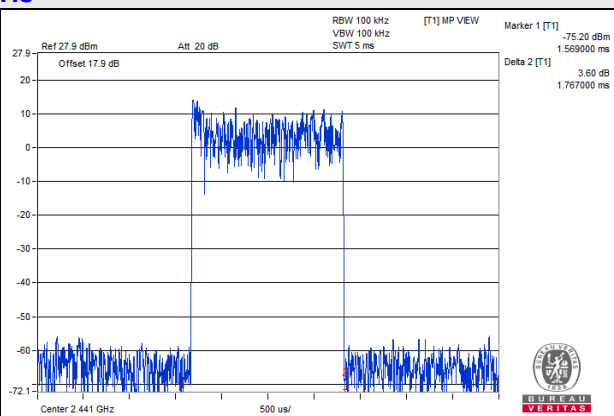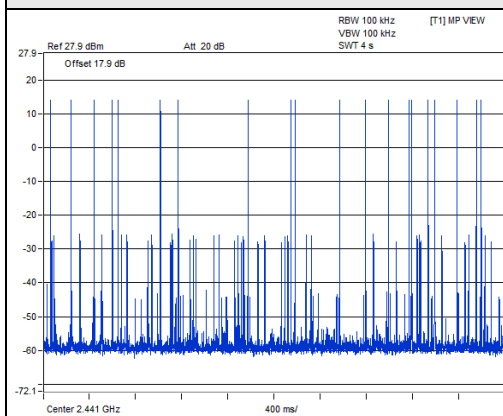


3DH5

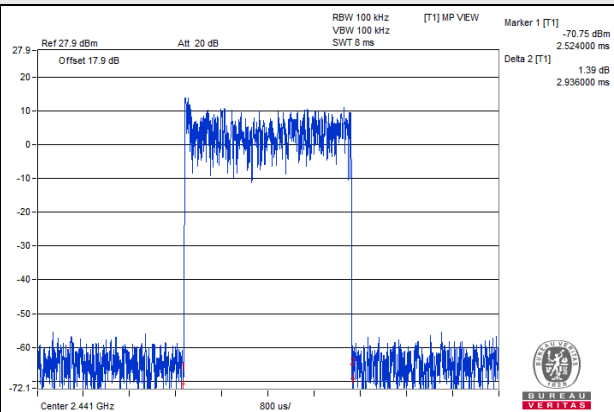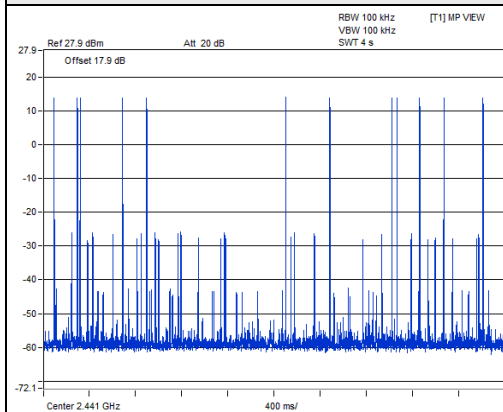

GFSK:

Frequency Occupation							
Mode	Actual Number of Hopping Channel	Dwell Time per Hop (msec)	T _{FO} * (msec)	Number of Hop in T _{FO} *	Dwell Time in T _{FO} *	Limit-Minimum number of Hopping in T _{FO} *	Pass / Fail
DH1	79	0.443	139.988	1	0.443	1	Pass
DH3	79	1.681	531.196	3	5.043	1	Pass
DH5	79	2.928	925.248	3	8.784	1	Pass


*T_{FO}:4 × Dwell Time × Actual number of hopping frequencies in use

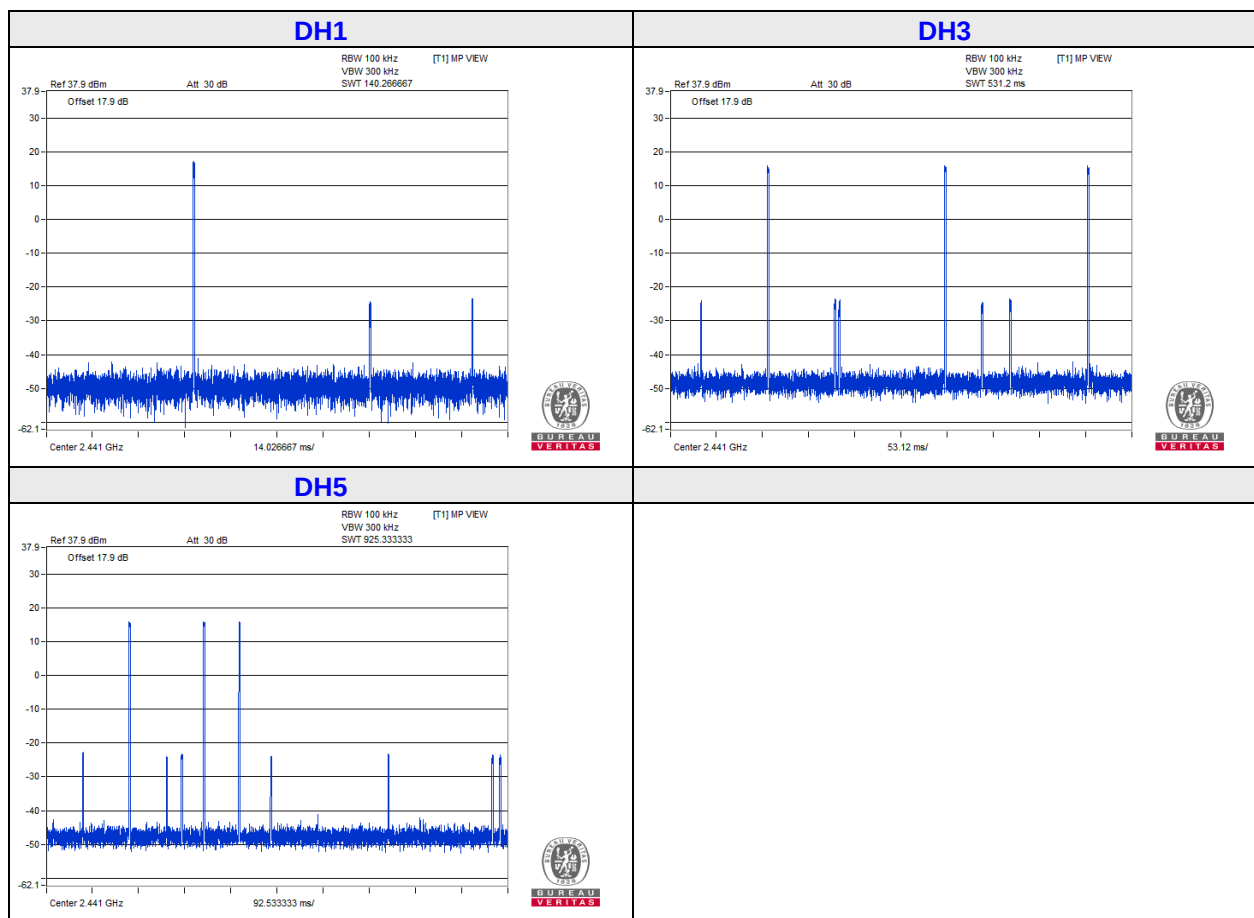

8DPSK:


Frequency Occupation							
Mode	Actual Number of Hopping Channel	Dwell Time per Hop (msec)	T _{FO} * (msec)	Number of Hop in T _{FO} *	Dwell Time in T _{FO} *	Limit-Minimum number of Hopping in T _{FO} *	Pass / Fail
3DH1	79	0.418	132.088	2	0.836	1	Pass
3DH3	79	1.767	558.372	2	3.534	1	Pass
3DH5	79	2.936	927.776	1	2.936	1	Pass

*T_{FO}:4 × Dwell Time × Actual number of hopping frequencies in use

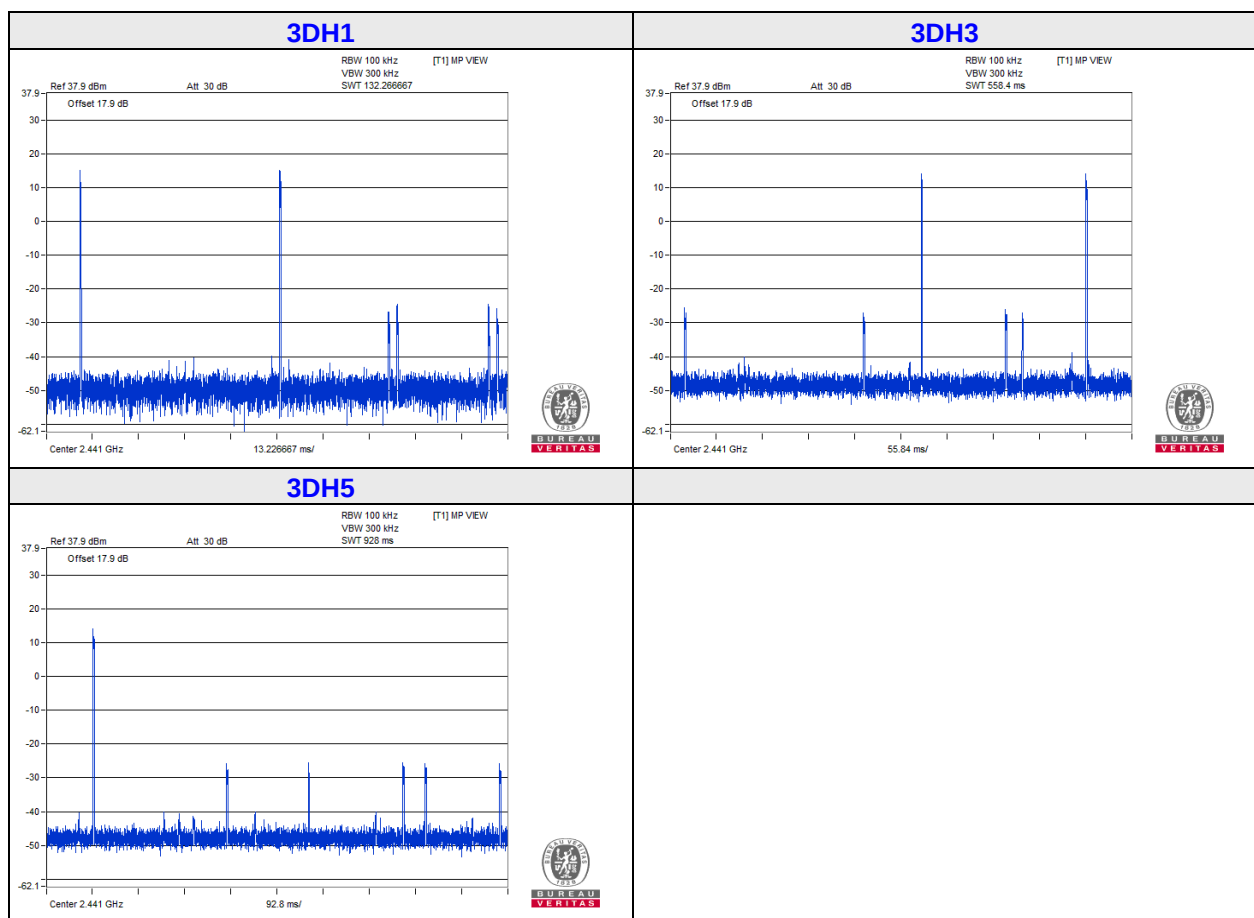


GFSK:

hopping sequence(s)		
Amount of Hopping frequency	Limit	Pass/Fail
79	≥15 hopping frequencies	PASS
Operating hopping Bandwidth (MHz)	Limit	Pass/Fail
79.38	≥58.45MHz	PASS

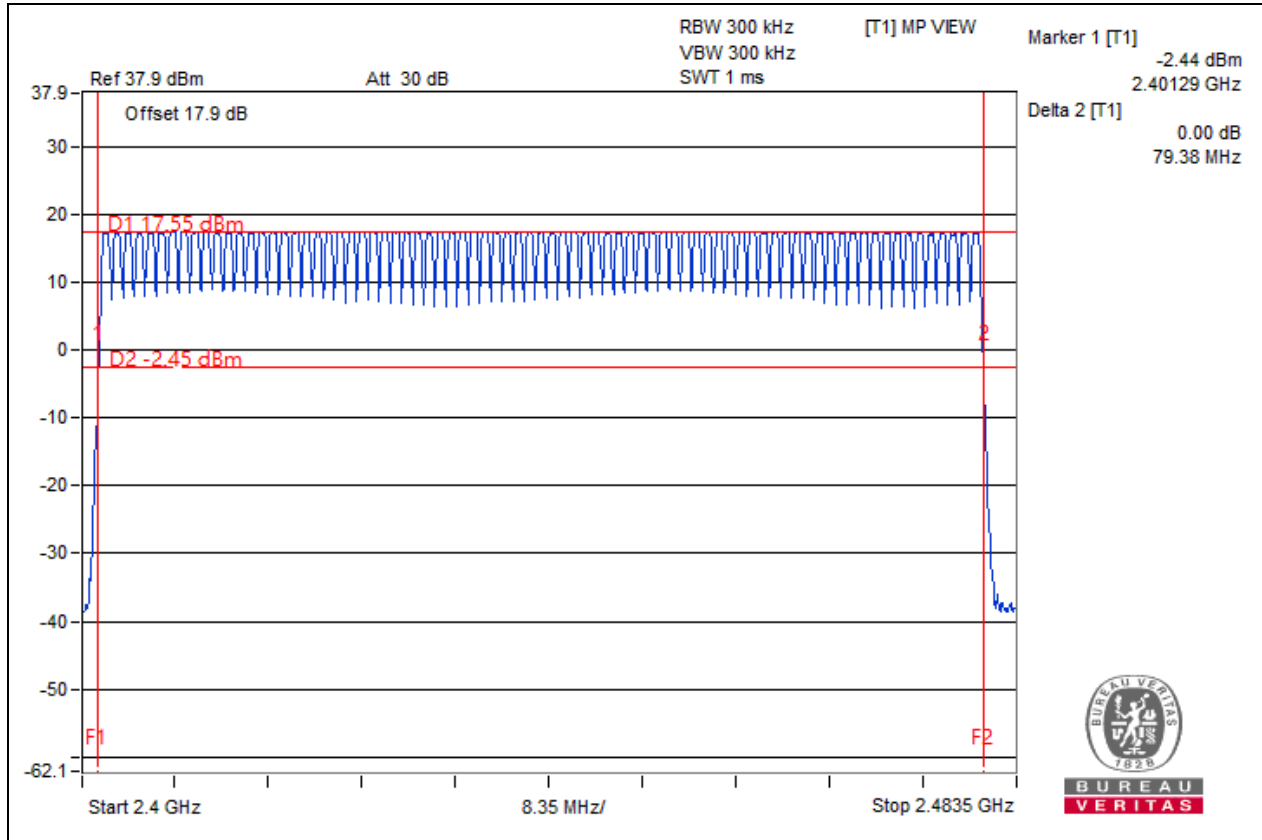

8DPSK:

hopping sequence(s)		
Amount of Hopping frequency	Limit	Pass/Fail
79	≥15/minimum Hopping Frequency	PASS
Operating hopping Bandwidth (MHz)	Limit	Pass/Fail
79.68	≥58.45MHz	PASS

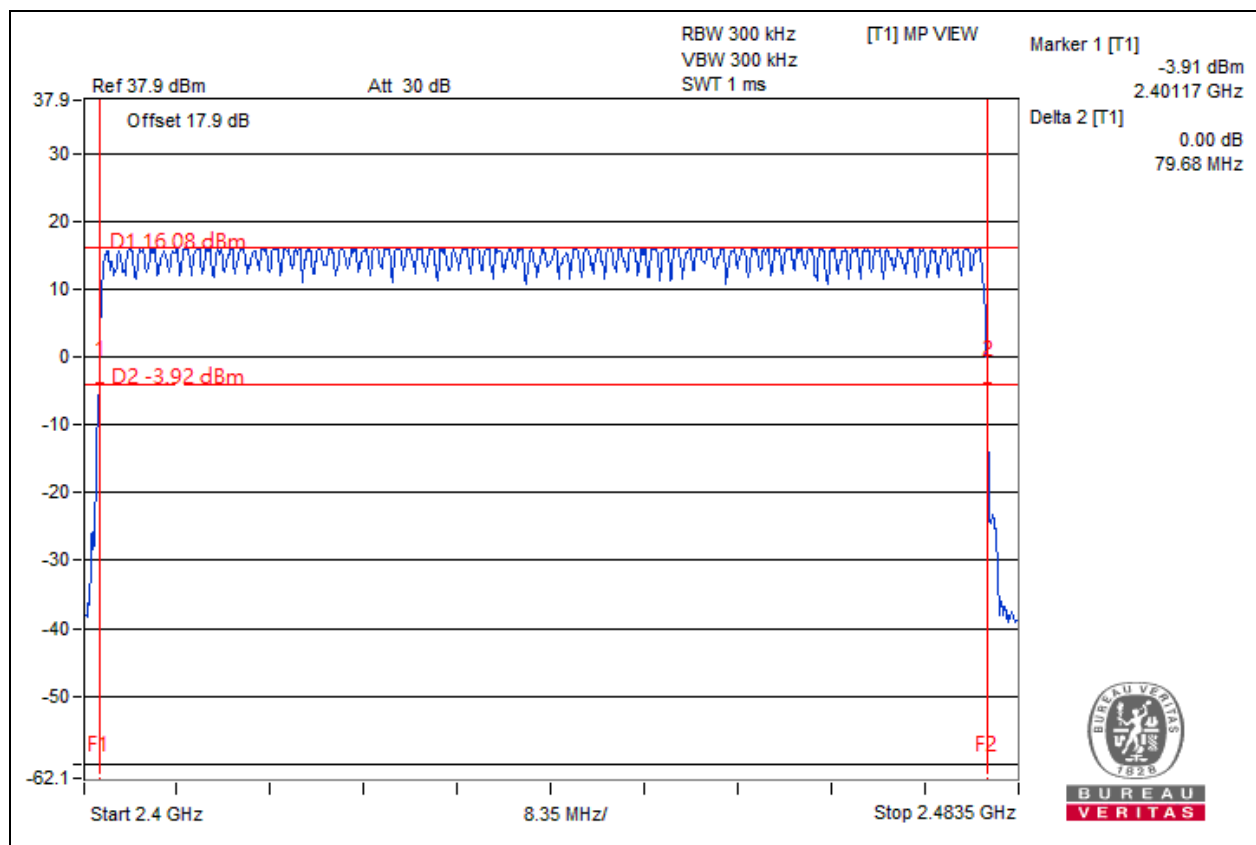

4.2.6 Test Results (Mode 2)



GFSK:

Accumulated Transmit Time							
Mode	Minimum Number of Hopping Channel	NTP* (Sec)	Number of Hop in NTP*	Dwell Time per Hop (msec)	Dwell Time in NTP* (msec)	Limit (msec)	Pass / Fail
DH1	79	31.6	316	0.419	132.404	400	Pass
DH3	79	31.6	158	1.691	267.178	400	Pass
DH5	79	31.6	94.8	2.92	276.816	400	Pass



*NTP: Number of transmission in a period (channel number *0.4sec)

NOTE: Test plots of the transmitting time slot are shown as below.



DH1

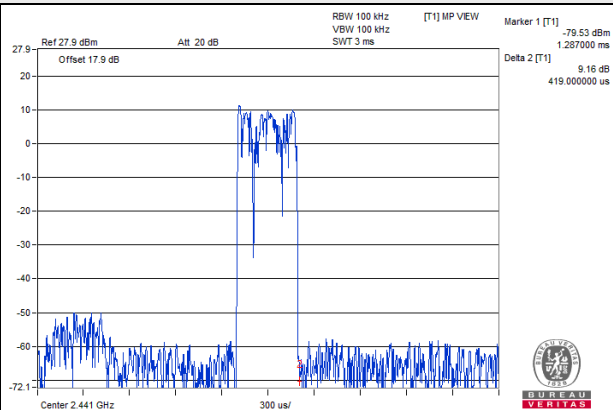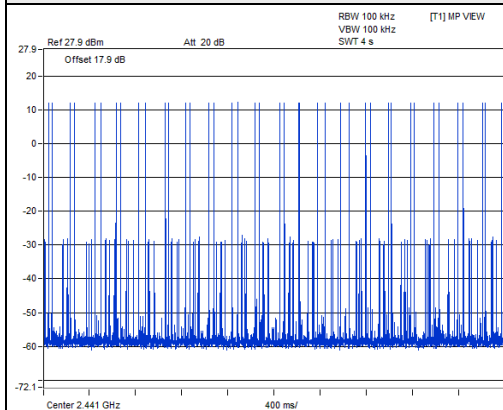

DH3

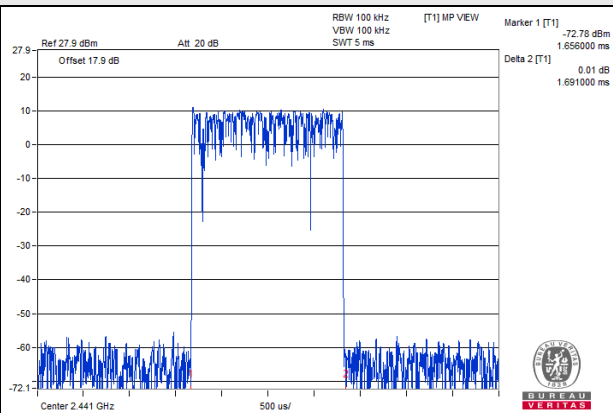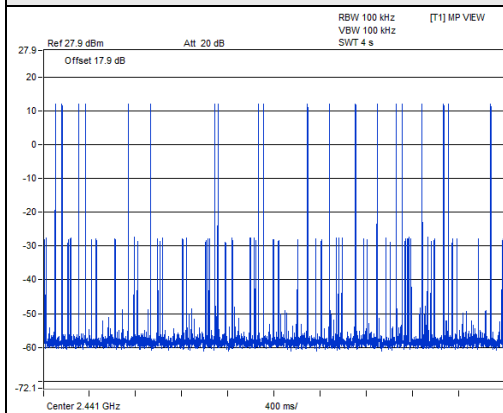

DH5

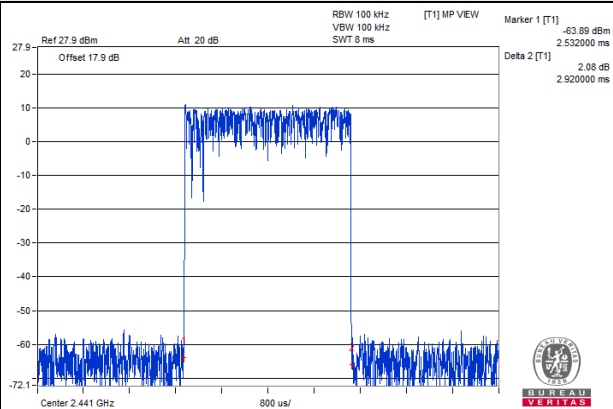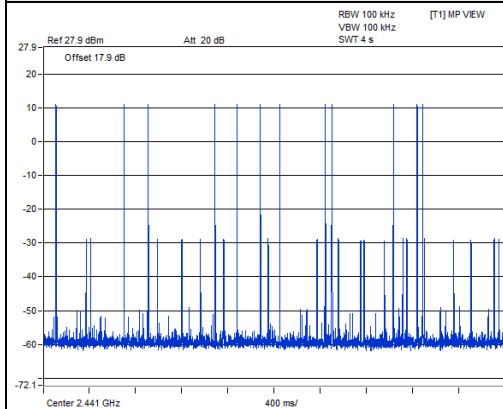



8DPSK:

Accumulated Transmit Time							
Mode	Minimum Number of Hopping Channel	NTP* (Sec)	Number of Hop in NTP*	Dwell Time per Hop (msec)	Dwell Time in NTP* (msec)	Limit (msec)	Pass / Fail
3DH1	79	31.6	308.1	0.48	147.888	400	Pass
3DH3	79	31.6	142.2	1.679	238.7538	400	Pass
3DH5	79	31.6	86.9	2.93	254.617	400	Pass



*NTP: Number of transmission in a period (channel number *0.4sec)

NOTE: Test plots of the transmitting time slot are shown as below.



3DH1

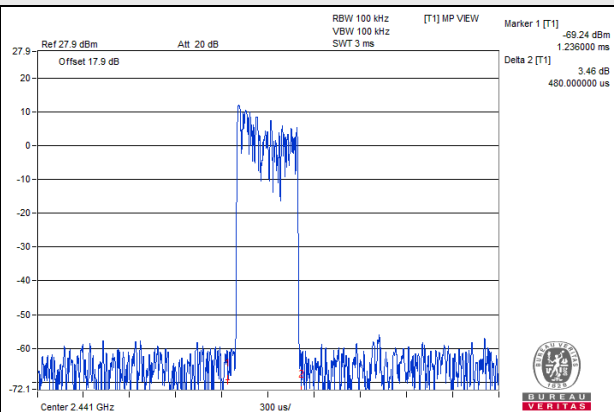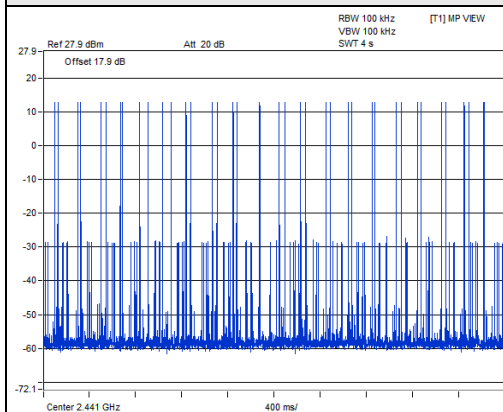

3DH3

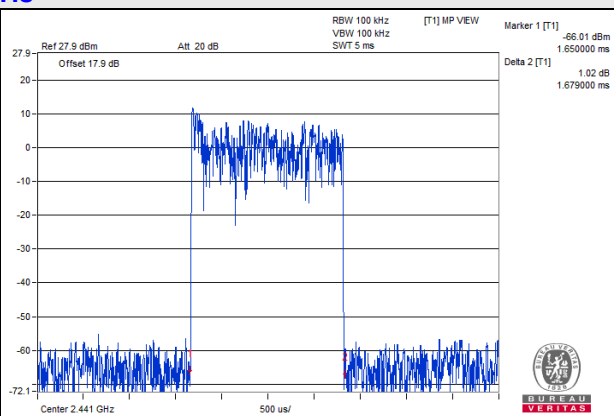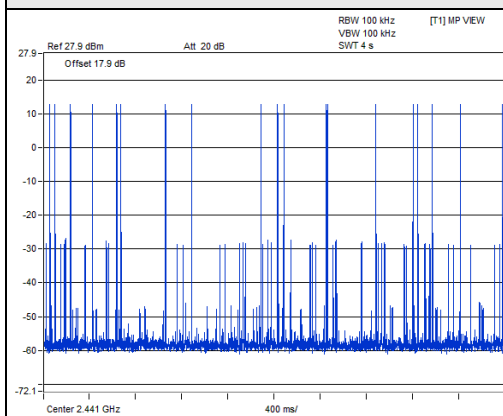


3DH5

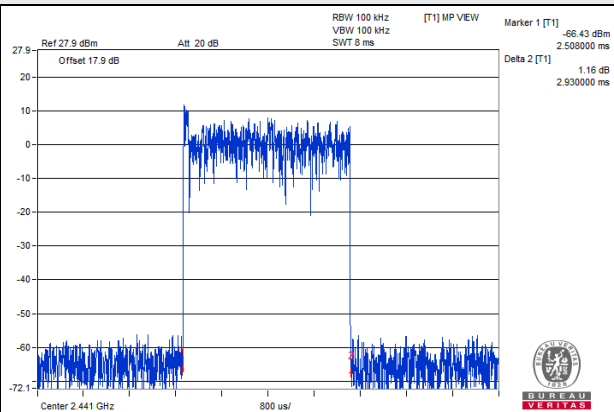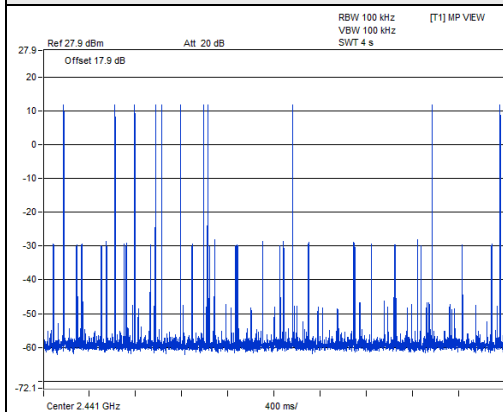

GFSK:

Frequency Occupation							
Mode	Actual Number of Hopping Channel	Dwell Time per Hop (msec)	T _{FO} * (msec)	Number of Hop in T _{FO} *	Dwell Time in T _{FO} *	Limit-Minimum number of Hopping in T _{FO} *	Pass / Fail
DH1	79	0.419	132.404	2	0.838	1	Pass
DH3	79	1.691	534.356	3	5.073	1	Pass
DH5	79	2.92	922.72	3	8.76	1	Pass


*T_{FO}:4 × Dwell Time × Actual number of hopping frequencies in use

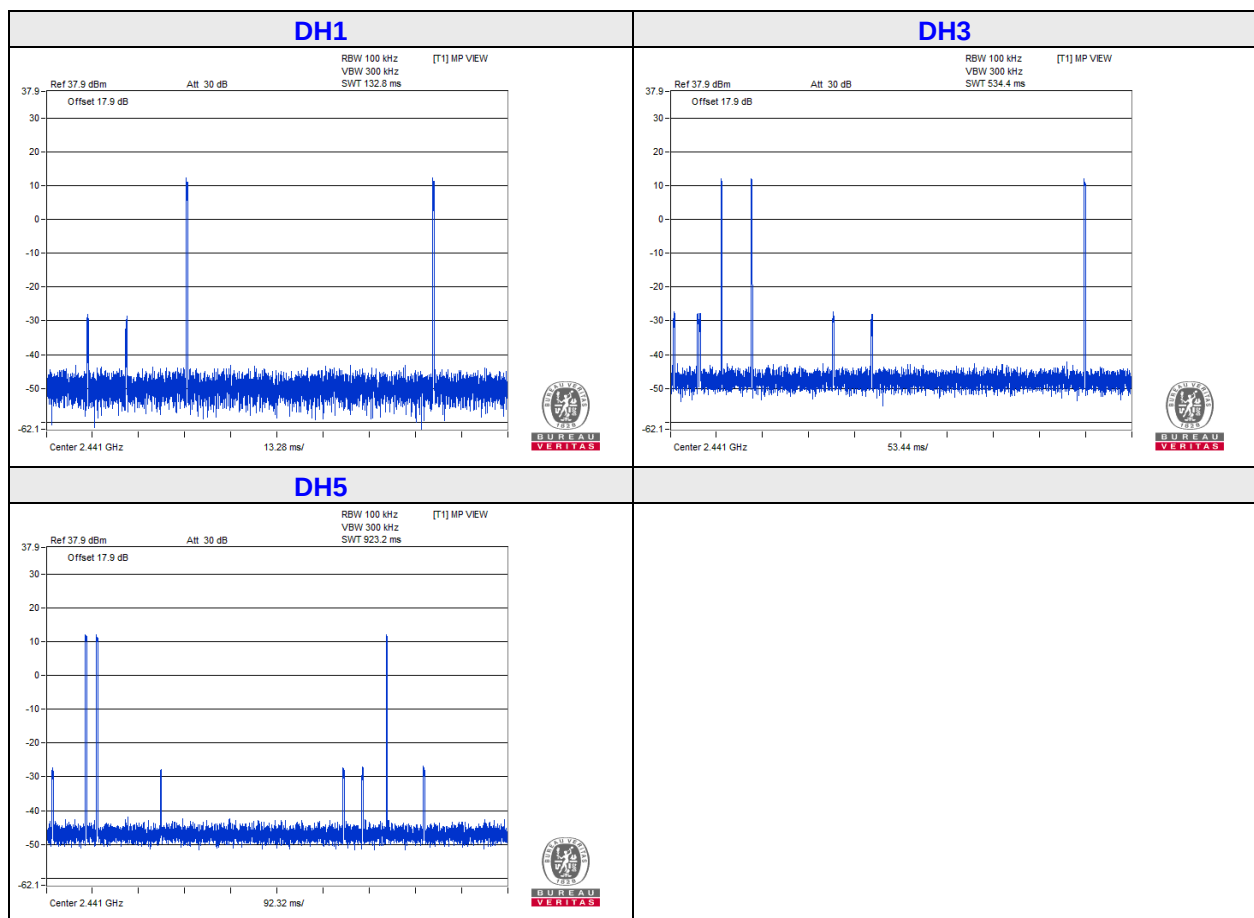

8DPSK:


Frequency Occupation							
Mode	Actual Number of Hopping Channel	Dwell Time per Hop (msec)	T _{FO} * (msec)	Number of Hop in T _{FO} *	Dwell Time in T _{FO} *	Limit-Minimum number of Hopping in T _{FO} *	Pass / Fail
3DH1	79	0.48	151.68	2	0.96	1	Pass
3DH3	79	1.679	530.564	1	1.679	1	Pass
3DH5	79	2.93	925.88	2	5.86	1	Pass

*T_{FO}:4 × Dwell Time × Actual number of hopping frequencies in use

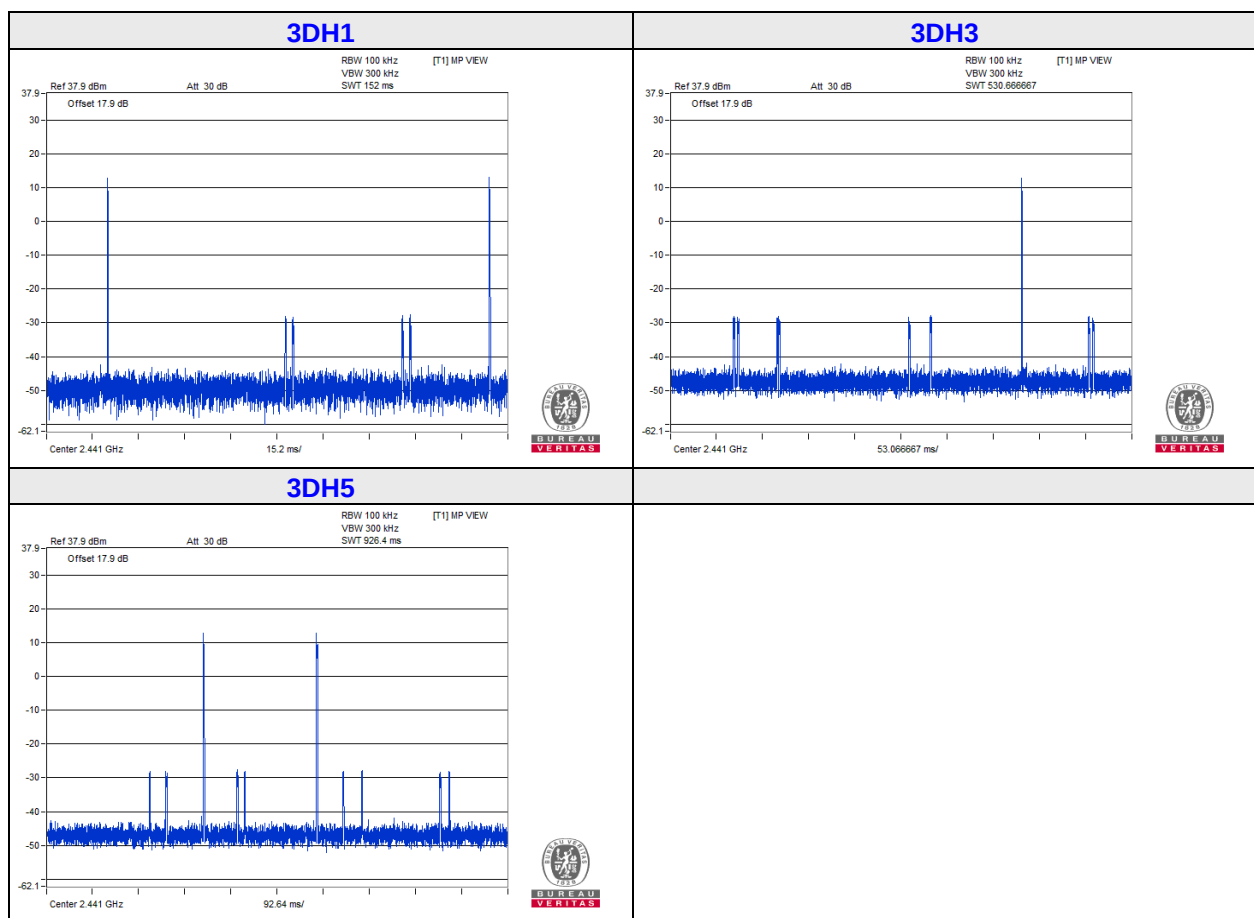


GFSK:

hopping sequence(s)		
Amount of Hopping frequency	Limit	Pass/Fail
79	≥15 hopping frequencies	PASS
Operating hopping Bandwidth (MHz)	Limit	Pass/Fail
79.38	≥58.45MHz	PASS

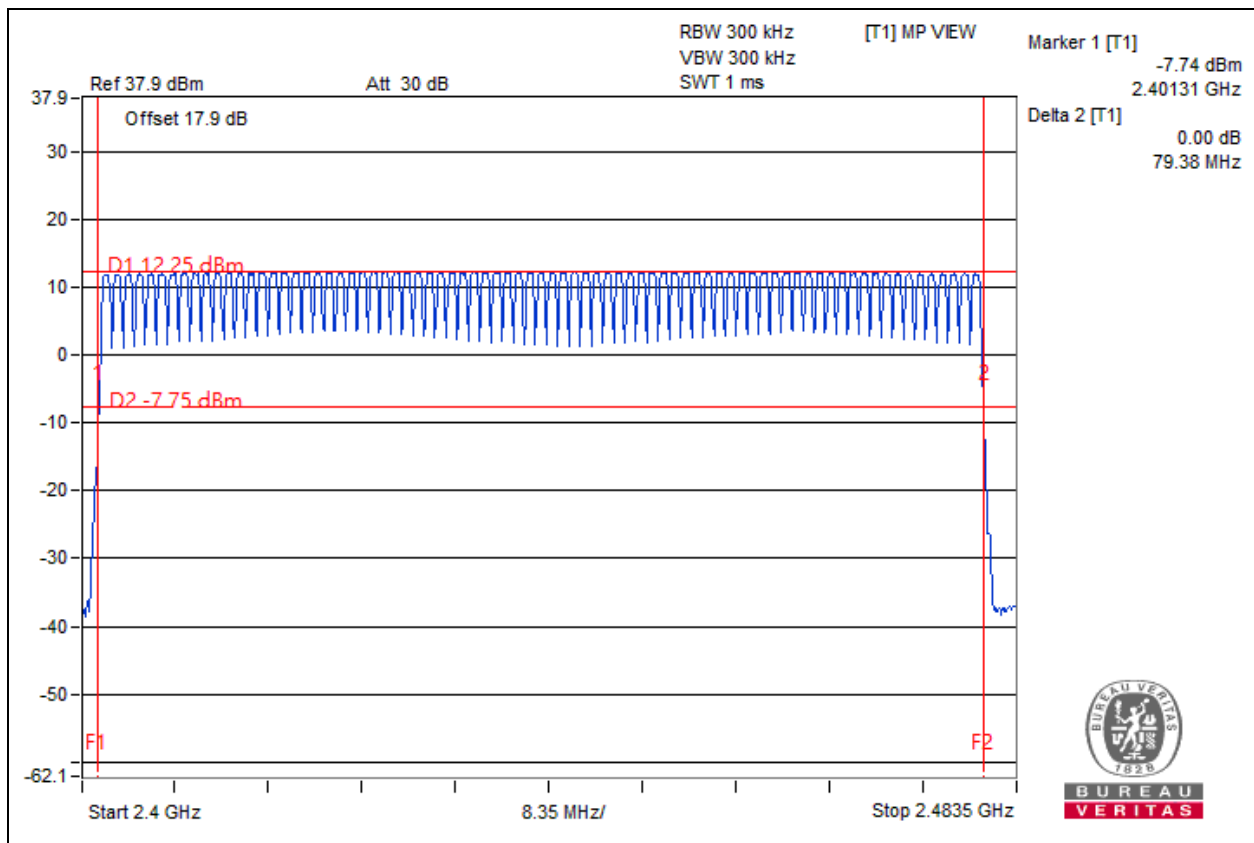

8DPSK:

hopping sequence(s)		
Amount of Hopping frequency	Limit	Pass/Fail
79	≥15/minimum Hopping Frequency	PASS
Operating hopping Bandwidth (MHz)	Limit	Pass/Fail
79.74	≥58.45MHz	PASS

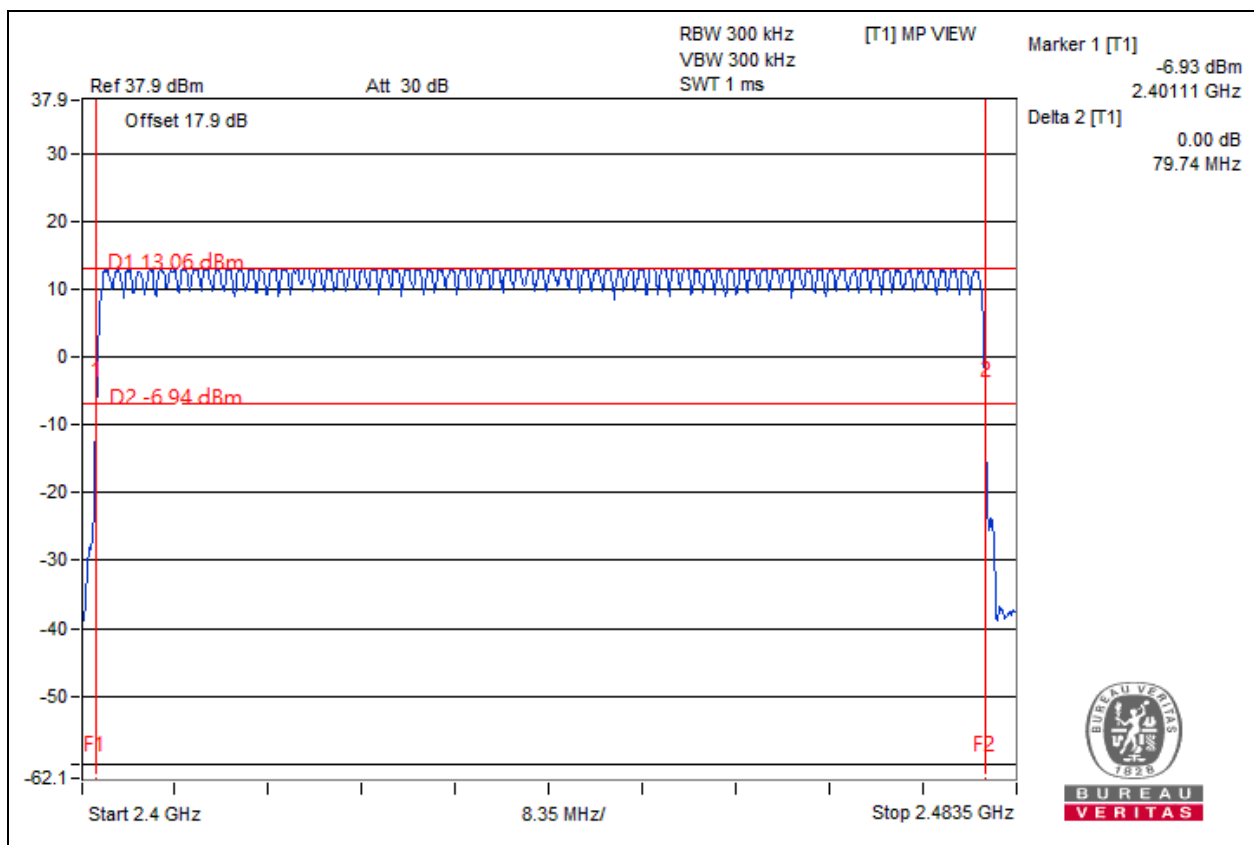

4.3 Hopping Frequency Separation

4.3.1 Limits of Hopping Frequency Separation

Condition	Limit
☐ Non-adaptive frequency hopping systems	The minimum Hopping Frequency Separation shall be equal to Occupied Channel Bandwidth of a single hop, with a minimum separation of 100 kHz.
☒ Adaptive frequency hopping systems	The minimum Hopping Frequency Separation shall be 100 kHz.

4.3.2 Test Procedure

Refer to chapter 5.4.5 of EN 300 328 V2.2.2.

Measurement	
☒ Conducted measurement	☐ Radiated measurement

4.3.3 Deviation from Test Standard

No deviation

4.3.4 Test Setup


The measurement was performed at normal environmental conditions only. The measurement was performed on 2 adjacent hopping frequencies. The equipment was configured to operate under its worst case situation with respect to output power. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator. Controlling software (Bluetooth RF test tool.exe (5.3.1.42)) has been activated to set the EUT on specific status.

4.3.5 Test Results (Mode 1)

GFSK:

Channel Number	Frequency (MHz)	Channel Separation (MHz)	Minimum Limit (MHz)	Pass /Fail
0	2402	1	0.1	Pass
78	2480	0.99	0.1	Pass


Note: The limitation is from OCB of a single hop and this value must greater and equal to 100kHz.

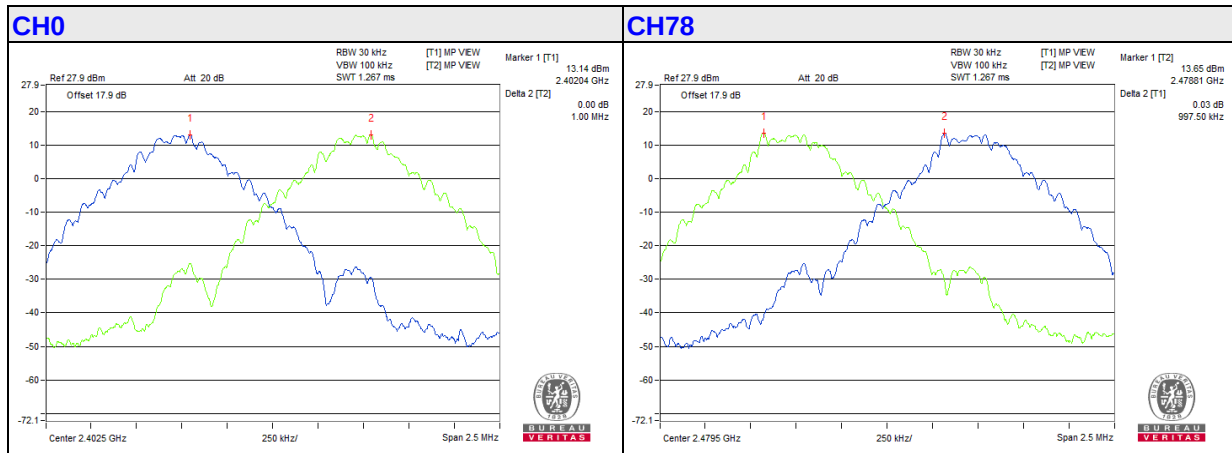

8DPSK:

Channel Number	Frequency (MHz)	Channel Separation (MHz)	Minimum Limit (MHz)	Pass /Fail
0	2402	1	0.1	Pass
78	2480	1	0.1	Pass

Note: The limitation is from OCB of a single hop and this value must greater and equal to 100kHz.

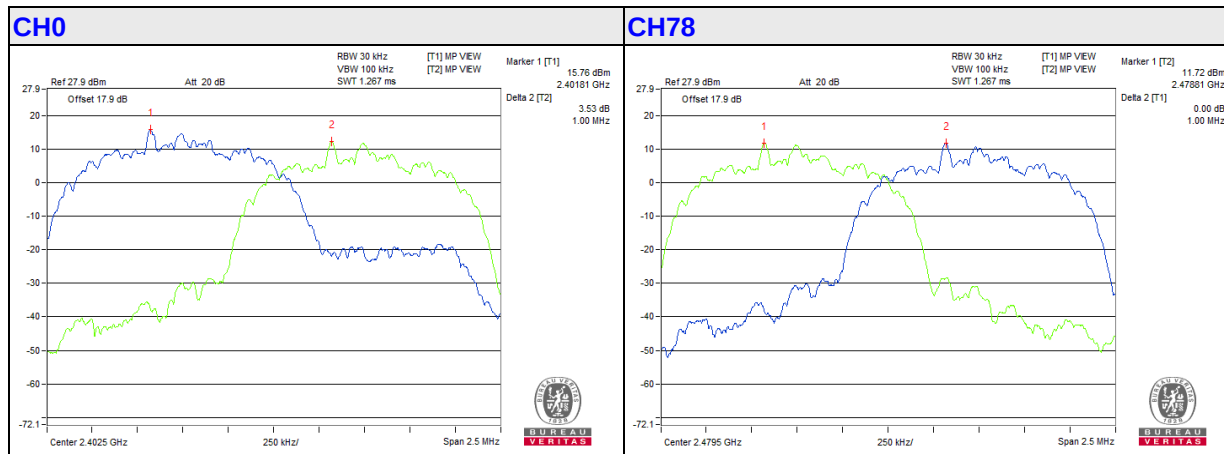


4.3.6 Test Results (Mode 2)

GFSK:

Channel Number	Frequency (MHz)	Channel Separation (MHz)	Minimum Limit (MHz)	Pass /Fail
0	2402	1	0.1	Pass
78	2480	1	0.1	Pass


Note: The limitation is from OCB of a single hop and this value must greater and equal to 100kHz.

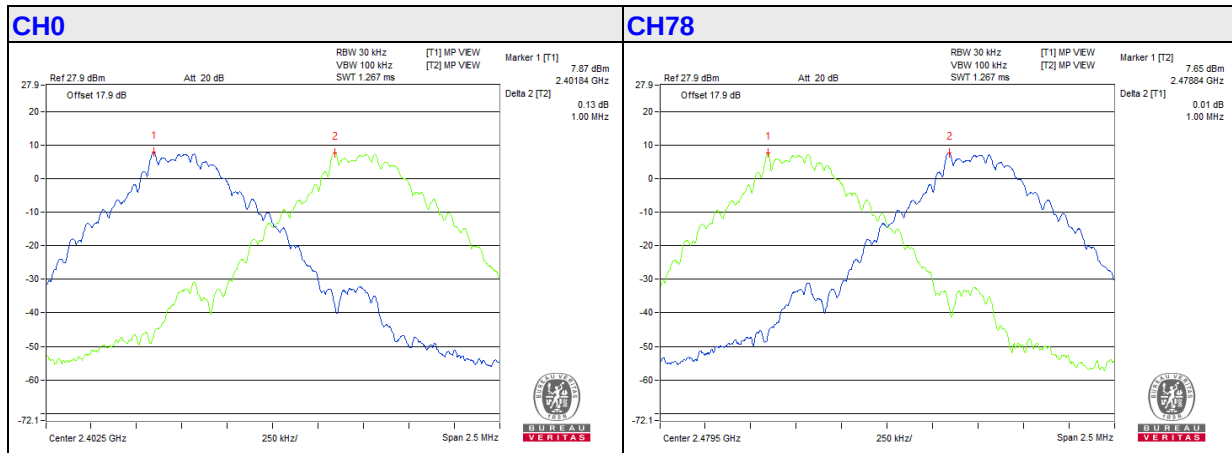

8DPSK:

Channel Number	Frequency (MHz)	Channel Separation (MHz)	Minimum Limit (MHz)	Pass /Fail
0	2402	1	0.1	Pass
78	2480	1	0.1	Pass

Note: The limitation is from OCB of a single hop and this value must greater and equal to 100kHz.

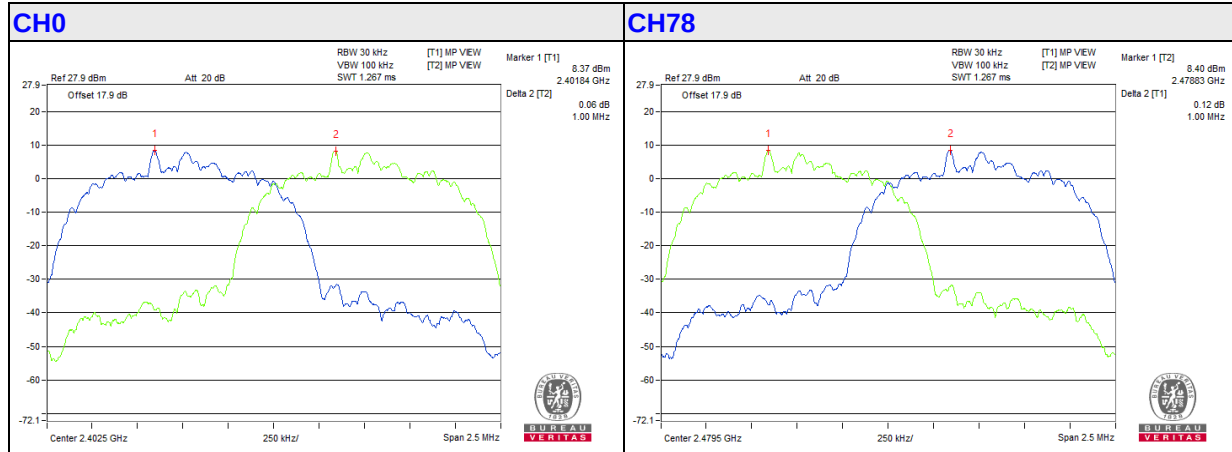

4.4 Adaptivity (Adaptive Frequency Hopping)

This requirement does not apply to non-adaptive equipment or adaptive equipment operating in a non-adaptive mode.

In addition, this requirement does not apply for equipment with a maximum declared RF Output power level of less than 10dBm e.i.r.p. or for FHSS equipment when operating in a mode where the RF Output power is less than 10dBm e.i.r.p.

4.4.1 Limit of Adaptive

Applicability of adaptive requirements and limit for frequency hopping equipment

Requirement	Operational Mode	
	LBT based DAA	Other forms of DAA (non-LBT based)
Minimum Clear Channel Assessment (CCA) Time	18 us (see note 1)	NA
Maximum Channel Occupancy (COT) Time	60 ms (see note2)	40 ms (see note5)
Minimum Idle Period	100 us (see note3)	100 us (see note5)
Extended CCA check	see note4	NA
Minimum time for unavailable	NA	see note6
Short Control Signalling Transmissions	Maximum duty cycle of 10 % within an observation period of 50 ms (see note 7)	

NOTE 1: The CCA observation time shall be not less than 0,2 % of the Channel Occupancy Time with a minimum of 18 μ s

NOTE 2: For LBT based frequency hopping equipment with a dwell time < 60 ms, the maximum Channel Occupancy Time is limited by the dwell time.

NOTE 3: Minimum 5 % of the Channel Occupancy Time with a minimum of 100 μ s.

NOTE 4: Extended CCA check is observed for a random duration between the value defined for the CCA observation time and 5 % of the Channel Occupancy Time.

NOTE 5: For equipment using a dwell time > 40 ms that want to have other transmissions during the same hop (dwell time) an Idle Period (no transmissions) of minimum 5 % of the Channel Occupancy Period with a minimum of 100 μ s shall be implemented.

NOTE 6: The frequency shall remain unavailable for a minimum time equal to 1 second or 5 times the actual number of hopping frequencies multiplied with the Channel Occupancy Time whichever is the longest.

NOTE 7: Adaptive equipment may or may not have Short Control Signaling Transmissions.

Interference threshold level

Maximum transmit power (P_H) EIRP dBm	Threshold level (TL) (see notes 1 and 2)
20	-70 dBm / MHz

NOTE 1: For a 20 dBm e.i.r.p. transmitter the detection threshold level (TL) shall be equal or less than -70 dBm/MHz at the input to the receiver (assuming a 0 dBi receive antenna)

NOTE 2: For power levels below 20 dBm e.i.r.p., the detection threshold level may be relaxed to $TL = -70 \text{ dBm/MHz} + 10 \times \log_{10} (100 \text{ mW} / P_{out})$ (P_{out} in mW e.i.r.p.)

Unwanted signal parameters for LBT based DAA

Wanted signal mean power from companion device	Unwanted signal frequency (MHz)	Unwanted CW signal power (dBm)
sufficient to maintain the link (see note 2)	2 395 or 2 488.5 (see note 1)	-35 (see note 3)
NOTE 1: The highest frequency shall be used for testing operating channels within the range 2 400 MHz to 2442 MHz, while the lowest frequency shall be used for testing operating channels within the range 2 442 MHz to 2 483.5 MHz.		
NOTE 2: A typical value which can be used in most cases is -50dBm/MHz.		
NOTE 3: The level specified is the level in front of the UUT antenna. In case of conducted measurements, this level has to be corrected by the actual antenna assembly gain.		

Unwanted signal parameters for non-LBT Based

Wanted signal mean power from companion device (dBm)	Unwanted signal frequency (MHz)	Unwanted CW signal power (dBm)
-30	2 395 or 2 488.5 (see note 1)	-35 (see note 2)
NOTE 1: The highest frequency shall be used for testing operating channels within the range 2 400 MHz to 2 442 MHz, while the lowest frequency shall be used for testing operating channels within the range 2 442 MHz to 2 483,5 MHz.		
NOTE 2: The level specified is the level in front of the UUT antenna. In case of conducted measurements, this level has to be corrected by the actual antenna assembly gain.		

4.4.2 Test Procedure


Refer to chapter 5.4.6 of EN 300 328 V2.2.2.

Measurement Method	
☒ Conducted measurement	☐ Radiated measurement

4.4.3 Deviation from Test Standard

No deviation.

4.4.4 Test Setup Configuration

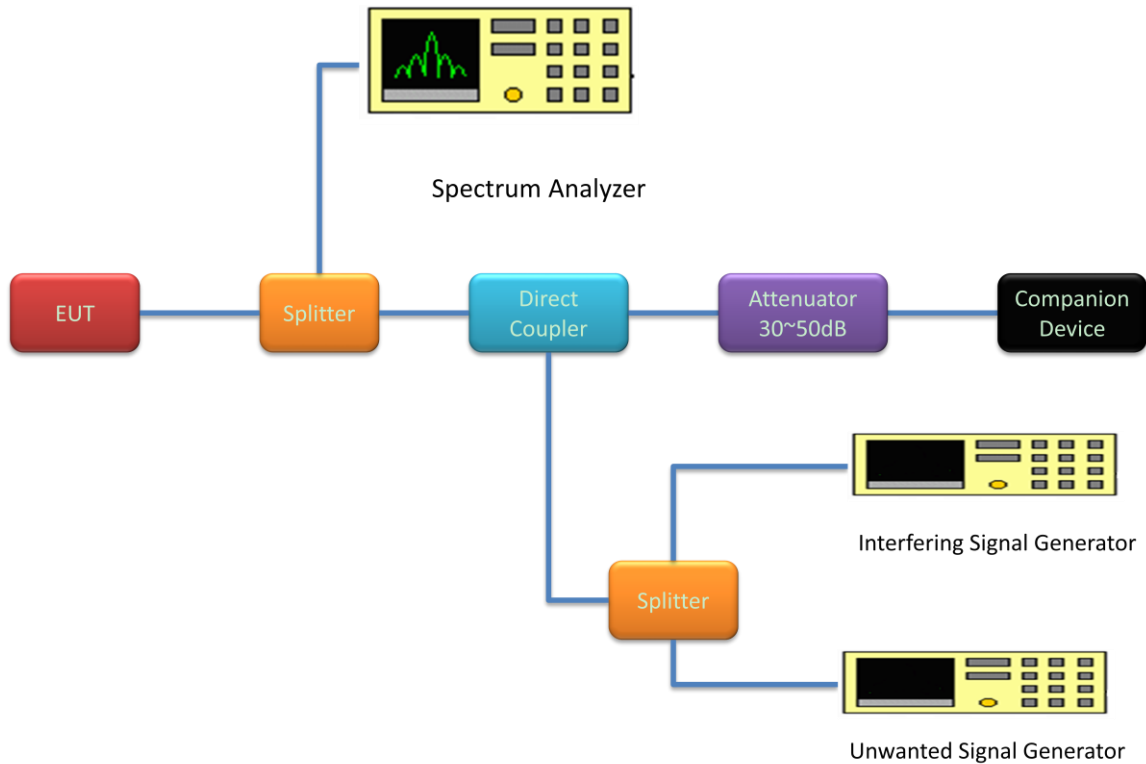

Companion Device information

PRODUCT	BRAND	MODEL NO.
Bluetooth Test Set	Anritsu	MT8852b

4.4.5 List of Measurements


UUT Operational Mode	Applicable	Limit	
		The Maximum Channel Occupancy Time	The Minimum idle Period
FHSS using others form of DAA (non-LBT based)	v	40 ms	5% of COT
FHSS using LBT based		60ms	5% of COT

Clause	Test Parameter	Remarks	Pass/Fail
4.3.1.7.2	Adaptive FHSS using LBT Based DAA	Not Applicable	NA
4.3.1.7.3	Adaptive FHSS using others form of DAA (non-LBT based)	Applicable	PASS
4.3.1.7.4	Short Control Signalling Transmissions	Applicable	PASS
4.3.1.7.3.2.6	Unwanted signal test	Applicable	PASS


4.4.6 Interference Threshold Level


Detection Threshold Level

"The maximum EIRP (nom) power is 15.9 dBm (38.9 mW) and antenna gain is 3.14 dBi.
 Detection Threshold level= -70 dBm/MHz + $10 \times \log(100 \text{ mW} / P_{\text{out}} (38.9 \text{ mW})) + G (3.14 \text{ dBi}) = -62.76 \text{ dBm/MHz}$
 The interference signal level to the UUT is lower than -62.76 dBm/MHz."

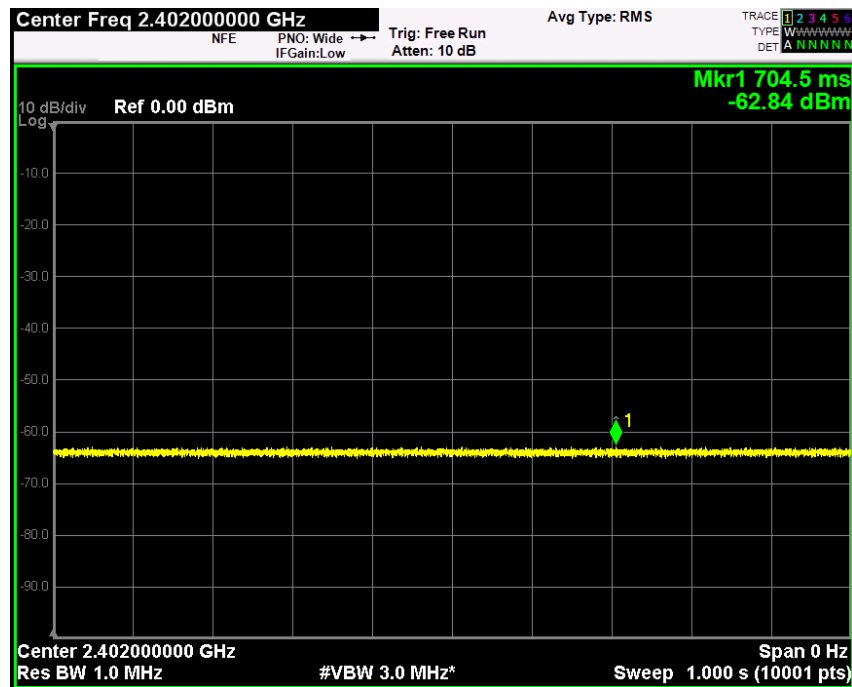

Detection Threshold Level

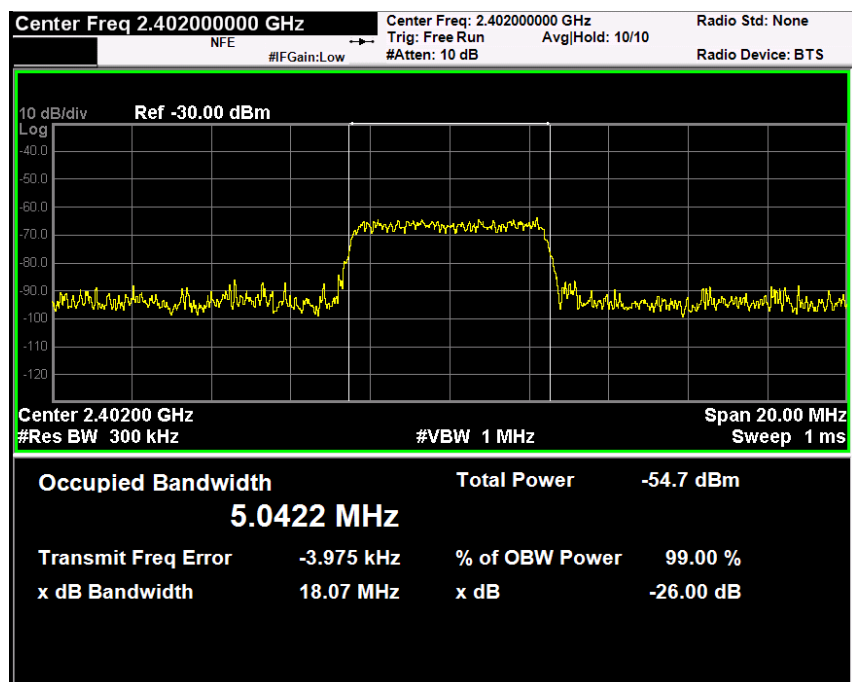

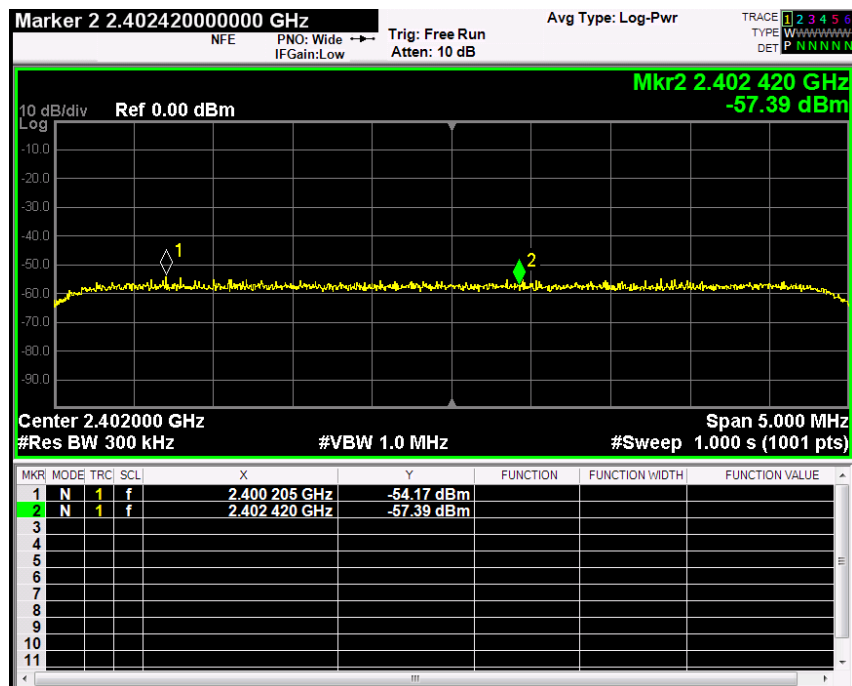

Flatness and Bandwidth


4.4.7 Test Result

- | | |
|-------------------------------------|---|
| ☐ | Not applicable to non-adaptive equipment or adaptive equipment operating in a non-adaptive mode |
| ☐ | Not applicable to equipment with RF output power is less than 10 dBm e.i.r.p. |
| ☒ | Refer to below test result |

4.4.7.1 Adaptive Result


Operating Frequency Bands and Mode of EUT

Operational Mode	Operating Frequency (MHz)	Test Result
GFSK	2402	PASS

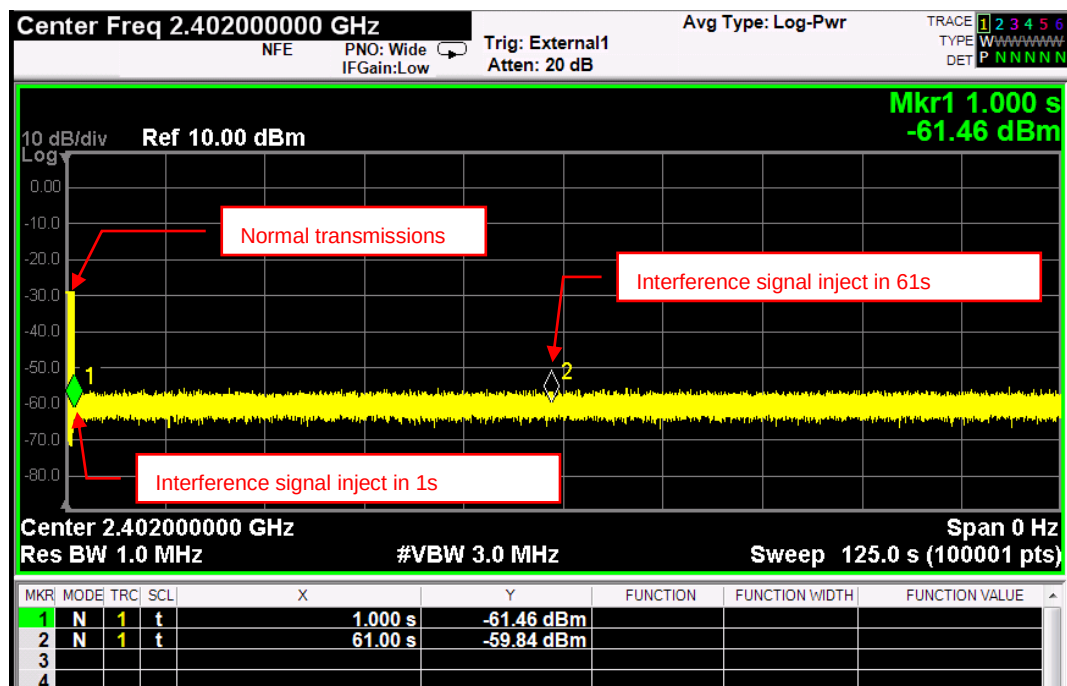

Operating Frequency Bands and Mode of EUT


Operational Mode	Operating Frequency (MHz)	Test Result
GFSK	2480	PASS

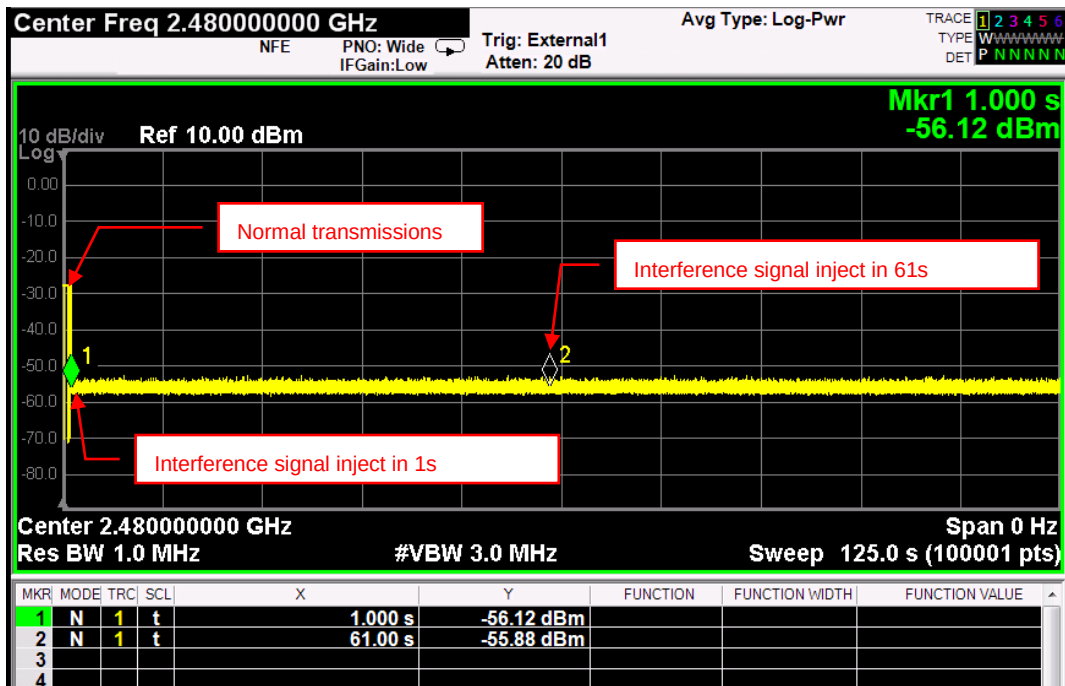

4.4.7.2 The Channel Occupancy Time Result


Operating Frequency Bands and Mode of EUT

Operational Mode	Operating Frequency (MHz)	The Channel Occupancy Time (ms)	Minimum Idle Period (ms)	Test Result
GFSK	2402	0.41	0.85	PASS

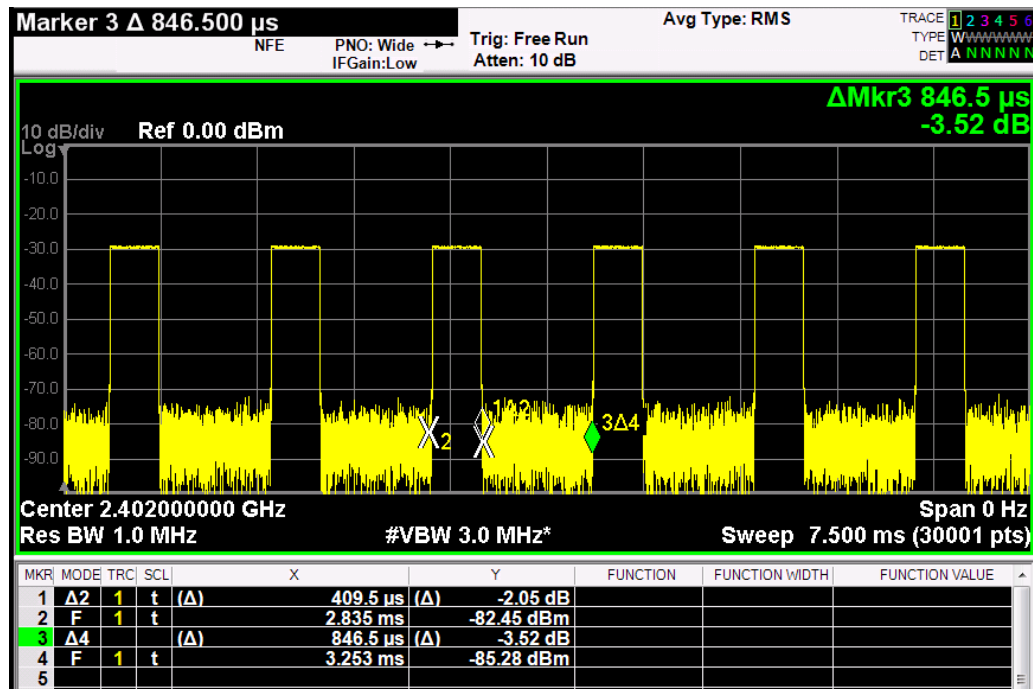

Operating Frequency Bands and Mode of EUT

Operational Mode	Operating Frequency (MHz)	The Channel Occupancy Time (ms)	Minimum Idle Period (ms)	Test Result
GFSK	2480	0.41	0.84	PASS

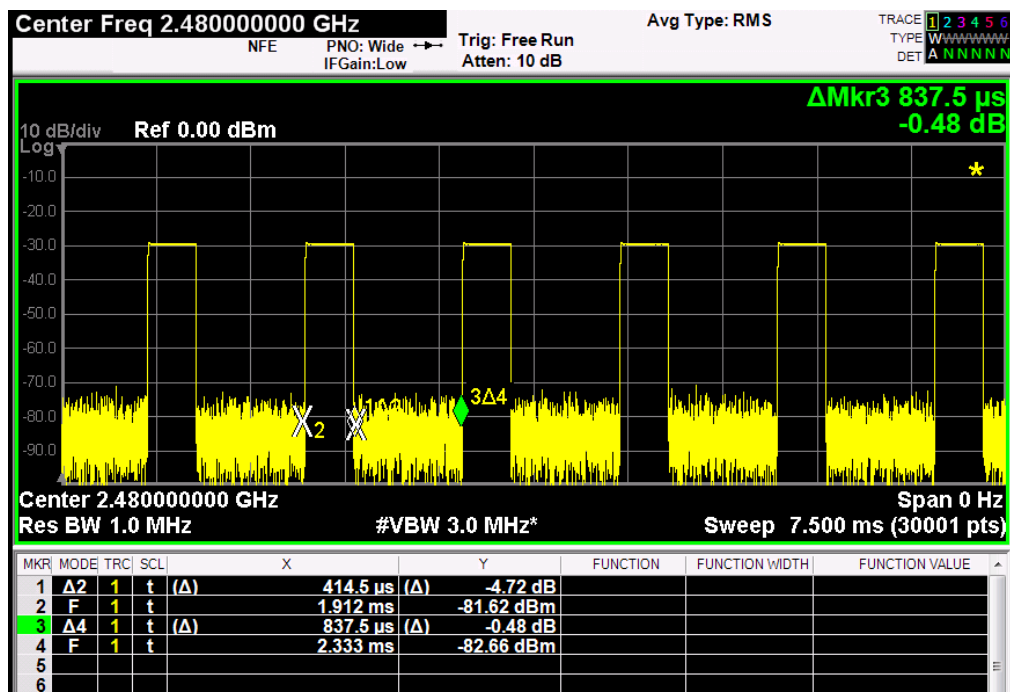

4.4.7.3 Unwanted Signal Interference Test Results

Channel	Channel Frequency (MHz)	Wanted Signal Mean Power from Companion Device (dBm/MHz)	Wanted Signal Frequency (MHz)	Unwanted Signal Power (dBm)	Pass/Fail
0	2402	-30	2488.5	-31.5	Pass
			2395	-31.5	Pass

Channel	Channel Frequency (MHz)	Wanted Signal Mean Power from Companion Device (dBm/MHz)	Wanted Signal Frequency (MHz)	Unwanted Signal Power (dBm)	Pass/Fail
78	2480	-30	2488.5	-31.5	Pass
			2395	-31.5	Pass

4.5 Occupied Channel Bandwidth

4.5.1 Limit of Occupied Channel Bandwidth

Condition		Limit
All types of equipment		Shall fall completely within the band 2400 to 2483.5 MHz.
Additional requirement	For non-adaptive using wide band modulations other than FHSS system and e.i.r.p. >10dBm.	Less than 20MHz
	For non-adaptive Frequency Hopping system and e.i.r.p. >10dBm.	Less than 5MHz

4.5.2 Test Procedure

Refer to chapter 5.4.7 of EN 300 328 V2.2.2.

Measurement	
☒ Conducted measurement	☐ Radiated measurement

4.5.3 Deviation from Test Standard

No deviation.

4.5.4 Test Setup

The measurement was performed at normal environmental conditions only. This measurement was performed at the lowest and the highest channel. Using software to force the EUT to hop or transmit on a single Hopping Frequency. The equipment was configured to operate under its worst case situation with respect to output power. (In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator.) Controlling software (Bluetooth RF test tool.exe (5.3.1.42)) has been activated to set the EUT on specific status.

4.5.5 Test Results (Mode 1)

GFSK:

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)	Measured Frequencies		Limit	Pass/Fail
			F _L (MHz)	F _H (MHz)		
0	2402	0.88	2401.54	2402.42	F _L > 2.4 GHz and F _H < 2.4835 GHz	Pass
78	2480	0.88	2479.54	2480.42		Pass

Note: F_L is the lowest frequency of the 99% occupied bandwidth of power envelope.
F_H is the highest frequency of the 99% occupied bandwidth of power envelope.

8DPSK:

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)	Measured Frequencies		Limit	Pass/Fail
			F _L (MHz)	F _H (MHz)		
0	2402	1.19	2401.39	2402.58	F _L > 2.4 GHz and F _H < 2.4835 GHz	Pass
78	2480	1.19	2479.39	2480.58		Pass

Note: F_L is the lowest frequency of the 99% occupied bandwidth of power envelope.
F_H is the highest frequency of the 99% occupied bandwidth of power envelope.

4.5.1 Test Results (Mode 2)

GFSK:

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)	Measured Frequencies		Limit	Pass/Fail
			F _L (MHz)	F _H (MHz)		
0	2402	0.88	2401.56	2402.44	F _L > 2.4 GHz and F _H < 2.4835 GHz	Pass
78	2480	0.88	2479.56	2480.44		Pass

Note: F_L is the lowest frequency of the 99% occupied bandwidth of power envelope.
F_H is the highest frequency of the 99% occupied bandwidth of power envelope.

8DPSK:


Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)	Measured Frequencies		Limit	Pass/Fail
			F _L (MHz)	F _H (MHz)		
0	2402	1.19	2401.41	2402.6	F _L > 2.4 GHz and F _H < 2.4835 GHz	Pass
78	2480	1.2	2479.4	2480.6		Pass

Note: F_L is the lowest frequency of the 99% occupied bandwidth of power envelope.
F_H is the highest frequency of the 99% occupied bandwidth of power envelope.

4.6 Transmitter Unwanted Emissions in the Out-of-Band Domain

4.6.1 Limits of Transmitter Unwanted Emission in the Out-of-Band Domain

Condition	Limit
Under normal conditions	The transmitter unwanted emissions in the out-of-band domain shall not exceed the values provided by the mask in below figure.

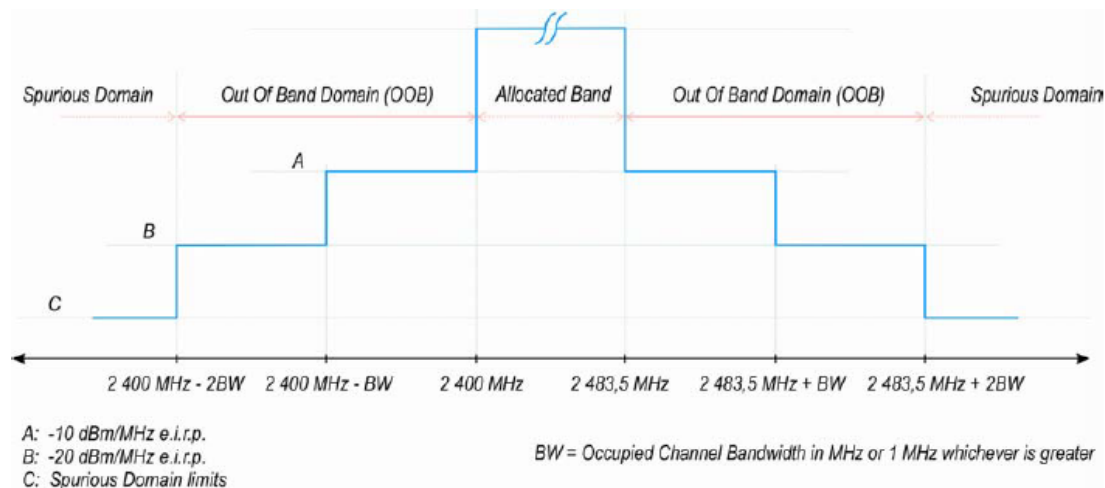

4.6.2 Test Procedure

Refer to chapter 5.4.8 of EN 300 328 V2.2.2.

Measurement	
☒ Conducted measurement	☐ Radiated measurement

4.6.3 Deviation from Test Standard

No deviation

4.6.4 Test Setup

The measurement was performed at normal environmental conditions only. The equipment was performed normal operation (hopping) during test. The equipment was configured to operate under its worst case situation with respect to output power. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator. The frequency has to be recorded for the right and left end above threshold of highest and lowest channel respectively.

4.6.5 Test Results (Mode 1)

GFSK:

Channel Frequency		2402MHz				2480MHz			
Test Condition		OOB Emission (MHz)				OOB Emission (MHz)			
		2399 ~ 2400		2398 ~ 2399		2483.5 ~ 2484.5		2484.5 ~ 2485.5	
		Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)
Tnom 25°C	V _{nom} (V)	2399.50	-36.23	2398.50	-46.48	2484.00	-47.01	2485.00	-48.58
Power Limit (dBm/MHz)		-10.00		-20.00		-10.00		-20.00	
Pass/Fail		Pass		Pass		Pass		Pass	

8DPSK:

Channel Frequency		2402MHz				2480MHz			
Test Condition		OOB Emission (MHz)				OOB Emission (MHz)			
		2398.81 ~ 2400		2397.62 ~ 2398.81		2483.5 ~ 2484.69		2484.69 ~ 2485.88	
		Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)
Tnom 25°C	V _{nom} (V)	2399.50	-29.75	2398.31	-47.51	2484.00	-47.77	2485.19	-49.10
Power Limit (dBm/MHz)		-10.00		-20.00		-10.00		-20.00	
Pass/Fail		Pass		Pass		Pass		Pass	

4.6.6 Test Results (Mode 2)

GFSK:

Channel Frequency		2402MHz				2480MHz			
Test Condition		OOB Emission (MHz)				OOB Emission (MHz)			
		2399 ~ 2400		2398 ~ 2399		2483.5 ~ 2484.5		2484.5 ~ 2485.5	
		Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)
Tnom 25°C	V _{nom} (V)	2399.50	-42.64	2398.50	-49.27	2484.00	-49.40	2485.00	-50.14
Power Limit (dBm/MHz)		-10.00		-20.00		-10.00		-20.00	
Pass/Fail		Pass		Pass		Pass		Pass	

8DPSK:

Channel Frequency		2402MHz				2480MHz			
Test Condition		OOB Emission (MHz)				OOB Emission (MHz)			
		2398.81 ~ 2400		2397.62 ~ 2398.81		2483.5 ~ 2484.7		2484.7 ~ 2485.9	
		Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)
Tnom 25°C	V _{nom} (V)	2399.50	-33.79	2398.31	-49.13	2484.00	-49.32	2485.20	-50.15
Power Limit (dBm/MHz)		-10.00		-20.00		-10.00		-20.00	
Pass/Fail		Pass		Pass		Pass		Pass	

4.7 Transmitter Unwanted Emissions in the Spurious Domain

4.7.1 Limits of Transmitter Unwanted Emissions in the Spurious Domain

Frequency Range	Maximum Power Limit	Bandwidth
30 MHz to 47 MHz	-36dBm	100kHz
47 MHz to 74 MHz	-54dBm	100kHz
74 MHz to 87,5 MHz	-36dBm	100kHz
87,5 MHz to 118 MHz	-54dBm	100kHz
118 MHz to 174 MHz	-36dBm	100kHz
174 MHz to 230 MHz	-54dBm	100kHz
230 MHz to 470 MHz	-36dBm	100kHz
470 MHz to 694 MHz	-54dBm	100kHz
694 MHz to 1 GHz	-36dBm	100kHz
1GHz ~ 12.75GHz	-30dBm	1MHz

Note: These limits are e.r.p. for emissions up to 1 GHz and as e.i.r.p. for emissions above 1 GHz.

4.7.2 Test Procedure

Refer to chapter 5.4.9 of EN 300 328 V2.2.2.

Measurement	
☐ Conducted measurement	☒ Radiated measurement

For Conducted measurement:

The level of unwanted emissions shall be measured as their power in a specified load (conducted spurious emissions) and their effective radiated power when radiated by the cabinet or structure of the equipment with the antenna connector(s) terminated by a specified load (cabinet radiation).

4.7.3 Deviation from Test Standard

No deviation.

4.7.4 Test Setup

1. For the actual test configuration, please refer to the related Item in this test report (Photographs of the Test Configuration).
2. The measurements were performed when normal hopping was disabled. In this case measurements were performed when operating at the lowest and the highest hopping frequency.
3. The equipment was configured to operate under its worst case situation with respect to output power.
4. The measurement was performed at normal environmental conditions only. Controlling software (Bluetooth RF test tool.exe (5.3.1.42)) has been activated to set the EUT on specific status.

4.7.5 Test Results

Dipole Antenna

Below 1GHz Worst-case Data

BT_GFSK

SPURIOUS EMISSION FREQUENCY RANGE	30MHz ~ 1GHz	OPERATING CHANNEL	39
--	--------------	------------------------------	----

Spurious Emission Level				
Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
89.10	H	-64.89	-54.00	-10.89
92.55	V	-65.95	-54.00	-11.95
99.60	V	-60.55	-54.00	-6.55
99.95	H	-63.40	-54.00	-9.40
199.20	H	-61.72	-54.00	-7.72
199.20	V	-66.00	-54.00	-12.00
298.75	H	-47.36	-36.00	-11.36
497.85	V	-66.93	-54.00	-12.93
497.90	H	-64.50	-54.00	-10.50
528.00	V	-70.20	-54.00	-16.20
554.70	V	-67.96	-54.00	-13.96
558.35	H	-68.55	-54.00	-14.55
571.90	H	-68.73	-54.00	-14.73
599.95	H	-67.11	-54.00	-13.11
600.00	V	-65.60	-54.00	-11.60
622.30	H	-63.81	-54.00	-9.81
624.85	V	-64.75	-54.00	-10.75
634.00	V	-69.81	-54.00	-15.81
666.45	H	-60.97	-54.00	-6.97
666.45	V	-64.52	-54.00	-10.52

Above 1GHz Worst-case Data

BT_GFSK

SPURIOUS EMISSION FREQUENCY RANGE	1GHz ~ 12.75GHz	OPERATING CHANNEL	0, 78
--	-----------------	------------------------------	-------

Spurious Emission Level					
Channel	Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
0	4804.00	H	-59.08	-30.00	-29.08
	4804.16	V	-51.63	-30.00	-21.63
	7206.00	H	-55.90	-30.00	-25.90
	7206.00	V	-55.21	-30.00	-25.21
	9608.00	H	-53.73	-30.00	-23.73
	9608.00	V	-53.54	-30.00	-23.54
78	4959.67	H	-53.30	-30.00	-23.30
	4960.00	V	-58.53	-30.00	-28.53
	7440.00	H	-53.24	-30.00	-23.24
	7440.00	V	-53.44	-30.00	-23.44
	9920.00	H	-52.82	-30.00	-22.82
	9920.00	V	-53.79	-30.00	-23.79

PIFA Antenna

BT_GFSK

SPURIOUS EMISSION FREQUENCY RANGE	30MHz ~ 1GHz	OPERATING CHANNEL	39
--	--------------	------------------------------	----

Spurious Emission Level				
Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
94.35	V	-66.40	-54.00	-12.40
99.80	H	-63.06	-54.00	-9.06
99.95	V	-60.38	-54.00	-6.38
199.20	H	-62.03	-54.00	-8.03
199.20	V	-66.09	-54.00	-12.09
298.75	H	-47.29	-36.00	-11.29
497.90	H	-64.67	-54.00	-10.67
499.80	V	-66.64	-54.00	-12.64
528.00	V	-70.00	-54.00	-16.00
531.65	H	-68.99	-54.00	-14.99
552.00	H	-67.55	-54.00	-13.55
559.80	V	-69.24	-54.00	-15.24
575.90	V	-66.84	-54.00	-12.84
585.70	H	-69.53	-54.00	-15.53
599.95	H	-66.10	-54.00	-12.10
600.00	V	-65.83	-54.00	-11.83
622.30	H	-64.35	-54.00	-10.35
624.75	V	-64.92	-54.00	-10.92
663.85	V	-63.47	-54.00	-9.47
666.45	H	-61.13	-54.00	-7.13

Above 1GHz Worst-case Data

BT_GFSK

SPURIOUS EMISSION FREQUENCY RANGE	1GHz ~ 12.75GHz	OPERATING CHANNEL	0, 78
--	-----------------	------------------------------	-------

Spurious Emission Level					
Channel	Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
0	4804.00	H	-56.26	-30.00	-26.26
	4804.00	V	-57.62	-30.00	-27.62
	7206.00	H	-56.54	-30.00	-26.54
	7206.00	V	-56.06	-30.00	-26.06
	9608.00	H	-52.61	-30.00	-22.61
	9608.00	V	-52.33	-30.00	-22.33
78	4960.00	H	-59.64	-30.00	-29.64
	4960.00	V	-59.89	-30.00	-29.89
	7440.00	H	-55.91	-30.00	-25.91
	7440.00	V	-55.26	-30.00	-25.26
	9920.00	H	-52.67	-30.00	-22.67
	9920.00	V	-53.03	-30.00	-23.03

4.8 Receiver Spurious Emissions

4.9 Limit of Receiver Spurious Radiation

Frequency Range	Maximum Power Limit	Bandwidth
30 MHz ~ 1 GHz	-57dBm	100 kHz
1 GHz ~ 12.75 GHz	-47dBm	1 MHz

Note: These limits are e.r.p. for emissions up to 1 GHz and as e.i.r.p. for emissions above 1 GHz.

4.9.1 Test Procedure

Refer to chapter 5.4.10 of EN 300 328 V2.2.2.

Measurement	
☐ Conducted measurement	☒ Radiated measurement
<u>For Conducted measurement:</u> The level of unwanted emissions shall be measured as their power in a specified load (conducted spurious emissions) and their effective radiated power when radiated by the cabinet or structure of the equipment with the antenna connector(s) terminated by a specified load (cabinet radiation).	

4.9.2 Deviation from Test Standard

No deviation.

4.9.3 Test Setup

1. For the actual test configuration, please refer to the related Item in this test report (Photographs of the Test Configuration).
2. Testing was performed when the equipment was in a receive-only mode.
3. The measurements were performed when normal hopping was disabled. In this case measurements were performed when operating at the lowest and the highest hopping frequency.
4. The measurement was performed at normal environmental conditions only. Controlling software (Bluetooth RF test tool.exe (5.3.1.42)) has been activated to set the EUT on specific status.

4.9.4 Test Results

Dipole Antenna

RX Below 1GHz Data

SPURIOUS EMISSION FREQUENCY RANGE	30MHz ~ 1GHz	OPERATING CHANNEL	39
--	--------------	------------------------------	----

Spurious Emission Level				
Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
99.60	V	-60.56	-57.00	-3.56
99.95	H	-62.38	-57.00	-5.38
153.50	H	-62.70	-57.00	-5.70
164.75	H	-63.89	-57.00	-6.89
166.55	V	-65.84	-57.00	-8.84
199.15	H	-61.87	-57.00	-4.87
199.20	V	-65.97	-57.00	-8.97
373.40	H	-60.54	-57.00	-3.54
373.50	V	-63.64	-57.00	-6.64
432.00	H	-66.86	-57.00	-9.86
599.85	V	-64.59	-57.00	-7.59
624.85	V	-65.28	-57.00	-8.28
663.85	H	-61.51	-57.00	-4.51
663.85	V	-64.55	-57.00	-7.55
699.80	V	-61.29	-57.00	-4.29
728.15	H	-63.32	-57.00	-6.32
746.95	H	-62.37	-57.00	-5.37
749.80	V	-65.42	-57.00	-8.42
773.95	V	-65.93	-57.00	-8.93
788.50	H	-63.31	-57.00	-6.31

RX Above 1GHz Data

SPURIOUS EMISSION FREQUENCY RANGE	1GHz ~ 12.75GHz	OPERATING CHANNEL	0, 78
--	-----------------	------------------------------	-------

Spurious Emission Level					
Channel	Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
0	9602.00	H	-57.12	-47.00	-10.12
	9602.22	V	-57.26	-47.00	-10.26
78	9914.00	H	-57.00	-47.00	-10.00
	9914.00	V	-54.84	-47.00	-7.84

PIFA Antenna

RX Below 1GHz Data

SPURIOUS EMISSION FREQUENCY RANGE	30MHz ~ 1GHz	OPERATING CHANNEL	39
--	--------------	------------------------------	----

Spurious Emission Level				
Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
99.95	H	-63.52	-57.00	-6.52
99.95	V	-60.45	-57.00	-3.45
144.00	H	-61.94	-57.00	-4.94
160.00	H	-63.01	-57.00	-6.01
199.20	H	-61.31	-57.00	-4.31
199.20	V	-65.93	-57.00	-8.93
373.35	H	-60.95	-57.00	-3.95
373.75	V	-63.37	-57.00	-6.37
497.90	V	-67.01	-57.00	-10.01
499.80	H	-64.59	-57.00	-7.59
600.00	V	-65.84	-57.00	-8.84
624.85	H	-64.97	-57.00	-7.97
624.85	V	-64.92	-57.00	-7.92
666.45	V	-63.44	-57.00	-6.44
697.05	V	-61.70	-57.00	-4.70
739.85	H	-64.11	-57.00	-7.11
767.55	V	-65.28	-57.00	-8.28
773.25	H	-63.67	-57.00	-6.67
794.65	V	-64.13	-57.00	-7.13
871.30	H	-65.96	-57.00	-8.96

RX Above 1GHz Data

SPURIOUS EMISSION FREQUENCY RANGE	1GHz ~ 12.75GHz	OPERATING CHANNEL	0, 78
--	-----------------	------------------------------	-------

Spurious Emission Level					
Channel	Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
0	9601.62	H	-57.30	-47.00	-10.30
	9602.66	V	-56.91	-47.00	-9.91
78	9918.38	H	-55.94	-47.00	-8.94
	9918.44	V	-54.04	-47.00	-7.04

4.10 Receiver Blocking

4.10.1 Limit of Receiver Blocking

This requirement applies to all receiver categories.

Receiver Category		
☒ Category 1	☐ Category 2	☐ Category 3
Minimum performance criterion	☒ $PER \leq 10\%$	
	☐ Alternative performance criteria (See note)	
Note: The manufacturer declared the performance criteria is x% for the intended use of the equipment.		

Receiver Category 1 Equipment			
Wanted signal mean power from companion device (dBm) (see notes 1 to 4)	Blocking Signal Frequency (MHz)	Blocking Signal Power (dBm) (see note 4)	Type of blocking signal
(-133 dBm + $10 \times \log_{10}(\text{OCBW})$) or -68 dBm whichever is less (see note 2)	2 380 2 504	-34	CW
(-139 dBm + $10 \times \log_{10}(\text{OCBW})$) or -74 dBm whichever is less (see note 3)	2 300 2 330 2 360 2 524 2 584 2 674		

NOTE 1: OCBW is in Hz.

NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\min} + 26$ dB where $P_{\min}$ is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.

NOTE 3: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\min} + 20$ dB where $P_{\min}$ is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.

NOTE 4: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured / positioned as recorded in clause 5.4.3.2.2.

Receiver Category 2 Equipment

Wanted signal mean power from companion device (dBm) (see notes 1 to 3)	Blocking Signal Frequency (MHz)	Blocking Signal Power (dBm) (see note 3)	Type of blocking signal
$(-139 \text{ dBm} + 10 \times \log^{10}(\text{OCBW}) + 10)$ or $(-74 \text{ dBm} + 10)$ whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW

NOTE 1: OCBW is in Hz.

NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\min} + 26 \text{ dB}$ where $P_{\min}$ is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.

NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured / positioned as recorded in clause 5.4.3.2.2.

Receiver Category 3 Equipment

Wanted signal mean power from companion device (dBm) (see notes 1 to 3)	Blocking Signal Frequency (MHz)	Blocking Signal Power (dBm) (See note 3)	Type of blocking signal
$(-139 \text{ dBm} + 10 \times \log^{10}(\text{OCBW}) + 20)$ or $(-74 \text{ dBm} + 20)$ whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW

NOTE 1: OCBW is in Hz.

NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\min} + 26 \text{ dB}$ where $P_{\min}$ is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.

NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured / positioned as recorded in clause 5.4.3.2.2.

4.10.2 Test Procedure


Refer to chapter 5.4.11 of EN 300 328 V2.2.2.

Measurement Method	
☒ Conducted measurement	☐ Radiated measurement

4.10.3 Deviation from Test Standard

No deviation.

4.10.4 Test Setup Configuration

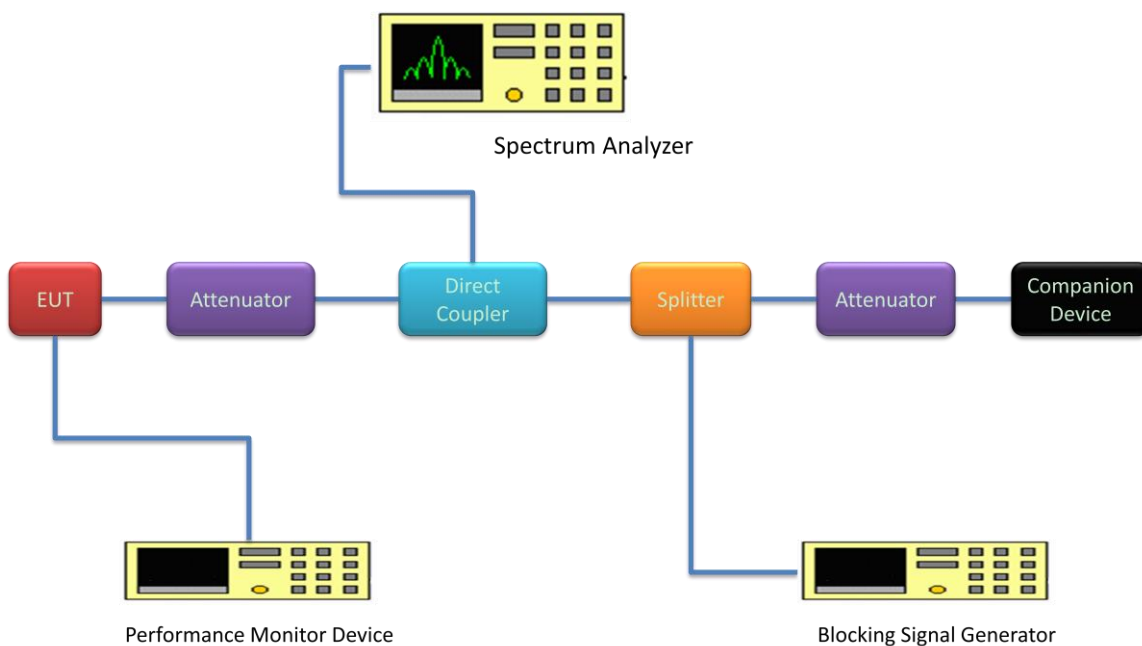

4.10.5 Test Results

Receiver Category 1 Equipment

Receiver blocking performance when operating at the lowest and highest channels							
CH 0	OCBW	0.88 MHz	Antenna Gain:	3.5 dBi	Blocking signal Power	☒	at the antenna connector
CH 78	OCBW	0.88 MHz				☐	in front of the antenna
Operation Mode	Channel Number	Wanted signal mean power from companion device (dBm) (Note 1)	Blocking signal frequency (MHz)	Blocking signal frequency shift (MHz) (Note 2)	Blocking signal power (dBm) (Note 1)	Pass/Fail	
BT_GFSK	0	-70.06	2380	-	-30.5	Pass	
		-76.06	2300	-	-30.5	Pass	
			2330		-30.5	Pass	
			2360		-30.5	Pass	
	78	-70.06	2504	-	-30.5	Pass	
		-76.06	2524	-	-30.5	Pass	
			2584		-30.5	Pass	
			2674		-30.5	Pass	
Note 1: In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G).							
Note 2: If the performance criteria is not met, those frequencies of the blocking signal has been increased/decreased with a value equal to the Occupied Channel Bandwidth except the blocking frequencies 2380, 2504MHz shall be increased/decreased with a value equal to 10MHz also if the frequency offset is more than 7MHz, the level of the wanted signal shall be increased by 3dB.							

5 Photographs of the Test Configuration

TX / RX Spurious Emission Test Dipole Antenna



PIFA Antenna



Appendix A- Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---

Appendix B- Test Results for reference by client's requirement

Receiver Category 1 Equipment

Receiver blocking performance when operating at the lowest and highest channels						
CH 0	OCBW	0.88 MHz	Antenna Gain:	3.5 dBi	Blocking signal Power	☒ at the antenna connector
CH 78	OCBW	0.88 MHz				☐ in front of the antenna
Operation Mode	Channel Number	Wanted signal mean power from companion device (dBm) (Note 1)	Blocking signal frequency (MHz)	Blocking signal frequency shift (MHz) (Note 2)	Blocking signal power (dBm) (Note 1)	Pass/Fail
BT_GFSK	0	-80	2380	-	-30.5	Pass
		-90	2300	-	-30.5	Pass
			2330		-30.5	Pass
			2360		-30.5	Pass
	78	-84	2504	-	-30.5	Pass
		-90	2524	-	-30.5	Pass
			2584		-30.5	Pass
			2674		-30.5	Pass

Note 1: In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G).

Note 2: If the performance criteria is not met, those frequencies of the blocking signal has been increased/decreased with a value equal to the Occupied Channel Bandwidth except the blocking frequencies 2380, 2504MHz shall be increased/decreased with a value equal to 10MHz also if the frequency offset is more than 7MHz, the level of the wanted signal shall be increased by 3dB.