

EN 300 328 RF Test Report

Report No.: RE200522E04

Test Model: RTL8852AE

Received Date: May 22, 2020

Test Date: June 24 to Sep. 17, 2020

Issued Date: Oct. 05, 2020

Applicant: Realtek Semiconductor Corp.

Address: No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Test Instruments	7
2.2 Measurement Uncertainty	13
2.3 Maximum Measurement Uncertainty	13
2.4 Modification Record	13
3 General Information	14
3.1 General Description of EUT (WLAN)	14
3.2 Description of Test Modes	17
3.2.1 Test Mode Applicability and Tested Channel Detail	18
3.3 Description of Support Units	24
3.3.1 Configuration of System under Test	24
3.4 General Description of Applied Standards	25
4 Test Procedure and Results	26
4.1 RF Output Power	26
4.1.1 Limits of RF Output Power	26
4.1.2 Test Procedures	26
4.1.3 Deviation from Test Standard	26
4.1.4 Test Setup	26
4.1.5 Test Results (Mode 1)	27
4.1.6 Test Results (Mode 2)	30
4.2 Power Spectral Density	32
4.2.1 Limit of Power Spectral Density	32
4.2.2 Test Procedures	32
4.2.3 Deviation of Test Standard	32
4.2.4 Test Setup	32
4.2.5 Test Results (Mode 1)	33
4.2.6 Test Results (Mode 2)	36
4.3 Adaptivity (non-FHSS)	38
4.3.1 Limit of Adaptive	38
4.3.2 Test Procedure	40
4.3.3 Deviation from Test Standard	40
4.3.4 Test Setup Configuration	40
4.3.5 List of Measurements	41
4.3.6 Interference Threshold Level	42
4.3.7 Test Result	43
4.3.7.1 Adaptive Result	43
4.3.7.2 The Channel Occupancy Time Result	52
4.3.7.3 Short Control Signalling Transmissions Result	61
4.4 Occupied Channel Bandwidth	63
4.4.1 Limit of Occupied Channel Bandwidth	63
4.4.2 Test Procedure	63
4.4.3 Deviation from Test Standard	63
4.4.4 Test Setup	63
4.4.5 Test Results (Mode 1)	64
4.4.6 Test Results (Mode 2)	66
4.5 Transmitter Unwanted Emissions in the Out-of-band Domain	68
4.5.1 Limits of Transmitter Unwanted Emissions in the Out-of-band Domain	68
4.5.2 Test Procedure	68
4.5.3 Deviation from Test Standard	68
4.5.4 Test Setup	68
4.5.5 Test Results (Mode 1)	69

4.5.6	Test Results (Mode 2).....	72
4.6	Transmitter Spurious Emissions in the Spurious Domain	75
4.6.1	Limits of Transmitter Spurious Emissions	75
4.6.2	Test Procedure	75
4.6.3	Deviation from Test Standard	75
4.6.4	Test Setup.....	75
4.6.5	Test Results (Mode 1)	76
4.6.6	Test Results (Mode 2)	80
4.7	Receiver Spurious Emissions	84
4.7.1	Limit of Receiver Spurious Radiation	84
4.7.2	Test Procedure	84
4.7.3	Deviation from Test Standard	84
4.7.4	Test Setup.....	84
4.7.5	Test Results	85
4.8	Receiver Blocking.....	87
4.8.1	Limit of Receiver Blocking	87
4.8.2	Test Procedure	89
4.8.3	Deviation from Test Standard	89
4.8.4	Test Setup Configuration	89
4.8.5	Test Results	90
5	Photographs of the Test Configuration	91
	Appendix A- Information of the Testing Laboratories.....	93
	Appendix B- Test Results for reference by client's requirement.....	94

Release Control Record

Issue No.	Description	Date Issued
RE200522E04	Original release.	Oct. 05, 2020

1 Certificate of Conformity

Product: 11ax RTL8852AE Combo module

Brand: REALTEK

Test Model: RTL8852AE

Sample Status: ENGINEERING SAMPLE

Applicant: Realtek Semiconductor Corp.

Test Date: June 24 to Sep. 17, 2020

Standards: EN 300 328 V2.2.2 (2019-07)

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Vivian Huang , **Date:** Oct. 05, 2020
Vivian Huang / Specialist

Approved by : Clark Lin , **Date:** Oct. 05, 2020
Clark Lin / Technical Manager

2 Summary of Test Results

The EUT has been tested according to the following specifications:

EN 300 328 V2.2.2		
Clause	Test Parameter	Results
4.3.2.2	RF Output Power	Pass
4.3.2.3	Power Spectral Density	Pass
4.3.2.4	Duty cycle, Tx-sequence, Tx-gap (Non-adaptive equipment)	Not Applicable
4.3.2.5	Medium Utilization (MU) Factor (Non-Adaptive Equipment)	Not Applicable
4.3.2.6	Adaptivity (non-FHSS)	Pass
4.3.2.7	Occupied Channel Bandwidth	Pass
4.3.2.8	Transmitter Unwanted Emissions in the out-of-band Domain	Pass
4.3.2.9	Transmitter Unwanted Emissions in the Spurious Domain	Pass
4.3.2.10	Receiver Spurious Emissions	Pass
4.3.2.11	Receiver Blocking	Pass
4.3.2.12	Geo-location capability	Not Applicable

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Test Instruments

For spurious emissions test (for TX emission below 1GHz & RX emission):

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer Keysight	N9030A	MY54490570	June 16, 2020	June 15, 2021
Pre_Amplifier Agilent	8447D	2944A10663	Apr. 28, 2020	Apr. 27, 2021
Pre_Amplifier HP	8449B	3008A01281	Jan. 09, 2020	Jan. 08, 2021
Pre_Amplifier EMCi	EMC184045	980143	Jan. 09, 2020	Jan. 08, 2021
TRILOG Antenna SCHWARZBECK	VULB9168	9168-162	Nov. 11, 2019	Nov. 10, 2020
Horn_Antenna SCHWARZBECK	BBHA9120-D1	D124	Nov. 24, 2019	Nov. 23, 2020
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 24, 2019	Nov. 23, 2020
Software	ADT_Radiated_V7.6.15.9.5	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208411	NA	NA
Power meter Anritsu	ML2495A	1529002	July 26, 2019	July 25, 2020
Power sensor Anritsu	MA2411B	1339443	July 26, 2019	July 25, 2020
Power meter Anritsu	ML2496A	1529003	Aug. 07, 2019	Aug. 06, 2020
Power sensor Anritsu	MA2411B	1339442	Aug. 07, 2019	Aug. 06, 2020
ESG Vector signal generator Agilent	E4438C	MY45094468/005 506 602 UK6 UNJ	Nov. 14, 2019	Nov. 13, 2020

- NOTE:**
1. The test was performed in RF Fully Chamber No. 1.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: July 07 to 10, 2020

For spurious emissions test (for TX emission for RU mode):

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer Keysight	N9030A	MY55410176	June 30, 2020	June 29, 2021
Pre_Amplifier HP	8449B	3008A01923	Oct. 09, 2019	Oct. 08, 2020
Pre_Amplifier EMCi	EMC184045	980143	Jan. 09, 2020	Jan. 08, 2021
Horn_Antenna SCHWARZBECK	BBHA 9120 D	9120D-1592	Nov. 24, 2019	Nov. 23, 2020
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 24, 2019	Nov. 23, 2020
Software	ADT_Radiated_V7.6.15.9.5	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208542	NA	NA
Power meter Anritsu	ML2495A	1529002	July 22, 2020	July 21, 2021
Power sensor Anritsu	MA2411B	1339443	July 22, 2020	July 21, 2021
Power meter Anritsu	ML2496A	1529003	Aug. 07, 2019	Aug. 06, 2020
Power sensor Anritsu	MA2411B	1339442	Aug. 07, 2019	Aug. 06, 2020
ESG Vector signal generator Agilent	E4438C	MY45094468/005 506 602 UK6 UNJ	Nov. 14, 2019	Nov. 13, 2020

- NOTE:**
1. The test was performed in RF Fully Chamber No. 2.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: July 23, 2020

For spurious emissions test (for TX emission above 1GHz):

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer Keysight	N9030A	MY55410176	July 03, 2019	July 02, 2020
Pre_Amplifier HP	8449B	3008A01923	Oct. 09, 2019	Oct. 08, 2020
Pre_Amplifier EMCi	EMC184045	980143	Jan. 09, 2020	Jan. 08, 2021
Horn_Antenna SCHWARZBECK	BBHA 9120 D	9120D-1592	Nov. 24, 2019	Nov. 23, 2020
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 24, 2019	Nov. 23, 2020
Software	ADT_Radiated_V7.6.15.9.5	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208542	NA	NA
Power meter Anritsu	ML2495A	1529002	July 26, 2019	July 25, 2020
Power sensor Anritsu	MA2411B	1339443	July 26, 2019	July 25, 2020
Power meter Anritsu	ML2496A	1529003	Aug. 07, 2019	Aug. 06, 2020
Power sensor Anritsu	MA2411B	1339442	Aug. 07, 2019	Aug. 06, 2020
ESG Vector signal generator Agilent	E4438C	MY45094468/005 506 602 UK6 UNJ	Nov. 14, 2019	Nov. 13, 2020

- NOTE:**
1. The test was performed in RF Fully Chamber No. 2.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: June 24, 2020

For receiver blocking and adaptivity test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer Keysight	N9030A	MY55410176	June 30, 2020	June 29, 2021
AD1AD191XA one box tester	MT8860C	1705001	Feb. 15, 2020	Feb. 14, 2021
ESG Vector signal generator Agilent	E4438C	MY45094468/005 506 602 UK6 UNJ	Nov. 14, 2019	Nov. 13, 2020
Upgrade the software license on current E4438C ESG Agilent	E4438CK-403	ESG E4_010001	NA	NA
MXG X-Series RF Vector Signal Generator Agilent	N5182B	MY53052700	July 14, 2020	July 13, 2021
Direct Coupler EMCI	CS20-18-436/16	1139	NA	NA
Power Splitter/combiner Mini-Circuits	ZN4PD-642W-S+	408501327_03	Oct. 04, 2019	Oct. 03, 2020
Power Splitter/combiner Mini-Circuits	ZN4PD-642W-S+	408501327_04	Oct. 04, 2019	Oct. 03, 2020

- NOTE:**
1. The test was performed in Adaptivity room.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: Sep. 10 to 17, 2020

For other test items (For RU mode):

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSV40	100964	May 29, 2020	May 28, 2021
Spectrum Analyzer Keysight	N9030A	MY54490570	June 16, 2020	June 15, 2021
AC Power Source Extech Electronics	6502	1140503	NA	NA
Temperature & Humidity Chamber TERCHY	MHU-225AU	911033	Nov. 26, 2019	Nov. 25, 2020
DC Power Supply GOOD WILL INSTRUMENT CO., LTD.	GPC - 3030D	7700087	NA	NA
ESG Vector signal generator Agilent	E4438C	MY45094468/005 506 602 UK6 UNJ	Nov. 14, 2019	Nov. 13, 2020
Power meter Anritsu	ML2495A	0824006	Apr. 28, 2020	Apr. 27, 2021
Software	ADT_RF Test Software V6.6.5.4	NA	NA	NA
MXG X-Series RF Vector Signal Generator Agilent	N5182B	MY53052700	July 14, 2020	July 13, 2021
MIMO Powermeasurement Test set (4X4) Agilent	U2021XA	U2021XA_01	Sep. 18, 2019	Sep. 17, 2020
MIMO Powermeasurement Test set (4X4) Agilent	U2021XA	U2021XA_02	Nov. 14, 2019	Nov. 13, 2020
Switch Box Agilent	PS-X10-100	PS-X10-100_01	Sep. 18, 2019	Sep. 17, 2020

- NOTE:**
1. The test was performed in Oven room 1.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: July 25 to 30, 2020

For other test items:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSV40	100964	May 29, 2020	May 28, 2021
Spectrum Analyzer Keysight	N9030A	MY54490570	June 16, 2020	June 15, 2021
AC Power Source Extech Electronics	6502	1140503	NA	NA
Temperature & Humidity Chamber TERCHY	MHU-225AU	911033	Nov. 26, 2019	Nov. 25, 2020
DC Power Supply GOOD WILL INSTRUMENT CO., LTD.	GPC - 3030D	7700087	NA	NA
ESG Vector signal generator Agilent	E4438C	MY45094468/005 506 602 UK6 UNJ	Nov. 14, 2019	Nov. 13, 2020
Power meter Anritsu	ML2495A	0824006	Apr. 28, 2020	Apr. 27, 2021
Software	ADT_RF Test Software V6.6.5.4	NA	NA	NA
MXG X-Series RF Vector Signal Generator Agilent	N5182B	MY53052700	July 17, 2019	July 16, 2020
MIMO Powermeasurement Test set (4X4) Agilent	U2021XA	U2021XA_01	Sep. 18, 2019	Sep. 17, 2020
MIMO Powermeasurement Test set (4X4) Agilent	U2021XA	U2021XA_02	Nov. 14, 2019	Nov. 13, 2020
Switch Box Agilent	PS-X10-100	PS-X10-100_01	Sep. 18, 2019	Sep. 17, 2020

- NOTE:**
1. The test was performed in Oven room 1.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: July 04 to 09, 2020

2.2 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Parameter	Uncertainty
Occupied Channel Bandwidth	$\pm 0.14 \times 10^{-4} \%$
RF output power, conducted	$\pm 1.2 \text{ dB}$
Power Spectral Density, conducted	$\pm 1.2 \text{ dB}$
Unwanted Emissions, conducted	$\pm 2.5 \text{ dB}$
All emissions, radiated	$\pm 4.9 \text{ dB}$
Temperature	$\pm 0.4 \text{ }^{\circ}\text{C}$
Supply voltages	$\pm 0.05 \%$
Time	$\pm 5 \%$

2.3 Maximum Measurement Uncertainty

For the test methods, according to ETSI EN 300 328 standard, the measurement uncertainty figures shall be calculated and shall correspond to an expansion factor (coverage factor) $k = 1,96$ or $k = 2$ (which provide confidence levels of respectively 95 % and 95,45 % in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian)). Principles for the calculation of measurement uncertainty are contained in ETSI TR 100 028-1, in particular in annex D of the ETSI TR 100 028-2.

Maximum measurement uncertainty

Parameter	Uncertainty
Occupied Channel Bandwidth	$\pm 5 \%$
RF output power, conducted	$\pm 1,5 \text{ dB}$
Power Spectral Density, conducted	$\pm 3 \text{ dB}$
Unwanted Emissions, conducted	$\pm 3 \text{ dB}$
All emissions, radiated	$\pm 6 \text{ dB}$
Temperature	$\pm 1 \text{ }^{\circ}\text{C}$
Supply voltages	$\pm 3 \%$
Time	$\pm 5 \%$

2.4 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT (WLAN)

Product	11ax RTL8852AE Combo module
Brand	REALTEK
Test Model	RTL8852AE
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	3.3Vdc from host equipment
Voltage Operation Range	Vnom= 3.3Vdc
Temperature Operating Range	-20°C ~ 70°C
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode and VHT (20/40) mode in 2.4GHz 1024QAM for OFDMA in 11ax HE mode
Modulation Technology	DSSS, OFDM, OFDMA
Transfer Rate	802.11b: up to 11 Mbps 802.11a/g: up to 54 Mbps 802.11n: up to 300 Mbps 802.11ac: up to 866.7 Mbps 802.11ax: up to 1201 Mbps
Operating Frequency	2.4GHz: 2.412 ~ 2.472GHz 5GHz: 5.18 ~ 5.24 GHz, 5.26 ~ 5.32 GHz, 5.50 ~ 5.70 GHz, 5.745 ~ 5.825 GHz
Number of Channel	2.4GHz: 802.11b, 802.11g, 802.11n (HT20), VHT20, 802.11ax (HE20): 13, 802.11n (HT40), VHT40, 802.11ax (HE40): 9 5GHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20): 24 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40): 11 802.11ac (VHT80), 802.11ax (HE80): 5
Adaptive/Non-Adaptive	☐ non-adaptive Equipment ☒ adaptive Equipment without the possibility to switch to a non-adaptive mode ☐ adaptive Equipment which can also operate in a non-adaptive mode
EIRP Power (Measured Max. Average)	For 2TX CDD Mode: 2.4 GHz: 19.98 dBm 5.18 ~ 5.24 GHz: 22.97 dBm 5.26 ~ 5.32 GHz: 22.90 dBm 5.5 ~ 5.70 GHz: 22.96 dBm 5.745 ~ 5.825 GHz: 13.96 dBm Beamforming Mode: 2.4 GHz: 19.98 dBm 5.18 ~ 5.24 GHz: 22.84 dBm 5.26 ~ 5.32 GHz: 22.94 dBm 5.5 ~ 5.70 GHz: 22.92 dBm 5.745 ~ 5.825 GHz: 13.96 dBm For 1TX 2.4 GHz: 19.90 dBm 5.18 ~ 5.24 GHz: 22.96 dBm 5.26 ~ 5.32 GHz: 22.90 dBm 5.5 ~ 5.70 GHz: 22.97 dBm 5.745 ~ 5.825 GHz: 13.95 dBm
Antenna Type	Refer to Note
Antenna Connector	Refer to Note

Beamforming Factor	3 dB by manufacturer's declaration
Accessory Device	NA
Data Cable Supplied	NA

Note:

1. The EUT has below HW SKU configuration, as below table:

SKU No.	Interface	Description
1	PCIe + USB	Single antenna port
2	PCIe + USB	Dual antenna port
3	PCIe + UART	Dual antenna port

Note: From the above HW SKUs, **SKU No.: 3** was selected as representative model for the test and its data was recorded in this report.

2. Simultaneously transmission condition.

Condition	Technology		
1	WLAN 2.4GHz	WLAN 5GHz	Bluetooth
2	WLAN 2.4GHz	WLAN 5GHz	-
3	WLAN 5GHz	Bluetooth	-

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

3. The antennas provided to the EUT, please refer to the following table:

Antenna Set	Chain NO.	Brand	Model	Antenna Gain (dBi)	Frequency range (GHz)	Antenna Type	Connector Type	Cable Length (mm)
1	Chain 0	LYNwave	ALA110-222050-300011	3.5	2.4~2.5	PIFA	i-pex(MHF)	300
				5	5.15~5.85			
	Chain 1	LYNwave	ALA110-222050-300011	3.5	2.4~2.5	PIFA	i-pex(MHF)	300
				5	5.15~5.85			
2	Chain 0	PSA	RFDPA171320EMLB301	3.14	2.4~2.5	Dipole	i-pex(MHF)	200
				5	5.15~5.85			
	Chain 1	PSA	RFDPA171320EMLB301	3.14	2.4~2.5	Dipole	i-pex(MHF)	200
				5	5.15~5.85			

Note:

- From the above transmission chains, the worse case was found in transmission on Chain 1 for 1TX mode. Therefore only the test data of the mode was recorded in this report.
- The Bluetooth technology will fix transmission on Chain 1.
- From the above antennas, antenna set 1 and 2 was selected as representative antenna for the test.

4. The EUT incorporates a MIMO function:

2.4GHZ BAND		
MODULATION MODE	TX & RX CONFIGURATION	
802.11b	2TX/1TX Diversity	2RX
802.11g	2TX/1TX Diversity	2RX
802.11n (HT20)	2TX/1TX Diversity	2RX
802.11n (HT40)	2TX/1TX Diversity	2RX
VHT20	2TX/1TX Diversity	2RX
VHT40	2TX/1TX Diversity	2RX
802.11ax (HE20)	2TX/1TX Diversity	2RX
802.11ax (HE40)	2TX/1TX Diversity	2RX
5GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11a	2TX/1TX Diversity	2RX
802.11n (HT20)	2TX/1TX Diversity	2RX
802.11n (HT40)	2TX/1TX Diversity	2RX
802.11ac (VHT20)	2TX/1TX Diversity	2RX
802.11ac (VHT40)	2TX/1TX Diversity	2RX
802.11ac (VHT80)	2TX/1TX Diversity	2RX
802.11ax (HE20)	2TX/1TX Diversity	2RX
802.11ax (HE40)	2TX/1TX Diversity	2RX
802.11ax (HE80)	2TX/1TX Diversity	2RX

Note:

1. All of modulation mode support beamforming function except 802.11a/b/g modulation mode.
2. The EUT support Beamforming and CDD mode, therefore both mode were investigated and the worst case scenario was identified. The worst case data were presented in test report.
3. The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz), VHT mode for 20MHz (40MHz) and 802.11ax mode for 20MHz (40MHz), therefore the manufacturer will control the power for 802.11n mode as same as the VHT mode and ax mode or more lower than it and investigated worst case to representative mode in test report. (Final test mode refer to section 3.2.1)
5. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.
6. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

3.2 Description of Test Modes

13 channels are provided for 802.11b, 802.11g and 802.11n (HT20), VHT20, 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
1	2412 MHz	8	2447 MHz
2	2417 MHz	9	2452 MHz
3	2422 MHz	10	2457 MHz
4	2427 MHz	11	2462 MHz
5	2432 MHz	12	2467 MHz
6	2437 MHz	13	2472 MHz
7	2442 MHz		

9 channels are provided for 802.11n (HT40), VHT40, 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
3	2422 MHz	8	2447 MHz
4	2427 MHz	9	2452 MHz
5	2432 MHz	10	2457 MHz
6	2437 MHz	11	2462 MHz
7	2442 MHz		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable to										Description
	ROP	PSD	DC/TS/TG	MU	AD	OCB	EOB	SE< 1G	SE≥ 1G	RB	
1	√	√	-	-	√	√	√	√	√	√	2TX
2	√	√	-	-	-	√	√	√	√	-	1TX

Where **ROP**: RF Output Power **PSD**: Power Spectral Density
DC/TS/TG: Duty Cycle/ Tx-Sequence / Tx-gap **MU**: Medium Utilization
AD: Adaptivity (Channel Access Mechanism) **OCB**: Occupied Channel Bandwidth
EOB: Transmitter unwanted emissions in the out-of-band domain **SE<1G**: Unwanted Emissions in the Spurious Domain below 1 GHz
SE≥1G: Unwanted Emissions in the Spurious Domain above 1 GHz **RB**: Receiver Blocking

Note: 1. The EUT's PIFA antenna had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Y-plane**.

2. For 20MHz bandwidth and 40MHz bandwidth of RU mode, the worst case was found in 20MHz bandwidth. Therefore only the test data of the mode was recorded in this report.

RF Output Power Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, RU configurations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

2TX (CDD Mode)						
Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	RU Configuration
802.11b	1 to 13	1, 7, 13	DSSS	DBPSK	1Mb/s	-
802.11g	1 to 13	1, 7, 13	OFDM	BPSK	6Mb/s	-
VHT20	1 to 13	1, 7, 13	OFDM	BPSK	MCS0	-
VHT40	3 to 11	3, 7, 11	OFDM	BPSK	MCS0	-
802.11ax (HE20)	1 to 13	1, 7, 13	OFDMA	BPSK	MCS0	-
802.11ax (HE40)	3 to 11	3, 7, 11	OFDMA	BPSK	MCS0	-
802.11ax (RU26)	1 to 13	1, 7, 13	OFDMA	BPSK	MCS0	26/0, 26/4, 26/8
802.11ax (RU52)	1 to 13	1, 7, 13	OFDMA	BPSK	MCS0	52/37, 52/38, 52/40
802.11ax (RU106)	1 to 13	1, 7, 13	OFDMA	BPSK	MCS0	106/53, 106/53, 106/54
2TX (Beamforming Mode)						
Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	
VHT20	1 to 13	1, 7, 13	OFDM	BPSK	MCS0	
VHT40	3 to 11	3, 7, 11	OFDM	BPSK	MCS0	
802.11ax (HE20)	1 to 13	1, 7, 13	OFDMA	BPSK	MCS0	
802.11ax (HE40)	3 to 11	3, 7, 11	OFDMA	BPSK	MCS0	

1TX						
Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	RU Configuration
802.11b	1 to 13	1, 7, 13	DSSS	DBPSK	1Mb/s	-
802.11g	1 to 13	1, 7, 13	OFDM	BPSK	6Mb/s	-
VHT20	1 to 13	1, 7, 13	OFDM	BPSK	MCS0	-
VHT40	3 to 11	3, 7, 11	OFDM	BPSK	MCS0	-
802.11ax (HE20)	1 to 13	1, 7, 13	OFDMA	BPSK	MCS0	-
802.11ax (HE40)	3 to 11	3, 7, 11	OFDMA	BPSK	MCS0	-
802.11ax (RU26)	1 to 13	1, 7, 13	OFDMA	BPSK	MCS0	26/0, 26/4, 26/8
802.11ax (RU52)	1 to 13	1, 7, 13	OFDMA	BPSK	MCS0	52/37, 52/38, 52/40
802.11ax (RU106)	1 to 13	1, 7, 13	OFDMA	BPSK	MCS0	106/53, 106/53, 106/54

Power Spectral Density Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, RU configurations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

2TX (CDD Mode)						
Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	RU Configuration
802.11b	1 to 13	1, 7, 13	DSSS	DBPSK	1Mb/s	-
802.11g	1 to 13	1, 7, 13	OFDM	BPSK	6Mb/s	-
VHT20	1 to 13	1, 7, 13	OFDM	BPSK	MCS0	-
VHT40	3 to 11	3, 7, 11	OFDM	BPSK	MCS0	-
802.11ax (HE20)	1 to 13	1, 7, 13	OFDMA	BPSK	MCS0	-
802.11ax (HE40)	3 to 11	3, 7, 11	OFDMA	BPSK	MCS0	-
802.11ax (RU26)	1 to 13	1, 7, 13	OFDMA	BPSK	MCS0	26/0, 26/4, 26/8
802.11ax (RU52)	1 to 13	1, 7, 13	OFDMA	BPSK	MCS0	52/37, 52/38, 52/40
802.11ax (RU106)	1 to 13	1, 7, 13	OFDMA	BPSK	MCS0	106/53, 106/53, 106/54

2TX (Beamforming Mode)					
Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter
VHT20	1 to 13	1, 7, 13	OFDM	BPSK	MCS0
VHT40	3 to 11	3, 7, 11	OFDM	BPSK	MCS0
802.11ax (HE20)	1 to 13	1, 7, 13	OFDMA	BPSK	MCS0
802.11ax (HE40)	3 to 11	3, 7, 11	OFDMA	BPSK	MCS0

1TX						
Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	RU Configuration
802.11b	1 to 13	1, 7, 13	DSSS	DBPSK	1Mb/s	-
802.11g	1 to 13	1, 7, 13	OFDM	BPSK	6Mb/s	-
VHT20	1 to 13	1, 7, 13	OFDM	BPSK	MCS0	-
VHT40	3 to 11	3, 7, 11	OFDM	BPSK	MCS0	-
802.11ax (HE20)	1 to 13	1, 7, 13	OFDMA	BPSK	MCS0	-
802.11ax (HE40)	3 to 11	3, 7, 11	OFDMA	BPSK	MCS0	-
802.11ax (RU26)	1 to 13	1, 7, 13	OFDMA	BPSK	MCS0	26/0, 26/4, 26/8
802.11ax (RU52)	1 to 13	1, 7, 13	OFDMA	BPSK	MCS0	52/37, 52/38, 52/40
802.11ax (RU106)	1 to 13	1, 7, 13	OFDMA	BPSK	MCS0	106/53, 106/53, 106/54

Adaptivity Test:

☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Type
802.11b	1 to 13	1, 13	DBPSK
802.11g	1 to 13	1, 13	BPSK
802.11ax (HE20)	1 to 13	1, 13	BPSK
802.11ax (HE40)	3 to 11	3, 11	BPSK

Occupied Channel Bandwidth Test:

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, RU configurations and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

2TX (CDD Mode)						
Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	RU Configuration
802.11b	1 to 13	1, 13	DSSS	DBPSK	1Mb/s	-
802.11g	1 to 13	1, 13	OFDM	BPSK	6Mb/s	-
802.11ax (HE20)	1 to 13	1, 13	OFDMA	BPSK	MCS0	-
802.11ax (HE40)	3 to 11	3, 11	OFDMA	BPSK	MCS0	-
802.11ax (RU26)	1 to 13	1, 13	OFDMA	BPSK	MCS0	26/0, 26/8
802.11ax (RU52)	1 to 13	1, 13	OFDMA	BPSK	MCS0	52/37, 52/40
802.11ax (RU106)	1 to 13	1, 13	OFDMA	BPSK	MCS0	106/53, 106/54

1TX						
Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	RU Configuration
802.11b	1 to 13	1, 13	DSSS	DBPSK	1Mb/s	-
802.11g	1 to 13	1, 13	OFDM	BPSK	6Mb/s	-
802.11ax (HE20)	1 to 13	1, 13	OFDMA	BPSK	MCS0	-
802.11ax (HE40)	3 to 11	3, 11	OFDMA	BPSK	MCS0	-
802.11ax (RU26)	1 to 13	1, 13	OFDMA	BPSK	MCS0	26/0, 26/8
802.11ax (RU52)	1 to 13	1, 13	OFDMA	BPSK	MCS0	52/37, 52/40
802.11ax (RU106)	1 to 13	1, 13	OFDMA	BPSK	MCS0	106/53, 106/54

Transmitter Unwanted Emissions in the Out-of-band Domain Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, RU configurations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

2TX (CDD Mode)						
Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	RU Configuration
802.11b	1 to 13	1, 13	DSSS	DBPSK	1Mb/s	-
802.11g	1 to 13	1, 13	OFDM	BPSK	6Mb/s	-
802.11ax (HE20)	1 to 13	1, 13	OFDMA	BPSK	MCS0	-
802.11ax (HE40)	3 to 11	3, 11	OFDMA	BPSK	MCS0	-
802.11ax (RU26)	1 to 13	1, 13	OFDMA	BPSK	MCS0	26/0, 26/8
802.11ax (RU52)	1 to 13	1, 13	OFDMA	BPSK	MCS0	52/37, 52/40
802.11ax (RU106)	1 to 13	1, 13	OFDMA	BPSK	MCS0	106/53, 106/54
1TX						
Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	RU Configuration
802.11b	1 to 13	1, 13	DSSS	DBPSK	1Mb/s	-
802.11g	1 to 13	1, 13	OFDM	BPSK	6Mb/s	-
802.11ax (HE20)	1 to 13	1, 13	OFDMA	BPSK	MCS0	-
802.11ax (HE40)	3 to 11	3, 11	OFDMA	BPSK	MCS0	-
802.11ax (RU26)	1 to 13	1, 13	OFDMA	BPSK	MCS0	26/0, 26/8
802.11ax (RU52)	1 to 13	1, 13	OFDMA	BPSK	MCS0	52/37, 52/40
802.11ax (RU106)	1 to 13	1, 13	OFDMA	BPSK	MCS0	106/53, 106/54

Unwanted Emissions in the Spurious Domain Test (Below 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, RU configurations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

2TX (CDD Mode)					
Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11g	1 to 13	1	OFDM	BPSK	6
Receiver	1 to 13	1	-	-	-
1TX					
Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11g	1 to 13	1	OFDM	BPSK	6
Receiver	1 to 13	1	-	-	-

Unwanted Emissions in the Spurious Domain Test (above 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, RU configurations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

2TX (CDD Mode)						
Dipole Antenna						
Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	RU Configuration
802.11b	1 to 13	1, 13	DSSS	DBPSK	1Mb/s	-
802.11ax (RU26)	1 to 13	1, 13	OFDMA	BPSK	MCS0	26/0, 26/8
Receiver	1 to 13	1, 13	-	-	-	-
PIFA Antenna						
Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	RU Configuration
802.11b	1 to 13	1, 13	DSSS	DBPSK	1Mb/s	-
802.11ax (RU26)	1 to 13	1, 13	OFDMA	BPSK	MCS0	26/0, 26/8
Receiver	1 to 13	1, 13	-	-	-	-
1TX						
Dipole Antenna						
Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	RU Configuration
802.11b	1 to 13	1, 13	DSSS	DBPSK	1Mb/s	-
802.11ax (RU26)	1 to 13	1, 13	OFDMA	BPSK	MCS0	26/0, 26/8
Receiver	1 to 13	1, 13	-	-	-	-
PIFA Antenna						
Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter	RU Configuration
802.11b	1 to 13	1, 13	DSSS	DBPSK	1Mb/s	-
802.11ax (RU26)	1 to 13	1, 13	OFDMA	BPSK	MCS0	26/0, 26/8
Receiver	1 to 13	1, 13	-	-	-	-

Receiver Blocking test:

- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 13	1, 13	OFDM	BPSK	1

Test Condition:

Applicable to	Environmental Conditions	Input Power	Tested by
ROP	25deg. C, 60%RH	3.3Vdc	Angus Peng,
PSD	25deg. C, 60%RH	3.3Vdc	Angus Peng,
AD	25deg. C, 60%RH	3.3Vdc	Zoey Peng
OCB	25deg. C, 60%RH	3.3Vdc	Angus Peng,
EOB	25deg. C, 60%RH	3.3Vdc	Angus Peng,
SE<1G	23deg. C, 62%RH,	230Vac, 50Hz (System)	Angus Peng,
SE≥1G	25deg. C, 65%RH,	230Vac, 50Hz (System)	Vic Huang
RB	22deg. C, 61%RH	3.3Vdc	Zoey Peng

3.3 Description of Support Units


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	DELL	P88G	G1WJL42	NA	Provided by Lab
B.	Test Tool	Realtek	NA	NA	NA	Supplied by client
C.	Adapter	DELL	FA65NE0-00	NA	NA	Provided by Lab

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	DC Cable	1	1.6	No	1	Provided by Lab
2	AC Cable	1	1	No	0	Provided by Lab

Note: The core(s) is(are) originally attached to the cable(s).

3.3.1 Configuration of System under Test

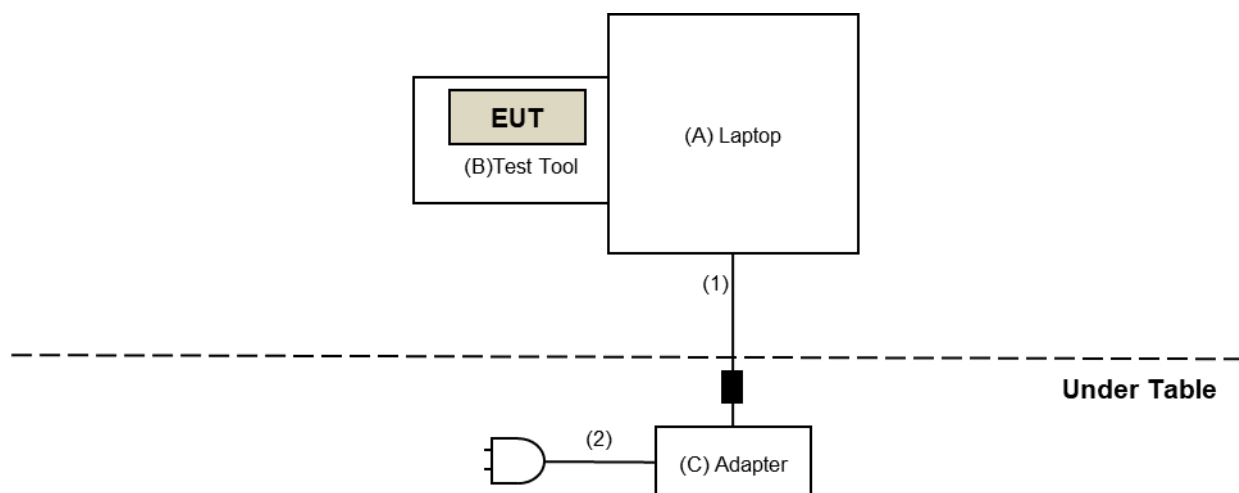

3.4 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standard:

EN 300 328 V2.2.2 (2019-07)

All test items have been performed and recorded as per the above standard.

4 Test Procedure and Results

4.1 RF Output Power

4.1.1 Limits of RF Output Power

Condition	Frequency Band	Limit (e.i.r.p.)
Under all test conditions	2400 ~ 2483.5 MHz	AV: 20dBm

4.1.2 Test Procedures

Refer to chapter 5.4.2 of EN 300 328 V2.2.2.

Measurement Method	
☒ Conducted measurement	☐ Radiated measurement

For extreme test condition refer to chapter Annex B.4 and procedure follow Annex B.4.3.

4.1.3 Deviation from Test Standard

No deviation.

4.1.4 Test Setup

The measurements for RF output power was performed at both normal environmental conditions and at the extremes of the operating temperature. Controlling software (RTL8852A MP Toolkit V1.0.21) has been activated to set the EUT on specific channel and power level.

4.1.5 Test Results (Mode 1)

CDD Mode

Test Condition			EIRP Power (dBm)		
			(CH1) 2412 MHz	(CH7) 2442 MHz	(CH13) 2472 MHz
802.11b					
T _{nom} (°C)	25	V _{nom} (V)	19.06	19.06	19.21
T _{min} (°C)	-20	V _{nom} (V)	18.78	18.71	19.05
T _{max} (°C)	70	V _{nom} (V)	19.43	19.39	19.57
802.11g					
T _{nom} (°C)	25	V _{nom} (V)	19.66	19.61	19.62
T _{min} (°C)	-20	V _{nom} (V)	19.51	19.39	19.37
T _{max} (°C)	70	V _{nom} (V)	19.92	19.90	19.90
VHT20					
T _{nom} (°C)	25	V _{nom} (V)	19.67	19.62	19.69
T _{min} (°C)	-20	V _{nom} (V)	19.40	19.24	19.45
T _{max} (°C)	70	V _{nom} (V)	19.80	19.95	19.93
802.11ax (HE20)					
T _{nom} (°C)	25	V _{nom} (V)	19.78	19.61	19.83
T _{min} (°C)	-20	V _{nom} (V)	19.40	19.30	19.58
T _{max} (°C)	70	V _{nom} (V)	19.96	19.90	19.95
TEST CONDITION			EIRP POWER (dBm)		
			(CH3) 2422 MHz	(CH7) 2442 MHz	(CH11) 2462 MHz
VHT40					
T _{nom} (°C)	25	V _{nom} (V)	19.65	19.61	19.66
T _{min} (°C)	-20	V _{nom} (V)	19.29	19.26	19.49
T _{max} (°C)	70	V _{nom} (V)	19.92	19.90	19.94
802.11ax (HE40)					
T _{nom} (°C)	25	V _{nom} (V)	19.70	19.69	19.66
T _{min} (°C)	-20	V _{nom} (V)	19.43	19.41	19.32
T _{max} (°C)	70	V _{nom} (V)	19.97	19.98	19.88

Test Condition			EIRP Power (dBm)		
			(CH1) 2412 MHz	(CH7) 2442 MHz	(CH13) 2472 MHz
			RU Configuration		
802.11ax (RU26)			26/0	26/4	26/8
T _{nom} (°C)	25	V _{nom} (V)	13.06	13.19	13.01
T _{min} (°C)	-10	V _{nom} (V)	13.03	12.97	12.96
T _{max} (°C)	70	V _{nom} (V)	13.42	13.48	13.18
802.11ax (RU52)			52/37	52/38	52/40
T _{nom} (°C)	25	V _{nom} (V)	15.57	15.93	15.62
T _{min} (°C)	-10	V _{nom} (V)	15.60	15.90	15.52
T _{max} (°C)	70	V _{nom} (V)	15.82	16.17	15.83
802.11ax (RU106)			106/53	106/53	106/54
T _{nom} (°C)	25	V _{nom} (V)	19.06	19.01	19.08
T _{min} (°C)	-10	V _{nom} (V)	19.43	19.32	19.32
T _{max} (°C)	70	V _{nom} (V)	19.76	19.70	19.74

Beamforming Mode

Test Condition			EIRP Power (dBm)		
			(CH1) 2412 MHz	(CH7) 2442 MHz	(CH13) 2472 MHz
VHT20					
T _{nom} (°C)	25	V _{nom} (V)	19.63	19.58	19.68
T _{min} (°C)	-20	V _{nom} (V)	19.60	19.27	19.33
T _{max} (°C)	70	V _{nom} (V)	19.89	19.74	19.90
802.11ax (HE20)					
T _{nom} (°C)	25	V _{nom} (V)	19.70	19.56	19.70
T _{min} (°C)	-20	V _{nom} (V)	19.59	19.17	19.27
T _{max} (°C)	70	V _{nom} (V)	19.88	19.64	19.98
TEST CONDITION			EIRP POWER (dBm)		
			(CH3) 2422 MHz	(CH7) 2442 MHz	(CH11) 2462 MHz
VHT40					
T _{nom} (°C)	25	V _{nom} (V)	19.58	19.56	19.57
T _{min} (°C)	-20	V _{nom} (V)	19.54	19.24	19.21
T _{max} (°C)	70	V _{nom} (V)	19.76	19.64	19.75
802.11ax (HE40)					
T _{nom} (°C)	25	V _{nom} (V)	19.66	19.62	19.60
T _{min} (°C)	-20	V _{nom} (V)	19.59	19.32	19.16
T _{max} (°C)	70	V _{nom} (V)	19.88	19.70	19.81

4.1.6 Test Results (Mode 2)

Test Condition			EIRP Power (dBm)		
			(CH1) 2412 MHz	(CH7) 2442 MHz	(CH13) 2472 MHz
802.11b					
T _{nom} (°C)	25	V _{nom} (V)	19.06	19.12	19.24
T _{min} (°C)	-20	V _{nom} (V)	18.90	19.11	19.09
T _{max} (°C)	70	V _{nom} (V)	19.23	19.39	19.32
802.11g					
T _{nom} (°C)	25	V _{nom} (V)	19.53	19.56	19.52
T _{min} (°C)	-20	V _{nom} (V)	19.27	19.25	19.40
T _{max} (°C)	70	V _{nom} (V)	19.88	19.79	19.81
VHT20					
T _{nom} (°C)	25	V _{nom} (V)	19.53	19.56	19.54
T _{min} (°C)	-20	V _{nom} (V)	19.19	19.21	19.49
T _{max} (°C)	70	V _{nom} (V)	19.79	19.84	19.83
802.11ax (HE20)					
T _{nom} (°C)	25	V _{nom} (V)	19.55	19.58	19.59
T _{min} (°C)	-20	V _{nom} (V)	19.50	19.55	19.46
T _{max} (°C)	70	V _{nom} (V)	19.90	19.86	19.77
TEST CONDITION			EIRP POWER (dBm)		
			(CH3) 2422 MHz	(CH7) 2442 MHz	(CH11) 2462 MHz
VHT40					
T _{nom} (°C)	25	V _{nom} (V)	19.55	19.51	19.53
T _{min} (°C)	-20	V _{nom} (V)	19.32	19.22	19.17
T _{max} (°C)	70	V _{nom} (V)	19.85	19.80	19.79
802.11ax (HE40)					
T _{nom} (°C)	25	V _{nom} (V)	19.55	19.51	19.53
T _{min} (°C)	-20	V _{nom} (V)	19.30	19.27	19.50
T _{max} (°C)	70	V _{nom} (V)	19.81	19.72	19.69

Test Condition			EIRP Power (dBm)		
			(CH1) 2412 MHz	(CH7) 2442 MHz	(CH13) 2472 MHz
			RU Configuration		
802.11ax (RU26)			26/0	26/4	26/8
T _{nom} (°C)	25	V _{nom} (V)	12.91	13.08	13.16
T _{min} (°C)	-10	V _{nom} (V)	13.22	13.20	13.45
T _{max} (°C)	70	V _{nom} (V)	13.72	13.82	13.78
802.11ax (RU52)			52/37	52/38	52/40
T _{nom} (°C)	25	V _{nom} (V)	15.43	16.08	15.47
T _{min} (°C)	-10	V _{nom} (V)	15.92	16.29	15.64
T _{max} (°C)	70	V _{nom} (V)	16.09	16.64	16.23
802.11ax (RU106)			106/53	106/53	106/54
T _{nom} (°C)	25	V _{nom} (V)	19.01	19.05	19.00
T _{min} (°C)	-10	V _{nom} (V)	19.38	19.36	19.24
T _{max} (°C)	70	V _{nom} (V)	19.71	19.74	19.66

4.2 Power Spectral Density

4.2.1 Limit of Power Spectral Density

Condition	Frequency Band	Limit (e.i.r.p.)
Under normal conditions	2400 ~ 2483.5 MHz	10dBm / 1MHz

4.2.2 Test Procedures

Refer to chapter 5.4.3 of EN 300 328 V2.2.2.

Measurement Method	
☒ Conducted measurement	☐ Radiated measurement
☒ Option 1: For equipment with continuous and non-continuous transmissions	
☐ Option 2: For equipment with continuous transmission capability or for equipment operating (or with the capability to operate) with a constant duty cycle (e.g. Frame Based equipment)	

4.2.3 Deviation of Test Standard

No deviation.

4.2.4 Test Setup

The test setup has been constructed as the normal test condition. The power spectral density as defined in EN 300 328 clause 4.3.2.3 shall be measured and recorded. Controlling software (RTL8852A MP Toolkit V1.0.21) has been activated to set the EUT on specific status.

4.2.5 Test Results (Mode 1)

CDD Mode

802.11b

Channel	Channel Frequency (MHz)	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass/Fail
1	2412	9.80	10	Pass
7	2442	9.83	10	Pass
13	2472	9.97	10	Pass

802.11g

Channel	Channel Frequency (MHz)	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass/Fail
1	2412	7.94	10	Pass
7	2442	7.86	10	Pass
13	2472	7.88	10	Pass

VHT20

Channel	Channel Frequency (MHz)	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass/Fail
1	2412	8.06	10	Pass
7	2442	7.98	10	Pass
13	2472	8.20	10	Pass

VHT40

Channel	Channel Frequency (MHz)	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass/Fail
3	2422	5.01	10	Pass
7	2442	4.98	10	Pass
11	2462	5.08	10	Pass

802.11ax (HE20)

Channel	Channel Frequency (MHz)	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass/Fail
1	2412	7.84	10	Pass
7	2442	7.69	10	Pass
13	2472	7.85	10	Pass

802.11ax (HE40)

Channel	Channel Frequency (MHz)	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass/Fail
3	2422	4.82	10	Pass
7	2442	4.69	10	Pass
11	2462	4.83	10	Pass

802.11ax (RU26)

Channel	Channel Frequency (MHz)	RU Configuration	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass/Fail
1	2412	26/0	9.76	10	Pass
7	2442	26/4	9.78	10	Pass
13	2472	26/8	9.67	10	Pass

802.11ax (RU52)

Channel	Channel Frequency (MHz)	RU Configuration	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass/Fail
1	2412	52/37	9.73	10	Pass
7	2442	52/38	9.89	10	Pass
13	2472	52/40	9.73	10	Pass

802.11ax (RU106)

Channel	Channel Frequency (MHz)	RU Configuration	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass/Fail
1	2412	106/53	9.91	10	Pass
7	2442	106/53	9.85	10	Pass
13	2472	106/54	9.97	10	Pass

Beamforming Mode

VHT20

Channel	Channel Frequency (MHz)	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass/Fail
1	2412	8.05	10	Pass
7	2442	7.97	10	Pass
13	2472	8.18	10	Pass

VHT40

Channel	Channel Frequency (MHz)	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass/Fail
3	2422	4.97	10	Pass
7	2442	4.92	10	Pass
11	2462	4.99	10	Pass

802.11ax (HE20)

Channel	Channel Frequency (MHz)	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass/Fail
1	2412	7.82	10	Pass
7	2442	7.67	10	Pass
13	2472	7.83	10	Pass

802.11ax (HE40)

Channel	Channel Frequency (MHz)	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass/Fail
3	2422	4.80	10	Pass
7	2442	4.67	10	Pass
11	2462	4.81	10	Pass

4.2.6 Test Results (Mode 2)

802.11b

Channel	Channel Frequency (MHz)	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass/Fail
1	2412	9.86	10	Pass
7	2442	9.93	10	Pass
13	2472	9.99	10	Pass

802.11g

Channel	Channel Frequency (MHz)	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass/Fail
1	2412	8.33	10	Pass
7	2442	8.33	10	Pass
13	2472	8.17	10	Pass

VHT20

Channel	Channel Frequency (MHz)	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass/Fail
1	2412	8.20	10	Pass
7	2442	8.24	10	Pass
13	2472	8.20	10	Pass

VHT40

Channel	Channel Frequency (MHz)	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass/Fail
3	2422	5.20	10	Pass
7	2442	5.24	10	Pass
11	2462	5.20	10	Pass

802.11ax (HE20)

Channel	Channel Frequency (MHz)	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass/Fail
1	2412	7.86	10	Pass
7	2442	7.89	10	Pass
13	2472	7.80	10	Pass

802.11ax (HE40)

Channel	Channel Frequency (MHz)	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass/Fail
3	2422	4.85	10	Pass
7	2442	4.77	10	Pass
11	2462	4.76	10	Pass

802.11ax (RU26)

Channel	Channel Frequency (MHz)	RU Configuration	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass/Fail
1	2412	26/0	9.52	10	Pass
7	2442	26/4	9.67	10	Pass
13	2472	26/8	9.92	10	Pass

802.11ax (RU52)

Channel	Channel Frequency (MHz)	RU Configuration	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass/Fail
1	2412	52/37	9.61	10	Pass
7	2442	52/38	9.92	10	Pass
13	2472	52/40	9.50	10	Pass

802.11ax (RU106)

Channel	Channel Frequency (MHz)	RU Configuration	Power Density (dBm/1MHz) (EIRP)	Limit (dBm/1MHz) (EIRP)	Pass/Fail
1	2412	106/53	9.86	10	Pass
7	2442	106/53	9.89	10	Pass
13	2472	106/54	9.92	10	Pass

4.3 Adaptivity (non-FHSS)

This requirement does not apply to non-adaptive non-FHSS equipment or adaptive non-FHSS equipment operating in a non-adaptive mode.

In addition, this requirement does not apply for non-FHSS equipment with a maximum declared RF Output power level of less than 10 dBm e.i.r.p. or for non-FHSS equipment when operating in a mode where the RF Output power is less than 10 dBm e.i.r.p.

4.3.1 Limit of Adaptive

Applicability of adaptive requirements and limit for wide band modulation techniques

Requirement	Operational Mode			
	Using Detect and Avoid	LBT mechanism		
		Frame Based Equipment	Load Based Equipment (Base on 'Spectrum Sharing' mechanisms)	Load Based Equipment (Not using any of the mechanisms referenced)
Minimum Clear Channel Assessment (CCA) Time	NA	18 us	(see note 1)	18 us
Maximum Channel Occupancy (COT) Time	40 ms	1 ms - 10 ms	(see note 1)	13ms
Minimum Idle Period	5% of COT	5% of COT	(see note 1)	18us (see note 2)
Extended CCA check	NA	NA	(see note 1)	18us – 160us
Short Control Signalling Transmissions	Maximum duty cycle of 10 % within an observation period of 50 ms (see note 3)			
NOTE 1: Load Based Equipment may implement an LBT based spectrum sharing mechanism based on the Clear Channel Assessment (CCA) mode using energy detect as described in IEEE 802.11™ [i.3], clause 10 clause 11, clause 15, clause 16, clause 18 and clause 19, or in IEEE 802.15.4™ [i.4], clause 5, clause 6 and clause 10				
NOTE 2: The Idle Period in between transmissions is considered to be the CCA or the Extended CCA check as there are no transmissions during this period.				
NOTE 3: Adaptive equipment may or may not have Short Control Signalling Transmissions				

Threshold Level for Non-LBT based Detect and Avoid	
Maximum transmit power (P _H) EIRP dBm	Threshold level (TL) (see notes 1 and 2)
20	-70 dBm / MHz
NOTE 1: For a 20 dBm e.i.r.p. transmitter the detection threshold level (TL) shall be equal to or less than -70 dBm/MHz at the input to the receiver assuming a 0 dBi (receive) antenna assembly. This threshold level (TL) may be corrected for the (receive) antenna assembly gain (G)	
NOTE 2: For power levels less than 20 dBm e.i.r.p., the detection threshold level may be relaxed to: TL = -70 dBm/MHz + 10 × log ₁₀ (100 mW / P _{out}) ; (P _{out} in mW e.i.r.p.)	

Unwanted signal parameters for Non-LBT based Detect and Avoid		
Wanted signal mean power from companion device (dBm)	Unwanted signal frequency (MHz)	Unwanted CW signal power (dBm)
-30	2 395 or 2 488,5 (see note 1)	-35 (see note 2)
NOTE 1: The highest frequency shall be used for testing operating channels within the range 2 400 MHz to 2 442 MHz, while the lowest frequency shall be used for testing operating channels within the range 2 442 MHz to 2 483,5 MHz.		
NOTE 2: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna.		

Threshold Level for LBT based Detect and Avoid (Frame Based Equipment)

Maximum transmit power (P_H) EIRP dBm	Threshold level (TL) (see notes 1 and 2)
20	-70 dBm / MHz
NOTE 1: For a 20 dBm e.i.r.p. transmitter the CCA threshold level (TL) shall be equal to or less than -70 dBm/MHz at the input to the receiver assuming a 0 dBi (receive) antenna assembly. This threshold level (TL) may be corrected for the (receive) antenna assembly gain (G)	
NOTE 2: For power levels less than 20 dBm e.i.r.p. the CCA threshold level may be relaxed to: $TL = -70 \text{ dBm/MHz} + 10 \times \log_{10} (100 \text{ mW} / P_{out})$; (P_{out} in mW e.i.r.p.)	

Unwanted signal parameters for LBT based Detect and Avoid (Frame Based Equipment)

Wanted signal mean power from companion device	Unwanted signal frequency (MHz)	Unwanted signal power (dBm)
sufficient to maintain the link (see note 2)	2 395 or 2 488,5 (see note 1)	-35 (see note 3)
NOTE 1: The highest frequency shall be used for testing operating channels within the range 2 400 MHz to 2 442 MHz, while the lowest frequency shall be used for testing operating channels within the range 2 442 MHz to 2 483,5 MHz. See clause 5.4.6.1.		
NOTE 2: A typical value which can be used in most cases is -50 dBm/MHz.		
NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna.		

Threshold Level for LBT based Detect and Avoid (Load Based Equipment)

Maximum transmit power (P_H) EIRP dBm	Threshold level (TL) (see notes 1 and 2)
20	-70 dBm / MHz
NOTE 1: For a 20 dBm e.i.r.p. transmitter the CCA threshold level (TL) shall be equal to or less than -70 dBm/MHz at the input to the receiver assuming a 0 dBi (receive) antenna assembly. This threshold level (TL) may be corrected for the (receive) antenna assembly gain (G)	
NOTE 2: For power levels less than 20 dBm e.i.r.p. the CCA threshold level may be relaxed to: $TL = -70 \text{ dBm/MHz} + 10 \times \log_{10} (100 \text{ mW} / P_{out})$; (P_{out} in mW e.i.r.p.)	

Unwanted signal parameters for LBT based Detect and Avoid (Load Based Equipment)

Wanted signal mean power from companion device	Unwanted signal frequency (MHz)	Unwanted signal power (dBm)
sufficient to maintain the link (see note 2)	2 395 or 2 488,5 (see note 1)	-35 (see note 3)
NOTE 1: The highest frequency shall be used for testing operating channels within the range 2 400 MHz to 2 442 MHz, while the lowest frequency shall be used for testing operating channels within the range 2 442 MHz to 2 483,5 MHz. See clause 5.4.6.1.		
NOTE 2: A typical value which can be used in most cases is -50 dBm/MHz.		
NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna.		

4.3.2 Test Procedure


Refer to chapter 5.4.6 of EN 300 328 V2.2.2.

Measurement Method	
☒ Conducted measurement	☐ Radiated measurement

4.3.3 Deviation from Test Standard

No deviation.

4.3.4 Test Setup Configuration

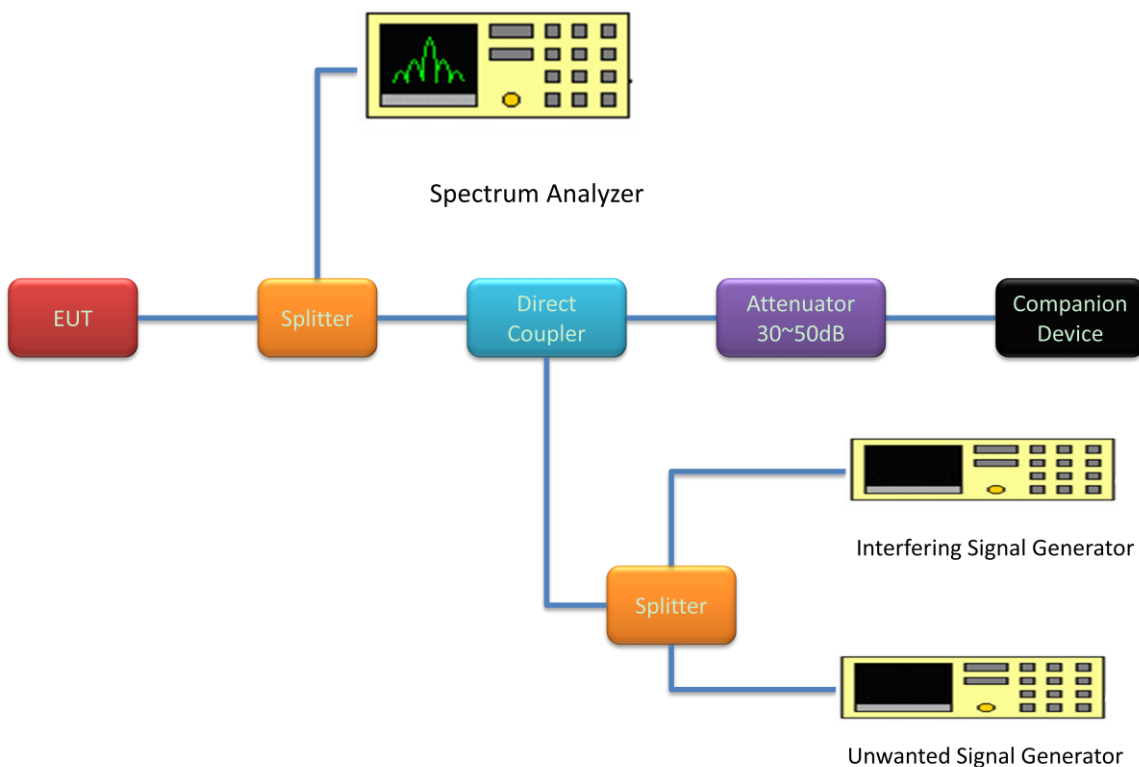

Companion Device information

PRODUCT	BRAND	MODEL NO.	SOFTWARE/FIRMWARE VERSION
Wireless-AX6000 Dual Band Gigabit Router	ASUS	RT-AX88U	3.0.0.4.384

4.3.5 List of Measurements

UUT Operational Mode	Applicable	Limit	
		The Maximum Channel Occupancy Time	The Minimum idle Period
Frame Based Equipment		meet in 1ms ~ 10ms	>5% x channel occupancy time
Load Based Equipment (Base on 'Spectrum Sharing' mechanisms)		Follow IEEE 802.11 Less than ____ms	Follow IEEE 802.11 More than ____ms
Load Based Equipment (Not using any of the mechanisms referenced)	v	13ms	18us


Clause	Test Parameter	Remarks	Pass/Fail
4.3.2.6.3.2.2	Adaptive (Frame Based Equipment)	Not Applicable	NA
4.3.2.6.3.2.3	Adaptive (Load Based Equipment)	Applicable	PASS
4.3.2.6.4	Short Control Signalling Transmissions	Applicable	PASS
4.3.2.6.3.2.3.6	Unwanted signal test	Applicable	PASS

4.3.6 Interference Threshold Level


Detection Threshold Level

The maximum EIRP (nom) power is 19.83 dBm (96.16 mW) and antenna gain is 3.14 dBi.
 Detection Threshold level= -70 dBm/MHz + $10 \times \log(100 \text{ mW} / P_{\text{out}} (96.16 \text{ mW})) + G (3.14 \text{ dBi}) = -66.69 \text{ dBm/MHz}$

The interference signal level to the UUT is lower than -66.69 dBm/MHz.

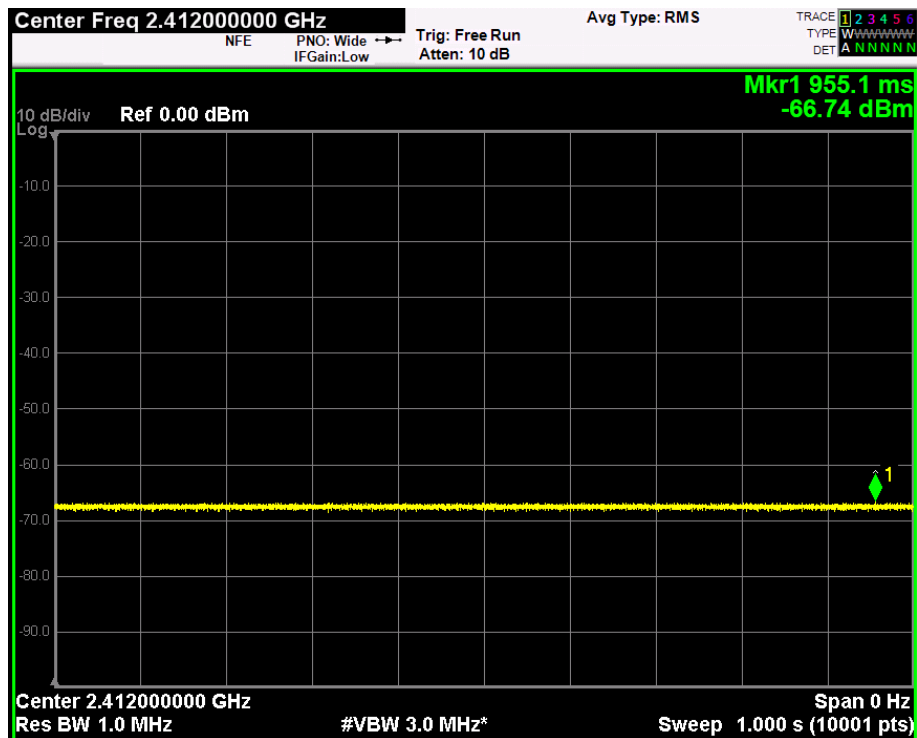

Detection Threshold Level

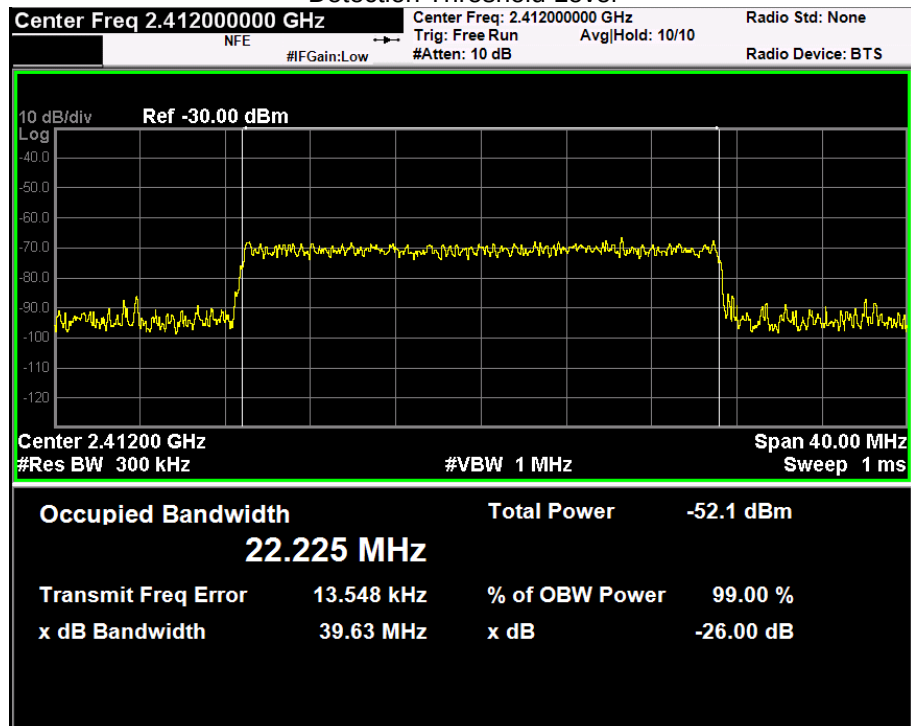

Flatness and Bandwidth

4.3.7 Test Result


☐	Not applicable to non-adaptive equipment or adaptive equipment operating in a non-adaptive mode
☐	Not applicable to equipment with RF output power is less than 10 dBm e.i.r.p.
☒	Refer to below test result

4.3.7.1 Adaptive Result


Operating Frequency Bands and Mode of EUT

Operational Mode	Operating Frequency (Low Channel, MHz)	Operating Frequency (High Channel, MHz)	Test Result
802.11b	2412	2472	PASS
802.11g	2412	2472	PASS
802.11ax (HE20)	2412	2472	PASS
802.11ax (HE40)	2422	2462	PASS


802.11b CH01 2412 MHz

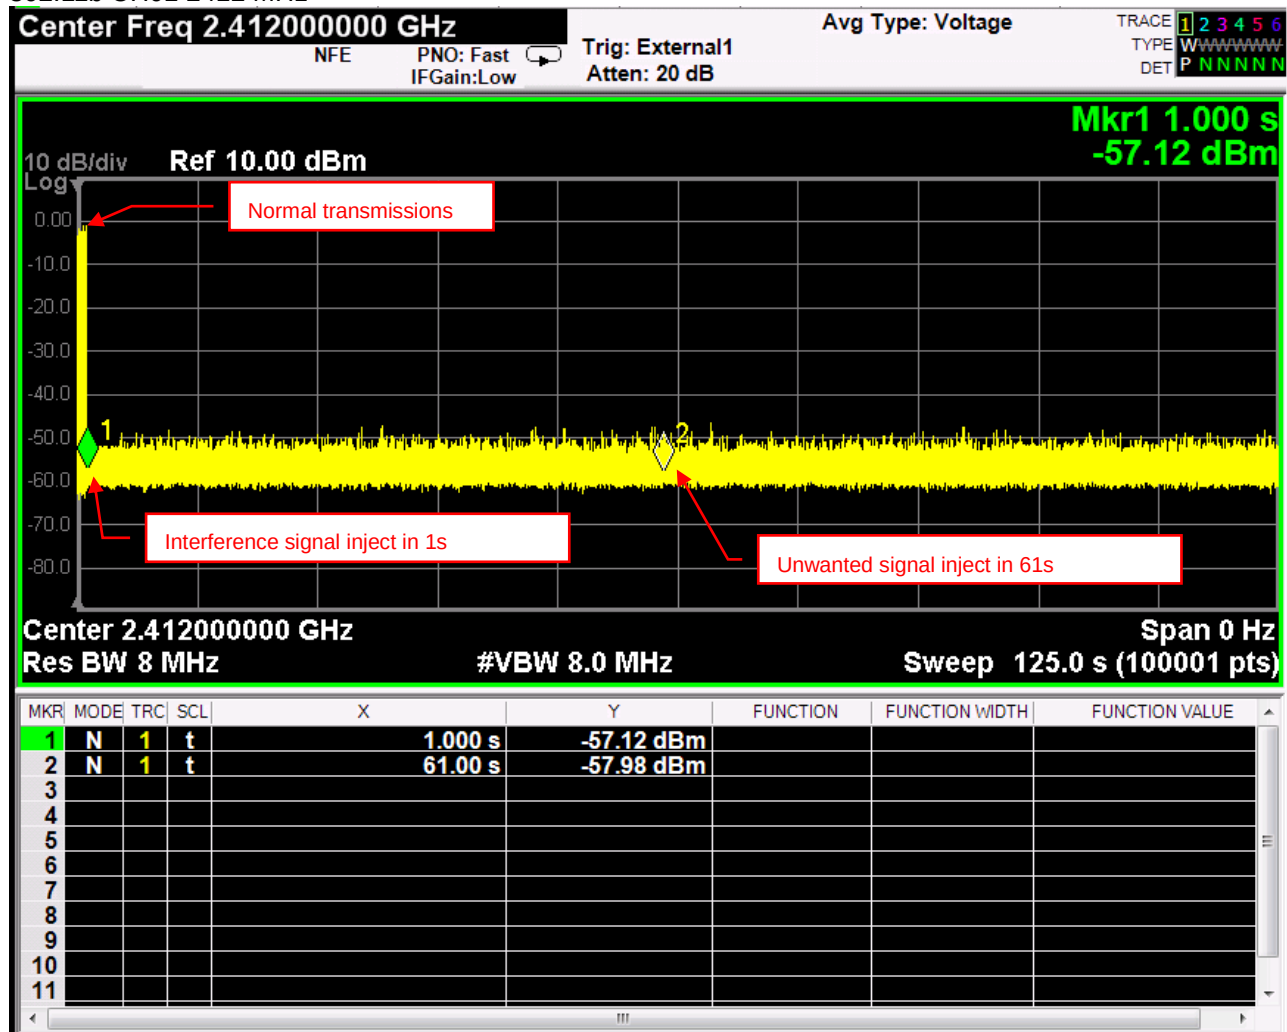


802.11b CH13 2472 MHz

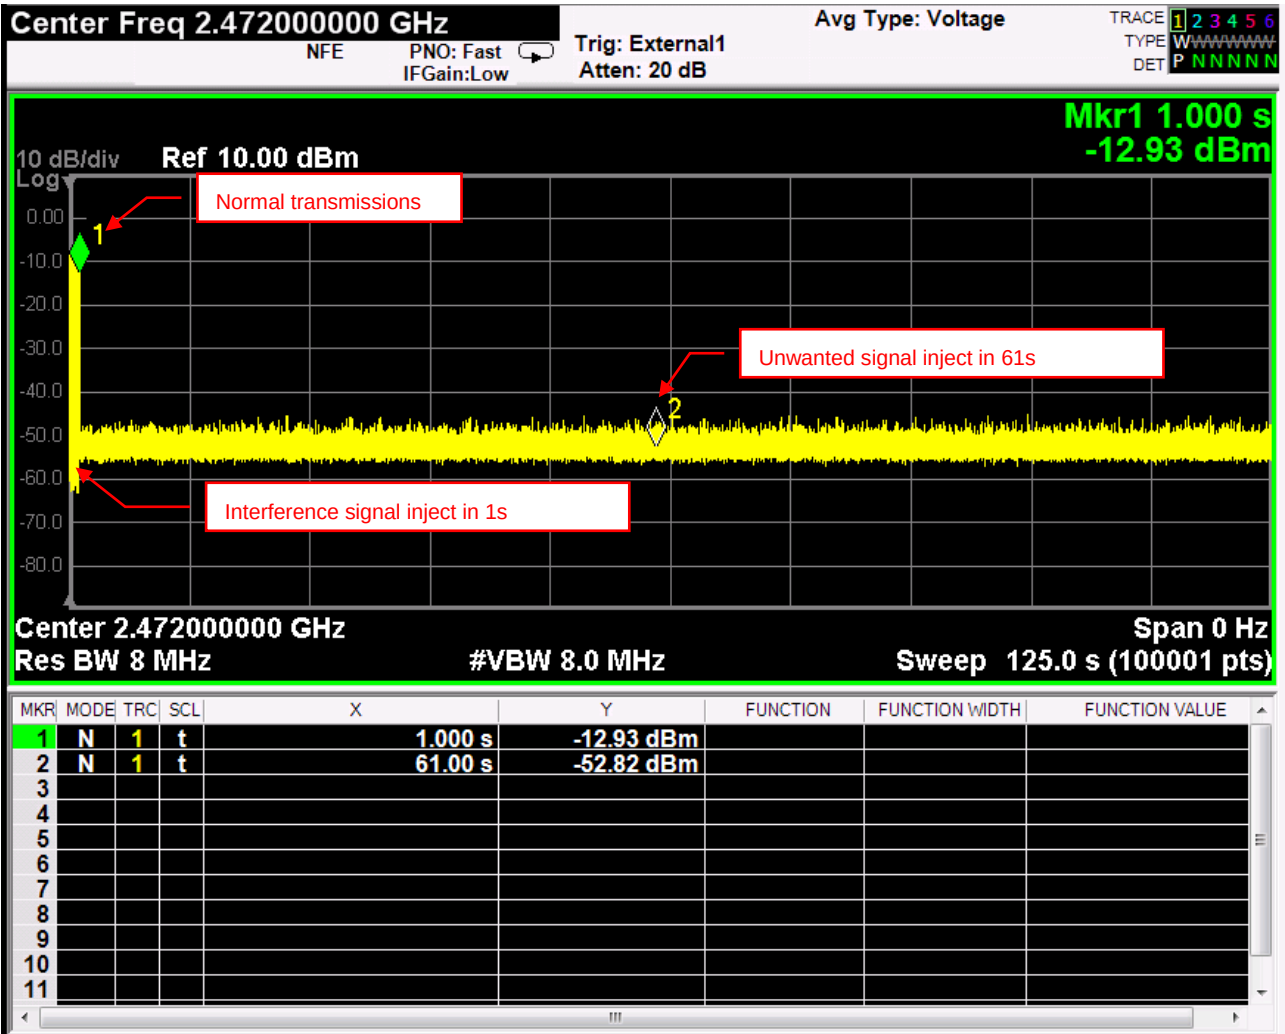


802.11g CH01 2412 MHz

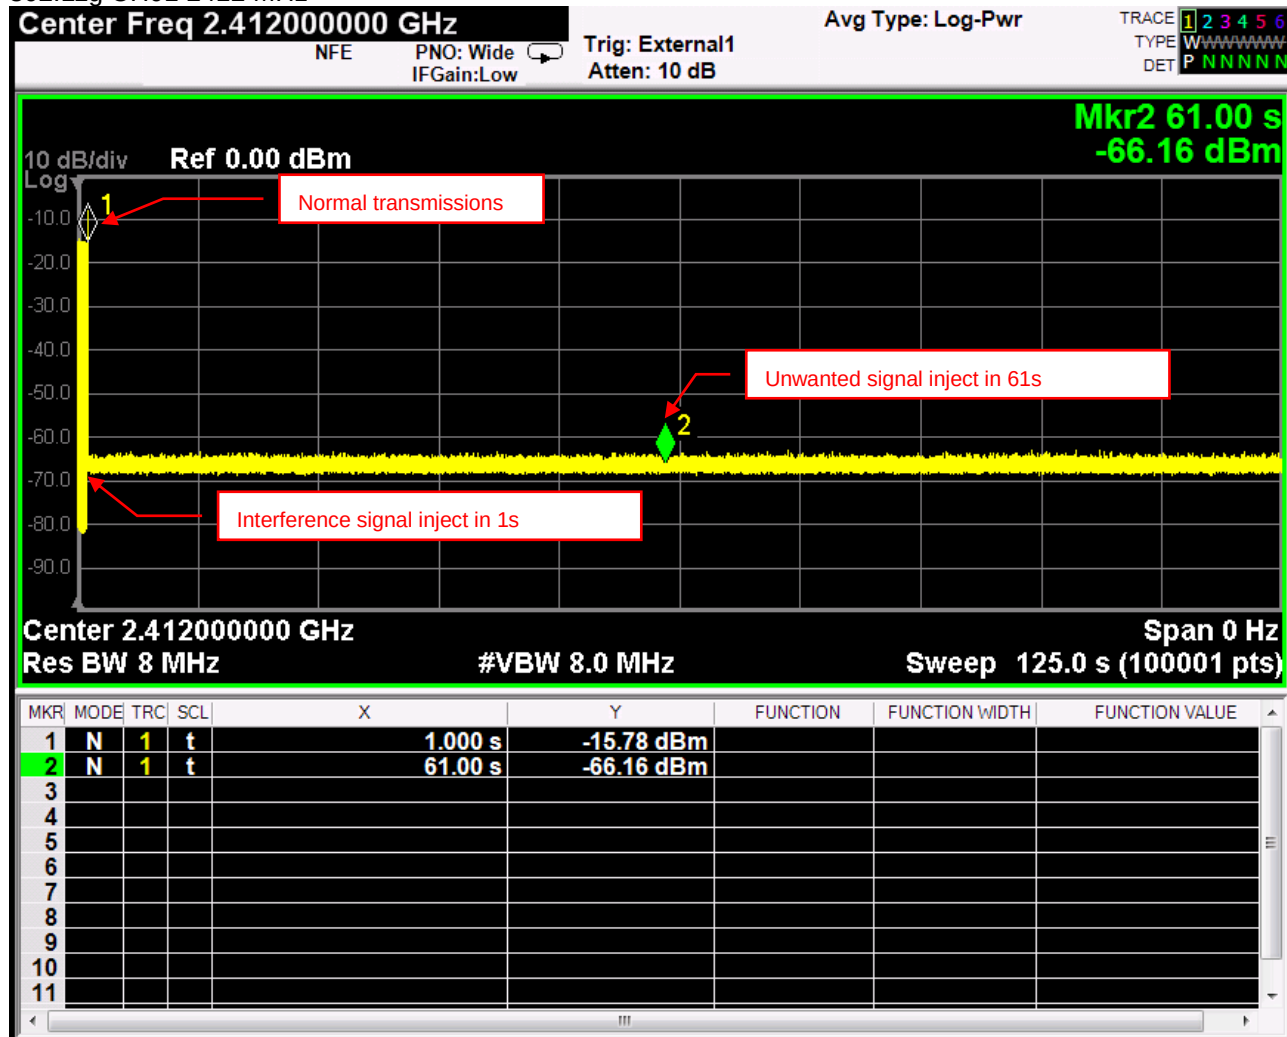


802.11g CH13 2472 MHz

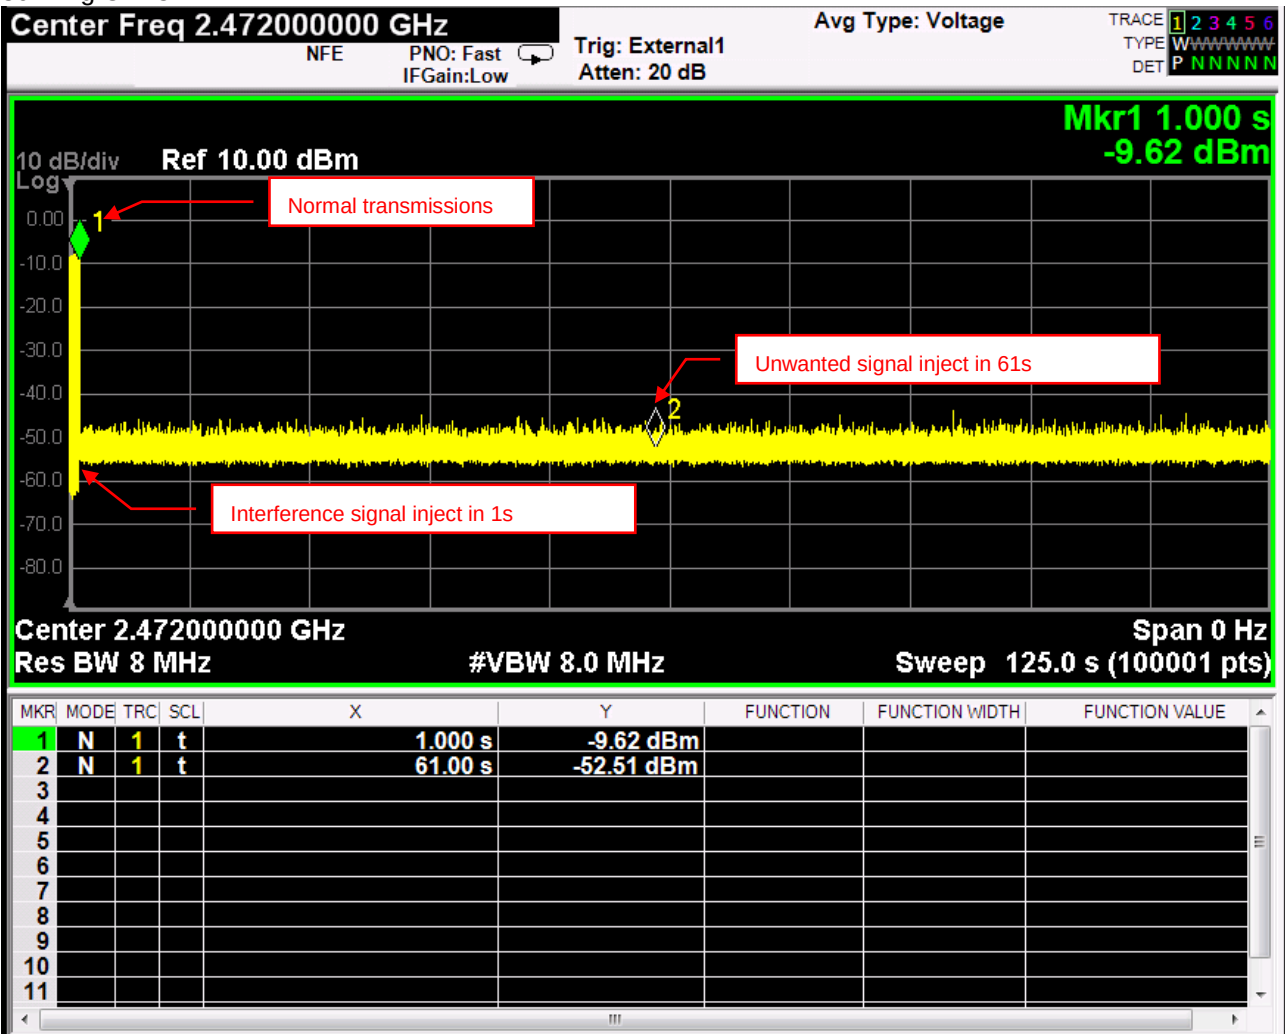


802.11ax (HE20) CH01 2412 MHz

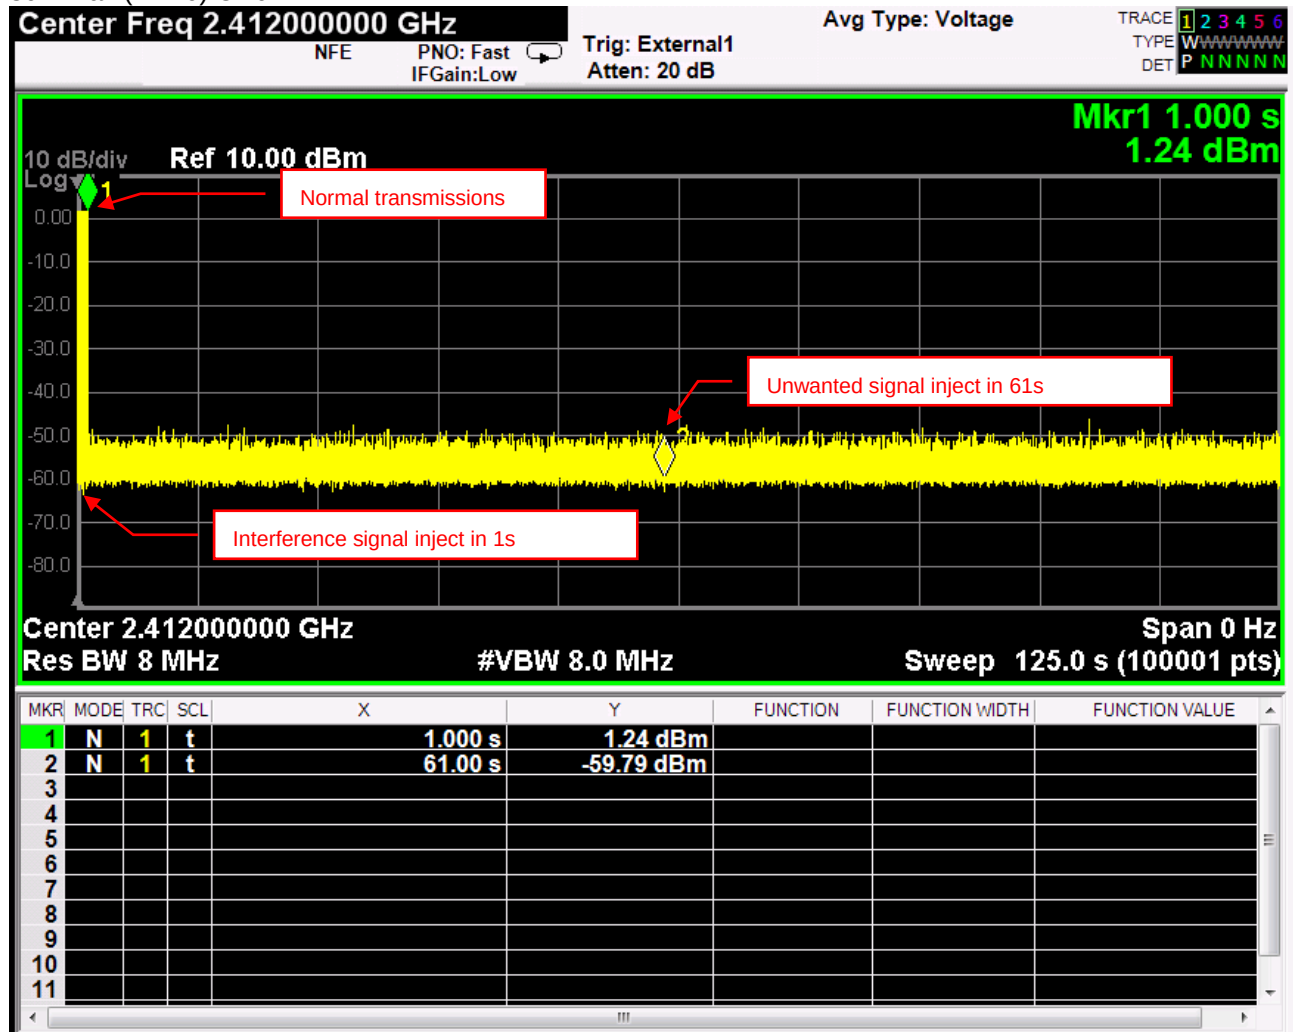


802.11ax (HE20) CH13 2472 MHz

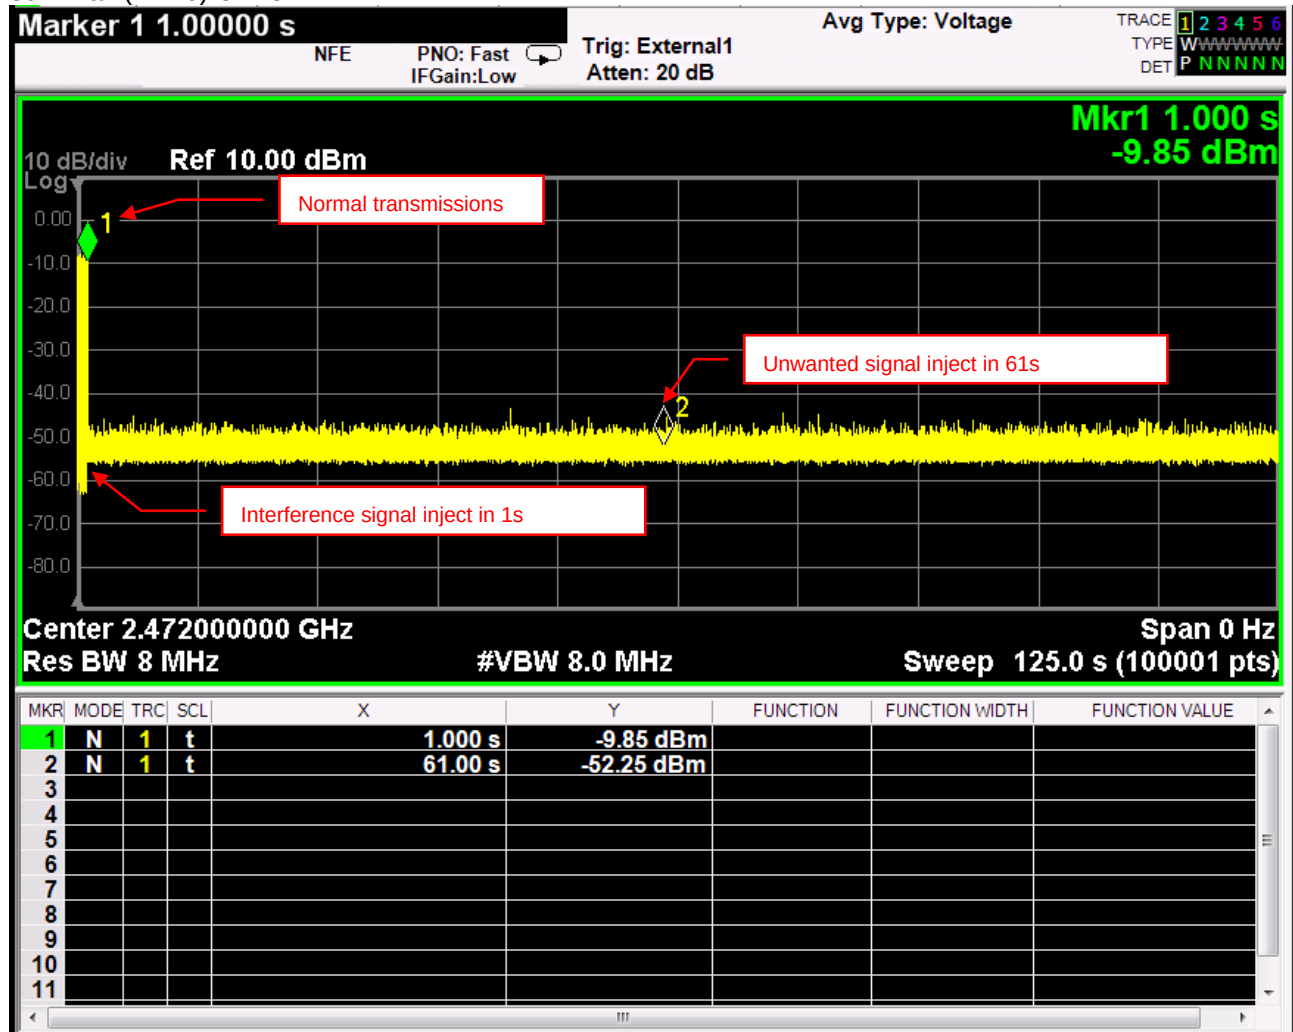

802.11ax (HE40) CH03 2422 MHz

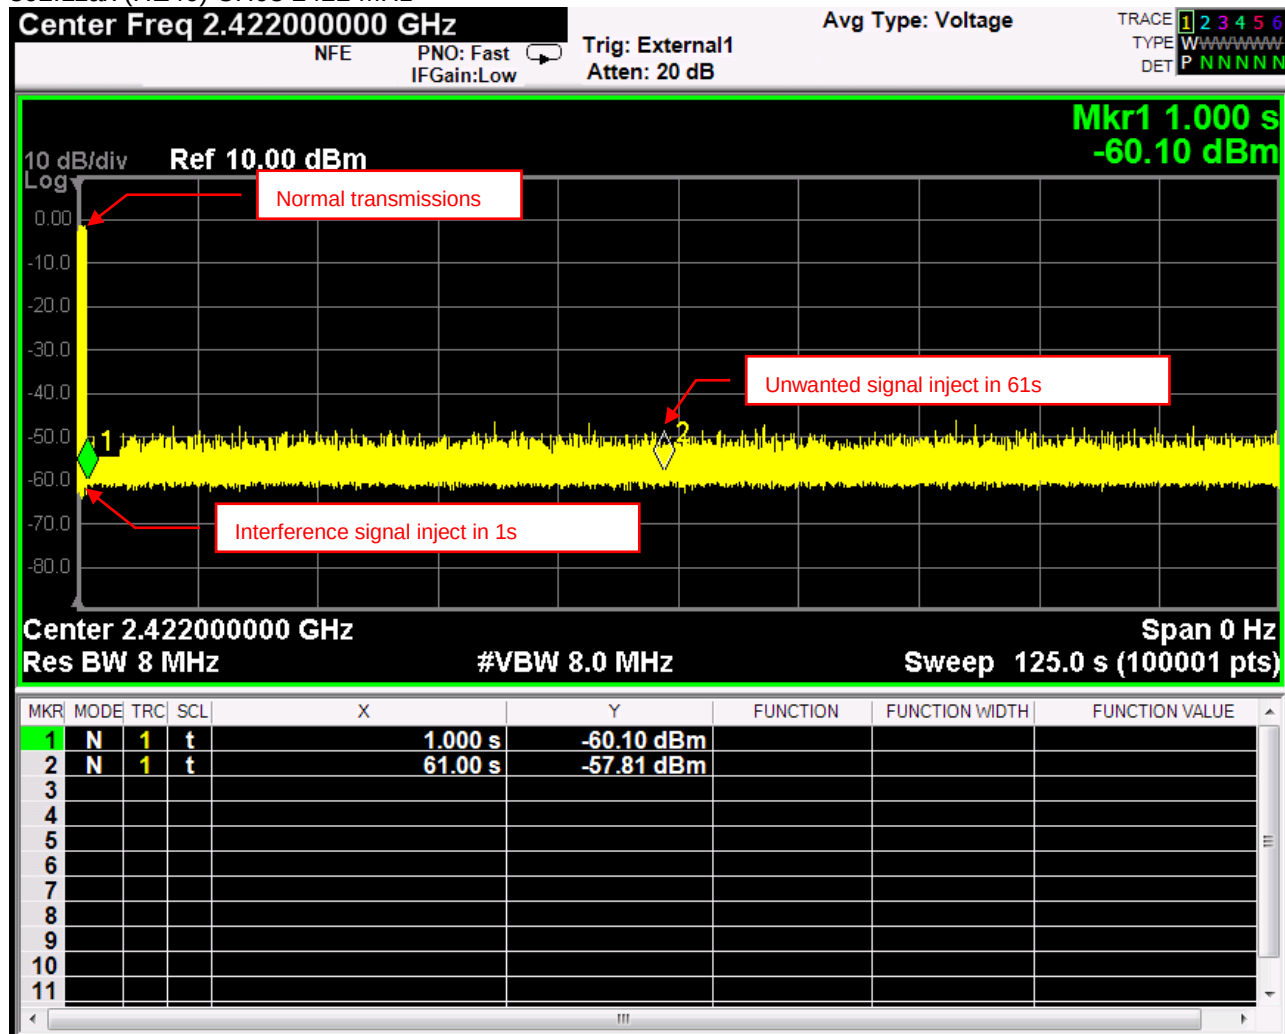

802.11ax (HE40) CH11 2462 MHz

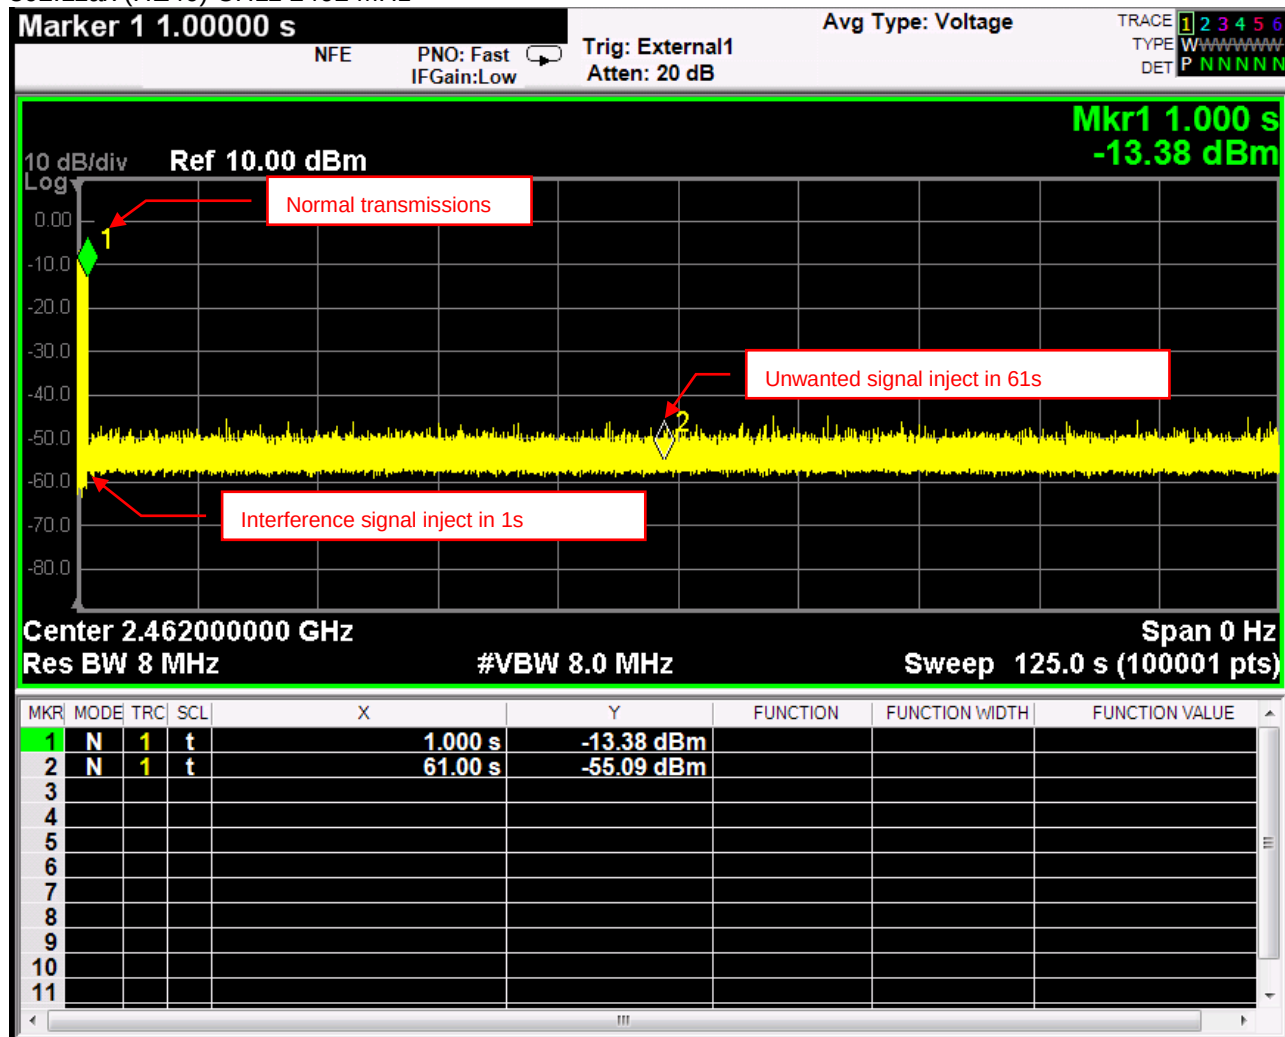


4.3.7.2 The Channel Occupancy Time Result

Operating Frequency Bands and Mode of EUT

Operational Mode	Operating Frequency Low Channel (MHz)	The Channel Occupancy Time (ms)	Minimum Idle Period (us)	Test Result
802.11b	2412	1.76	60.15	PASS
802.11b	2472	1.75	70.43	PASS
802.11g	2412	0.23	56.73	PASS
802.11g	2472	0.23	57.55	PASS
802.11ax (HE20)	2412	5.46	246.8	PASS
802.11ax (HE20)	2472	5.19	292.8	PASS
802.11ax (HE40)	2422	5.10	230.7	PASS
802.11ax (HE40)	2462	5.05	296.2	PASS

802.11b mode

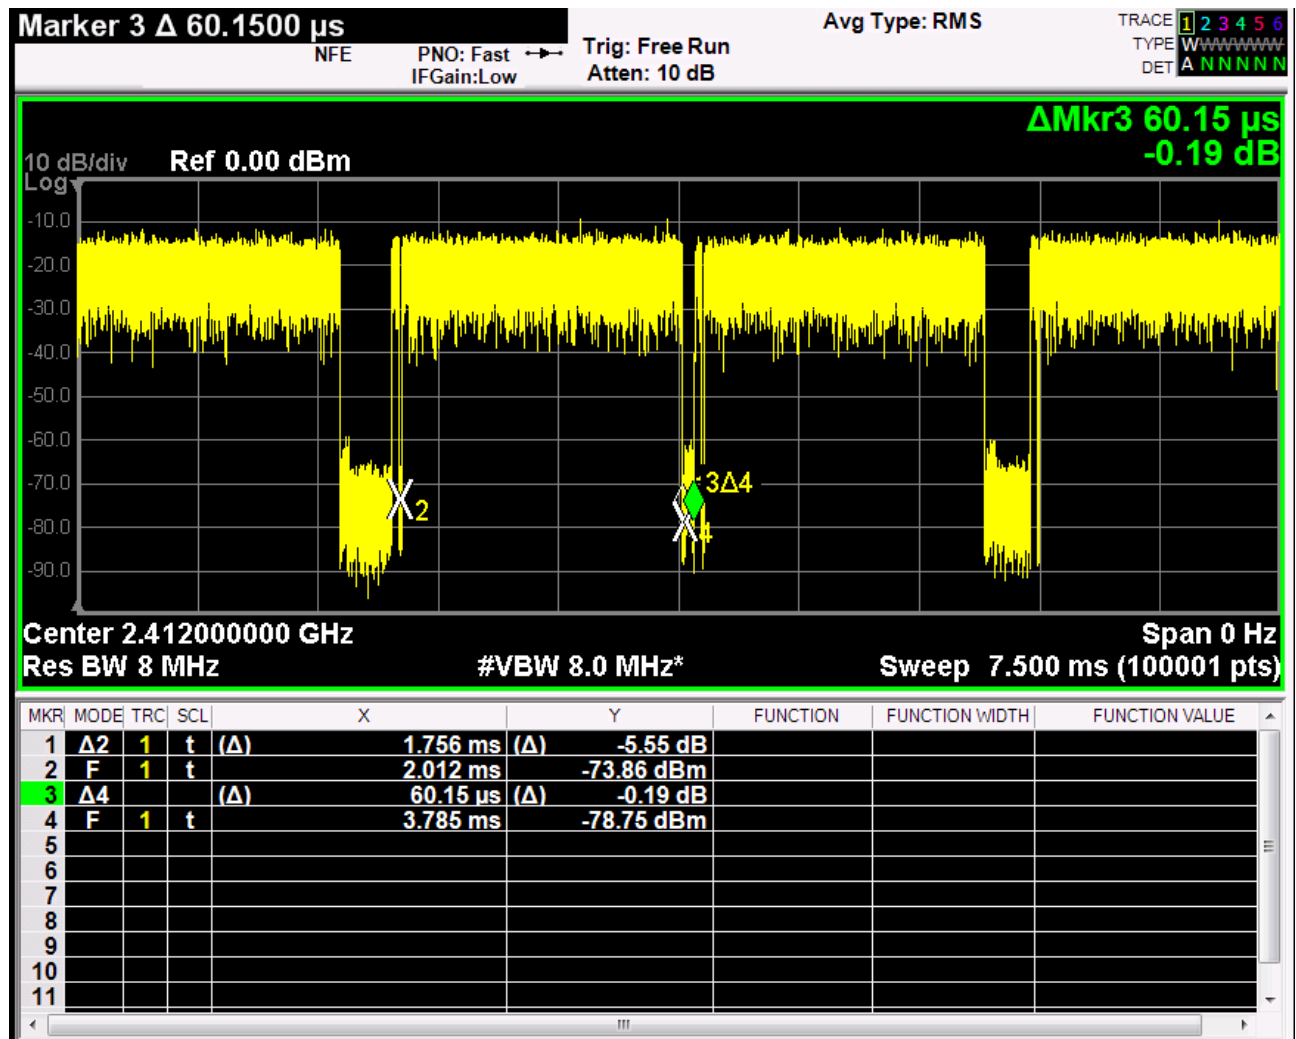



Marker 3 Δ 70.4250 μ s


NFE

PNO: Fast
IFGain:Low

Trig: Video
Atten: 10 dB

Avg Type: RMS

TRACE 1 2 3 4 5 6
TYPE W W W W W W
DET A N N N N N

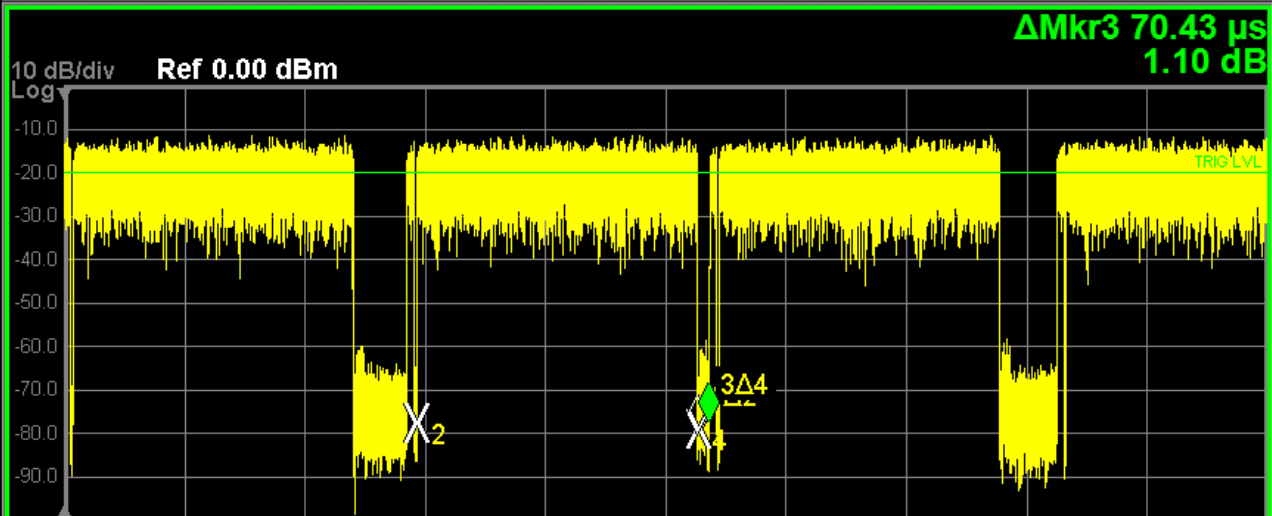

Center 2.47200000 GHz


Res BW 8 MHz


#VBW 8.0 MHz*

Span 0 Hz
Sweep 7.500 ms (100001 pts)


MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	Δ 2	1	t	(Δ)	1.751 ms	(Δ)	-2.55 dB	
2	F	1	t		2.193 ms		-77.87 dBm	
3	Δ 4	1	t	(Δ)	70.43 μ s	(Δ)	1.10 dB	
4	F	1	t		3.950 ms		-79.05 dBm	
5								
6								
7								
8								
9								
10								
11								


802.11g mode

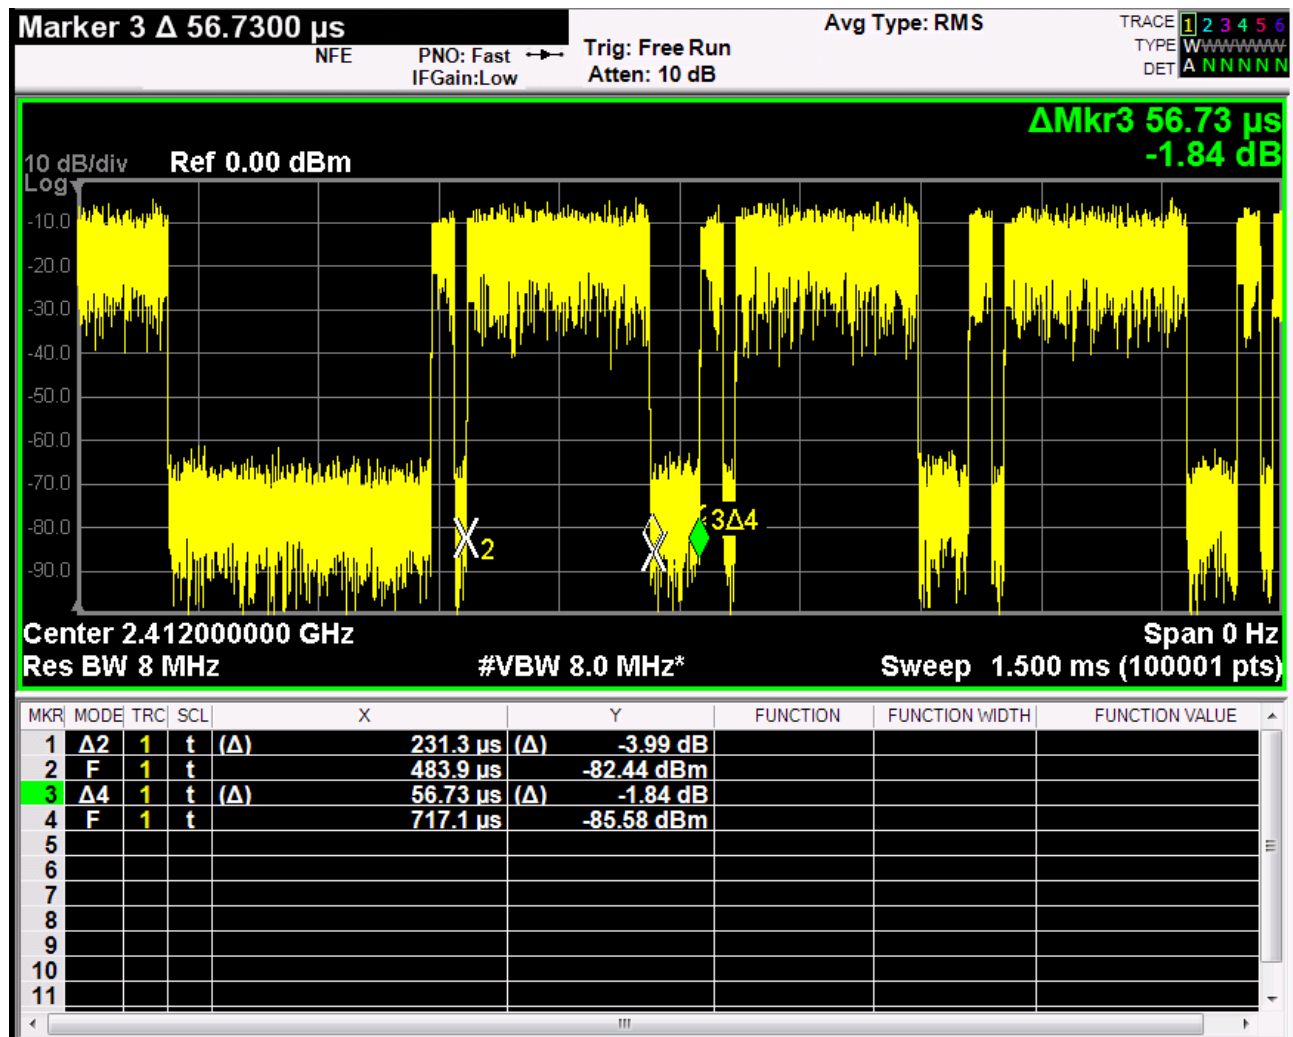

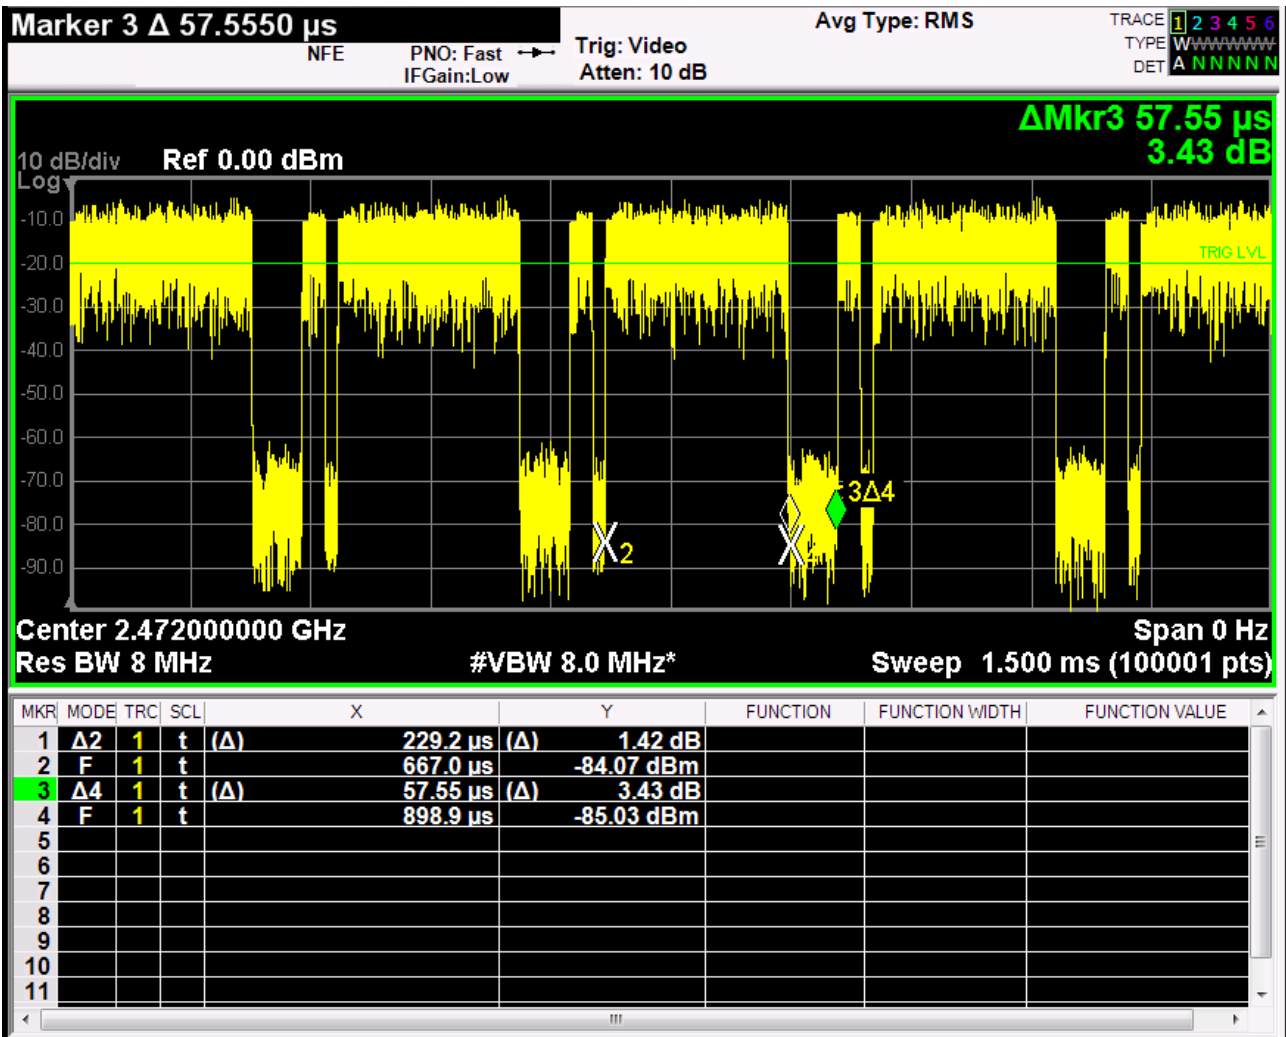


802.11ax (HE20) mode

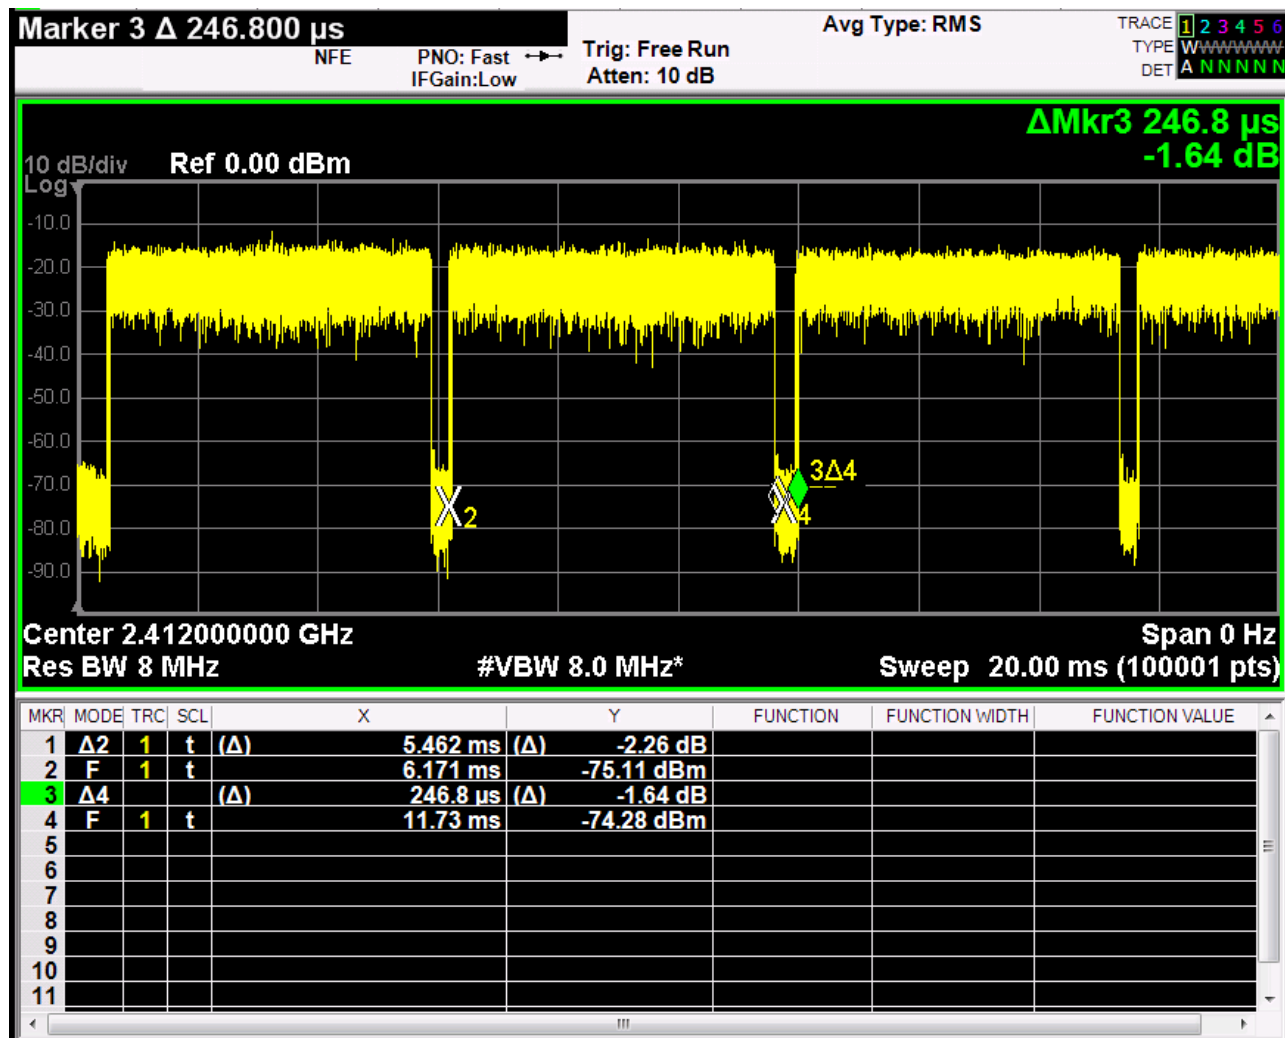

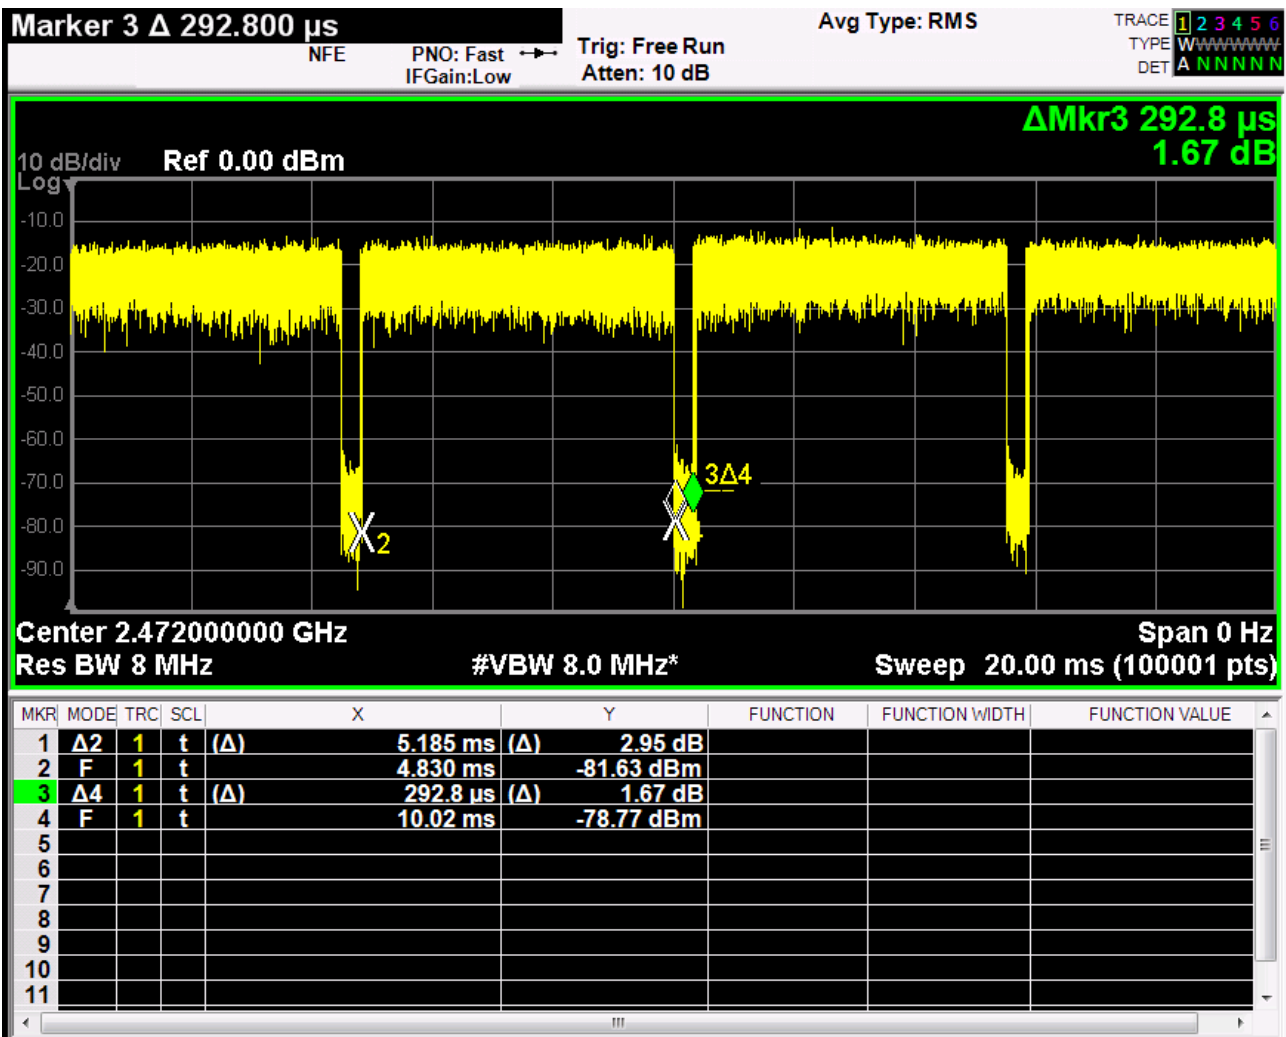

802.11ax (HE40) mode

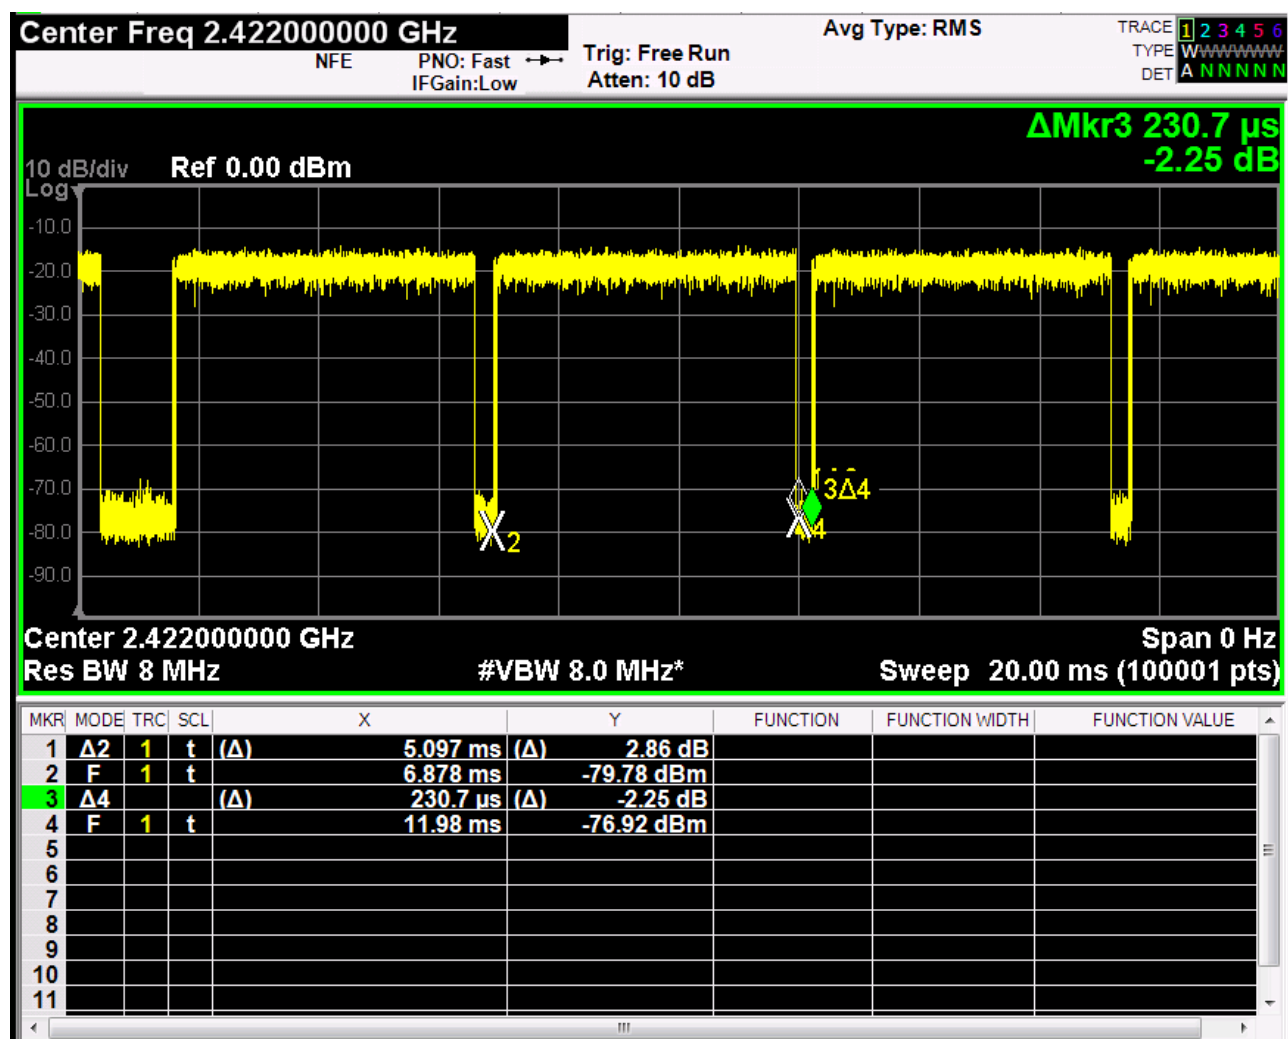

Marker 3 Δ 296.200 μ s


NFE

PNO: Fast
IFGain:Low

Trig: Free Run
Atten: 10 dB

Avg Type: RMS

TRACE 1 2 3 4 5 6
TYPE W W W W W W
DET A N N N N N

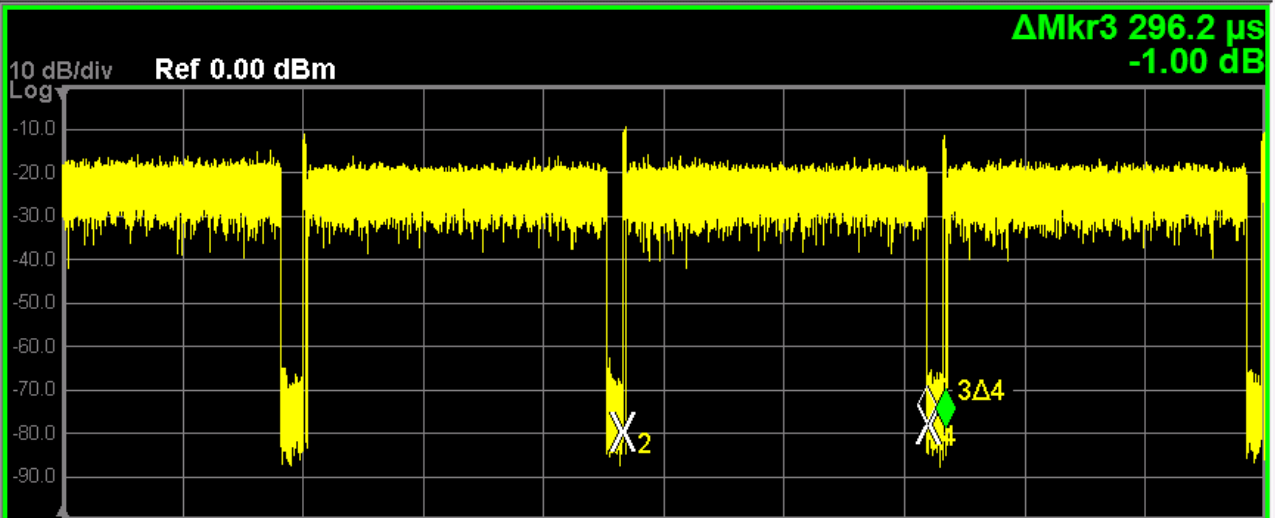

Center 2.46200000 GHz

Res BW 8 MHz

#VBW 8.0 MHz*

Span 0 Hz
Sweep 20.00 ms (100001 pts)

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	Δ 2	1	t	(Δ)	5.053 ms	(Δ)	1.29 dB	
2	F	1	t		9.313 ms		-79.78 dBm	
3	Δ 4			(Δ)	296.2 μ s	(Δ)	-1.00 dB	
4	F	1	t		14.39 ms		-78.30 dBm	
5								
6								
7								
8								
9								
10								
11								

4.3.7.3 Short Control Signalling Transmissions Result

802.11b CH01 2412 MHz

Short Control Signalling Transmission Result		
SCST total on time	SCST Limit	PASS/FAIL
0 ms	5ms	PASS

802.11b CH13 2472 MHz

Short Control Signalling Transmission Result		
SCST total on time	SCST Limit	PASS/FAIL
0 ms	5ms	PASS

802.11g CH01 2412 MHz

Short Control Signalling Transmission Result		
SCST total on time	SCST Limit	PASS/FAIL
0 ms	5ms	PASS

802.11g CH13 2472 MHz

Short Control Signalling Transmission Result		
SCST total on time	SCST Limit	PASS/FAIL
0 ms	5ms	PASS

802.11ax (HE20) CH01 2412 MHz

Short Control Signalling Transmission Result		
SCST total on time	SCST Limit	PASS/FAIL
0 ms	5ms	PASS

802.11ax (HE20) CH13 2472 MHz

Short Control Signalling Transmission Result		
SCST total on time	SCST Limit	PASS/FAIL
0 ms	5ms	PASS

802.11ax (HE40) CH03 2422 MHz

Short Control Signalling Transmission Result		
SCST total on time	SCST Limit	PASS/FAIL
0 ms	5ms	PASS

802.11ax (HE40) CH11 2462 MHz

Short Control Signalling Transmission Result		
SCST total on time	SCST Limit	PASS/FAIL
0 ms	5ms	PASS

4.3.7.4 Unwanted Signal interference Test Results

802.11b

Channel	Channel Frequency (MHz)	Wanted Signal Mean Power from Companion Device (dBm/MHz)	Unwanted Signal Frequency (MHz)	Unwanted Signal Power (dBm)	Pass/Fail
1	2412	-50	2488.5	-31.5	Pass
13	2472	-50	2395	-31.5	Pass

802.11g

Channel	Channel Frequency (MHz)	Wanted Signal Mean Power from Companion Device (dBm/MHz)	Unwanted Signal Frequency (MHz)	Unwanted Signal Power (dBm)	Pass/Fail
1	2412	-50	2488.5	-31.5	Pass
13	2472	-50	2395	-31.5	Pass

802.11ax (HE20)

Channel	Channel Frequency (MHz)	Wanted Signal Mean Power from Companion Device (dBm/MHz)	Unwanted Signal Frequency (MHz)	Unwanted Signal Power (dBm)	Pass/Fail
1	2412	-50	2488.5	-31.5	Pass
13	2472	-50	2395	-31.5	Pass

802.11ax (HE40)

Channel	Channel Frequency (MHz)	Wanted Signal Mean Power from Companion Device (dBm/MHz)	Unwanted Signal Frequency (MHz)	Unwanted Signal Power (dBm)	Pass/Fail
3	2422	-50	2488.5	-31.5	Pass
11	2462	-50	2395	-31.5	Pass

4.4 Occupied Channel Bandwidth

4.4.1 Limit of Occupied Channel Bandwidth

Condition		Limit
All types of equipment		Shall fall completely within the band 2400 to 2483.5 MHz.
Additional requirement	For non-adaptive using wide band modulations other than FHSS system and e.i.r.p >10dBm.	Less than 20MHz
	For non-adaptive Frequency Hopping system and e.i.r.p >10dBm.	Less than 5MHz

4.4.2 Test Procedure

Refer to chapter 5.4.7 of EN 300 328 V2.2.2.

Measurement	
☒ Conducted measurement	☐ Radiated measurement

4.4.3 Deviation from Test Standard

No deviation.

4.4.4 Test Setup

These measurements only were performed at normal test conditions. The measurement shall be performed only on the lowest and the highest frequency within the stated frequency range. Controlling software (RTL8852A MP Toolkit V1.0.21) has been activated to set the EUT on specific status.

4.4.5 Test Results (Mode 1)

CDD Mode

802.11b

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)	Measured Frequencies		Limit	Pass/Fail
			F _L (MHz)	F _H (MHz)		
1	2412	14.44	2404.76	2419.2	F _L > 2400 MHz and F _H < 2483.5 MHz	Pass
13	2472	14.48	2464.72	2479.2		Pass

802.11g

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)	Measured Frequencies		Limit	Pass/Fail
			F _L (MHz)	F _H (MHz)		
1	2412	16.36	2403.8	2420.16	F _L > 2400 MHz and F _H < 2483.5 MHz	Pass
13	2472	16.36	2463.8	2480.16		Pass

802.11ax (HE20)

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)	Measured Frequencies		Limit	Pass/Fail
			F _L (MHz)	F _H (MHz)		
1	2412	18.76	2402.6	2421.36	F _L > 2400 MHz and F _H < 2483.5 MHz	Pass
13	2472	18.76	2462.6	2481.36		Pass

802.11ax (HE40)

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)	Measured Frequencies		Limit	Pass/Fail
			F _L (MHz)	F _H (MHz)		
3	2422	37.68	2403.12	2440.8	F _L > 2400 MHz and F _H < 2483.5 MHz	Pass
11	2462	37.68	2443.12	2480.8		Pass

Note: F_L is the lowest frequency of the 99% occupied bandwidth of power envelope.
F_H is the highest frequency of the 99% occupied bandwidth of power envelope.

802.11ax (RU26)

Channel	Channel Frequency (MHz)	RU Configuration	Occupied Bandwidth (MHz)	Measured Frequencies		Limit	Pass/Fail
				F _L (MHz)	F _H (MHz)		
1	2412	26/0	15.84	2402.36	2418.2	F _L > 2400 MHz and F _H < 2483.5 MHz	Pass
13	2472	26/8	15.84	2465.76	2481.6		Pass

802.11ax (RU52)

Channel	Channel Frequency (MHz)	RU Configuration	Occupied Bandwidth (MHz)	Measured Frequencies		Limit	Pass/Fail
				F _L (MHz)	F _H (MHz)		
1	2412	52/37	16	2402.44	2418.44	F _L > 2400 MHz and F _H < 2483.5 MHz	Pass
13	2472	52/40	15.44	2466.08	2481.52		Pass

802.11ax (RU106)

Channel	Channel Frequency (MHz)	RU Configuration	Occupied Bandwidth (MHz)	Measured Frequencies		Limit	Pass/Fail
				F _L (MHz)	F _H (MHz)		
1	2412	106/53	15.32	2402.4	2417.72	F _L > 2400 MHz and F _H < 2483.5 MHz	Pass
13	2472	106/54	15.56	2465.96	2481.52		Pass

Note: F_L is the lowest frequency of the 99% occupied bandwidth of power envelope.
F_H is the highest frequency of the 99% occupied bandwidth of power envelope.

4.4.6 Test Results (Mode 2)

802.11b

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)	Measured Frequencies		Limit	Pass/Fail
			F _L (MHz)	F _H (MHz)		
1	2412	14.4	2404.8	2419.2	F _L > 2400 MHz and F _H < 2483.5 MHz	Pass
13	2472	14.44	2464.76	2479.2		Pass

802.11g

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)	Measured Frequencies		Limit	Pass/Fail
			F _L (MHz)	F _H (MHz)		
1	2412	16.36	2403.8	2420.16	F _L > 2400 MHz and F _H < 2483.5 MHz	Pass
13	2472	16.36	2463.8	2480.16		Pass

802.11ax (HE20)

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)	Measured Frequencies		Limit	Pass/Fail
			F _L (MHz)	F _H (MHz)		
1	2412	18.8	2402.6	2421.4	F _L > 2400 MHz and F _H < 2483.5 MHz	Pass
13	2472	18.76	2462.6	2481.36		Pass

802.11ax (HE40)

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)	Measured Frequencies		Limit	Pass/Fail
			F _L (MHz)	F _H (MHz)		
3	2422	37.68	2403.12	2440.8	F _L > 2400 MHz and F _H < 2483.5 MHz	Pass
11	2462	37.68	2443.12	2480.8		Pass

Note: F_L is the lowest frequency of the 99% occupied bandwidth of power envelope.
F_H is the highest frequency of the 99% occupied bandwidth of power envelope.

802.11ax (RU26)

Channel	Channel Frequency (MHz)	RU Configuration	Occupied Bandwidth (MHz)	Measured Frequencies		Limit	Pass/Fail
				F _L (MHz)	F _H (MHz)		
1	2412	26/0	15.88	2402.36	2418.24	F _L > 2400 MHz and F _H < 2483.5 MHz	Pass
13	2472	26/8	15.84	2465.76	2481.6		Pass

802.11ax (RU52)

Channel	Channel Frequency (MHz)	RU Configuration	Occupied Bandwidth (MHz)	Measured Frequencies		Limit	Pass/Fail
				F _L (MHz)	F _H (MHz)		
1	2412	52/37	15.44	2402.44	2417.88	F _L > 2400 MHz and F _H < 2483.5 MHz	Pass
13	2472	52/40	15.28	2466.24	2481.52		Pass

802.11ax (RU106)


Channel	Channel Frequency (MHz)	RU Configuration	Occupied Bandwidth (MHz)	Measured Frequencies		Limit	Pass/Fail
				F _L (MHz)	F _H (MHz)		
1	2412	106/53	15.6	2402.4	2418	F _L > 2400 MHz and F _H < 2483.5 MHz	Pass
13	2472	106/54	15.52	2466	2481.52		Pass

Note: F_L is the lowest frequency of the 99% occupied bandwidth of power envelope.
F_H is the highest frequency of the 99% occupied bandwidth of power envelope.

4.5 Transmitter Unwanted Emissions in the Out-of-band Domain

4.5.1 Limits of Transmitter Unwanted Emissions in the Out-of-band Domain

Condition	Limit
Under all test conditions	The transmitter unwanted emissions in the out-of-band domain but outside the allocated band, shall not exceed the values provided by the mask in below figure.

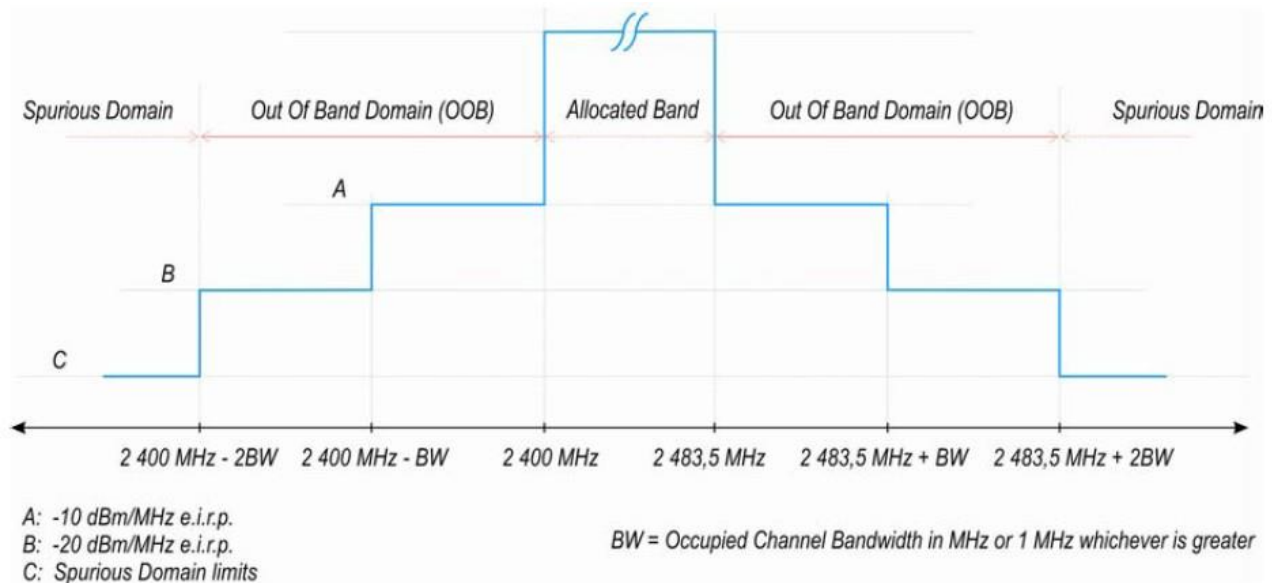

4.5.2 Test Procedure

Refer to chapter 5.4.8 of EN 300 328 V2.2.2.

Measurement Method	
☒ Conducted measurement	☐ Radiated measurement

4.5.3 Deviation from Test Standard

No deviation

4.5.4 Test Setup

The measurements were performed at normal environmental conditions. The measurement was performed at the lowest and the highest channel on which the equipment can operate. The equipment was configured to operate under its worst case situation with respect to output power. The frequency has to be recorded for the right and left end above threshold of highest and lowest channel respectively.

4.5.5 Test Results (Mode 1)

CDD Mode

802.11b

Channel Frequency		2412 MHz				2472 MHz			
Test Condition		OOB Emission (MHz)				OOB Emission (MHz)			
		2385.56 ~ 2400		2371.12 ~ 2385.56		2483.5 ~ 2497.98		2497.98 ~ 2512.46	
		Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)
T _{nom} 25°C	V _{nom} (V)	2397.50	-34.65	2385.06	-44.78	2484.00	-36.91	2498.48	-42.81
Limit (dBm/MHz)		-10.00		-20.00		-10.00		-20.00	
Pass/Fail		Pass		Pass		Pass		Pass	

802.11g

Channel Frequency		2412 MHz				2472 MHz			
Test Condition		OOB Emission (MHz)				OOB Emission (MHz)			
		2383.64 ~ 2400		2367.28 ~ 2383.64		2483.5 ~ 2499.86		2499.86 ~ 2516.22	
		Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)
T _{nom} 25°C	V _{nom} (V)	2399.50	-32.23	2383.14	-42.15	2484.00	-35.17	2500.36	-42.82
Limit (dBm/MHz)		-10.00		-20.00		-10.00		-20.00	
Pass/Fail		Pass		Pass		Pass		Pass	

802.11ax (HE20)

Channel Frequency		2412 MHz				2472 MHz			
Test Condition		OOB Emission (MHz)				OOB Emission (MHz)			
		2381.24 ~ 2400		2362.48 ~ 2381.24		2483.5 ~ 2502.26		2502.26 ~ 2521.02	
		Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)
T _{nom} 25°C	V _{nom} (V)	2399.50	-30.18	2380.74	-41.86	2484.00	-32.34	2502.76	-42.13
Limit (dBm/MHz)		-10.00		-20.00		-10.00		-20.00	
Pass/Fail		Pass		Pass		Pass		Pass	

802.11ax (HE40)

Channel Frequency		2422 MHz				2462 MHz			
Test Condition		OOB Emission (MHz)				OOB Emission (MHz)			
		2362.32 ~ 2400		2324.64 ~ 2362.32		2483.5 ~ 2521.18		2521.18 ~ 2558.86	
		Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)
T _{nom} 25°C	V _{nom} (V)	2399.50	-30.45	2361.82	-44.18	2484.00	-31.64	2521.68	-44.04
Limit (dBm/MHz)		-10.00		-20.00		-10.00		-20.00	
Pass/Fail		Pass		Pass		Pass		Pass	

802.11ax (RU26)

Channel Frequency		2412 MHz				2472 MHz			
RU Configuration		26/0				26/8			
Test Condition		OOB Emission (MHz)				OOB Emission (MHz)			
		2384.16 ~ 2400		2368.32 ~ 2384.16		2483.5 ~ 2499.34		2499.34 ~ 2515.18	
		Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)
T _{nom} 25°C	V _{nom} (V)	2399.50	-35.42	2371.66	-44.91	2484.00	-34.40	2511.84	-44.85
Limit (dBm/MHz)		-10.00		-20.00		-10.00		-20.00	
Pass/Fail		Pass		Pass		Pass		Pass	

802.11ax (RU52)

Channel Frequency		2412 MHz				2472 MHz			
RU Configuration		52/37				52/40			
Test Condition		OOB Emission (MHz)				OOB Emission (MHz)			
		2384 ~ 2400		2368 ~ 2384		2483.5 ~ 2498.94		2498.94 ~ 2514.38	
		Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)
T _{nom} 25°C	V _{nom} (V)	2399.50	-35.35	2383.50	-44.65	2484.00	-33.95	2512.44	-44.24
Limit (dBm/MHz)		-10.00		-20.00		-10.00		-20.00	
Pass/Fail		Pass		Pass		Pass		Pass	

802.11ax (RU106)

Channel Frequency		2412 MHz				2472 MHz			
RU Configuration		106/53				106/54			
Test Condition		OOB Emission (MHz)				OOB Emission (MHz)			
		2384.68 ~ 2400		2369.36 ~ 2384.68		2483.5 ~ 2499.06		2499.06 ~ 2514.62	
		Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)
T _{nom} 25°C	V _{nom} (V)	2399.50	-25.82	2384.18	-33.30	2484.00	-19.92	2514.56	-29.02
Limit (dBm/MHz)		-10.00		-20.00		-10.00		-20.00	
Pass/Fail		Pass		Pass		Pass		Pass	

4.5.6 Test Results (Mode 2)

802.11b

Channel Frequency		2412 MHz				2472 MHz			
Test Condition		OOB Emission (MHz)				OOB Emission (MHz)			
		2385.6 ~ 2400		2371.2 ~ 2385.6		2483.5 ~ 2497.94		2497.94 ~ 2512.38	
		Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)
T _{nom} 25°C	V _{nom} (V)	2399.50	-35.32	2385.10	-45.80	2484.00	-39.29	2498.44	-42.83
Limit (dBm/MHz)		-10.00		-20.00		-10.00		-20.00	
Pass/Fail		Pass		Pass		Pass		Pass	

802.11g

Channel Frequency		2412 MHz				2472 MHz			
Test Condition		OOB Emission (MHz)				OOB Emission (MHz)			
		2383.64 ~ 2400		2367.28 ~ 2383.64		2483.5 ~ 2499.86		2499.86 ~ 2516.22	
		Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)
T _{nom} 25°C	V _{nom} (V)	2399.50	-29.35	2383.14	-44.40	2484.00	-28.63	2500.36	-44.38
Limit (dBm/MHz)		-10.00		-20.00		-10.00		-20.00	
Pass/Fail		Pass		Pass		Pass		Pass	

802.11ax (HE20)

Channel Frequency		2412 MHz				2472 MHz			
Test Condition		OOB Emission (MHz)				OOB Emission (MHz)			
		2381.2 ~ 2400		2362.4 ~ 2381.2		2483.5 ~ 2502.26		2502.26 ~ 2521.02	
		Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)
T _{nom} 25°C	V _{nom} (V)	2399.50	-28.90	2380.70	-44.55	2484.00	-28.91	2502.76	-44.45
Limit (dBm/MHz)		-10.00		-20.00		-10.00		-20.00	
Pass/Fail		Pass		Pass		Pass		Pass	

802.11ax (HE40)

Channel Frequency		2422 MHz				2462 MHz			
Test Condition		OOB Emission (MHz)				OOB Emission (MHz)			
		2362.32 ~ 2400		2324.64 ~ 2362.32		2483.5 ~ 2521.18		2521.18 ~ 2558.86	
		Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)
T _{nom} 25°C	V _{nom} (V)	2399.50	-30.78	2361.82	-46.02	2484.00	-30.71	2521.68	-45.52
Limit (dBm/MHz)		-10.00		-20.00		-10.00		-20.00	
Pass/Fail		Pass		Pass		Pass		Pass	

802.11ax (RU26)

Channel Frequency		2412 MHz				2472 MHz			
RU Configuration		26/0				26/8			
Test Condition		OOB Emission (MHz)				OOB Emission (MHz)			
		2384.12 ~ 2400		2368.24 ~ 2384.12		2483.5 ~ 2499.34		2499.34 ~ 2515.18	
		Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)
T _{nom} 25°C	V _{nom} (V)	2399.50	-36.29	2383.62	-48.11	2484.00	-34.62	2511.84	-45.78
Limit (dBm/MHz)		-10.00		-20.00		-10.00		-20.00	
Pass/Fail		Pass		Pass		Pass		Pass	

802.11ax (RU52)

Channel Frequency		2412 MHz				2472 MHz			
RU Configuration		52/37				52/40			
Test Condition		OOB Emission (MHz)				OOB Emission (MHz)			
		2384.56 ~ 2400		2369.12 ~ 2384.56		2483.5 ~ 2498.78		2498.78 ~ 2514.06	
		Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)
T _{nom} 25°C	V _{nom} (V)	2399.50	-34.39	2372.06	-45.08	2484.00	-34.79	2512.28	-45.93
Limit (dBm/MHz)		-10.00		-20.00		-10.00		-20.00	
Pass/Fail		Pass		Pass		Pass		Pass	

802.11ax (RU106)

Channel Frequency		2412 MHz				2472 MHz			
RU Configuration		106/53				106/54			
Test Condition		OOB Emission (MHz)				OOB Emission (MHz)			
		2384.4 ~ 2400		2368.8 ~ 2384.4		2483.5 ~ 2499.02		2499.02 ~ 2514.54	
		Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)	Freq. (MHz)	Power (dBm/ MHz)
T_{nom} 25°C	$V_{nom}(V)$	2399.50	-25.49	2383.90	-31.76	2484.00	-23.46	2499.52	-33.09
Limit (dBm/MHz)		-10.00		-20.00		-10.00		-20.00	
Pass/Fail		Pass		Pass		Pass		Pass	

4.6 Transmitter Spurious Emissions in the Spurious Domain

4.6.1 Limits of Transmitter Spurious Emissions

Frequency Range	Maximum Power Limit	Bandwidth
30 MHz to 47 MHz	-36dBm	100kHz
47 MHz to 74 MHz	-54dBm	100kHz
74 MHz to 87,5 MHz	-36dBm	100kHz
87,5 MHz to 118 MHz	-54dBm	100kHz
118 MHz to 174 MHz	-36dBm	100kHz
174 MHz to 230 MHz	-54dBm	100kHz
230 MHz to 470 MHz	-36dBm	100kHz
470 MHz to 694 MHz	-54dBm	100kHz
694 MHz to 1 GHz	-36dBm	100kHz
1GHz ~ 12.75GHz	-30dBm	1MHz

Note: These limits are e.r.p. for emissions up to 1 GHz and as e.i.r.p. for emissions above 1 GHz.

4.6.2 Test Procedure

Refer to chapter 5.4.9 of EN 300 328 V2.2.2.

Measurement Method	
☐ Conducted measurement	☒ Radiated measurement
<u>For Conducted measurement:</u> The level of unwanted emissions shall be measured as their power in a specified load (conducted spurious emissions) and their effective radiated power when radiated by the cabinet or structure of the equipment with the antenna connector(s) terminated by a specified load (cabinet radiation).	
<u>Conducted measurement (For equipment with multiple transmit chains):</u> ☐ Option 1: The results for each of the transmit chains for the corresponding 1MHz segments shall be added and compared with the limits. ☐ Option 2: The results for each of the transmit chains shall be individually compared with the limits after these limits have been reduced by $10 \times \log(N)$ (number of active transmit chains)	

4.6.3 Deviation from Test Standard

No deviation.

4.6.4 Test Setup

1. For the actual test configuration, please refer to the related Item in this test report (Photographs of the Test Configuration).
2. The equipment was configured to operate under its worst case situation with respect to output power.
3. The test setup has been constructed as the normal use condition. Controlling software (RTL8852A MP Toolkit V1.0.21) has been activated to set the EUT on specific status.

4.6.5 Test Results (Mode 1)

Dipole Antenna

Below 1GHz Data:

802.11g

SPURIOUS EMISSION FREQUENCY RANGE	30MHz ~ 1GHz	OPERATING CHANNEL	1
--	--------------	------------------------------	---

Spurious Emission Level				
Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
92.20	V	-67.53	-54.00	-13.53
99.60	V	-60.25	-54.00	-6.25
99.95	H	-62.87	-54.00	-8.87
199.20	H	-61.12	-54.00	-7.12
199.20	V	-65.86	-54.00	-11.86
298.75	H	-46.83	-36.00	-10.83
480.00	V	-70.96	-54.00	-16.96
499.80	H	-65.07	-54.00	-11.07
499.80	V	-66.39	-54.00	-12.39
527.30	H	-67.49	-54.00	-13.49
528.00	V	-69.98	-54.00	-15.98
559.35	H	-67.39	-54.00	-13.39
577.35	V	-67.52	-54.00	-13.52
599.95	H	-67.04	-54.00	-13.04
600.00	V	-66.12	-54.00	-12.12
623.75	H	-64.22	-54.00	-10.22
624.85	V	-65.51	-54.00	-11.51
666.40	H	-60.85	-54.00	-6.85
666.45	V	-63.64	-54.00	-9.64
685.20	H	-70.58	-54.00	-16.58

Above 1GHz Data:

802.11b

SPURIOUS EMISSION FREQUENCY RANGE	1GHz ~ 12.75GHz	OPERATING CHANNEL	1, 13
--	-----------------	------------------------------	-------

Spurious Emission Level					
Channel	Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
1	4824.16	H	-50.34	-30.00	-20.34
	4824.16	V	-41.49	-30.00	-11.49
	7237.27	V	-51.47	-30.00	-21.47
	7237.50	H	-53.05	-30.00	-23.05
	9648.00	H	-50.11	-30.00	-20.11
	9648.00	V	-51.08	-30.00	-21.08
13	4944.17	H	-53.23	-30.00	-23.23
	4944.17	V	-44.59	-30.00	-14.59
	7413.77	H	-50.29	-30.00	-20.29
	7414.77	V	-49.27	-30.00	-19.27
	9888.00	H	-51.20	-30.00	-21.20
	9888.00	V	-51.91	-30.00	-21.91

802.11ax (RU26)

SPURIOUS EMISSION FREQUENCY RANGE	1GHz ~ 12.75GHz	OPERATING CHANNEL	1
		RU CONFIGURATION	26/0

Spurious Emission Level					
Channel	Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
1	4806.16	H	-50.94	-30.00	-20.94
	4808.16	V	-42.37	-30.00	-12.37
	7212.26	H	-48.98	-30.00	-18.98
	7212.26	V	-54.99	-30.00	-24.99

SPURIOUS EMISSION FREQUENCY RANGE	1GHz ~ 12.75GHz	OPERATING CHANNEL	13
		RU CONFIGURATION	26/8

Spurious Emission Level					
Channel	Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
13	4927.17	H	-51.01	-30.00	-21.01
	4928.67	V	-43.39	-30.00	-13.39
	7390.27	V	-50.76	-30.00	-20.76
	7390.77	H	-49.57	-30.00	-19.57

PIFA Antenna

Below 1GHz Data:

802.11g

SPURIOUS EMISSION FREQUENCY RANGE	30MHz ~ 1GHz	OPERATING CHANNEL	1
--	--------------	------------------------------	---

Spurious Emission Level				
Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
91.90	V	-66.19	-54.00	-12.19
99.60	V	-60.12	-54.00	-6.12
99.90	H	-63.67	-54.00	-9.67
199.20	H	-61.60	-54.00	-7.60
199.20	V	-66.10	-54.00	-12.10
298.75	H	-47.17	-36.00	-11.17
497.90	H	-64.50	-54.00	-10.50
499.80	V	-66.15	-54.00	-12.15
528.00	V	-69.41	-54.00	-15.41
541.00	H	-66.35	-54.00	-12.35
542.90	V	-68.72	-54.00	-14.72
562.10	H	-67.85	-54.00	-13.85
576.05	H	-69.50	-54.00	-15.50
576.95	V	-66.47	-54.00	-12.47
600.00	V	-65.53	-54.00	-11.53
605.95	H	-67.06	-54.00	-13.06
622.35	H	-64.24	-54.00	-10.24
624.85	V	-65.61	-54.00	-11.61
663.80	V	-62.31	-54.00	-8.31
666.45	H	-61.78	-54.00	-7.78

Above 1GHz Data:

802.11b

SPURIOUS EMISSION FREQUENCY RANGE	1GHz ~ 12.75GHz	OPERATING CHANNEL	1, 13
--	-----------------	------------------------------	-------

Spurious Emission Level					
Channel	Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
1	4823.66	H	-40.34	-30.00	-10.34
	4824.16	V	-43.62	-30.00	-13.62
	7233.77	H	-47.26	-30.00	-17.26
	7233.77	V	-49.74	-30.00	-19.74
	9647.87	H	-48.52	-30.00	-18.52
	9648.00	V	-52.22	-30.00	-22.22
13	4944.17	H	-43.68	-30.00	-13.68
	4944.17	V	-47.37	-30.00	-17.37
	7414.27	H	-48.71	-30.00	-18.71
	7415.77	V	-49.17	-30.00	-19.17
	9887.88	H	-48.98	-30.00	-18.98
	9888.00	V	-51.74	-30.00	-21.74

802.11ax (RU26)

SPURIOUS EMISSION FREQUENCY RANGE	1GHz ~ 12.75GHz	OPERATING CHANNEL	1
		RU CONFIGURATION	26/0

Spurious Emission Level					
Channel	Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
1	4807.16	H	-42.74	-30.00	-12.74
	4807.66	V	-48.33	-30.00	-18.33
	7210.26	H	-43.98	-30.00	-13.98
	7210.76	V	-50.63	-30.00	-20.63
	7390.00	V	-51.49	-30.00	-21.49

SPURIOUS EMISSION FREQUENCY RANGE	1GHz ~ 12.75GHz	OPERATING CHANNEL	13
		RU CONFIGURATION	26/8

Spurious Emission Level					
Channel	Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
13	4926.67	H	-45.12	-30.00	-15.12
	4926.67	V	-46.32	-30.00	-16.32
	7389.77	H	-46.49	-30.00	-16.49
	7390.00	V	-51.49	-30.00	-21.49

4.6.6 Test Results (Mode 2)

Dipole Antenna

Below 1GHz Data:

802.11g

SPURIOUS EMISSION FREQUENCY RANGE	30MHz ~ 1GHz	OPERATING CHANNEL	1
--	--------------	------------------------------	---

Spurious Emission Level				
Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
93.20	V	-66.94	-54.00	-12.94
99.60	H	-62.98	-54.00	-8.98
99.90	V	-60.29	-54.00	-6.29
199.15	H	-61.76	-54.00	-7.76
199.20	V	-65.57	-54.00	-11.57
298.75	H	-47.00	-36.00	-11.00
497.90	H	-65.04	-54.00	-11.04
499.80	V	-66.93	-54.00	-12.93
528.00	V	-70.06	-54.00	-16.06
536.65	H	-67.49	-54.00	-13.49
555.05	V	-68.30	-54.00	-14.30
558.35	H	-69.57	-54.00	-15.57
578.10	V	-68.04	-54.00	-14.04
599.95	H	-65.96	-54.00	-11.96
600.00	V	-66.27	-54.00	-12.27
624.40	H	-64.70	-54.00	-10.70
624.70	V	-64.72	-54.00	-10.72
639.05	H	-68.71	-54.00	-14.71
663.85	V	-64.19	-54.00	-10.19
666.45	H	-60.67	-54.00	-6.67

Above 1GHz Data:

802.11b

SPURIOUS EMISSION FREQUENCY RANGE	1GHz ~ 12.75GHz	OPERATING CHANNEL	1, 13
--	-----------------	------------------------------	-------

Spurious Emission Level					
Channel	Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
1	4824.16	H	-53.96	-30.00	-23.96
	4824.16	V	-44.93	-30.00	-14.93
	7236.00	H	-56.21	-30.00	-26.21
	7236.00	V	-56.06	-30.00	-26.06
	9648.00	H	-51.64	-30.00	-21.64
	9648.00	V	-51.16	-30.00	-21.16
13	4943.67	H	-54.35	-30.00	-24.35
	4943.67	V	-47.69	-30.00	-17.69
	7416.00	H	-53.18	-30.00	-23.18
	7416.00	V	-54.94	-30.00	-24.94
	9888.00	H	-49.62	-30.00	-19.62
	9888.00	V	-51.61	-30.00	-21.61

802.11ax (RU26)

SPURIOUS EMISSION FREQUENCY RANGE	1GHz ~ 12.75GHz	OPERATING CHANNEL	1
		RU CONFIGURATION	26/0

Spurious Emission Level					
Channel	Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
1	4806.16	H	-56.41	-30.00	-26.41
	4807.16	V	-51.04	-30.00	-21.04
	7212.26	H	-52.77	-30.00	-22.77
	7212.26	V	-55.64	-30.00	-25.64

SPURIOUS EMISSION FREQUENCY RANGE	1GHz ~ 12.75GHz	OPERATING CHANNEL	13
		RU CONFIGURATION	26/8

Spurious Emission Level					
Channel	Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
13	4925.67	H	-54.72	-30.00	-24.72
	4928.17	V	-48.36	-30.00	-18.36
	7390.00	H	-51.44	-30.00	-21.44
	7390.77	V	-51.20	-30.00	-21.20

PIFA Antenna

Below 1GHz Data:

802.11g

SPURIOUS EMISSION FREQUENCY RANGE	30MHz ~ 1GHz	OPERATING CHANNEL	1
--	--------------	------------------------------	---

Spurious Emission Level				
Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
88.55	H	-62.72	-54.00	-8.72
92.35	V	-65.37	-54.00	-11.37
99.60	V	-60.12	-54.00	-6.12
99.95	H	-63.44	-54.00	-9.44
199.15	H	-61.98	-54.00	-7.98
298.75	H	-46.92	-36.00	-10.92
480.00	V	-71.61	-54.00	-17.61
499.80	H	-64.29	-54.00	-10.29
499.80	V	-65.86	-54.00	-11.86
528.00	V	-69.75	-54.00	-15.75
533.65	H	-67.17	-54.00	-13.17
546.50	V	-68.90	-54.00	-14.90
560.90	H	-66.74	-54.00	-12.74
569.45	V	-66.09	-54.00	-12.09
599.75	H	-67.65	-54.00	-13.65
600.00	V	-65.79	-54.00	-11.79
617.90	V	-62.32	-54.00	-8.32
624.85	H	-62.95	-54.00	-8.95
663.85	V	-63.94	-54.00	-9.94
666.45	H	-62.01	-54.00	-8.01

Above 1GHz Data:

802.11b

SPURIOUS EMISSION FREQUENCY RANGE		1GHz ~ 12.75GHz	OPERATING CHANNEL		1, 13
Spurious Emission Level					
Channel	Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
1	4824.16	H	-45.48	-30.00	-15.48
	4824.16	V	-48.09	-30.00	-18.09
	7236.00	H	-55.53	-30.00	-25.53
	7236.00	V	-53.36	-30.00	-23.36
	9648.00	H	-51.58	-30.00	-21.58
	9648.00	V	-52.52	-30.00	-22.52
13	4943.67	H	-44.65	-30.00	-14.65
	4944.17	V	-47.34	-30.00	-17.34
	7416.00	H	-53.30	-30.00	-23.30
	7416.00	V	-54.69	-30.00	-24.69
	9888.00	H	-50.63	-30.00	-20.63
	9888.00	V	-49.85	-30.00	-19.85

802.11ax (RU26)

SPURIOUS EMISSION FREQUENCY RANGE	1GHz ~ 12.75GHz	OPERATING CHANNEL	1
		RU CONFIGURATION	26/0

Spurious Emission Level					
Channel	Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
1	4807.16	H	-46.32	-30.00	-16.32
	4807.66	V	-52.79	-30.00	-22.79
	7211.76	V	-48.15	-30.00	-18.15
	7212.26	H	-44.46	-30.00	-14.46

SPURIOUS EMISSION FREQUENCY RANGE	1GHz ~ 12.75GHz	OPERATING CHANNEL	13
		RU CONFIGURATION	26/8

Spurious Emission Level					
Channel	Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
13	4926.17	H	-45.29	-30.00	-15.29
	4926.67	V	-51.78	-30.00	-21.78
	7390.77	H	-44.82	-30.00	-14.82
	7390.77	V	-52.70	-30.00	-22.70

4.7 Receiver Spurious Emissions

4.7.1 Limit of Receiver Spurious Radiation

Frequency Range	Maximum Power Limit	Bandwidth
30 MHz ~ 1 GHz	-57dBm	100 kHz
1 GHz ~ 12.75 GHz	-47dBm	1 MHz

Note: These limits are e.r.p. for emissions up to 1 GHz and as e.i.r.p. for emissions above 1 GHz.

4.7.2 Test Procedure

Refer to chapter 5.4.10 of EN 300 328 V2.2.2.

Measurement Method	
☐ Conducted measurement	☒ Radiated measurement
<u>For Conducted measurement:</u> The level of unwanted emissions shall be measured as their power in a specified load (conducted spurious emissions) and their effective radiated power when radiated by the cabinet or structure of the equipment with the antenna connector(s) terminated by a specified load (cabinet radiation).	
<u>Conducted measurement (For equipment with multiple transmit chains):</u> ☐ Option 1: The results for each of the transmit chains for the corresponding 1MHz segments shall be added and compared with the limits. ☐ Option 2: The results for each of the transmit chains shall be individually compared with the limits after these limits have been reduced by $10 \times \log(N)$ (number of active transmit chains)	

4.7.3 Deviation from Test Standard

No deviation.

4.7.4 Test Setup

1. For the actual test configuration, please refer to the related Item in this test report (Photographs of the Test Configuration).
2. Testing was performed when the equipment was in a receive-only mode.
3. The test setup has been constructed as the normal use condition. Controlling software (RTL8852A MP Toolkit V1.0.21) has been activated to set the EUT on specific status.

4.7.5 Test Results

Dipole Antenna

Below 1GHz data:

SPURIOUS EMISSION FREQUENCY RANGE	30MHz ~ 1GHz	OPERATING CHANNEL	1
--	--------------	------------------------------	---

Spurious Emission Level				
Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
99.90	H	-63.14	-57.00	-6.14
99.95	V	-60.16	-57.00	-3.16
144.00	H	-62.78	-57.00	-5.78
159.95	H	-62.92	-57.00	-5.92
199.20	H	-61.90	-57.00	-4.90
199.90	V	-64.86	-57.00	-7.86
374.80	H	-61.48	-57.00	-4.48
374.95	V	-63.41	-57.00	-6.41
499.80	H	-64.84	-57.00	-7.84
499.80	V	-66.97	-57.00	-9.97
528.00	V	-70.00	-57.00	-13.00
624.75	H	-64.57	-57.00	-7.57
663.85	H	-62.03	-57.00	-5.03
665.75	V	-63.00	-57.00	-6.00
699.75	V	-61.86	-57.00	-4.86
728.30	V	-64.59	-57.00	-7.59
772.15	H	-63.80	-57.00	-6.80
773.70	V	-64.56	-57.00	-7.56
778.15	V	-63.89	-57.00	-6.89
796.70	H	-63.96	-57.00	-6.96

Above 1GHz data:

SPURIOUS EMISSION FREQUENCY RANGE	1GHz ~ 12.75GHz	OPERATING CHANNEL	1, 13
--	-----------------	------------------------------	-------

Spurious Emission Level					
Channel	Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
1	9647.85	V	-50.45	-47.00	-3.45
	9648.09	H	-50.87	-47.00	-3.87
13	9887.69	H	-50.37	-47.00	-3.37
	9887.70	V	-50.49	-47.00	-3.49

PIFA Antenna
Below 1GHz data:

SPURIOUS EMISSION FREQUENCY RANGE	30MHz ~ 1GHz	OPERATING CHANNEL	1
--	--------------	------------------------------	---

Spurious Emission Level				
Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
91.40	V	-64.66	-57.00	-7.66
99.95	H	-62.63	-57.00	-5.63
99.95	V	-60.40	-57.00	-3.40
144.00	V	-64.89	-57.00	-7.89
151.60	H	-61.13	-57.00	-4.13
159.50	H	-61.37	-57.00	-4.37
199.20	H	-61.89	-57.00	-4.89
374.10	H	-62.08	-57.00	-5.08
374.85	V	-64.10	-57.00	-7.10
499.75	V	-66.50	-57.00	-9.50
499.80	H	-65.32	-57.00	-8.32
578.75	V	-66.76	-57.00	-9.76
636.20	V	-64.57	-57.00	-7.57
663.85	H	-61.92	-57.00	-4.92
666.45	V	-64.86	-57.00	-7.86
699.75	V	-61.86	-57.00	-4.86
740.85	H	-63.71	-57.00	-6.71
762.00	H	-60.49	-57.00	-3.49
767.60	V	-64.65	-57.00	-7.65
788.05	H	-61.03	-57.00	-4.03

Above 1GHz data:

SPURIOUS EMISSION FREQUENCY RANGE	1GHz ~ 12.75GHz	OPERATING CHANNEL	1, 13
--	-----------------	------------------------------	-------

Spurious Emission Level					
Channel	Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
1	9647.52	V	-51.58	-47.00	-4.58
	9648.44	H	-50.73	-47.00	-3.73
13	9887.43	V	-49.69	-47.00	-2.69
	9888.33	H	-50.57	-47.00	-3.57

4.8 Receiver Blocking

4.8.1 Limit of Receiver Blocking

This requirement applies to all receiver categories.

Receiver Category		
☒ Category 1	☐ Category 2	☐ Category 3
Minimum performance criterion	☒ PER or FER $\leq 10\%$	
	☐ Alternative performance criteria (See note)	
Note: The minimum performance criterion shall be no loss of the wireless transmission function needed for the intended use of the equipment.		

Receiver Category 1 Equipment			
Wanted signal mean power from companion device (dBm) (see notes 1 to 4)	Blocking Signal Frequency (MHz)	Blocking Signal Power (dBm) (see note 4)	Type of blocking signal
(-133 dBm + 10 × log ¹⁰ (OCBW)) or -68 dBm whichever is less (see note 2)	2 380 2 504	-34	CW
(-139 dBm + 10 × log ¹⁰ (OCBW)) or -74 dBm whichever is less (see note 3)	2 300 2 330 2 360 2 524 2 584 2 674		
NOTE 1: OCBW is in Hz.			
NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to Pmin + 26 dB where Pmin is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.			
NOTE 3: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to Pmin + 20 dB where Pmin is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.			
NOTE 4: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured / positioned as recorded in clause 5.4.3.2.2.			

Receiver Category 2 Equipment

Wanted signal mean power from companion device (dBm) (see notes 1 to 3)	Blocking Signal Frequency (MHz)	Blocking Signal Power (dBm) (see note 3)	Type of blocking signal
$(-139 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}) + 10)$ or $(-74 \text{ dBm} + 10)$ whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW

NOTE 1: OCBW is in Hz.

NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\min} + 26 \text{ dB}$ where $P_{\min}$ is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.

NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured / positioned as recorded in clause 5.4.3.2.2.

Receiver Category 3 Equipment

Wanted signal mean power from companion device (dBm) (see notes 1 to 3)	Blocking Signal Frequency (MHz)	Blocking Signal Power (dBm) (See note 3)	Type of blocking signal
$(-139 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}) + 20)$ or $(-74 \text{ dBm} + 20)$ whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW

NOTE 1: OCBW is in Hz.

NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\min} + 26 \text{ dB}$ where $P_{\min}$ is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.

NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured / positioned as recorded in clause 5.4.3.2.2.

4.8.2 Test Procedure


Refer to chapter 5.4.11 of EN 300 328 V2.2.2.

Measurement Method	
☒ Conducted measurement	☐ Radiated measurement

4.8.3 Deviation from Test Standard

No deviation.

4.8.4 Test Setup Configuration

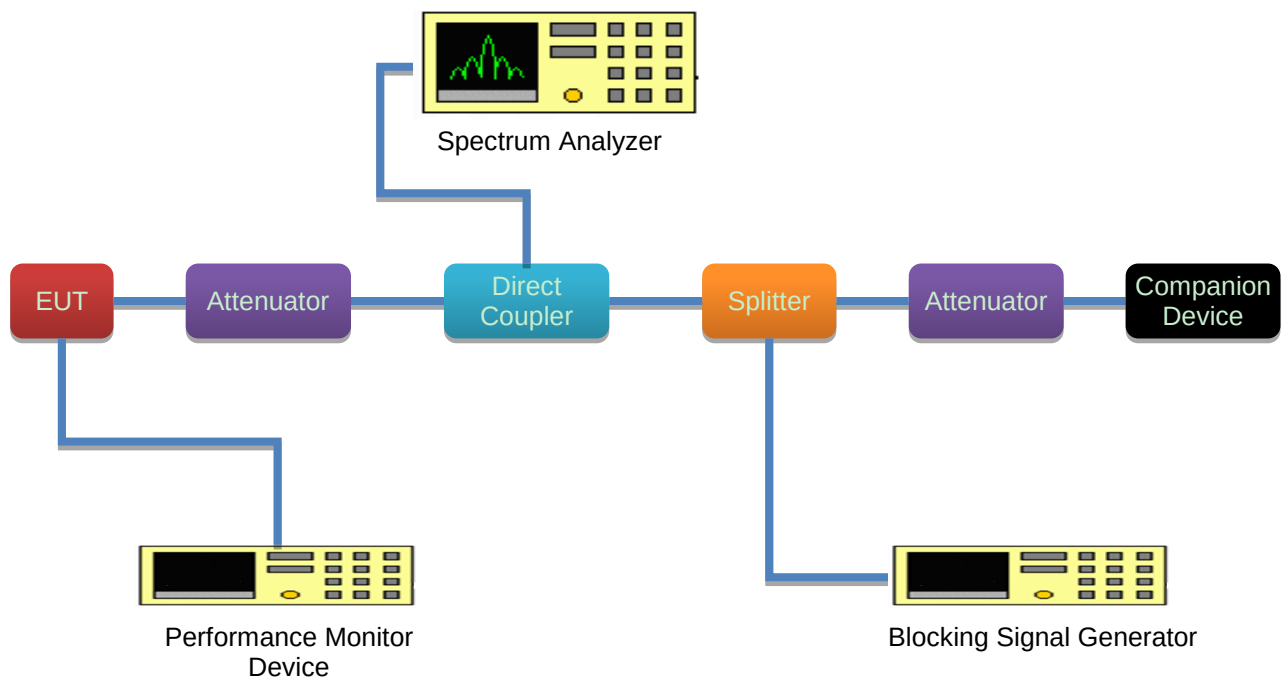

4.8.5 Test Results

Receiver Category 1 Equipment

Receiver blocking performance when operating at the lowest and highest channels						
CH 1	OCBW	14.44 MHz	Antenna Gain:	3.5 dBi	Blocking signal Power	☒ at the antenna connector
CH 13	OCBW	14.48 MHz				☐ in front of the antenna
Operation Mode	Channel Number	Wanted signal mean power from companion device (dBm) (Note 1)	Blocking signal frequency (MHz)	Blocking signal frequency shift (MHz) (Note 2)	Blocking signal power (dBm) (Note 1)	Pass/Fail
11b	1	-64.5	2380	-	-30.5	Pass
		-70.5	2300	-	-30.5	Pass
			2330	-	-30.5	Pass
			2360	-	-30.5	Pass
	13	-64.5	2504	-	-30.5	Pass
		-70.5	2524	-	-30.5	Pass
			2584	-	-30.5	Pass
			2674	-	-30.5	Pass
Note 1: In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G).						
Note2: If the performance criteria is not met, those frequencies of the blocking signal has been increased/decreased with a value equal to the Occupied Channel Bandwidth except the blocking frequencies 2380, 2504MHz shall be increased/decreased with a value equal to 10MHz also if the frequency offset is more than 7MHz, the level of the wanted signal shall be increased by 3dB.						

5 Photographs of the Test Configuration

TX / RX Spurious Emission Test Dipole Antenna



PIFA Antenna



Appendix A- Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---

Appendix B- Test Results for reference by client's requirement

Receiver Category 1 Equipment

Receiver blocking performance when operating at the lowest and highest channels						
CH 1	OCBW	14.44 MHz	Antenna Gain:	3.5 dBi	Blocking signal Power	☒ at the antenna connector
CH 13	OCBW	14.48 MHz				☐ in front of the antenna
Operation Mode	Channel Number	Wanted signal mean power from companion device (dBm) (Note 1)	Blocking signal frequency (MHz)	Blocking signal frequency shift (MHz) (Note 2)	Blocking signal power (dBm) (Note 1)	Pass/Fail
11b	1	-80	2380	-	-30.5	Pass
		-86	2300	-	-30.5	Pass
			2330	-	-30.5	Pass
			2360	-	-30.5	Pass
	13	-80	2504	-	-30.5	Pass
		-86	2524	-	-30.5	Pass
			2584	-	-30.5	Pass
			2674	-	-30.5	Pass
Note 1: In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G).						
Note2: If the performance criteria is not met, those frequencies of the blocking signal has been increased/decreased with a value equal to the Occupied Channel Bandwidth except the blocking frequencies 2380, 2504MHz shall be increased/decreased with a value equal to 10MHz also if the frequency offset is more than 7MHz, the level of the wanted signal shall be increased by 3dB.						