

# **FCC RADIO TEST REPORT**

## **FCC ID: 2BFDF-ZERO16**

**Product:** Notebook

**Trade Mark:** THUNDERBOT

**Model No.:** ZERO 16 Pro

**Family Model:** ZERO 16

**Report No.:** S25052004402004

**Issue Date:** Jul. 18, 2025

### **Prepared for**

Qingdao THUNDERBOT Technology Co.,Ltd.

No. 1, Haier Road, Laoshan District, Qingdao.

### **Prepared by**

Shenzhen NTEK Testing Technology Co., Ltd.

No. 24 Xinfu East Road, Xiangshan Community, Xinqiao Street,  
Baoan District, Shenzhen, Guangdong, People's Republic of China

Tel. 0755-23200050 Website: <http://www.ntek.org.cn>

## TEST RESULT CERTIFICATION

**Applicant's name** ..... : Qingdao THUNDEROBOT Technology Co.,Ltd.  
**Address** ..... : No. 1, Haier Road, Laoshan District, Qingdao.  
**Manufacturer's Name** ..... : Qingdao THUNDEROBOT Technology Co.,Ltd.  
**Address** ..... : No. 1, Haier Road, Laoshan District, Qingdao.  
**Product description**  
**Product name** ..... : Notebook  
**Trade Mark** ..... : THUNDEROBOT  
**Model and/or type reference** : ZERO 16 Pro  
**Family Model** ..... : ZERO 16  
**Test Sample Number**..... : S250520044002  
**Date (s) of performance of tests** .: May 21, 2025 ~ Jul. 18, 2025  
**Standards** ..... : FCC Part15.407  
**Test procedure**.....: ANSI C63.10-2013  
KDB 789033 D02 General UNII Test Procedures New Rules v02r01  
KDB 905462 D03 Client Without DFS New Rules v01r02  
KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.

Prepared By: Kieron Luo  
Kieron Luo  
(Project Engineer)

Reviewed By: Aaron Cheng  
Aaron Cheng  
(Supervisor)

Approved By: Alex Li  
Alex Li  
(Manager)

## Table of Contents

|                                                             | Page      |
|-------------------------------------------------------------|-----------|
| <b>1. SUMMARY OF TEST RESULTS</b>                           | <b>7</b>  |
| 1.1 FACILITIES AND ACCREDITATIONS                           | 8         |
| 1.2 MEASUREMENT UNCERTAINTY                                 | 8         |
| <b>1 . GENERAL INFORMATION</b>                              | <b>9</b>  |
| 1.1 GENERAL DESCRIPTION OF EUT                              | 9         |
| 1.2 DESCRIPTION OF TEST MODES                               | 13        |
| 1.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED | 14        |
| 1.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)            | 15        |
| 1.5 EQUIPMENTS LIST FOR ALL TEST ITEMS                      | 16        |
| <b>2 . EMC EMISSION TEST</b>                                | <b>18</b> |
| 2.1 CONDUCTED EMISSION MEASUREMENT                          | 18        |
| 2.1.1 APPLICABLE STANDARD                                   | 18        |
| 2.1.2 CONFORMANCE LIMIT                                     | 18        |
| 2.1.3 TEST CONFIGURATION                                    | 18        |
| 2.1.4 TEST PROCEDURE                                        | 18        |
| 2.1.5 TEST RESULTS                                          | 19        |
| 2.2 RADIATED EMISSION MEASUREMENT                           | 23        |
| 2.2.1 APPLICABLE STANDARD                                   | 23        |
| 2.2.2 CONFORMANCE LIMIT                                     | 23        |
| 2.2.3 MEASURING INSTRUMENTS                                 | 24        |
| 2.2.4 TEST CONFIGURATION                                    | 25        |
| 2.2.5 TEST PROCEDURE                                        | 26        |
| 2.2.6 TEST RESULTS (9KHZ – 30 MHZ)                          | 27        |
| 2.2.7 TEST RESULTS (30MHZ – 1GHZ)                           | 28        |
| 2.2.8 TEST RESULTS (1GHZ-18GHZ)                             | 32        |
| 2.2.10 TEST RESULTS (18GHZ-40GHZ)                           | 36        |
| <b>3 . POWER SPECTRAL DENSITY TEST</b>                      | <b>44</b> |
| 3.1 APPLIED PROCEDURES / LIMIT                              | 44        |
| 3.2 TEST PROCEDURE                                          | 45        |
| 3.3 DEVIATION FROM STANDARD                                 | 45        |
| 3.4 TEST SETUP                                              | 45        |
| 3.5 EUT OPERATION CONDITIONS                                | 45        |
| 3.6 TEST RESULTS                                            | 46        |
| <b>4 . 26DB &amp; 99% EMISSION BANDWIDTH</b>                | <b>47</b> |
| 4.1 APPLIED PROCEDURES / LIMIT                              | 47        |
| 4.2 TEST PROCEDURE                                          | 47        |
| 4.3 EUT OPERATION CONDITIONS                                | 48        |

## Table of Contents

|                                                                                                             | Page |
|-------------------------------------------------------------------------------------------------------------|------|
| 4.4 TEST RESULTS                                                                                            | 48   |
| 5 . MINIMUM 6 DB BANDWIDTH                                                                                  | 49   |
| 5.1 APPLIED PROCEDURES / LIMIT                                                                              | 49   |
| 5.2 TEST PROCEDURE                                                                                          | 49   |
| 5.3 DEVIATION FROM STANDARD                                                                                 | 49   |
| 5.4 TEST SETUP                                                                                              | 49   |
| 5.5 EUT OPERATION CONDITIONS                                                                                | 49   |
| 5.6 TEST RESULTS                                                                                            | 50   |
| 6 . MAXIMUM CONDUCTED OUTPUT POWER                                                                          | 51   |
| 6.1 PPLIED PROCEDURES / LIMIT                                                                               | 51   |
| 6.2 TEST RESULTS                                                                                            | 53   |
| 7 . OUT OF BAND EMISSIONS                                                                                   | 54   |
| 7.1 APPLICABLE STANDARD                                                                                     | 54   |
| 7.2 TEST PROCEDURE                                                                                          | 54   |
| 7.3 DEVIATION FROM STANDARD                                                                                 | 55   |
| 7.4 TEST SETUP                                                                                              | 55   |
| 7.5 EUT OPERATION CONDITIONS                                                                                | 55   |
| 7.6 TEST RESULTS                                                                                            | 56   |
| 8. FREQUENCY STABILITY MEASUREMENT                                                                          | 57   |
| 8.1 LIMIT                                                                                                   | 57   |
| 8.2 TEST PROCEDURES                                                                                         | 57   |
| 8.3 TEST SETUP LAYOUT                                                                                       | 57   |
| 8.4 EUT OPERATION DURING TEST                                                                               | 57   |
| 8.5 TEST RESULTS                                                                                            | 58   |
| 9. DYNAMIC FREQUENCY SELECTION(DFS)                                                                         | 70   |
| 9.1 APPLICABILITY OF DFS REQUIREMENTS                                                                       | 70   |
| 9.2 INTERFERENCE THRESHOLD VALUES, MASTER OR CLIENT INCORPORATING<br>IN-SERVICE MONITORING                  | 70   |
| 9.3 DFS RESPONSE REQUIREMENT VALUES                                                                         | 71   |
| 9.4 SHORT PULSE RADAR TEST WAVEFORMS                                                                        | 71   |
| 9.5 CALIBRATION SETUP AND DFS TEST RESULTS                                                                  | 72   |
| 9.6 CONDUCTED CALIBRATION SETUP                                                                             | 72   |
| 9.7 RADAR WAVEFORM CALIBRATION RESULT                                                                       | 72   |
| 9.8 IN-SERVICE MONITORING: CHANNEL MOVE TIME, CHANNEL CLOSING<br>TRANSMISSION TIME AND NON-OCCUPANCY PERIOD | 73   |
| 9.9 RESULT OF CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME                                          |      |

**Table of Contents**

|                                                 | <b>Page</b> |
|-------------------------------------------------|-------------|
| AND NON-OCCUPANCY PERIOD FOR CLIENT BEACON TEST | 74          |
| <b>10. ANTENNA REQUIREMENT</b>                  | <b>75</b>   |
| 10.1 STANDARD REQUIREMENT                       | 75          |
| 10.2 EUT ANTENNA                                | 75          |
| <b>11. TEST RESULTS</b>                         | <b>75</b>   |

Revision History

| Report No.      | Version | Description             | Issued Date   |
|-----------------|---------|-------------------------|---------------|
| S25052004402004 | Rev.01  | Initial issue of report | Jul. 18, 2025 |
|                 |         |                         |               |
|                 |         |                         |               |
|                 |         |                         |               |
|                 |         |                         |               |
|                 |         |                         |               |
|                 |         |                         |               |
|                 |         |                         |               |
|                 |         |                         |               |
|                 |         |                         |               |
|                 |         |                         |               |
|                 |         |                         |               |
|                 |         |                         |               |
|                 |         |                         |               |
|                 |         |                         |               |
|                 |         |                         |               |

## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

| FCC Part15 (15.407) , Subpart E                                                                   |                                         |          |          |
|---------------------------------------------------------------------------------------------------|-----------------------------------------|----------|----------|
| Standard Section                                                                                  | Test Item                               | Judgment | Remark   |
| 15.207                                                                                            | AC Power Line Conducted Emissions       | PASS     |          |
| 15.209(a),<br>15.407 (b)(1)<br>15.407 (b)(2)<br>15.407 (b)(3)<br>15.407 (b)(4)<br>15.407(b)(8)(9) | Spurious Radiated Emissions             | PASS     |          |
| 15.407 (a)                                                                                        | 26 dB and 99% Emission Bandwidth        | PASS     |          |
| 15.407(e)                                                                                         | Minimum 6 dB bandwidth                  | PASS     |          |
| 15.407 (a)                                                                                        | Maximum Conducted Output Power          | PASS     |          |
| 15.407 (b)(1)<br>15.407 (b)(2)<br>15.407 (b)(3)<br>15.407 (b)(4)                                  | Band Edge                               | PASS     |          |
| 15.407 (a)                                                                                        | Power Spectral Density                  | PASS     |          |
| 15.407(b)                                                                                         | Spurious Emissions at Antenna Terminals | PASS     |          |
| 15.407(g)                                                                                         | Frequency Stability Measurement         | PASS     |          |
| 15.407(h)                                                                                         | Dynamic Frequency Selection(DFS)        | PASS     |          |
| 15.203                                                                                            | Antenna Requirement                     | PASS     |          |
| 15.407(c)                                                                                         | Automatically discontinue transmission  | PASS     | (Note 3) |

### NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report
- (2) This device operates with a duty cycle greater than 99%
- (3) The product is a client device, and the data transmission is limited by the AP.  
When the information to be sent is missing or the operation fails,  
the device will automatically stop sending and directly connect to the AP correctly again.

## 1.1 FACILITIES AND ACCREDITATIONS

### FACILITIES

All measurement facilities used to collect the measurement data are located at

No. 24 Xinfu East Road, Xiangshan Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong, People's Republic of China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

### LABORATORY ACCREDITATIONS AND LISTINGS

#### Site Description

CNAS-Lab. : The Certificate Registration Number is L5516.

IC-Registration : The Certificate Registration Number is 9270A.  
CAB identifier:CN0074

FCC- Accredited : Test Firm Registration Number: 463705.  
Designation Number: CN1184

A2LA-Lab. : The Certificate Registration Number is 4298.01

Name of Firm : Shenzhen NTEK Testing Technology Co., Ltd.

Site Location : No. 24 Xinfu East Road, Xiangshan Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong, People's Republic of China

## 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

| No. | Item                                | Uncertainty             |
|-----|-------------------------------------|-------------------------|
| 1   | Conducted Emission Test             | $\pm 2.80\text{dB}$     |
| 2   | RF power, conducted                 | $\pm 0.16\text{dB}$     |
| 3   | Spurious emissions, conducted       | $\pm 0.21\text{dB}$     |
| 4   | All emissions, radiated(9KHz~30MHz) | $\pm 6\text{dB}$        |
| 5   | All emissions, radiated(30MHz~1GHz) | $\pm 2.64\text{dB}$     |
| 6   | All emissions, radiated(1GHz~6GHz)  | $\pm 2.40\text{dB}$     |
| 7   | All emissions, radiated( > 6GHz)    | $\pm 2.52\text{dB}$     |
| 8   | Temperature                         | $\pm 0.5^\circ\text{C}$ |
| 9   | Humidity                            | $\pm 2\%$               |
| 10  | Radio Frequency                     | $\pm 0.2\text{ppm}$     |
| 11  | POWER SPECTRAL DENSITY              | $\pm 1.21\text{dB}$     |

## 1. GENERAL INFORMATION

### 1.1 GENERAL DESCRIPTION OF EUT

|                     |                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |  |
|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Equipment           | Notebook                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |  |
| Trade Mark          | THUNDEROBOT                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |  |
| Model Name          | ZERO 16 Pro                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |  |
| Family Model        | ZERO 16                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |  |
| Model Difference    | All models are the same antenna and RF module, except for model names and main board. ZERO 16 Pro with A55B1_MB main board while ZERO 16 with R55B2C_MB main board. |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |  |
| FCC ID              | 2BFDF-ZERO16                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |  |
| Product Description | Mode Supported                                                                                                                                                      | <input checked="" type="checkbox"/> 802.11a/n/ac/ax (20MHz channel bandwidth)<br><input checked="" type="checkbox"/> 802.11n/ac/ax (40MHz channel bandwidth)<br><input checked="" type="checkbox"/> 802.11ac/ax (80MHz channel bandwidth)<br><input checked="" type="checkbox"/> 802.11ac/ax (160MHz channel bandwidth)                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |
|                     | Modulation                                                                                                                                                          | 802.11a: OFDM (BPSK / QPSK / 16QAM/64QAM)<br>802.11n: OFDM (QPSK/BPSK/16QAM/64QAM)<br>802.11ac: OFDM (QPSK/BPSK/16QAM/64QAM/256QAM)<br>802.11ax: OFDMA (QPSK/BPSK/16QAM/64QAM/256QAM/1024QAM)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |  |
|                     | Operating Frequency Range                                                                                                                                           | <input checked="" type="checkbox"/> U-NII-1: 5180-5240MHz for 802.11a/n/ac/ax(20MHz);<br>5190-5230MHz for 802.11n/ac/ax(40MHz);<br>5210MHz for 802.11ac/ax(80MHz)<br>5250MHz for 802.11ac/ax(160MHz)<br><input checked="" type="checkbox"/> U-NII-2A: 5260-5320MHz for 802.11a/n/ac/ax(20MHz);<br>5270-5310MHz for 802.11n/ac/ax(40MHz);<br>5290MHz for 802.11ac/ax(80MHz)<br>5250MHz for 802.11ac/ax(160MHz)<br><input checked="" type="checkbox"/> U-NII-2C: 5500-5700MHz for 802.11a/n/ac/ax(20MHz);<br>5510-5670MHz for 802.11n/ac/ax(40MHz);<br>5530-5610MHz for 802.11ac/ax(80MHz)<br>5570MHz for 802.11ac/ax(160MHz)<br><input checked="" type="checkbox"/> U-NII-3: 5745-5825 MHz for 802.11a/n/ac/ax(20MHz);<br>5755-5795 MHz for 802.11n/ac/ax(40MHz);<br>5775MHz for 802.11ac/ax(80MHz) |  |
|                     | Number of Channels                                                                                                                                                  | <input checked="" type="checkbox"/> 4 channels for U-NII-1(a/n/ac/ax 20);<br>2 channels for U-NII-1(n/ac/ax 40);<br>1 channels for U-NII-1(ac/ax 80);<br>1 channels for U-NII-1(ac/ax 160);<br><input checked="" type="checkbox"/> 4 channels for U-NII-2A(a/n/ac/ax 20);<br>2 channels for U-NII-2A(n/ac/ax 40);<br>1 channels for U-NII-2A(ac/ax 80);<br>1 channels for U-NII-2A(ac/ax 160);<br><input checked="" type="checkbox"/> 11 channels for U-NII-2C(a/n/ac/ax 20);<br>5 channels for U-NII-2C(n/ac/ax 40);<br>2 channels for U-NII-2C(ac/ax 80);<br>1 channels for U-NII-2C(ac/ax 160);<br><input checked="" type="checkbox"/> 5 channels for U-NII-3(a/n/ac/ax 20);<br>2 channels for U-NII-3(n/ac/ax 40);<br>1 channels for U-NII-3(ac/ax 80);                                        |  |
|                     | Function:                                                                                                                                                           | <input type="checkbox"/> Outdoor AP <input type="checkbox"/> Indoor AP <input type="checkbox"/> Fixed P2P<br><input checked="" type="checkbox"/> Client                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |

|                                                                                                                                                                  |                                                                                         |                                                                                                                                                                                                  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Description                                                                                                                                              | DFS type:                                                                               | <input type="checkbox"/> master devices<br><input type="checkbox"/> Slave devices with radar detection<br><input checked="" type="checkbox"/> Slave devices without radar detection              |
|                                                                                                                                                                  | Support TPC                                                                             | <input type="checkbox"/> YES<br><input checked="" type="checkbox"/> NO                                                                                                                           |
|                                                                                                                                                                  | Antenna Type                                                                            | Antenna 1: PIFA Antenna<br>Antenna 2: PIFA Antenna                                                                                                                                               |
|                                                                                                                                                                  | Antenna Gain                                                                            | 5.2G Antenna 1: 3.45 dBi; Antenna 2: 2.64 dBi<br>5.3G Antenna 1: 3.54 dBi; Antenna 2: 3.27 dBi<br>5.6G Antenna 1: 3.31 dBi; Antenna 2: 3.57 dBi<br>5.8G Antenna 1: 3.59 dBi; Antenna 2: 3.56 dBi |
|                                                                                                                                                                  | Smart system                                                                            | <input checked="" type="checkbox"/> SISO for 802.11a/n/ac/ax<br><input checked="" type="checkbox"/> MIMO for 802.11n/ac/ax                                                                       |
| Based on the application, features, or specification exhibited in User's Manual, More details of EUT technical specification, please refer to the User's Manual. |                                                                                         |                                                                                                                                                                                                  |
| Adapter1                                                                                                                                                         | Model: A621-2001400W-B31<br>Input: 100-240V~50/60Hz 4.0A<br>Output: 20V---14A 280.0W    |                                                                                                                                                                                                  |
| Adapter2                                                                                                                                                         | Model: A775-195B80W-B31<br>Input: 100-240V~50/60Hz 3.0A<br>Output: 19.5V---11.8A 230.1W |                                                                                                                                                                                                  |
| Battery                                                                                                                                                          | DC 15.56V, 4924mAh, 76.62Wh                                                             |                                                                                                                                                                                                  |
| Rating(s)                                                                                                                                                        | DC 15.56V from battery or DC 20V or DC 19.5V from adapter                               |                                                                                                                                                                                                  |
| Connecting I/O Port(s)                                                                                                                                           | Please refer to the User's Manual                                                       |                                                                                                                                                                                                  |
| HW Version                                                                                                                                                       | A55B1_MB, R55B2C_MB                                                                     |                                                                                                                                                                                                  |
| SW Version                                                                                                                                                       | Windows 11                                                                              |                                                                                                                                                                                                  |

for 5G WIFI has two antennas, and different modes support different transmit mode what describe as Following form:

| Mode            | Tx/Rx            |
|-----------------|------------------|
| 802.11a/n/ac/ax | 1TX, 1RX         |
| 802.11n/ac/ax   | 1TX/2TX, 1RX/2RX |

For 5GHz mode, antennas 1 and 2 are transmitting, each with a different directional gain.

For MIMO mode,

Directional gain= $[10\log(10^{G1/20}+10^{G2/20})^2/N_{ANT}]$  dBi

5.2GWiFi=6.06dBi >6.0 dBi; 5.3GWiFi=6.42dBi >6.0 dBi;

5.6GWiFi=6.45dBi >6.0 dBi; 5.8GWiFi=6.59dBi >6.0 dBi;

5150-525MHz: Power limit reduce (6.06-6)=0.06dB

5250-5350MHz: Power limit reduce (6.42-6)=0.42dB

5470-5725MHz: Power limit reduce (6.45-6)=0.45dB

5725-5850MHz: Power limit reduce (6.59-6)=0.59dB

the 802.11n/(20/40) ac/ax(20/40/80) 5GHz has MIMO mode.

Note: G1 means antenna gain for ANT 1 in dBi.

G2 means antenna gain for ANT 2 in dBi.

N<sub>ANT</sub> means the number of Antennas.

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- Frequency and Channel list:

| Band     | 20MHz   |           | 40MHz   |           | 80MHz   |           | 160MHz  |           |
|----------|---------|-----------|---------|-----------|---------|-----------|---------|-----------|
|          | Channel | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| U-NII-1  | 36      | 5180 MHz  | 38      | 5190 MHz  | 42      | 5210 MHz  | 50      | 5250 MHz  |
|          | 40      | 5200 MHz  | 46      | 5230 MHz  | -       | -         | -       | -         |
|          | 44      | 5220 MHz  |         |           |         |           |         |           |
|          | 48      | 5240 MHz  |         |           |         |           |         |           |
| U-NII-2A | 52      | 5260 MHz  | 54      | 5270 MHz  | 58      | 5290 MHz  | 50      | 5250 MHz  |
|          | 56      | 5280 MHz  | 62      | 5310 MHz  |         |           |         |           |
|          | 60      | 5300 MHz  |         |           |         |           |         |           |
|          | 64      | 5320 MHz  |         |           |         |           |         |           |
| U-NII-2C | 100     | 5500 MHz  | 102     | 5510 MHz  | 106     | 5530 MHz  | 114     | 5570 MHz  |
|          | 104     | 5520 MHz  | 110     | 5550 MHz  | 122     | 5610 MHz  |         |           |
|          | 108     | 5540 MHz  | 118     | 5590 MHz  |         |           |         |           |
|          | 112     | 5560 MHz  | 126     | 5630 MHz  |         |           |         |           |
|          | 116     | 5580 MHz  | 134     | 5670 MHz  |         |           |         |           |
|          | 120     | 5600 MHz  |         |           |         |           |         |           |
|          | 124     | 5620 MHz  |         |           |         |           |         |           |
|          | 128     | 5640 MHz  |         |           |         |           |         |           |
|          | 132     | 5660 MHz  |         |           |         |           |         |           |
|          | 136     | 5680 MHz  |         |           |         |           |         |           |
|          | 140     | 5700 MHz  |         |           |         |           |         |           |
| U-NII-3  | 149     | 5745 MHz  | 151     | 5755 MHz  | 155     | 5775 MHz  |         |           |
|          | 153     | 5765 MHz  | 159     | 5795 MHz  |         |           |         |           |
|          | 157     | 5785 MHz  |         |           |         |           |         |           |
|          | 161     | 5805 MHz  |         |           |         |           |         |           |
|          | 165     | 5825 MHz  |         |           |         |           |         |           |

## 1.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

| For Radiated Emission |                                                                                                            |
|-----------------------|------------------------------------------------------------------------------------------------------------|
| Final Test Mode       | Description                                                                                                |
| Mode 1                | Normal Link Mode                                                                                           |
| Mode 2                | 802.11a/n/ac/ax 20<br>CH36/ CH40/CH48/CH52/CH56/CH64/CH100/CH120<br>/CH140/CH149/CH157/CH165 for SISO&MIMO |
| Mode 3                | 802.11n/ac/ax 40<br>CH38/CH46/CH54/CH62/CH102/CH118/CH134<br>/CH151/CH159 for SISO&MIMO                    |
| Mode 4                | 802.11ac/ax80 CH42/CH58/CH106/CH122/CH155 for<br>SISO&MIMO                                                 |
| Mode 5                | 802.11ac/ax 160 CH 50<br>802.11ac/ax 160 CH 114<br>for SISO&MIMO                                           |


| For Conducted Emission |                                                                                                            |
|------------------------|------------------------------------------------------------------------------------------------------------|
| Final Test Mode        | Description                                                                                                |
| Mode 1                 | Normal Link Mode                                                                                           |
| Mode 2                 | 802.11a/n/ac/ax 20<br>CH36/ CH40/CH48/CH52/CH56/CH64/CH100/CH120<br>/CH140/CH149/CH157/CH165 for SISO&MIMO |
| Mode 3                 | 802.11n/ac/ax 40<br>CH38/CH46/CH54/CH62/CH102/CH118/CH134<br>/CH151/CH159 for SISO&MIMO                    |
| Mode 4                 | 802.11ac/ax80 CH42/CH58/CH106/CH122/CH155                                                                  |
| Mode 5                 | 802.11ac/ax 160 CH 50<br>802.11ac/ax 160 CH 114<br>for SISO&MIMO                                           |

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported
- (3) 802.11ax supports only full RU.
- (4) There are a total of two motherboards, namely A55B1\_MB motherboard and R55B2C\_MB motherboard. Both motherboards have undergone testing and evaluation. But the report will only show the worst data.

### 1.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

For AC Conducted Emission Mode

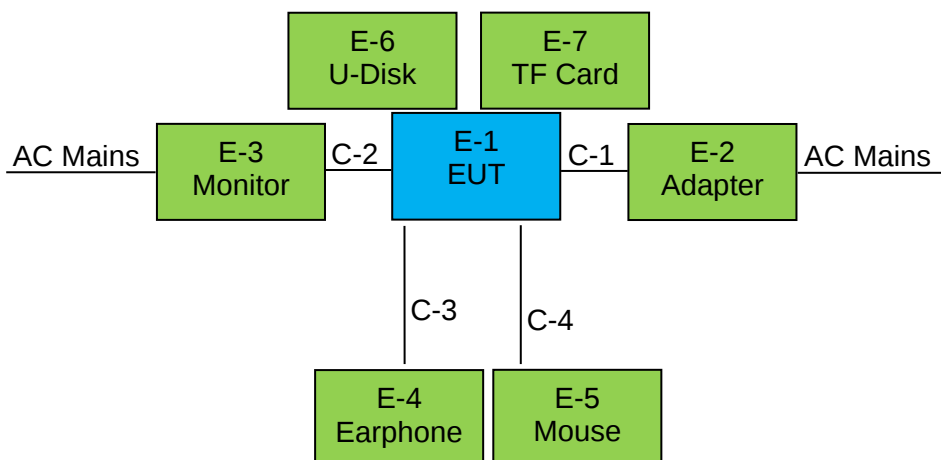

For Radiated Test Cases

AE-1  
EUT

For Conducted Test Cases



Note: 1. The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

2. EUT built-in battery-powered, the battery is fully-charged.

**1.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)**

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment | Manufacturer                           | Model/Type No.    | Series No.          | Note        |
|------|-----------|----------------------------------------|-------------------|---------------------|-------------|
| E-1  | Notebook  | Qingdao THUNDERBOT Technology Co.,Ltd. | ZERO 16 Pro       | N/A                 | EUT         |
|      |           |                                        | ZERO 16           | N/A                 |             |
| E-2  | Adapter   | Dongguan Aohai Technology Co., Ltd.    | A621-2001400W-B31 | N/A                 | Peripherals |
| E-2  | Adapter   | Dongguan Aohai Technology Co., Ltd.    | A775-195B80W-B31  | N/A                 | Peripherals |
| E-3  | Monitor   | PHIIPS                                 | 32PFF6899/T3      | N/A                 | Peripherals |
| E-4  | Earphone  | N/A                                    | N/A               | N/A                 | Peripherals |
| E-5  | Mouse     | DELL                                   | MS116c            | N/A                 | Peripherals |
| E-6  | U-Disk    | SONY                                   | SF-8C4            | MMCTF08GWA<br>CA-MM | Peripherals |
| E-7  | TF Card   | Kingston                               | CO8G              | N/A                 | Peripherals |

| Item | Cable Type  | Shielded Type | Ferrite Core | Length |
|------|-------------|---------------|--------------|--------|
| C-1  | Power Cable | YES           | NO           | 1.1m   |
| C-2  | HDMI Cable  | YES           | YES          | 1.2m   |
| C-3  | Audio cable | NO            | NO           | 0.8m   |
| C-4  | USB Cable   | NO            | NO           | 0.8m   |
| C-5  | RF Cable    | YES           | NO           | 0.1m   |

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) During the battery power test, the battery is fully charged.

**1.5 EQUIPMENTS LIST FOR ALL TEST ITEMS****Radiation& Conducted Test equipment**

| Item | Kind of Equipment                  | Manufacturer | Type No.    | Serial No. | Last calibration | Calibrated until | Calibration period |
|------|------------------------------------|--------------|-------------|------------|------------------|------------------|--------------------|
| 1    | Spectrum Analyzer                  | Agilent      | E4440A      | MY41000130 | 2025.04.24       | 2026.04.23       | 1 year             |
| 2    | Spectrum Analyzer                  | Agilent      | N9020A      | MY49100060 | 2025.04.17       | 2026.04.16       | 1 year             |
| 3    | Spectrum Analyzer                  | R&S          | FSV40       | 101417     | 2025.04.17       | 2026.04.16       | 1 year             |
| 4    | Test Receiver                      | R&S          | ESPI7       | 101318     | 2025.04.17       | 2026.04.16       | 1 year             |
| 5    | Bilog Antenna                      | TESEQ        | CBL6111D    | 31216      | 2025.05.11       | 2026.05.10       | 1 year             |
| 6    | 50Ω Coaxial Switch                 | Anritsu      | MP59B       | 6200983705 | 2024.04.26       | 2027.04.25       | 3 year             |
| 7    | Horn Antenna                       | EM           | EM-AH-10180 | 2011071402 | 2024.05.12       | 2027.05.11       | 3 year             |
| 8    | Broadband Horn Antenna             | SCHWARZBECK  | BBHA 9170   | 803        | 2024.05.12       | 2027.05.11       | 3 year             |
| 9    | Amplifier                          | EMC          | EMC051835SE | 980246     | 2025.04.17       | 2026.04.16       | 1 year             |
| 10   | Active Loop Antenna                | SCHWARZBECK  | FMZB 1519B  | 055        | 2024.05.17       | 2027.05.16       | 3 year             |
| 11   | Power Meter                        | MWRFTest     | MW100-PD    | MW2021043  | 2024.12.15       | 2025.12.14       | 1 year             |
| 12   | Test Cable (9KHz-30MHz)            | N/A          | R-01        | N/A        | 2023.05.06       | 2026.05.05       | 3 year             |
| 13   | Test Cable (30MHz-1GHz)            | N/A          | R-02        | N/A        | 2023.05.06       | 2026.05.05       | 3 year             |
| 14   | High Test Cable(1G-40GHz)          | N/A          | R-03        | N/A        | 2023.05.06       | 2026.05.05       | 3 year             |
| 15   | Filter                             | TRILTHIC     | 2400MHz     | 29         | 2024.04.26       | 2027.04.25       | 3 year             |
| 16   | temporary antenna connector (Note) | NTS          | R001        | N/A        | N/A              | N/A              | N/A                |

**Note:**

We will use the temporary antenna connector (soldered on the PCB board) When conducted test  
And this temporary antenna connector is listed within the instrument list

## AC Conduction Test equipment

| Item | Kind of Equipment       | Manufacturer | Type No.  | Serial No. | Last calibration | Calibrated until | Calibration period |
|------|-------------------------|--------------|-----------|------------|------------------|------------------|--------------------|
| 1    | Test Receiver           | R&S          | ESCI      | 101160     | 2025.04.17       | 2026.04.16       | 1 year             |
| 2    | LISN                    | R&S          | ENV216    | 101313     | 2025.04.17       | 2026.04.16       | 1 year             |
| 3    | LISN                    | SCHWARZBECK  | NNLK 8129 | 8129245    | 2025.04.17       | 2026.04.16       | 1 year             |
| 4    | 50Ω Coaxial Switch      | ANRITSU CORP | MP59B     | 6200983704 | 2024.04.26       | 2027.04.25       | 3 year             |
| 5    | Test Cable (9KHz-30MHz) | N/A          | C01       | N/A        | 2023.05.06       | 2026.05.05       | 3 year             |
| 6    | Test Cable (9KHz-30MHz) | N/A          | C02       | N/A        | 2023.05.06       | 2026.05.05       | 3 year             |
| 7    | Test Cable (9KHz-30MHz) | N/A          | C03       | N/A        | 2023.05.06       | 2026.05.05       | 3 year             |

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable& Aux Equipment which is scheduled for calibration every 3 years.

## Measurement Software

| Item | Manufacturer | Software Name        | Software Version | Description       |
|------|--------------|----------------------|------------------|-------------------|
| 1    | MWRFtest     | MTS 8310 2.4GHz/5GHz | 2.0              | RF Conducted Test |
| 2    | Farad        | EZ-EMC_RE            | AIT-03A          | RadiatedTest      |
| 3    | Farad        | EZ-EMC_CE            | AIT-03A          | AC Conducted Test |

## 2. EMC EMISSION TEST

### 2.1 CONDUCTED EMISSION MEASUREMENT

#### 2.1.1 APPLICABLE STANDARD


According to FCC Part 15.207(a)

#### 2.1.2 CONFORMANCE LIMIT

| Frequency(MHz) | Conducted Emission Limit |         |
|----------------|--------------------------|---------|
|                | Quasi-peak               | Average |
| 0.15-0.5       | 66-56*                   | 56-46*  |
| 0.5-5.0        | 56                       | 46      |
| 5.0-30.0       | 60                       | 50      |

Note: 1. \*Decreases with the logarithm of the frequency  
2. The lower limit shall apply at the transition frequencies  
3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

#### 2.1.3 TEST CONFIGURATION

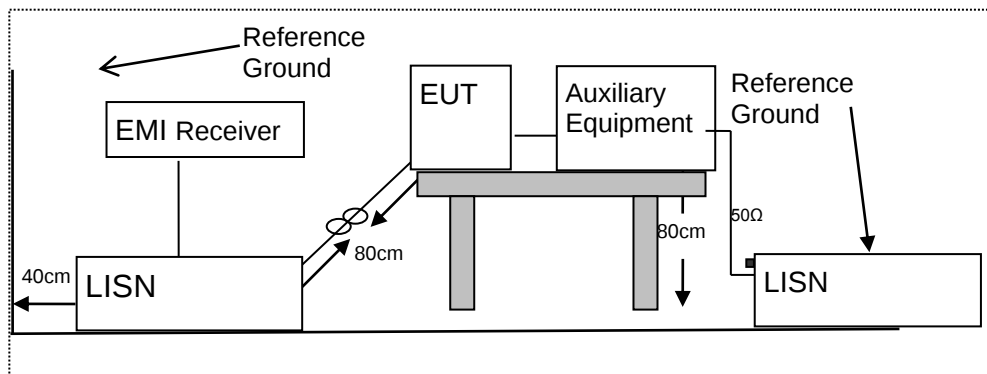

#### 2.1.4 TEST PROCEDURE

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
2. The EUT was placed on a table which is 0.8m above ground plane.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. LISN at least 80 cm from nearest part of EUT chassis.
7. The frequency range from 150KHz to 30MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
9. For the actual test configuration, please refer to the related Item –EUT Test Photos.

## 2.1.5 TEST RESULTS


|                |                                  |                     |                 |
|----------------|----------------------------------|---------------------|-----------------|
| EUT :          | Notebook                         | Model Name. :       | ZERO 16 Pro     |
| Temperature :  | 24 °C                            | Relative Humidity : | 46%             |
| Pressure :     | 1010hPa                          | Phase :             | L               |
| Test Voltage : | DC 20V from Adapter AC 120V/60Hz | Test Mode :         | Mode 1(WIFI 5G) |

### Adapter1:

| Frequency<br>(MHz) | Reading Level<br>(dBμV) | Correct Factor<br>(dB) | Measure-ment<br>(dBμV) | Limits<br>(dBμV) | Margin<br>(dB) | Remark |
|--------------------|-------------------------|------------------------|------------------------|------------------|----------------|--------|
| 0.3860             | 35.27                   | 10.49                  | 45.76                  | 58.15            | -12.39         | QP     |
| 0.3860             | 23.64                   | 10.49                  | 34.13                  | 48.15            | -14.02         | AVG    |
| 0.5299             | 33.48                   | 10.80                  | 44.28                  | 56.00            | -11.72         | QP     |
| 0.5299             | 20.21                   | 10.80                  | 31.01                  | 46.00            | -14.99         | AVG    |
| 1.1100             | 27.90                   | 12.00                  | 39.90                  | 56.00            | -16.10         | QP     |
| 1.1100             | 13.07                   | 12.00                  | 25.07                  | 46.00            | -20.93         | AVG    |
| 5.1420             | 29.54                   | 9.92                   | 39.46                  | 60.00            | -20.54         | QP     |
| 5.1420             | 17.04                   | 9.92                   | 26.96                  | 50.00            | -23.04         | AVG    |
| 11.9780            | 22.57                   | 10.15                  | 32.72                  | 60.00            | -27.28         | QP     |
| 11.9780            | 9.64                    | 10.15                  | 19.79                  | 50.00            | -30.21         | AVG    |
| 15.2980            | 20.50                   | 10.37                  | 30.87                  | 60.00            | -29.13         | QP     |
| 15.2980            | 5.42                    | 10.37                  | 15.79                  | 50.00            | -34.21         | AVG    |

#### Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

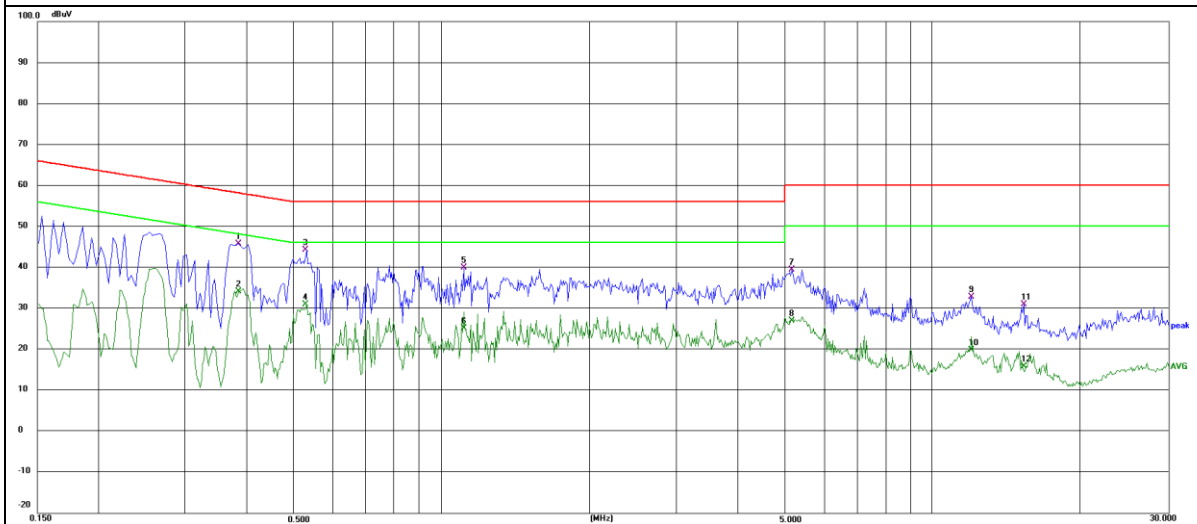


|                |                                  |                     |                 |
|----------------|----------------------------------|---------------------|-----------------|
| EUT :          | Notebook                         | Model Name. :       | ZERO 16 Pro     |
| Temperature :  | 24 °C                            | Relative Humidity : | 46%             |
| Pressure :     | 1010hPa                          | Phase :             | N               |
| Test Voltage : | DC 20V from Adapter AC 120V/60Hz | Test Mode :         | Mode 1(WIFI 5G) |

| Frequency<br>(MHz) | Reading Level<br>(dBμV) | Correct Factor<br>(dB) | Measure-ment<br>(dBμV) | Limits<br>(dBμV) | Margin<br>(dB) | Remark |
|--------------------|-------------------------|------------------------|------------------------|------------------|----------------|--------|
| 0.2660             | 39.30                   | 10.22                  | 49.52                  | 61.24            | -11.72         | QP     |
| 0.2660             | 28.29                   | 10.22                  | 38.51                  | 51.24            | -12.73         | AVG    |
| 0.3980             | 36.22                   | 10.49                  | 46.71                  | 57.90            | -11.19         | QP     |
| 0.3980             | 23.86                   | 10.49                  | 34.35                  | 47.90            | -13.55         | AVG    |
| 0.7980             | 29.93                   | 11.31                  | 41.24                  | 56.00            | -14.76         | QP     |
| 0.7980             | 14.00                   | 11.31                  | 25.31                  | 46.00            | -20.69         | AVG    |
| 1.5900             | 25.14                   | 12.92                  | 38.06                  | 56.00            | -17.94         | QP     |
| 1.5980             | 9.17                    | 12.94                  | 22.11                  | 46.00            | -23.89         | AVG    |
| 5.2980             | 26.88                   | 9.82                   | 36.70                  | 60.00            | -23.30         | QP     |
| 5.2980             | 12.89                   | 9.82                   | 22.71                  | 50.00            | -27.29         | AVG    |
| 15.1260            | 19.16                   | 10.31                  | 29.47                  | 60.00            | -30.53         | QP     |
| 15.1260            | 4.48                    | 10.31                  | 14.79                  | 50.00            | -35.21         | AVG    |

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

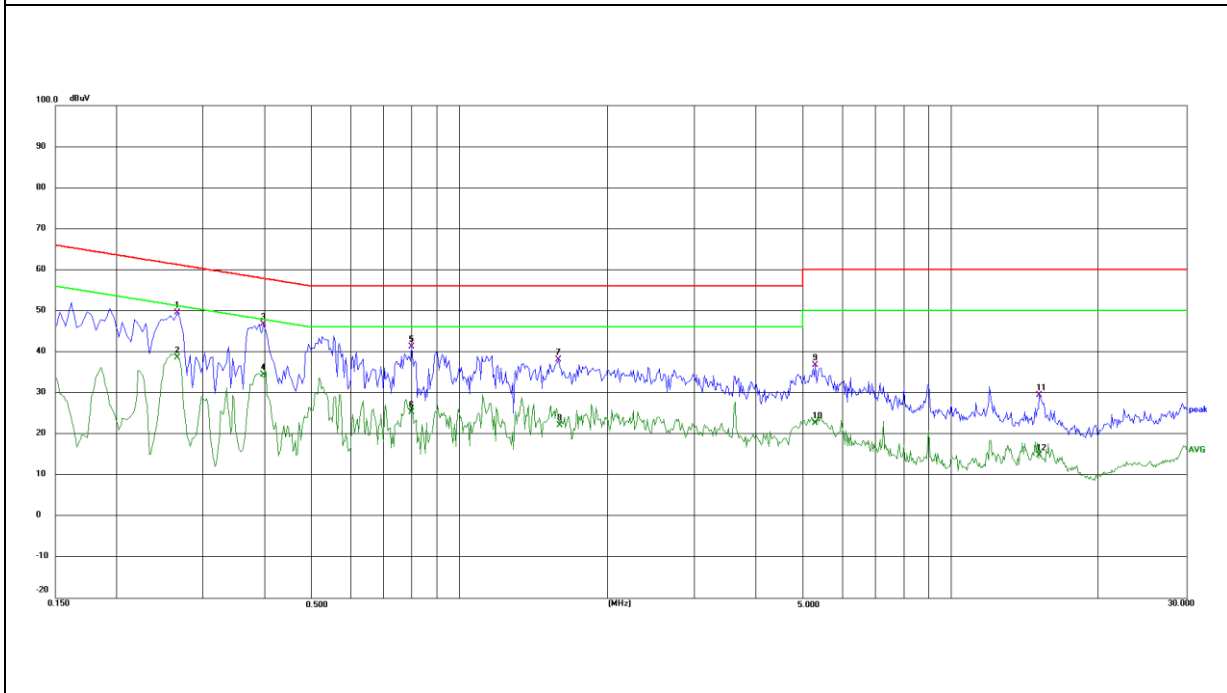


|                |                                    |                     |                 |
|----------------|------------------------------------|---------------------|-----------------|
| EUT :          | Notebook                           | Model Name. :       | ZERO 16         |
| Temperature :  | 24 °C                              | Relative Humidity : | 46%             |
| Pressure :     | 1010hPa                            | Phase :             | L               |
| Test Voltage : | DC 19.5V from Adapter AC 120V/60Hz | Test Mode :         | Mode 1(WIFI 5G) |

### Adapter2:

| Frequency<br>(MHz) | Reading Level<br>(dBμV) | Correct Factor<br>(dB) | Measure-ment<br>(dBμV) | Limits<br>(dBμV) | Margin<br>(dB) | Remark |
|--------------------|-------------------------|------------------------|------------------------|------------------|----------------|--------|
| 0.2020             | 42.22                   | 10.12                  | 52.34                  | 63.53            | -11.19         | QP     |
| 0.2020             | 29.26                   | 10.12                  | 39.38                  | 53.53            | -14.15         | AVG    |
| 0.2860             | 38.19                   | 10.21                  | 48.40                  | 60.64            | -12.24         | QP     |
| 0.2860             | 26.42                   | 10.21                  | 36.63                  | 50.64            | -14.01         | AVG    |
| 0.5140             | 32.17                   | 10.77                  | 42.94                  | 56.00            | -13.06         | QP     |
| 0.5140             | 17.56                   | 10.77                  | 28.33                  | 46.00            | -17.67         | AVG    |
| 1.3820             | 22.70                   | 12.56                  | 35.26                  | 56.00            | -20.74         | QP     |
| 1.3820             | 6.72                    | 12.56                  | 19.28                  | 46.00            | -26.72         | AVG    |
| 5.8380             | 32.43                   | 9.89                   | 42.32                  | 60.00            | -17.68         | QP     |
| 5.8380             | 18.40                   | 9.89                   | 28.29                  | 50.00            | -21.71         | AVG    |
| 20.7060            | 30.37                   | 10.30                  | 40.67                  | 60.00            | -19.33         | QP     |
| 20.7060            | 17.39                   | 10.30                  | 27.69                  | 50.00            | -22.31         | AVG    |

### Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

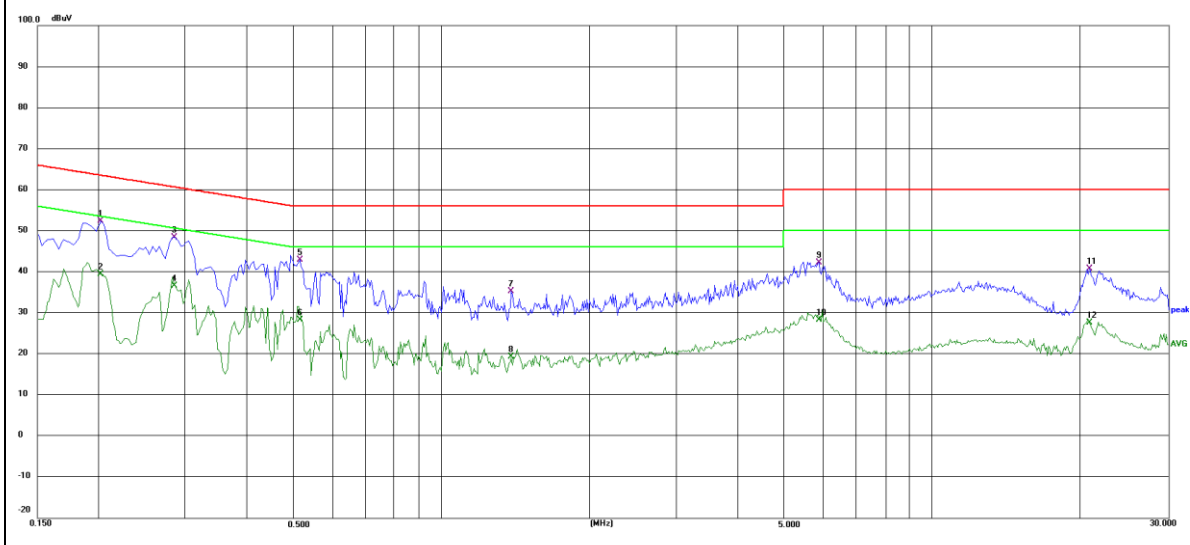


|                |                                    |                     |                 |
|----------------|------------------------------------|---------------------|-----------------|
| EUT :          | Notebook                           | Model Name. :       | ZERO 16         |
| Temperature :  | 24 °C                              | Relative Humidity : | 46%             |
| Pressure :     | 1010hPa                            | Phase :             | N               |
| Test Voltage : | DC 19.5V from Adapter AC 120V/60Hz | Test Mode :         | Mode 1(WIFI 5G) |

| Frequency<br>(MHz) | Reading Level<br>(dBμV) | Correct Factor<br>(dB) | Measure-ment<br>(dBμV) | Limits<br>(dBμV) | Margin<br>(dB) | Remark |
|--------------------|-------------------------|------------------------|------------------------|------------------|----------------|--------|
| 0.1900             | 43.49                   | 10.05                  | 53.54                  | 64.04            | -10.50         | QP     |
| 0.1900             | 34.60                   | 10.05                  | 44.65                  | 54.04            | -9.39          | AVG    |
| 0.2900             | 39.77                   | 10.26                  | 50.03                  | 60.52            | -10.49         | QP     |
| 0.2900             | 23.92                   | 10.26                  | 34.18                  | 50.52            | -16.34         | AVG    |
| 0.4580             | 33.78                   | 10.62                  | 44.40                  | 56.73            | -12.33         | QP     |
| 0.4580             | 20.45                   | 10.62                  | 31.07                  | 46.73            | -15.66         | AVG    |
| 1.0020             | 24.47                   | 11.72                  | 36.19                  | 56.00            | -19.81         | QP     |
| 1.0020             | 6.70                    | 11.72                  | 18.42                  | 46.00            | -27.58         | AVG    |
| 5.7540             | 32.15                   | 9.83                   | 41.98                  | 60.00            | -18.02         | QP     |
| 5.7540             | 19.21                   | 9.83                   | 29.04                  | 50.00            | -20.96         | AVG    |
| 21.9020            | 31.45                   | 10.28                  | 41.73                  | 60.00            | -18.27         | QP     |
| 21.9020            | 17.53                   | 10.28                  | 27.81                  | 50.00            | -22.19         | AVG    |

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

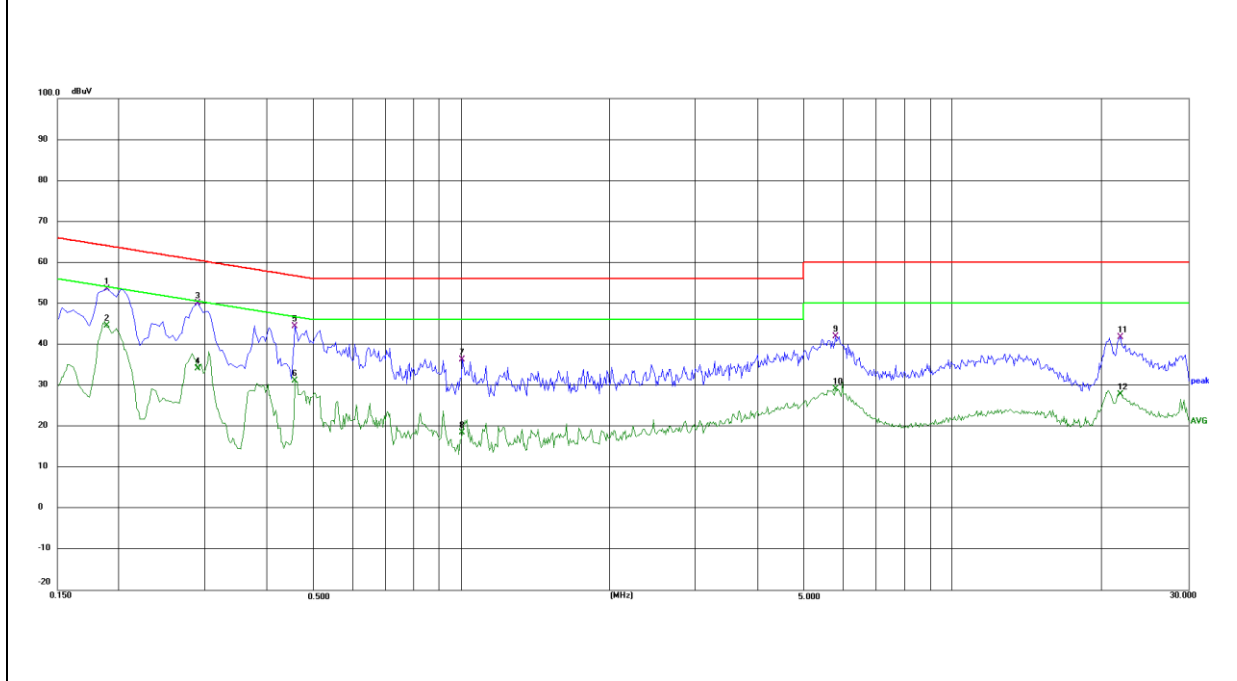

## 2.2 RADIATED EMISSION MEASUREMENT

### 2.2.1 APPLICABLE STANDARD

According to FCC Part 15.407(d) and 15.209

### 2.2.2 CONFORMANCE LIMIT

According to FCC Part 15.407(b)(7): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).  
According to FCC Part 15.205, Restricted bands

| MHz               | MHz                 | MHz           | GHz         |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110       | 16.42-16.423        | 399.9-410     | 4.5-5.15    |
| 0.495-0.505       | 16.69475-16.69525   | 608-614       | 5.35-5.46   |
| 2.1735-2.1905     | 16.80425-16.80475   | 960-1240      | 7.25-7.75   |
| 4.125-4.128       | 25.5-25.67          | 1300-1427     | 8.025-8.5   |
| 4.17725-4.17775   | 37.5-38.25          | 1435-1626.5   | 9.0-9.2     |
| 4.20725-4.20775   | 73-74.6             | 1645.5-1646.5 | 9.3-9.5     |
| 6.215-6.218       | 74.8-75.2           | 1660-1710     | 10.6-12.7   |
| 6.26775-6.26825   | 123-138             | 2200-2300     | 14.47-14.5  |
| 8.291-8.294       | 149.9-150.05        | 2310-2390     | 15.35-16.2  |
| 8.362-8.366       | 156.52475-156.52525 | 2483.5-2500   | 17.7-21.4   |
| 8.37625-8.38675   | 156.7-156.9         | 2690-2900     | 22.01-23.12 |
| 8.41425-8.41475   | 162.0125-167.17     | 3260-3267     | 23.6-24.0   |
| 12.29-12.293      | 167.72-173.2        | 3332-3339     | 31.2-31.8   |
| 12.51975-12.52025 | 240-285             | 3345.8-3358   | 36.43-36.5  |
| 12.57675-12.57725 | 322-335.4           | 3600-4400     | (2)         |
| 13.36-13.41       |                     |               |             |

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Restricted Frequency(MHz) | Field Strength (μV/m) | Field Strength (dBμV/m) | Measurement Distance |
|---------------------------|-----------------------|-------------------------|----------------------|
| 0.009~0.490               | 2400/F(KHz)           | 20 log (uV/m)           | 300                  |
| 0.490~1.705               | 24000/F(KHz)          | 20 log (uV/m)           | 30                   |
| 1.705~30.0                | 30                    | 29.5                    | 30                   |
| 30-88                     | 100                   | 40                      | 3                    |
| 88-216                    | 150                   | 43.5                    | 3                    |
| 216-960                   | 200                   | 46                      | 3                    |
| Above 960                 | 500                   | 54                      | 3                    |

#### Limits of Radiated Emission Measurement(Above 1000MHz)

| Frequency(MHz) | Class B (dBuV/m) (at 3M) |         |
|----------------|--------------------------|---------|
|                | PEAK                     | AVERAGE |
| Above 1000     | 74                       | 54      |

Remark :1. Emission level in dBuV/m=20 log (uV/m)

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. For Frequency 9kHz~30MHz:

Distance extrapolation factor =40log(Specific distance/ test distance)(dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor.

For Frequency above 30MHz:

Distance extrapolation factor =20log(Specific distance/ test distance)(dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor.

According to FCC §15.407(b)

For bands:5150~5250MHz

For transmitters operating in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p.

For bands:5250~5350MHz

All emissions outside the band 5250-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p.; or

All emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. and its power shall comply with the spectral power density for operation within the band 5150-5250 MHz. The device, except devices installed in vehicles, shall be labelled or include in the user manual the following text "for indoor use only."

For bands: 5470-5600 MHz and 5650-5725 MHz

Emissions outside the band 5470-5725 MHz shall not exceed -27 dBm/MHz e.i.r.p. However, devices with bandwidth overlapping the band edge of 5725 MHz can meet the emission limit of -27 dBm/MHz e.i.r.p. at 5850 MHz instead of 5725 MHz.

For bands:5725~5850MHz

Devices operating in the band 5725-5850 MHz shall have e.i.r.p. of unwanted emissions comply with the following:

27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 Bm/MHz at 5 MHz above or below the band edges;

15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges;

10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges; and


-27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.

## 2.2.3 MEASURING INSTRUMENTS


The Measuring equipment is listed in the section 6.3 of this test report.

## 2.2.4 TEST CONFIGURATION


(a) For radiated emissions below 30MHz

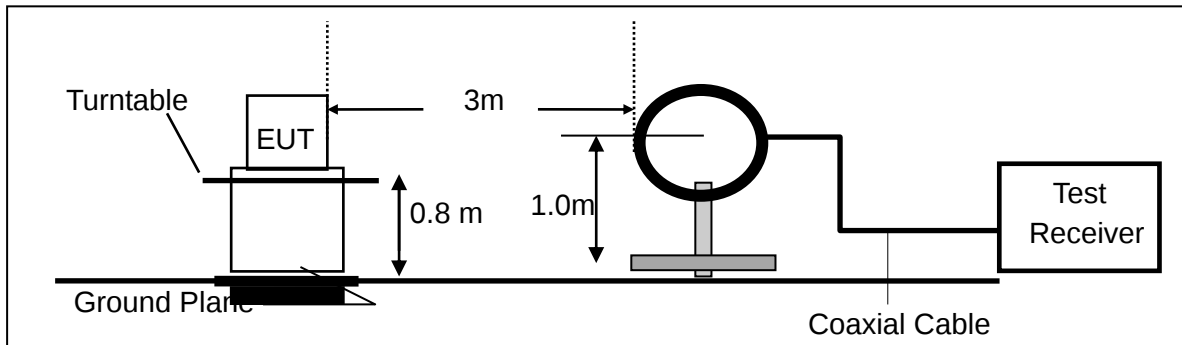

(b) For radiated emissions from 30MHz to 1000MHz

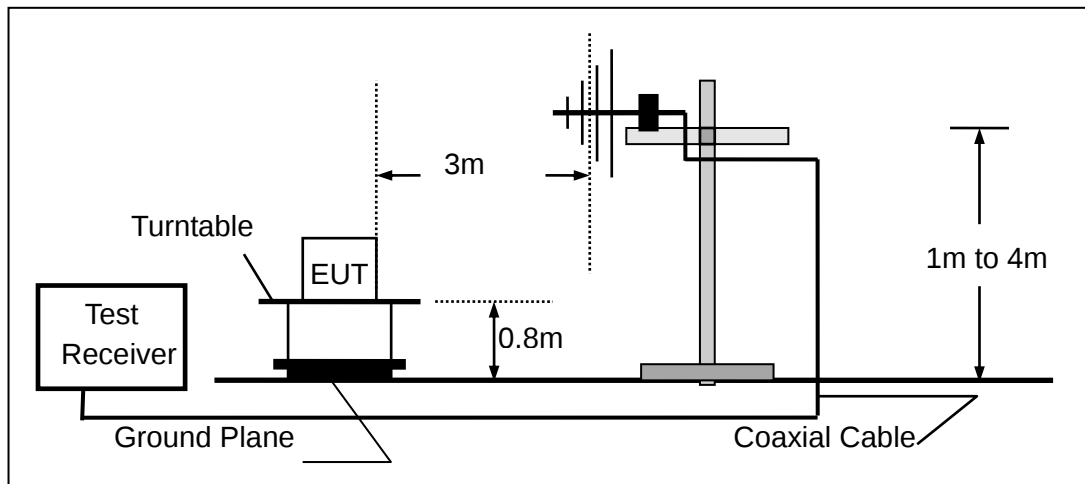

(c) For radiated emissions above 1000MHz

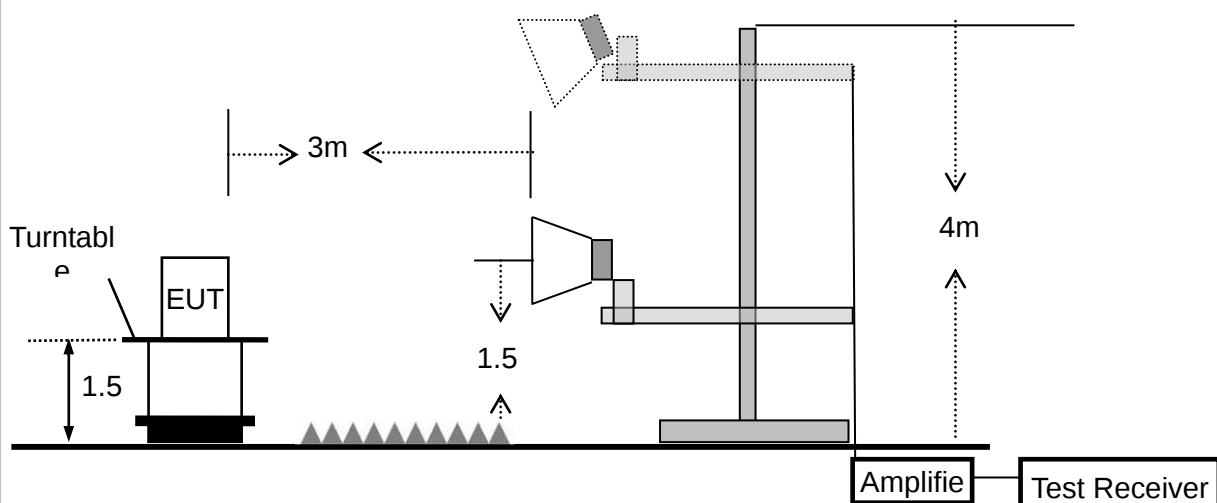

## 2.2.5 TEST PROCEDURE

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

| Spectrum Parameter                    | Setting                                          |
|---------------------------------------|--------------------------------------------------|
| Attenuation                           | Auto                                             |
| Start Frequency                       | 1000 MHz                                         |
| Stop Frequency                        | 10th carrier harmonic                            |
| RB / VB (emission in restricted band) | 1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average |

| Receiver Parameter     | Setting                          |
|------------------------|----------------------------------|
| Attenuation            | Auto                             |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP    |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP    |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 120kHz for QP |

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

| Frequency Band (MHz) | Function | Resolution bandwidth | Video Bandwidth |
|----------------------|----------|----------------------|-----------------|
| 30 to 1000           | QP       | 120 kHz              | 300 kHz         |
| Above 1000           | Peak     | 1 MHz                | 1 MHz           |
|                      | Average  | 1 MHz                | 10 Hz           |

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where  $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW} [kHz])$ . , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

**2.2.6 TEST RESULTS (9KHZ – 30 MHZ)**

|               |          |                     |             |
|---------------|----------|---------------------|-------------|
| EUT :         | Notebook | Model Name :        | ZERO 16 Pro |
| Temperature : | 26 °C    | Relative Humidity : | 54%         |
| Pressure:     | 1010 hPa | Test Voltage :      | DC 15.56V   |
| Test Mode :   | TX       | Polarization :      | --          |

| Freq. | Reading  | Limit    | Margin | State |
|-------|----------|----------|--------|-------|
| (MHz) | (dBuV/m) | (dBuV/m) | (dB)   | P/F   |
| --    | --       | --       | --     | N/A   |
| --    | --       | --       | --     | N/A   |

**NOTE:**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


## 2.2.7 TEST RESULTS (30MHZ – 1GHZ)

|               |             |                     |             |
|---------------|-------------|---------------------|-------------|
| EUT :         | Notebook    | Model Name :        | ZERO 16 Pro |
| Temperature : | 26 °C       | Relative Humidity : | 54%         |
| Pressure :    | 1010 hPa    | Test Voltage :      | DC 15.56V   |
| Test Mode :   | TX(WIFI 5G) |                     |             |

| Polar<br>(H/V) | Frequency | Meter<br>Reading | Factor | Emission<br>Level | Limits   | Margin | Remark |
|----------------|-----------|------------------|--------|-------------------|----------|--------|--------|
|                | (MHz)     | (dBuV)           | (dB)   | (dBuV/m)          | (dBuV/m) | (dB)   |        |
| V              | 36.4300   | 17.84            | 17.70  | 35.54             | 40.00    | -4.46  | QP     |
| V              | 119.4361  | 19.42            | 16.14  | 35.56             | 43.50    | -7.94  | QP     |
| V              | 423.5403  | 17.85            | 23.39  | 41.24             | 46.00    | -4.76  | QP     |
| V              | 620.7096  | 13.12            | 26.59  | 39.71             | 46.00    | -6.29  | QP     |
| V              | 744.1530  | 12.76            | 28.78  | 41.54             | 46.00    | -4.46  | QP     |
| V              | 900.2540  | 9.54             | 31.00  | 40.54             | 46.00    | -5.46  | QP     |

### Remark:


Emission Level= ReadingLevel+ Factor, Margin= Emission Level - Limit

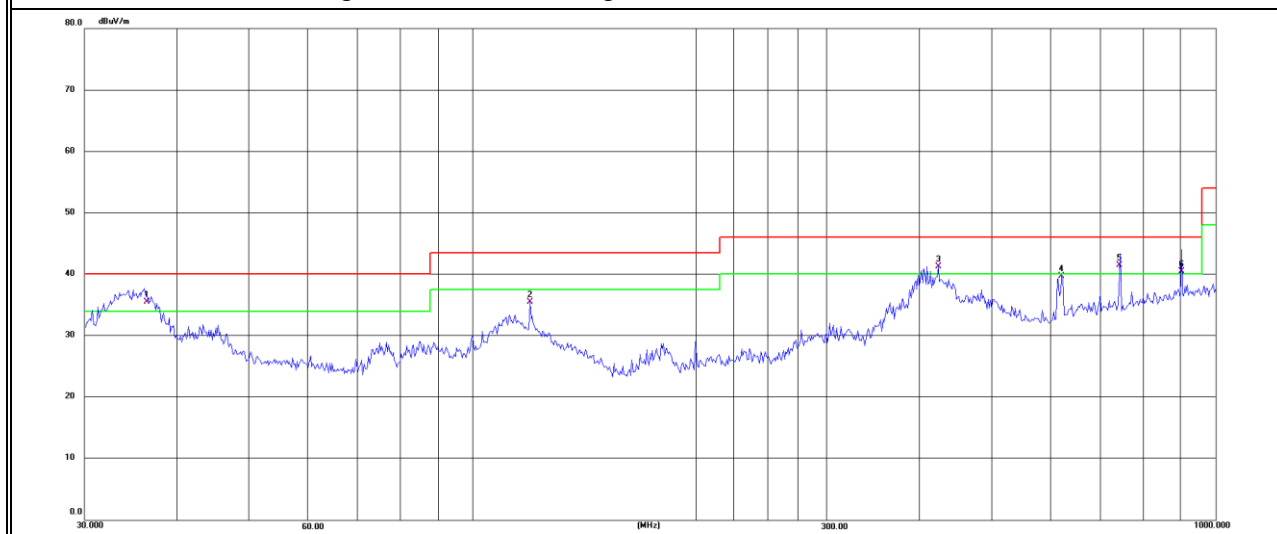

| Polar<br>(H/V) | Frequency | Meter<br>Reading | Factor | Emission<br>Level | Limits   | Margin | Remark |
|----------------|-----------|------------------|--------|-------------------|----------|--------|--------|
|                | (MHz)     | (dBuV)           | (dB)   | (dBuV/m)          | (dBuV/m) | (dB)   |        |
| H              | 208.5803  | 17.08            | 18.20  | 35.28             | 43.50    | -8.22  | QP     |
| H              | 299.3158  | 21.16            | 20.43  | 41.59             | 46.00    | -4.41  | QP     |
| H              | 401.8385  | 14.54            | 23.00  | 37.54             | 46.00    | -8.46  | QP     |
| H              | 618.5369  | 15.90            | 26.55  | 42.45             | 46.00    | -3.55  | QP     |
| H              | 744.4350  | 13.65            | 28.78  | 42.43             | 46.00    | -3.57  | QP     |
| H              | 900.1473  | 12.43            | 31.00  | 43.43             | 46.00    | -2.57  | QP     |

**Remark:**

Emission Level= ReadingLevel+ Factor, Margin= Emission Level - Limit

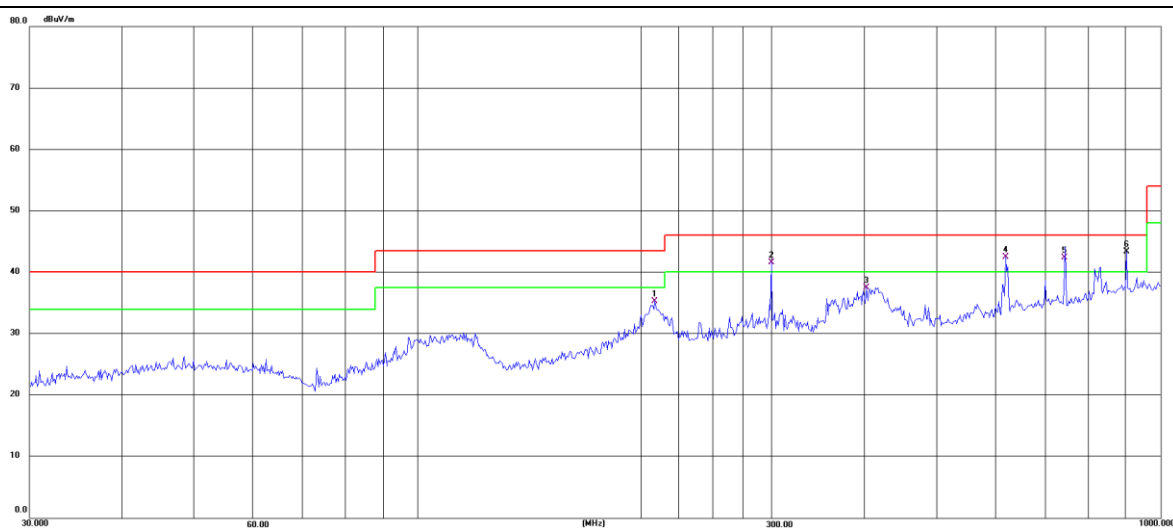


|               |             |                     |           |
|---------------|-------------|---------------------|-----------|
| EUT :         | Notebook    | Model Name :        | ZERO 16   |
| Temperature : | 26 °C       | Relative Humidity : | 54%       |
| Pressure :    | 1010 hPa    | Test Voltage :      | DC 15.56V |
| Test Mode :   | TX(WIFI 5G) |                     |           |

| Polar<br>(H/V) | Frequency | Meter<br>Reading | Factor | Emission<br>Level | Limits   | Margin | Remark |
|----------------|-----------|------------------|--------|-------------------|----------|--------|--------|
|                | (MHz)     | (dBuV)           | (dB)   | (dBuV/m)          | (dBuV/m) | (dB)   |        |
| V              | 30.4238   | 19.73            | 16.64  | 36.37             | 40.00    | -3.63  | QP     |
| V              | 41.1320   | 17.99            | 19.07  | 37.06             | 40.00    | -2.94  | QP     |
| V              | 41.2340   | 16.45            | 19.09  | 35.54             | 40.00    | -4.46  | QP     |
| V              | 81.4970   | 17.93            | 14.37  | 32.30             | 40.00    | -7.70  | QP     |
| V              | 396.2415  | 17.85            | 22.47  | 40.32             | 46.00    | -5.68  | QP     |
| V              | 629.4772  | 11.64            | 26.81  | 38.45             | 46.00    | -7.55  | QP     |

**Remark:**


Emission Level= ReadingLevel+ Factor, Margin= Emission Level - Limit

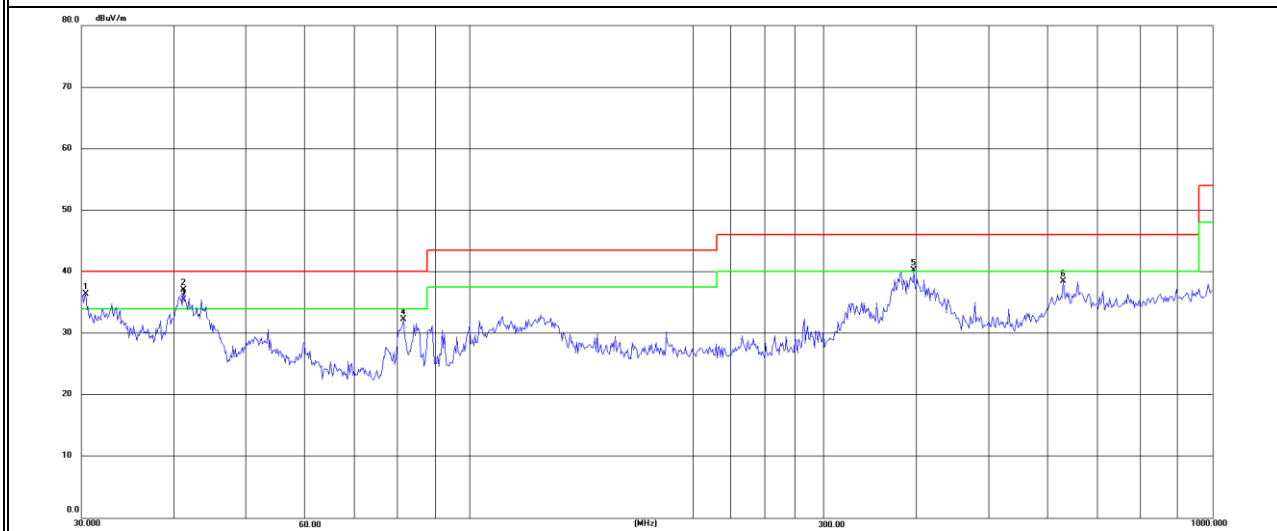

| Polar<br>(H/V) | Frequency | Meter<br>Reading | Factor | Emission<br>Level | Limits   | Margin | Remark |
|----------------|-----------|------------------|--------|-------------------|----------|--------|--------|
|                | (MHz)     | (dBuV)           | (dB)   | (dBuV/m)          | (dBuV/m) | (dB)   |        |
| H              | 40.9881   | 9.78             | 19.03  | 28.81             | 40.00    | -11.19 | QP     |
| H              | 71.3300   | 10.75            | 15.78  | 26.53             | 40.00    | -13.47 | QP     |
| H              | 119.4361  | 16.21            | 16.04  | 32.25             | 43.50    | -11.25 | QP     |
| H              | 207.1226  | 18.26            | 17.77  | 36.03             | 43.50    | -7.47  | QP     |
| H              | 414.7223  | 15.52            | 22.81  | 38.33             | 46.00    | -7.67  | QP     |
| H              | 651.9417  | 9.88             | 27.09  | 36.97             | 46.00    | -9.03  | QP     |

**Remark:**

Emission Level= ReadingLevel+ Factor, Margin= Emission Level - Limit

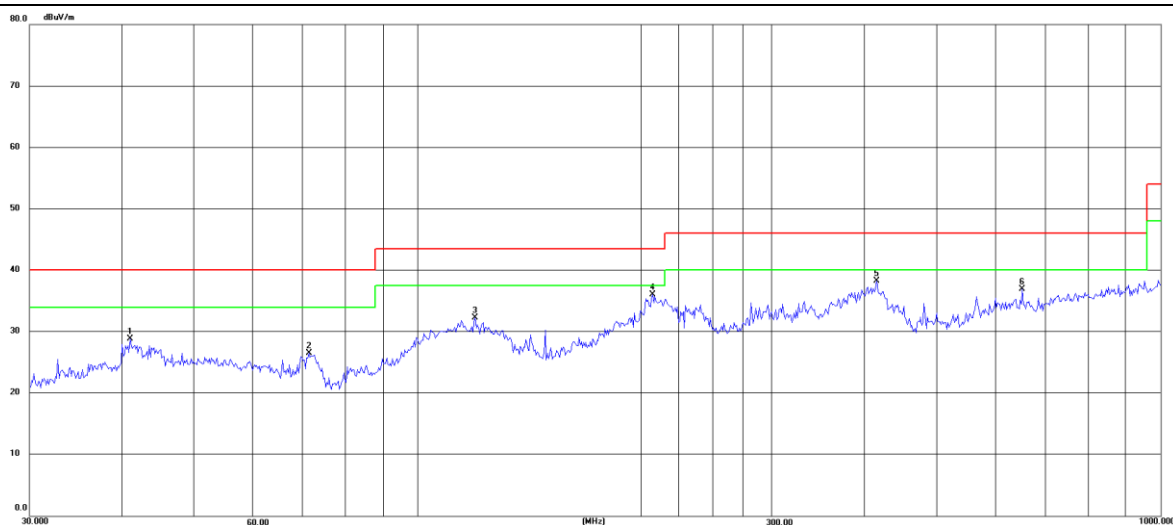

Note: All modes have been tested, just the worst mode has been recorded in the report.

## 2.2.8 TEST RESULTS (1GHz-18GHz)

|               |                            |                     |             |
|---------------|----------------------------|---------------------|-------------|
| EUT :         | Notebook                   | Model Name. :       | ZERO 16 Pro |
| Temperature : | 20 °C                      | Relative Humidity : | 48%         |
| Pressure :    | 1010 hPa                   | Test Voltage :      | DC 15.56V   |
| Test Mode :   | TX(5.2G) - 802.11ax20 MIMO |                     |             |

| Polar                              | Frequency | Meter Reading | Cable loss | Antenna Factor | Preamp Factor | Emission Level | Limits   | Margin | Detector Type |
|------------------------------------|-----------|---------------|------------|----------------|---------------|----------------|----------|--------|---------------|
| (H/V)                              | (MHz)     | (dBuV)        | (dB)       | dB/m           | (dB)          | (dBuV/m)       | (dBuV/m) | (dB)   |               |
| Low Channel (5180 MHz)-Above 1G    |           |               |            |                |               |                |          |        |               |
| Vertical                           | 3695.22   | 68.88         | 3.25       | 30.50          | 43.23         | 59.40          | 74.00    | -14.60 | Pk            |
| Vertical                           | 3695.22   | 49.69         | 3.25       | 30.50          | 43.23         | 40.21          | 54.00    | -13.79 | AV            |
| Vertical                           | 10361.28  | 60.79         | 5.62       | 38.96          | 43.41         | 61.95          | 68.20    | -6.25  | Pk            |
| Vertical                           | 15540.67  | 60.74         | 7.54       | 38.98          | 41.24         | 66.02          | 74.00    | -7.98  | Pk            |
| Vertical                           | 15540.67  | 40.96         | 7.54       | 38.98          | 41.24         | 46.24          | 54.00    | -7.76  | AV            |
| Horizontal                         | 3743.93   | 69.04         | 3.26       | 31.12          | 43.23         | 60.20          | 74.00    | -13.80 | Pk            |
| Horizontal                         | 3743.93   | 50.25         | 3.26       | 31.12          | 43.23         | 41.41          | 54.00    | -12.59 | AV            |
| Horizontal                         | 10361.67  | 60.57         | 5.62       | 38.96          | 43.41         | 61.73          | 68.20    | -6.47  | Pk            |
| Horizontal                         | 15541.41  | 56.44         | 7.54       | 38.98          | 41.24         | 61.72          | 74.00    | -12.28 | Pk            |
| Horizontal                         | 15541.41  | 40.30         | 7.54       | 38.98          | 41.24         | 45.58          | 54.00    | -8.42  | AV            |
| middle Channel (5200 MHz)-Above 1G |           |               |            |                |               |                |          |        |               |
| Vertical                           | 3624.91   | 67.56         | 3.22       | 30.26          | 43.24         | 57.80          | 74.00    | -16.20 | Pk            |
| Vertical                           | 3624.91   | 51.40         | 3.22       | 30.26          | 43.24         | 41.64          | 54.00    | -12.36 | AV            |
| Vertical                           | 10401.53  | 60.27         | 5.64       | 38.81          | 43.40         | 61.31          | 68.20    | -6.89  | Pk            |
| Vertical                           | 15601.75  | 59.79         | 7.55       | 39.09          | 41.19         | 65.24          | 74.00    | -8.76  | Pk            |
| Vertical                           | 15601.75  | 40.47         | 7.55       | 39.09          | 41.19         | 45.92          | 54.00    | -8.08  | AV            |
| Horizontal                         | 4203.03   | 64.51         | 3.45       | 32.31          | 43.22         | 57.05          | 74.00    | -16.95 | Pk            |
| Horizontal                         | 4203.03   | 51.11         | 3.45       | 32.31          | 43.22         | 43.65          | 54.00    | -10.35 | AV            |
| Horizontal                         | 10401.19  | 63.54         | 5.64       | 38.81          | 43.40         | 64.58          | 68.20    | -3.62  | Pk            |
| Horizontal                         | 15601.32  | 59.16         | 7.55       | 39.09          | 41.19         | 64.61          | 74.00    | -9.39  | Pk            |
| Horizontal                         | 15601.32  | 40.56         | 7.55       | 39.09          | 41.19         | 46.01          | 54.00    | -7.99  | AV            |
| High Channel (5240 MHz)-Above 1G   |           |               |            |                |               |                |          |        |               |
| Vertical                           | 4599.61   | 71.80         | 3.67       | 32.30          | 43.26         | 64.51          | 74.00    | -9.49  | Pk            |
| Vertical                           | 4599.61   | 51.68         | 3.67       | 32.30          | 43.26         | 44.39          | 54.00    | -9.61  | AV            |
| Vertical                           | 10482.64  | 60.02         | 5.68       | 39.21          | 43.38         | 61.53          | 68.20    | -6.67  | Pk            |
| Vertical                           | 15722.60  | 61.05         | 7.56       | 38.22          | 41.09         | 65.74          | 74.00    | -8.26  | Pk            |
| Vertical                           | 15722.60  | 41.66         | 7.56       | 38.22          | 41.09         | 46.35          | 54.00    | -7.65  | AV            |
| Horizontal                         | 4591.50   | 69.85         | 3.67       | 32.37          | 43.26         | 62.63          | 74.00    | -11.37 | Pk            |
| Horizontal                         | 4591.50   | 49.99         | 3.67       | 32.37          | 43.26         | 42.77          | 54.00    | -11.23 | AV            |
| Horizontal                         | 10482.75  | 63.20         | 5.68       | 39.21          | 43.38         | 64.71          | 68.20    | -3.49  | Pk            |
| Horizontal                         | 15721.80  | 59.59         | 7.56       | 38.22          | 41.09         | 64.28          | 74.00    | -9.72  | Pk            |
| Horizontal                         | 15721.80  | 42.64         | 7.56       | 38.22          | 41.09         | 47.33          | 54.00    | -6.67  | AV            |

Note:"802.11ax20 (5.2G)" mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

|               |                            |                     |             |
|---------------|----------------------------|---------------------|-------------|
| EUT :         | Notebook                   | Model Name. :       | ZERO 16 Pro |
| Temperature : | 20 °C                      | Relative Humidity : | 48%         |
| Pressure :    | 1010 hPa                   | Test Voltage :      | DC 15.56V   |
| Test Mode :   | TX(5.3G) - 802.11ax20 MIMO |                     |             |

| Polar                              | Frequency | Meter Reading | Cable loss | Antenna Factor | Preamplifier Factor | Emission Level | Limits   | Margin | Detector Type |
|------------------------------------|-----------|---------------|------------|----------------|---------------------|----------------|----------|--------|---------------|
| (H/V)                              | (MHz)     | (dBuV)        | (dB)       | dB/m           | (dB)                | (dBuV/m)       | (dBuV/m) | (dB)   |               |
| Low Channel (5260 MHz)-Above 1G    |           |               |            |                |                     |                |          |        |               |
| Vertical                           | 4635.16   | 67.35         | 3.69       | 32.58          | 43.26               | 60.35          | 74.00    | -13.65 | Pk            |
| Vertical                           | 4635.16   | 48.20         | 3.69       | 32.58          | 43.26               | 41.20          | 54.00    | -12.80 | AV            |
| Vertical                           | 10521.90  | 62.65         | 5.70       | 39.49          | 43.37               | 64.47          | 68.20    | -3.73  | Pk            |
| Vertical                           | 15781.74  | 62.03         | 7.56       | 38.28          | 41.04               | 66.84          | 74.00    | -7.16  | Pk            |
| Vertical                           | 15781.74  | 41.27         | 7.56       | 38.28          | 41.04               | 46.08          | 54.00    | -7.92  | AV            |
| Horizontal                         | 4368.02   | 68.89         | 3.54       | 32.83          | 43.24               | 62.02          | 74.00    | -11.98 | Pk            |
| Horizontal                         | 4368.02   | 48.96         | 3.54       | 32.83          | 43.24               | 42.09          | 54.00    | -11.91 | AV            |
| Horizontal                         | 10521.52  | 60.91         | 5.70       | 39.49          | 43.37               | 62.73          | 68.20    | -5.47  | Pk            |
| Horizontal                         | 15781.96  | 58.17         | 7.56       | 38.28          | 41.04               | 62.98          | 74.00    | -11.02 | Pk            |
| Horizontal                         | 15781.96  | 40.11         | 7.56       | 38.28          | 41.04               | 44.92          | 54.00    | -9.08  | AV            |
| middle Channel (5280 MHz)-Above 1G |           |               |            |                |                     |                |          |        |               |
| Vertical                           | 4123.14   | 66.65         | 3.41       | 31.55          | 43.21               | 58.39          | 74.00    | -15.61 | Pk            |
| Vertical                           | 4123.14   | 50.78         | 3.41       | 31.55          | 43.21               | 42.52          | 54.00    | -11.48 | AV            |
| Vertical                           | 10562.06  | 60.40         | 5.72       | 39.85          | 43.36               | 62.61          | 68.20    | -5.59  | Pk            |
| Vertical                           | 15841.45  | 62.58         | 7.57       | 38.26          | 40.99               | 67.42          | 74.00    | -6.58  | Pk            |
| Vertical                           | 15841.45  | 42.21         | 7.57       | 38.26          | 40.99               | 47.05          | 54.00    | -6.95  | AV            |
| Horizontal                         | 3871.29   | 66.31         | 3.30       | 31.52          | 43.21               | 57.92          | 74.00    | -16.08 | Pk            |
| Horizontal                         | 3871.29   | 54.50         | 3.30       | 31.52          | 43.21               | 46.11          | 54.00    | -7.89  | AV            |
| Horizontal                         | 10561.64  | 56.15         | 5.72       | 39.85          | 43.36               | 58.36          | 68.20    | -9.84  | Pk            |
| Horizontal                         | 15841.63  | 60.88         | 7.57       | 38.26          | 40.98               | 65.72          | 74.00    | -8.28  | Pk            |
| Horizontal                         | 15841.63  | 41.01         | 7.57       | 38.26          | 40.98               | 45.85          | 54.00    | -8.15  | AV            |
| High Channel (5320 MHz)-Above 1G   |           |               |            |                |                     |                |          |        |               |
| Vertical                           | 5368.38   | 69.96         | 3.94       | 33.77          | 43.23               | 64.45          | 74.00    | -9.55  | Pk            |
| Vertical                           | 5368.38   | 51.14         | 3.94       | 33.77          | 43.23               | 45.63          | 54.00    | -8.37  | AV            |
| Vertical                           | 10642.17  | 62.04         | 5.75       | 39.87          | 43.34               | 64.32          | 74.00    | -9.68  | Pk            |
| Vertical                           | 10642.17  | 41.78         | 5.75       | 39.87          | 43.34               | 44.06          | 54.00    | -9.94  | AV            |
| Vertical                           | 15960.88  | 61.11         | 7.58       | 38.56          | 40.88               | 66.37          | 74.00    | -7.63  | Pk            |
| Vertical                           | 15960.88  | 40.52         | 7.58       | 38.56          | 40.88               | 45.78          | 54.00    | -8.22  | AV            |
| Horizontal                         | 5437.48   | 68.52         | 3.95       | 34.27          | 43.21               | 63.53          | 74.00    | -10.47 | Pk            |
| Horizontal                         | 5437.48   | 48.45         | 3.95       | 34.27          | 43.21               | 43.46          | 54.00    | -10.54 | AV            |
| Horizontal                         | 10641.76  | 62.13         | 5.75       | 39.87          | 43.34               | 64.41          | 74.00    | -9.59  | Pk            |
| Horizontal                         | 10641.76  | 44.44         | 5.75       | 39.87          | 43.34               | 46.72          | 54.00    | -7.28  | AV            |
| Horizontal                         | 15961.87  | 59.80         | 7.58       | 38.57          | 40.88               | 65.06          | 74.00    | -8.94  | Pk            |
| Horizontal                         | 15961.87  | 43.46         | 7.58       | 38.57          | 40.88               | 48.72          | 54.00    | -5.28  | AV            |

Note: ANT 1 802.11ax20 (5.3G) mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamplifier Factor = Level.

|               |                            |                     |             |
|---------------|----------------------------|---------------------|-------------|
| EUT :         | Notebook                   | Model Name. :       | ZERO 16 Pro |
| Temperature : | 20 °C                      | Relative Humidity : | 48%         |
| Pressure :    | 1010 hPa                   | Test Voltage :      | DC 15.56V   |
| Test Mode :   | TX(5.6G) - 802.11ax20 MIMO |                     |             |

| Polar                              | Frequency | Meter Reading | Cable loss | Antenna Factor | Preamp Factor | Emission Level | Limits   | Margin | Detector Type |
|------------------------------------|-----------|---------------|------------|----------------|---------------|----------------|----------|--------|---------------|
| (H/V)                              | (MHz)     | (dBuV)        | (dB)       | dB/m           | (dB)          | (dBuV/m)       | (dBuV/m) | (dB)   |               |
| Low Channel (5500 MHz)-Above 1G    |           |               |            |                |               |                |          |        |               |
| Vertical                           | 5433.43   | 67.10         | 3.95       | 34.23          | 43.21         | 62.07          | 74.00    | -11.93 | Pk            |
| Vertical                           | 5433.43   | 48.55         | 3.95       | 34.23          | 43.21         | 43.52          | 54.00    | -10.48 | AV            |
| Vertical                           | 11001.29  | 61.12         | 5.93       | 40.50          | 43.25         | 64.30          | 74.00    | -9.70  | Pk            |
| Vertical                           | 11001.29  | 42.72         | 5.93       | 40.50          | 43.25         | 45.90          | 54.00    | -8.10  | AV            |
| Vertical                           | 16501.36  | 49.28         | 7.79       | 39.60          | 40.42         | 56.25          | 68.20    | -11.95 | Pk            |
| Horizontal                         | 5127.06   | 62.90         | 3.91       | 34.18          | 43.27         | 57.72          | 74.00    | -16.28 | Pk            |
| Horizontal                         | 5127.06   | 45.44         | 3.91       | 34.18          | 43.27         | 40.26          | 54.00    | -13.74 | AV            |
| Horizontal                         | 11001.21  | 58.04         | 5.93       | 40.50          | 43.25         | 61.22          | 74.00    | -12.78 | Pk            |
| Horizontal                         | 11001.21  | 41.02         | 5.93       | 40.50          | 43.25         | 44.20          | 54.00    | -9.80  | AV            |
| Horizontal                         | 16500.77  | 54.57         | 7.79       | 39.60          | 40.42         | 61.54          | 68.20    | -6.66  | Pk            |
| Middle Channel (5600 MHz)-Above 1G |           |               |            |                |               |                |          |        |               |
| Vertical                           | 4934.97   | 67.91         | 3.85       | 34.03          | 43.29         | 62.50          | 74.00    | -11.50 | Pk            |
| Vertical                           | 4934.97   | 49.10         | 3.85       | 34.03          | 43.29         | 43.69          | 54.00    | -10.31 | AV            |
| Vertical                           | 11201.90  | 61.03         | 6.04       | 39.21          | 43.20         | 63.08          | 74.00    | -10.92 | Pk            |
| Vertical                           | 11201.90  | 44.50         | 6.04       | 39.21          | 43.20         | 46.55          | 54.00    | -7.45  | AV            |
| Vertical                           | 16802.07  | 57.05         | 7.92       | 39.49          | 40.17         | 64.29          | 68.20    | -3.91  | Pk            |
| Horizontal                         | 4768.34   | 66.60         | 3.76       | 33.14          | 43.28         | 60.23          | 74.00    | -13.77 | Pk            |
| Horizontal                         | 4768.34   | 49.08         | 3.76       | 33.14          | 43.28         | 42.71          | 54.00    | -11.29 | AV            |
| Horizontal                         | 11201.41  | 61.86         | 6.04       | 39.21          | 43.20         | 63.91          | 74.00    | -10.09 | Pk            |
| Horizontal                         | 11201.41  | 44.50         | 6.04       | 39.21          | 43.20         | 46.55          | 54.00    | -7.45  | AV            |
| Horizontal                         | 16802.28  | 55.16         | 7.92       | 39.49          | 40.17         | 62.40          | 68.20    | -5.80  | Pk            |
| High Channel (5700 MHz)-Above 1G   |           |               |            |                |               |                |          |        |               |
| Vertical                           | 5648.72   | 67.47         | 3.98       | 34.79          | 43.17         | 63.07          | 68.20    | -5.13  | Pk            |
| Vertical                           | 11401.43  | 58.83         | 6.15       | 39.90          | 43.15         | 61.73          | 74.00    | -12.27 | Pk            |
| Vertical                           | 11401.43  | 41.73         | 6.15       | 39.90          | 43.15         | 44.63          | 54.00    | -9.37  | AV            |
| Vertical                           | 17101.58  | 53.99         | 8.03       | 39.40          | 40.08         | 61.33          | 68.20    | -6.87  | Pk            |
| Horizontal                         | 5434.25   | 66.58         | 3.95       | 34.24          | 43.21         | 61.56          | 74.00    | -12.44 | Pk            |
| Horizontal                         | 5434.25   | 47.82         | 3.95       | 34.24          | 43.21         | 42.80          | 54.00    | -11.20 | AV            |
| Horizontal                         | 11401.77  | 59.90         | 6.15       | 39.89          | 43.15         | 62.79          | 74.00    | -11.21 | Pk            |
| Horizontal                         | 11401.77  | 42.28         | 6.15       | 39.89          | 43.15         | 45.17          | 54.00    | -8.83  | AV            |
| Horizontal                         | 17101.29  | 56.03         | 8.03       | 39.40          | 40.08         | 63.38          | 68.20    | -4.82  | Pk            |

Note:"802.11ax20 MIMO(5.6G)" mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

|               |                              |                     |             |
|---------------|------------------------------|---------------------|-------------|
| EUT :         | Notebook                     | Model Name. :       | ZERO 16 Pro |
| Temperature : | 20 °C                        | Relative Humidity : | 48%         |
| Pressure :    | 1010 hPa                     | Test Voltage :      | DC 15.56V   |
| Test Mode :   | TX (5.8G) -- 802.11ax20 MIMO |                     |             |

| Polar                              | Frequency | Meter Reading | Cable loss | Antenna Factor | Preamp Factor | Emission Level | Limits   | Margin | Detector Type |
|------------------------------------|-----------|---------------|------------|----------------|---------------|----------------|----------|--------|---------------|
| (H/V)                              | (MHz)     | (dBuV)        | (dB)       | dB/m           | (dB)          | (dBuV/m)       | (dBuV/m) | (dB)   |               |
| Low Channel (5745 MHz)-Above 1G    |           |               |            |                |               |                |          |        |               |
| Vertical                           | 5123.12   | 66.23         | 3.91       | 34.12          | 43.28         | 60.98          | 74.00    | -13.02 | Pk            |
| Vertical                           | 5123.12   | 48.01         | 3.91       | 34.12          | 43.28         | 42.76          | 54.00    | -11.24 | AV            |
| Vertical                           | 11491.31  | 60.90         | 6.20       | 39.44          | 43.13         | 63.42          | 74.00    | -10.58 | Pk            |
| Vertical                           | 11491.31  | 44.29         | 6.20       | 39.44          | 43.13         | 46.81          | 54.00    | -7.19  | AV            |
| Vertical                           | 17236.60  | 50.29         | 8.07       | 39.38          | 40.20         | 57.55          | 68.20    | -10.65 | Pk            |
| Horizontal                         | 5167.19   | 61.64         | 3.91       | 34.43          | 43.27         | 56.72          | 68.20    | -11.48 | Pk            |
| Horizontal                         | 11491.22  | 60.16         | 6.20       | 39.44          | 43.13         | 62.68          | 74.00    | -11.32 | Pk            |
| Horizontal                         | 11491.22  | 42.98         | 6.20       | 39.44          | 43.13         | 45.50          | 54.00    | -8.50  | AV            |
| Horizontal                         | 17236.72  | 48.81         | 8.07       | 39.38          | 40.20         | 56.07          | 68.20    | -12.13 | Pk            |
| middle Channel (5785 MHz)-Above 1G |           |               |            |                |               |                |          |        |               |
| Vertical                           | 5134.24   | 66.43         | 3.95       | 34.24          | 43.21         | 61.40          | 74.00    | -12.60 | Pk            |
| Vertical                           | 5134.24   | 46.47         | 3.95       | 34.24          | 43.21         | 41.44          | 54.00    | -12.56 | AV            |
| Vertical                           | 11572.19  | 60.51         | 6.24       | 38.90          | 43.11         | 62.55          | 74.00    | -11.45 | Pk            |
| Vertical                           | 11572.19  | 43.37         | 6.24       | 38.90          | 43.11         | 45.41          | 54.00    | -8.59  | AV            |
| Vertical                           | 17357.19  | 52.72         | 8.11       | 39.93          | 40.30         | 60.46          | 68.20    | -7.74  | Pk            |
| Horizontal                         | 4868.25   | 64.95         | 3.82       | 33.39          | 43.29         | 58.87          | 74.00    | -15.13 | Pk            |
| Horizontal                         | 4868.25   | 48.20         | 3.82       | 33.39          | 43.29         | 42.12          | 54.00    | -11.88 | AV            |
| Horizontal                         | 11572.09  | 63.62         | 6.24       | 38.90          | 43.11         | 65.66          | 74.00    | -8.34  | Pk            |
| Horizontal                         | 11572.09  | 44.88         | 6.24       | 38.90          | 43.11         | 46.92          | 54.00    | -7.08  | AV            |
| Horizontal                         | 17356.43  | 53.49         | 8.11       | 39.92          | 40.30         | 61.23          | 68.20    | -6.97  | Pk            |
| middle Channel (5825 MHz)-Above 1G |           |               |            |                |               |                |          |        |               |
| Vertical                           | 5111.62   | 68.90         | 3.92       | 34.12          | 43.25         | 63.69          | 74.00    | -10.31 | Pk            |
| Vertical                           | 5111.78   | 50.55         | 3.92       | 34.12          | 43.09         | 45.50          | 54.00    | -8.50  | Pk            |
| Vertical                           | 11652.14  | 60.18         | 6.29       | 38.80          | 43.09         | 62.19          | 74.00    | -11.81 | AV            |
| Vertical                           | 11652.14  | 44.21         | 6.29       | 38.80          | 40.39         | 48.91          | 54.00    | -5.09  | Pk            |
| Vertical                           | 17473.55  | 54.93         | 8.15       | 40.98          | 40.39         | 63.66          | 68.20    | -4.54  | Pk            |
| Horizontal                         | 5118.76   | 66.96         | 3.92       | 34.12          | 43.25         | 61.75          | 74.00    | -12.25 | Pk            |
| Horizontal                         | 5118.76   | 47.93         | 3.92       | 34.12          | 43.25         | 42.72          | 54.00    | -11.28 | Pk            |
| Horizontal                         | 11652.45  | 60.48         | 6.29       | 38.80          | 43.09         | 62.49          | 74.00    | -11.51 | AV            |
| Horizontal                         | 11652.45  | 45.57         | 6.29       | 38.80          | 43.09         | 47.57          | 54.00    | -6.43  | Pk            |
| Horizontal                         | 17475.98  | 55.10         | 8.15       | 40.98          | 40.39         | 63.83          | 68.20    | -4.37  | Pk            |

Note:"802.11ax20 MIMO(5.8G)" mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

**2.2.10 TEST RESULTS (18GHz-40GHz)**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

## 2.2.10 Spurious Emission in Restricted Band 4.5GHz~5.150 GHz&amp; 5.350GHz~5460GHz

|               |                           |                     |             |
|---------------|---------------------------|---------------------|-------------|
| EUT :         | Notebook                  | Model Name. :       | ZERO 16 Pro |
| Temperature : | 20 °C                     | Relative Humidity : | 48%         |
| Pressure :    | 1010 hPa                  | Test Voltage :      | DC 15.56V   |
| Test Mode :   | TX (5.2G)-802.11ax20 MIMO |                     |             |

All the modulation modes have been tested, The report just record the worst data mode.

| Frequency                 | Meter Reading | Cable Loss | Antenna Factor | Preamp Factor | Emission Level | Limits   | Margin | Detector | Comment    |
|---------------------------|---------------|------------|----------------|---------------|----------------|----------|--------|----------|------------|
| (MHz)                     | (dBμV)        | (dB)       | dB/m           | (dB)          | (dBμV/m)       | (dBμV/m) | (dB)   | Type     |            |
| 5.2G WIFI-802.11ax20 Mode |               |            |                |               |                |          |        |          |            |
| 4500                      | 62.04         | 3.615      | 32.6           | 43.25         | 55.01          | 74       | -19.00 | Pk       | Horizontal |
| 4500                      | 52.27         | 3.615      | 32.6           | 43.25         | 45.24          | 54       | -8.76  | AV       | Horizontal |
| 4500                      | 64.70         | 3.615      | 32.6           | 43.25         | 57.67          | 74       | -16.34 | Pk       | Vertical   |
| 4500                      | 50.71         | 3.615      | 32.6           | 43.25         | 43.68          | 54       | -10.33 | AV       | Vertical   |
| 5150                      | 72.75         | 3.911      | 34.6           | 43.27         | 67.99          | 74       | -6.01  | Pk       | Horizontal |
| 5150                      | 52.73         | 3.911      | 34.6           | 43.27         | 47.97          | 54       | -6.03  | AV       | Horizontal |
| 5150                      | 60.74         | 3.911      | 34.6           | 43.27         | 55.98          | 74       | -18.02 | Pk       | Vertical   |
| 5150                      | 42.31         | 3.911      | 34.6           | 43.27         | 37.55          | 54       | -16.45 | AV       | Vertical   |
| 5350                      | 70.81         | 3.939      | 33.7           | 43.23         | 65.22          | 74       | -8.78  | Pk       | Vertical   |
| 5350                      | 51.95         | 3.939      | 33.7           | 43.23         | 46.36          | 54       | -7.64  | AV       | Vertical   |
| 5350                      | 63.63         | 3.939      | 33.7           | 43.23         | 58.04          | 74       | -15.96 | Pk       | Horizontal |
| 5350                      | 51.06         | 3.939      | 33.7           | 43.23         | 45.47          | 54       | -8.53  | AV       | Horizontal |

Note: (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor

(2) "802.11ax20" mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

|               |                           |                     |             |
|---------------|---------------------------|---------------------|-------------|
| EUT :         | Notebook                  | Model Name. :       | ZERO 16 Pro |
| Temperature : | 20 °C                     | Relative Humidity : | 48%         |
| Pressure :    | 1010 hPa                  | Test Voltage :      | DC 15.56V   |
| Test Mode :   | TX (5.3G)-802.11ax20 MIMO |                     |             |

All the modulation modes have been tested, The report just record the worst data mode.

| Polar                            | Frequency | Meter Reading | Cable loss | Antenna Factor | Preamp Factor | Emission Level | Limits   | Margin | Detector Type |
|----------------------------------|-----------|---------------|------------|----------------|---------------|----------------|----------|--------|---------------|
| (H/V)                            | (MHz)     | (dBuV)        | (dB)       | dB/m           | (dB)          | (dBuV/m)       | (dBuV/m) | (dB)   |               |
| High Channel (5320 MHz)-Above 1G |           |               |            |                |               |                |          |        |               |
| Horizontal                       | 5350      | 71.59         | 3.94       | 33.7           | 43.23         | 66.00          | 74.00    | -8.00  | Pk            |
| Horizontal                       | 5350      | 49.15         | 3.94       | 33.7           | 43.23         | 43.56          | 54.00    | -10.44 | AV            |
| Vertical                         | 5350      | 72.10         | 3.94       | 33.7           | 43.23         | 66.51          | 74.00    | -7.49  | Pk            |
| Vertical                         | 5350      | 51.99         | 3.94       | 33.7           | 43.23         | 46.40          | 54.00    | -7.60  | AV            |

Note: (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor

(2) "802.11ax20" mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

|               |                           |                     |             |
|---------------|---------------------------|---------------------|-------------|
| EUT :         | Notebook                  | Model Name. :       | ZERO 16 Pro |
| Temperature : | 20 °C                     | Relative Humidity : | 48%         |
| Pressure :    | 1010 hPa                  | Test Voltage :      | DC 15.56V   |
| Test Mode :   | TX (5.6G)-802.11ac20 MIMO |                     |             |

All the modulation modes have been tested, The report just record the worst data mode.

| Polar                           | Frequency | Meter Reading | Cable loss | Antenna Factor | Preamp Factor | Emission Level | Limits   | Margin | Detector Type |
|---------------------------------|-----------|---------------|------------|----------------|---------------|----------------|----------|--------|---------------|
| (H/V)                           | (MHz)     | (dBuV)        | (dB)       | dB/m           | (dB)          | (dBuV/m)       | (dBuV/m) | (dB)   |               |
| Low Channel (5500 MHz)-Above 1G |           |               |            |                |               |                |          |        |               |
| Vertical                        | 5460      | 69.61         | 3.95       | 34.56          | 43.21         | 64.92          | 74.00    | -9.08  | Pk            |
| Vertical                        | 5460      | 51.91         | 3.95       | 34.56          | 43.21         | 47.22          | 54.00    | -6.78  | AV            |
| Horizontal                      | 5460      | 63.96         | 3.95       | 34.56          | 43.21         | 59.27          | 74.00    | -14.73 | Pk            |
| Horizontal                      | 5460      | 49.01         | 3.95       | 34.56          | 43.21         | 44.32          | 54.00    | -9.68  | AV            |

Note: (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor


(2) "802.11ac20 MIMO" mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

## Unwanted emission for operating in the band 5725-5850 MHz

|               |                                        |                     |             |
|---------------|----------------------------------------|---------------------|-------------|
| EUT :         | Notebook                               | Model Name. :       | ZERO 16 Pro |
| Temperature : | 20 °C                                  | Relative Humidity : | 48%         |
| Pressure :    | 1010 hPa                               | Test Voltage :      | DC 15.56V   |
| Test Mode :   | TX (5.8G)-802.11n MIMO 5745MHz~5825MHz |                     |             |


All the modulation modes have been tested, The report just record the worst data mode.

Vertical Low Channel (5745 MHz)-Above 1G

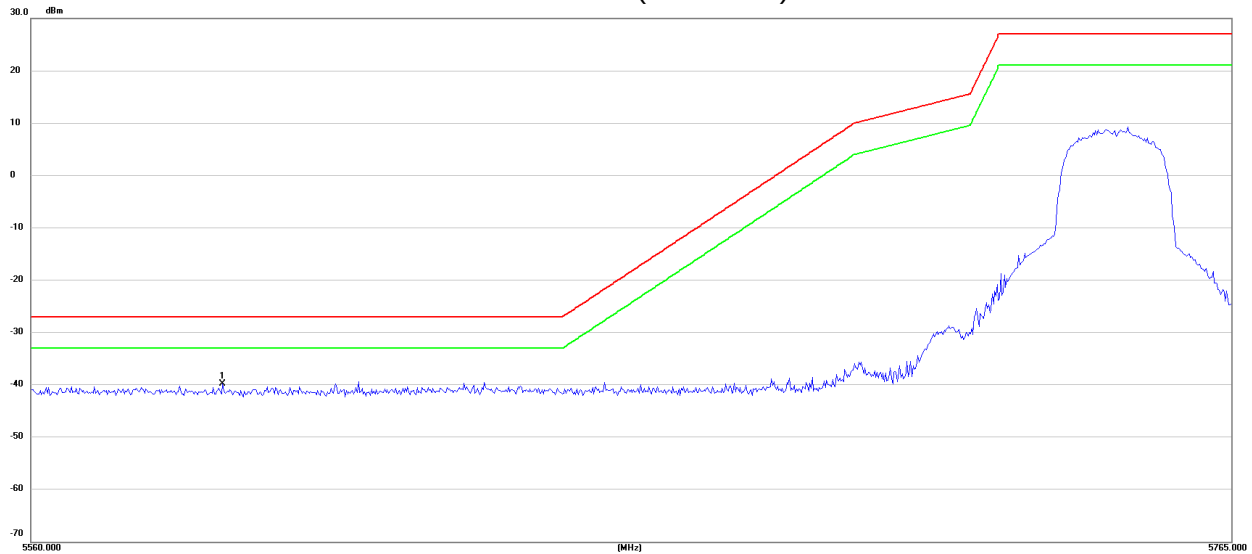


| No. | Frequency (MHz) | Reading (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Det. |
|-----|-----------------|---------------|-------------|-------------|-------------|-------------|------|
| 1   | 5592.350        | -51.45        | 11.94       | -39.51      | -27         | -12.51      | peak |

Horizontal Low Channel (5745 MHz)-Above 1G

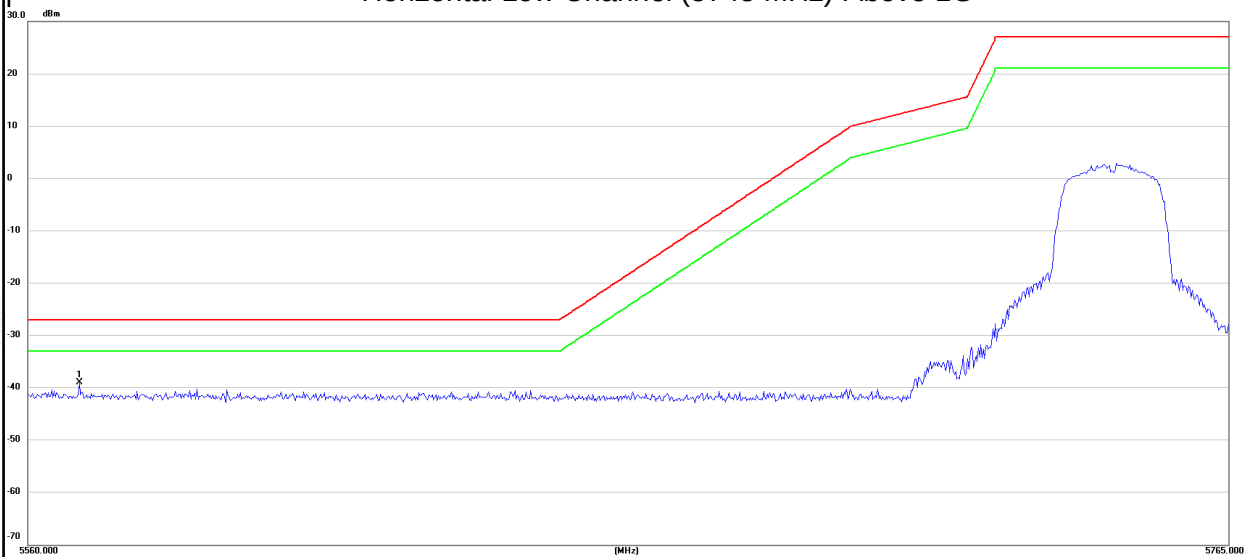


| No.    | Frequency (MHz) | Reading (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Det. |
|--------|-----------------|---------------|-------------|-------------|-------------|-------------|------|
| -38.95 | -27             | -11.95        | -38.95      | -27         | -11.95      | -38.95      | peak |

## Vertical High Channel (5825 MHz)-Above 1G

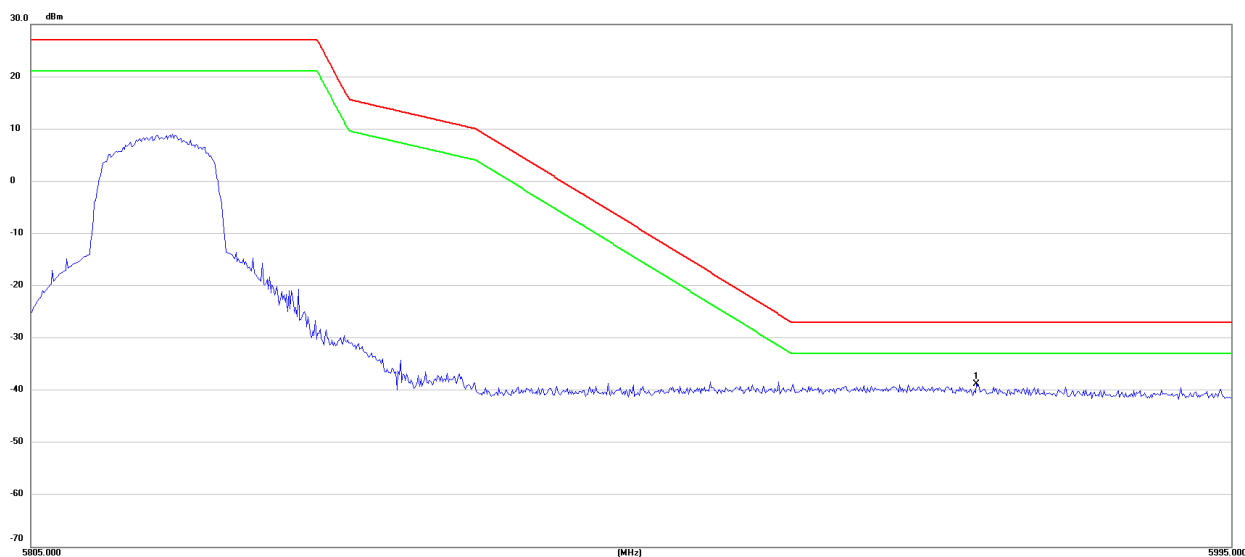

| No. | Frequency (MHz) | Reading (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Det. |
|-----|-----------------|---------------|-------------|-------------|-------------|-------------|------|
| 1   | 5955.46         | -52.88        | 13.33       | -39.55      | -27         | -12.55      | peak |

Horizontal High Channel (5825 MHz)-Above 1G

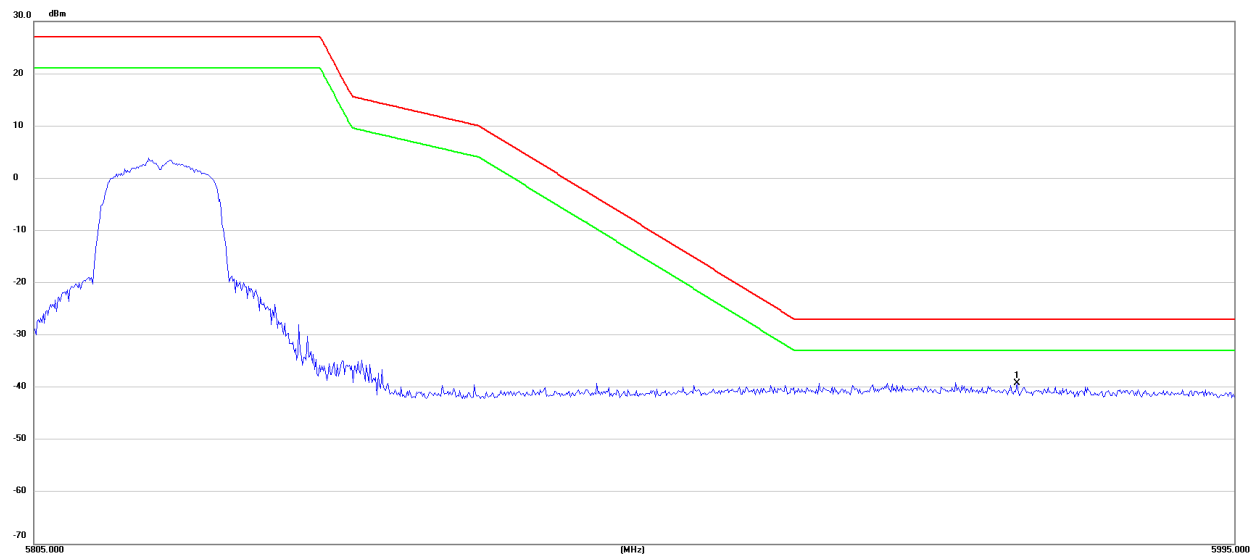

| No. | Frequency (MHz) | Reading (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Det. |
|-----|-----------------|---------------|-------------|-------------|-------------|-------------|------|
| 1   | 5960.45         | -52.56        | 13.22       | -39.34      | -27         | -12.34      | peak |

### 3. POWER SPECTRAL DENSITY TEST

#### 3.1 APPLIED PROCEDURES / LIMIT

##### According to FCC §15.407(a)

For the band 5.15-5.25 GHz,

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz

(3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

,

### 3.2 TEST PROCEDURE

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth ( $< 1$  MHz, or  $< 500$  kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:


- a) Set  $RBW \geq 1/T$ , where T is defined in section II.B.I.a).
- b) Set  $VBW \geq 3$  RBW.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add  $10\log(500\text{kHz}/RBW)$  to the measured result, whereas  $RBW (< 500 \text{ KHz})$  is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add  $10\log(1\text{MHz}/RBW)$  to the measured result, whereas  $RBW (< 1 \text{ MHz})$  is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since  $RBW=100 \text{ KHz}$  is available on nearly all spectrum analyzers.

### 3.3 DEVIATION FROM STANDARD

No deviation.

### 3.4 TEST SETUP

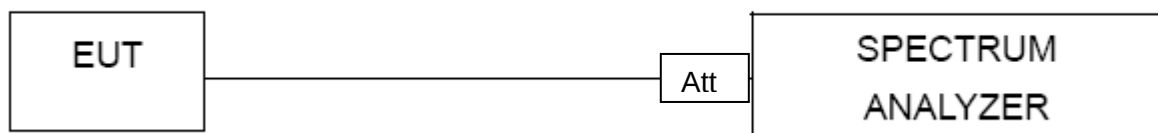

### 3.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.6 TEST RESULTS**

|               |                                                                                                           |                     |             |
|---------------|-----------------------------------------------------------------------------------------------------------|---------------------|-------------|
| EUT :         | Notebook                                                                                                  | Model Name :        | ZERO 16 Pro |
| Temperature : | 26 °C                                                                                                     | Relative Humidity : | 54%         |
| Pressure :    | 1015 hPa                                                                                                  | Test Voltage :      | DC 15.56V   |
| Test Mode :   | TX Frequency Band 1 (5150-5250MHz), Band 2A (5250-5350MHz), Band 2C (5470-5725MHz), Band 3 (5745-5825MHz) |                     |             |

Test data reference attachment.

## 4. 26DB & 99% EMISSION BANDWIDTH

### 4.1 APPLIED PROCEDURES / LIMIT


The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

### 4.2 TEST PROCEDURE

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW  $\geq 3 \cdot$  RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

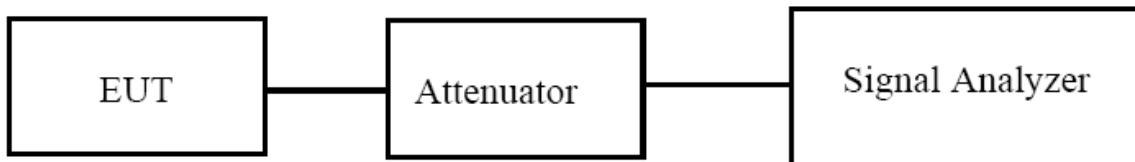

#### 4.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

#### 4.4 TEST RESULTS

|               |                                                                                                         |                     |             |
|---------------|---------------------------------------------------------------------------------------------------------|---------------------|-------------|
| EUT :         | Notebook                                                                                                | Model Name :        | ZERO 16 Pro |
| Temperature : | 26 °C                                                                                                   | Relative Humidity : | 54%         |
| Pressure :    | 1012 hPa                                                                                                | Test Voltage :      | DC 15.56V   |
| Test Mode :   | TX Frequency Band 1 (5150-5250MHz), Band 2A (5250-5350MHz), Band 2C(5470-5725MHz), Band 3(5725-5850MHz) |                     |             |

Test data reference attachment.

## 5. MINIMUM 6 DB BANDWIDTH

### 5.1 APPLIED PROCEDURES / LIMIT

#### According to FCC §15.407(e)

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

### 5.2 TEST PROCEDURE


Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 5.3 DEVIATION FROM STANDARD

No deviation.

### 5.4 TEST SETUP

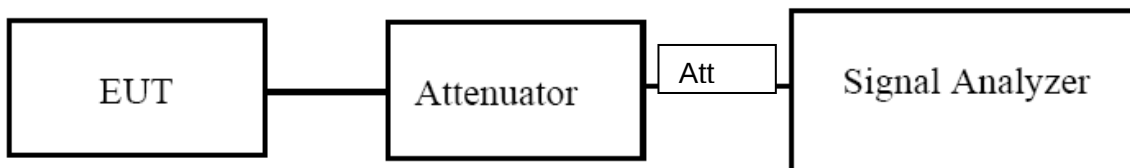

### 5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**5.6 TEST RESULTS**

|               |                                              |                     |             |
|---------------|----------------------------------------------|---------------------|-------------|
| EUT :         | Notebook                                     | Model Name :        | ZERO 16 Pro |
| Temperature : | 26 °C                                        | Relative Humidity : | 54%         |
| Pressure :    | 1012 hPa                                     | Test Voltage :      | DC 15.56V   |
| Test Mode :   | TX (5G) Mode Frequency Band 3 (5725-5850MHz) |                     |             |

Test data reference attachment.

## 6. MAXIMUM CONDUCTED OUTPUT POWER

### 6.1 PPLIED PROCEDURES / LIMIT

#### According to FCC §15.407

The maximum conducted output power should not exceed:

| Frequency Band(MHz) | Limit                                                                                                     |
|---------------------|-----------------------------------------------------------------------------------------------------------|
| 5150~5250           | 250mW                                                                                                     |
| 5250~5350           | 250 mW or 11 dBm + 10 log B<br>Note: The limit is the smaller of the two, "B" represents -26dB bandwidth. |
| 5470~5725           | 250 mW or 11 dBm + 10 log B<br>Note: The limit is the smaller of the two, "B" represents -26dB bandwidth. |
| 5725~5850           | 1W                                                                                                        |


### 6.2 TEST PROCEDURE

- Method PM is Measurement using an RF average power meter. The procedure for this method is as follows:
  - a) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:
    - 1) The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
    - 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
    - 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
  - b) If the transmitter does not transmit continuously, measure the duty cycle D of the transmitter output signal as described in 12.2.
  - c) Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
  - d) Adjust the measurement in dBm by adding  $[10 \log (1 / D)]$ , where D is the duty cycle {e.g.,  $[10 \log (1 / 0.25)]$ , if the duty cycle is 25%}.

### 6.3 DEVIATION FROM STANDARD

No deviation.

### 6.4 TEST SETUP

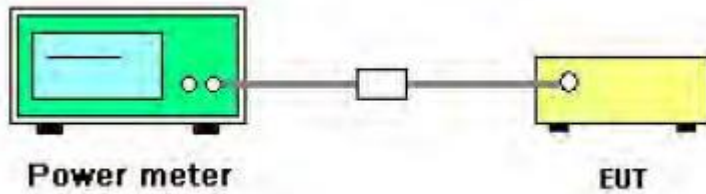

### 6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**6.2 TEST RESULTS**

|               |                                                                                                                        |                     |             |
|---------------|------------------------------------------------------------------------------------------------------------------------|---------------------|-------------|
| EUT :         | Notebook                                                                                                               | Model Name :        | ZERO 16 Pro |
| Temperature : | 26 °C                                                                                                                  | Relative Humidity : | 54%         |
| Pressure :    | 1012 hPa                                                                                                               | Test Voltage :      | DC 15.56V   |
| Test Mode :   | TX (5G) Mode Frequency Band 1 (5150-5250MHz), Band 2A (5250-5350MHz)<br>Band 2C, (5470-5725MHz), Band 3 (5725-5850MHz) |                     |             |

Test data reference attachment.

## 7. OUT OF BAND EMISSIONS

### 7.1 APPLICABLE STANDARD

#### According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
  - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
  - (ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

### 7.2 TEST PROCEDURE


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.

3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### 7.3 DEVIATION FROM STANDARD

No deviation.

### 7.4 TEST SETUP

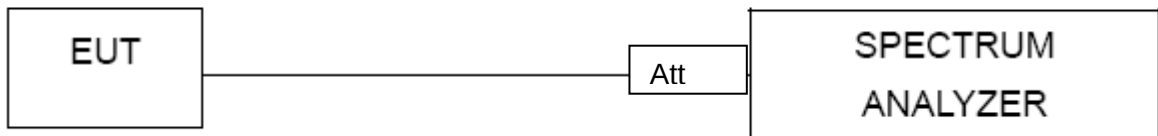

### 7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.6 TEST RESULTS

|               |          |                     |             |
|---------------|----------|---------------------|-------------|
| EUT :         | Notebook | Model Name :        | ZERO 16 Pro |
| Temperature : | 26 °C    | Relative Humidity : | 54%         |
| Pressure :    | 1012 hPa | Test Voltage :      | DC 15.56V   |

Test data reference attachment.

## 8. Frequency Stability Measurement


### 8.1 LIMIT

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

### 8.2 TEST PROCEDURES

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5.  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c - f)/f_c \times 10^6$  ppm.
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is -20°C~70°C.

### 8.3 TEST SETUP LAYOUT

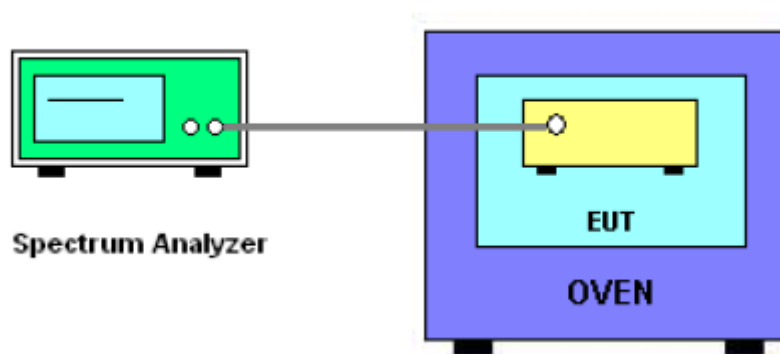

### 8.4 EUT OPERATION DURING TEST

1. The EUT was programmed to be in continuously un-modulation transmitting mode.
2. The module has two antennas, and the worst data is Antenna 1, only shown Antenna 1 Plot.

## 8.5 TEST RESULTS

|               |                                    |                     |             |
|---------------|------------------------------------|---------------------|-------------|
| EUT :         | Notebook                           | Model Name. :       | ZERO 16 Pro |
| Temperature : | 25 °C                              | Relative Humidity : | 56%         |
| Pressure :    | 1012 hPa                           | Test Voltage :      | DC 15.56V   |
| Test Mode :   | TX Frequency Band I (5150-5250MHz) |                     |             |

### Voltage vs. Frequency Stability

| TEST CONDITIONS |    |           |       | Reference Frequency: 5180MHz |      |                            |                            |
|-----------------|----|-----------|-------|------------------------------|------|----------------------------|----------------------------|
|                 |    |           |       | f                            | fc   | Max.<br>Deviation<br>(MHz) | Max.<br>Deviation<br>(ppm) |
| T nom<br>(°C)   | 20 | V nom (V) | 15.56 | 5180.0241                    | 5180 | 0.0241                     | 4.6525                     |
|                 |    | V max (V) | 17.89 | 5180.0077                    | 5180 | 0.0077                     | 1.4865                     |
|                 |    | V min (V) | 13.23 | 5180.0322                    | 5180 | 0.0322                     | 6.2162                     |
| Limits          |    |           |       | Within 5150-5250MHz          |      |                            |                            |
| Result          |    |           |       | Complies                     |      |                            |                            |

### Temperature vs. Frequency Stability

| TEST CONDITIONS |       |        |     | Reference Frequency: 5180MHz |      |                            |                            |
|-----------------|-------|--------|-----|------------------------------|------|----------------------------|----------------------------|
|                 |       |        |     | f                            | fc   | Max.<br>Deviation<br>(MHz) | Max.<br>Deviation<br>(ppm) |
| V nom (V)       | 15.56 | T (°C) | -20 | 5180.0280                    | 5180 | 0.0280                     | 5.4054                     |
|                 |       | T (°C) | -10 | 5180.0326                    | 5180 | 0.0326                     | 6.2934                     |
|                 |       | T (°C) | 0   | 5180.0147                    | 5180 | 0.0147                     | 2.8378                     |
|                 |       | T (°C) | 10  | 5180.0164                    | 5180 | 0.0164                     | 3.1660                     |
|                 |       | T (°C) | 20  | 5180.0154                    | 5180 | 0.0154                     | 2.9730                     |
|                 |       | T (°C) | 30  | 5180.0330                    | 5180 | 0.0330                     | 6.3707                     |
|                 |       | T (°C) | 40  | 5180.0083                    | 5180 | 0.0083                     | 1.6023                     |
|                 |       | T (°C) | 50  | 5180.0332                    | 5180 | 0.0332                     | 6.4093                     |
|                 |       | T (°C) | 60  | 5180.0283                    | 5180 | 0.0283                     | 5.4633                     |
|                 |       | T (°C) | 70  | 5180.0280                    | 5180 | 0.0280                     | 5.4054                     |
| Limits          |       |        |     | Within 5150-5250MHz          |      |                            |                            |
| Result          |       |        |     | Complies                     |      |                            |                            |

Voltage vs. Frequency Stability

| TEST CONDITIONS |    |           |       | Reference Frequency: 5200MHz |      |                            |                            |
|-----------------|----|-----------|-------|------------------------------|------|----------------------------|----------------------------|
|                 |    |           |       | f                            | fc   | Max.<br>Deviation<br>(MHz) | Max.<br>Deviation<br>(ppm) |
| T nom<br>(°C)   | 20 | V nom (V) | 15.56 | 5200.0194                    | 5200 | 0.0194                     | 3.7308                     |
|                 |    | V max (V) | 17.89 | 5200.0084                    | 5200 | 0.0084                     | 1.6154                     |
|                 |    | V min (V) | 13.23 | 5200.0110                    | 5200 | 0.0110                     | 2.1154                     |
| Limits          |    |           |       | Within 5150-5250MHz          |      |                            |                            |
| Result          |    |           |       | Complies                     |      |                            |                            |

Temperature vs. Frequency Stability

| TEST CONDITIONS |       |        |     | Reference Frequency: 5200MHz |      |                            |                            |
|-----------------|-------|--------|-----|------------------------------|------|----------------------------|----------------------------|
|                 |       |        |     | f                            | fc   | Max.<br>Deviation<br>(MHz) | Max.<br>Deviation<br>(ppm) |
| V nom (V)       | 15.56 | T (°C) | -20 | 5200.0061                    | 5200 | 0.0061                     | 1.1731                     |
|                 |       | T (°C) | -10 | 5200.0226                    | 5200 | 0.0226                     | 4.3462                     |
|                 |       | T (°C) | 0   | 5200.0177                    | 5200 | 0.0177                     | 3.4038                     |
|                 |       | T (°C) | 10  | 5200.0221                    | 5200 | 0.0221                     | 4.2500                     |
|                 |       | T (°C) | 20  | 5200.0237                    | 5200 | 0.0237                     | 4.5577                     |
|                 |       | T (°C) | 30  | 5200.0066                    | 5200 | 0.0066                     | 1.2692                     |
|                 |       | T (°C) | 40  | 5200.0183                    | 5200 | 0.0183                     | 3.5192                     |
|                 |       | T (°C) | 50  | 5200.0388                    | 5200 | 0.0388                     | 7.4615                     |
|                 |       | T (°C) | 60  | 5200.0251                    | 5200 | 0.0251                     | 4.8269                     |
|                 |       | T (°C) | 70  | 5200.0237                    | 5200 | 0.0237                     | 4.5577                     |
| Limits          |       |        |     | Within 5150-5250MHz          |      |                            |                            |
| Result          |       |        |     | Complies                     |      |                            |                            |

Voltage vs. Frequency Stability

| TEST CONDITIONS |    |           |       | Reference Frequency: 5240MHz |      |                            |                            |
|-----------------|----|-----------|-------|------------------------------|------|----------------------------|----------------------------|
|                 |    |           |       | f                            | fc   | Max.<br>Deviation<br>(MHz) | Max.<br>Deviation<br>(ppm) |
| T nom<br>(°C)   | 20 | V nom (V) | 15.56 | 5240.0228                    | 5240 | 0.0228                     | 4.3511                     |
|                 |    | V max (V) | 17.89 | 5240.0090                    | 5240 | 0.0090                     | 1.7176                     |
|                 |    | V min (V) | 13.23 | 5240.0170                    | 5240 | 0.0170                     | 3.2443                     |
| Limits          |    |           |       | Within 5150-5250MHz          |      |                            |                            |
| Result          |    |           |       | Complies                     |      |                            |                            |

Temperature vs. Frequency Stability

| TEST CONDITIONS |       |        |     | Reference Frequency: 5240MHz |      |                            |                            |
|-----------------|-------|--------|-----|------------------------------|------|----------------------------|----------------------------|
|                 |       |        |     | f                            | fc   | Max.<br>Deviation<br>(MHz) | Max.<br>Deviation<br>(ppm) |
| V nom (V)       | 15.56 | T (°C) | -20 | 5240.0238                    | 5240 | 0.0238                     | 4.5420                     |
|                 |       | T (°C) | -10 | 5240.0139                    | 5240 | 0.0139                     | 2.6527                     |
|                 |       | T (°C) | 0   | 5240.0206                    | 5240 | 0.0206                     | 3.9313                     |
|                 |       | T (°C) | 10  | 5240.0253                    | 5240 | 0.0253                     | 4.8282                     |
|                 |       | T (°C) | 20  | 5240.0187                    | 5240 | 0.0187                     | 3.5687                     |
|                 |       | T (°C) | 30  | 5240.0220                    | 5240 | 0.0220                     | 4.1985                     |
|                 |       | T (°C) | 40  | 5240.0340                    | 5240 | 0.0340                     | 6.4885                     |
|                 |       | T (°C) | 50  | 5240.0365                    | 5240 | 0.0365                     | 6.9656                     |
|                 |       | T (°C) | 60  | 5240.0071                    | 5240 | 0.0071                     | 1.3550                     |
|                 |       | T (°C) | 70  | 5240.0147                    | 5240 | 0.0147                     | 2.8053                     |
| Limits          |       |        |     | Within 5150-5250MHz          |      |                            |                            |
| Result          |       |        |     | Complies                     |      |                            |                            |

|               |                                     |                     |             |
|---------------|-------------------------------------|---------------------|-------------|
| EUT :         | Notebook                            | Model Name. :       | ZERO 16 Pro |
| Temperature : | 25 °C                               | Relative Humidity : | 56%         |
| Pressure :    | 1012 hPa                            | Test Voltage :      | DC 15.56V   |
| Test Mode :   | TX Frequency Band 2A (5250-5350MHz) |                     |             |

Voltage vs. Frequency Stability

| TEST CONDITIONS |    |           |       | Reference Frequency: 5260MHz |      |                            |                            |
|-----------------|----|-----------|-------|------------------------------|------|----------------------------|----------------------------|
|                 |    |           |       | f                            | fc   | Max.<br>Deviation<br>(MHz) | Max.<br>Deviation<br>(ppm) |
| T nom<br>(°C)   | 20 | V nom (V) | 15.56 | 5260.0049                    | 5260 | 0.00490                    | 0.9316                     |
|                 |    | V max (V) | 17.89 | 5260.0212                    | 5260 | 0.02120                    | 4.0304                     |
|                 |    | V min (V) | 13.23 | 5260.0191                    | 5260 | 0.01910                    | 3.6312                     |
| Limits          |    |           |       | Within 5250-5350MHz          |      |                            |                            |
| Result          |    |           |       | Complies                     |      |                            |                            |

Temperature vs. Frequency Stability

| TEST CONDITIONS |       |        |     | Reference Frequency: 5260MHz |      |                            |                            |
|-----------------|-------|--------|-----|------------------------------|------|----------------------------|----------------------------|
|                 |       |        |     | f                            | fc   | Max.<br>Deviation<br>(MHz) | Max.<br>Deviation<br>(ppm) |
| V nom (V)       | 15.56 | T (°C) | -20 | 5260.0209                    | 5260 | 0.02090                    | 3.9734                     |
|                 |       | T (°C) | -10 | 5260.0147                    | 5260 | 0.01470                    | 2.7947                     |
|                 |       | T (°C) | 0   | 5260.0333                    | 5260 | 0.03330                    | 6.3308                     |
|                 |       | T (°C) | 10  | 5260.0089                    | 5260 | 0.00890                    | 1.6920                     |
|                 |       | T (°C) | 20  | 5260.0285                    | 5260 | 0.02850                    | 5.4183                     |
|                 |       | T (°C) | 30  | 5260.0051                    | 5260 | 0.00510                    | 0.9696                     |
|                 |       | T (°C) | 40  | 5260.0094                    | 5260 | 0.00940                    | 1.7871                     |
|                 |       | T (°C) | 50  | 5260.0345                    | 5260 | 0.03450                    | 6.5589                     |
|                 |       | T (°C) | 60  | 5260.0390                    | 5260 | 0.03900                    | 7.4144                     |
|                 |       | T (°C) | 70  | 5260.0211                    | 5260 | 0.02110                    | 4.0114                     |
| Limits          |       |        |     | Within 5250-5350MHz          |      |                            |                            |
| Result          |       |        |     | Complies                     |      |                            |                            |

Voltage vs. Frequency Stability

| TEST CONDITIONS |    |           |       | Reference Frequency: 5280MHz |      |                            |                            |
|-----------------|----|-----------|-------|------------------------------|------|----------------------------|----------------------------|
|                 |    |           |       | f                            | fc   | Max.<br>Deviation<br>(MHz) | Max.<br>Deviation<br>(ppm) |
| T nom<br>(°C)   | 20 | V nom (V) | 15.56 | 5280.0223                    | 5280 | 0.02230                    | 4.2235                     |
|                 |    | V max (V) | 17.89 | 5280.0323                    | 5280 | 0.03230                    | 6.1174                     |
|                 |    | V min (V) | 13.23 | 5280.0215                    | 5280 | 0.02150                    | 4.0720                     |
| Limits          |    |           |       | Within 5250-5350MHz          |      |                            |                            |
| Result          |    |           |       | Complies                     |      |                            |                            |

Temperature vs. Frequency Stability

| TEST CONDITIONS |       |        |     | Reference Frequency: 5280MHz |      |                            |                            |
|-----------------|-------|--------|-----|------------------------------|------|----------------------------|----------------------------|
|                 |       |        |     | f                            | fc   | Max.<br>Deviation<br>(MHz) | Max.<br>Deviation<br>(ppm) |
| V nom (V)       | 15.56 | T (°C) | -20 | 5280.0211                    | 5280 | 0.02110                    | 3.9962                     |
|                 |       | T (°C) | -10 | 5280.0109                    | 5280 | 0.01090                    | 2.0644                     |
|                 |       | T (°C) | 0   | 5280.0155                    | 5280 | 0.01550                    | 2.9356                     |
|                 |       | T (°C) | 10  | 5280.0330                    | 5280 | 0.03300                    | 6.2500                     |
|                 |       | T (°C) | 20  | 5280.0247                    | 5280 | 0.02470                    | 4.6780                     |
|                 |       | T (°C) | 30  | 5280.0312                    | 5280 | 0.03120                    | 5.9091                     |
|                 |       | T (°C) | 40  | 5280.0084                    | 5280 | 0.00840                    | 1.5909                     |
|                 |       | T (°C) | 50  | 5280.0322                    | 5280 | 0.03220                    | 6.0985                     |
|                 |       | T (°C) | 60  | 5280.0182                    | 5280 | 0.01820                    | 3.4470                     |
|                 |       | T (°C) | 70  | 5280.0278                    | 5280 | 0.02780                    | 5.2652                     |
| Limits          |       |        |     | Within 5250-5350MHz          |      |                            |                            |
| Result          |       |        |     | Complies                     |      |                            |                            |

## Voltage vs. Frequency Stability

| TEST CONDITIONS |    |           |       | Reference Frequency: 5320MHz |      |                            |                            |
|-----------------|----|-----------|-------|------------------------------|------|----------------------------|----------------------------|
|                 |    |           |       | f                            | fc   | Max.<br>Deviation<br>(MHz) | Max.<br>Deviation<br>(ppm) |
| T nom<br>(°C)   | 20 | V nom (V) | 15.56 | 5320.0212                    | 5320 | 0.02120                    | 3.9850                     |
|                 |    | V max (V) | 17.89 | 5320.0158                    | 5320 | 0.01580                    | 2.9699                     |
|                 |    | V min (V) | 13.23 | 5320.0251                    | 5320 | 0.02510                    | 4.7180                     |
| Limits          |    |           |       | Within 5250-5350MHz          |      |                            |                            |
| Result          |    |           |       | Complies                     |      |                            |                            |

## Temperature vs. Frequency Stability

| TEST CONDITIONS |       |        |     | Reference Frequency: 5320MHz |      |                            |                            |
|-----------------|-------|--------|-----|------------------------------|------|----------------------------|----------------------------|
|                 |       |        |     | f                            | fc   | Max.<br>Deviation<br>(MHz) | Max.<br>Deviation<br>(ppm) |
| V nom (V)       | 15.56 | T (°C) | -20 | 5320.0383                    | 5320 | 0.03830                    | 7.1992                     |
|                 |       | T (°C) | -10 | 5320.0222                    | 5320 | 0.02220                    | 4.1729                     |
|                 |       | T (°C) | 0   | 5320.0218                    | 5320 | 0.02180                    | 4.0977                     |
|                 |       | T (°C) | 10  | 5320.0317                    | 5320 | 0.03170                    | 5.9586                     |
|                 |       | T (°C) | 20  | 5320.0212                    | 5320 | 0.02120                    | 3.9850                     |
|                 |       | T (°C) | 30  | 5320.0241                    | 5320 | 0.02410                    | 4.5301                     |
|                 |       | T (°C) | 40  | 5320.0143                    | 5320 | 0.01430                    | 2.6880                     |
|                 |       | T (°C) | 50  | 5320.0152                    | 5320 | 0.01520                    | 2.8571                     |
|                 |       | T (°C) | 60  | 5320.0169                    | 5320 | 0.01690                    | 3.1767                     |
|                 |       | T (°C) | 70  | 5320.0041                    | 5320 | 0.00410                    | 0.7707                     |
| Limits          |       |        |     | Within 5250-5350MHz          |      |                            |                            |
| Result          |       |        |     | Complies                     |      |                            |                            |

|               |                                     |                     |             |
|---------------|-------------------------------------|---------------------|-------------|
| EUT :         | Notebook                            | Model Name. :       | ZERO 16 Pro |
| Temperature : | 25 °C                               | Relative Humidity : | 56%         |
| Pressure :    | 1012 hPa                            | Test Voltage :      | DC 15.56V   |
| Test Mode :   | TX Frequency Band 2C (5470-5725MHz) |                     |             |

Voltage vs. Frequency Stability

| TEST CONDITIONS |    |           |       | Reference Frequency: 5500MHz |      |                            |                            |
|-----------------|----|-----------|-------|------------------------------|------|----------------------------|----------------------------|
|                 |    |           |       | f                            | fc   | Max.<br>Deviation<br>(MHz) | Max.<br>Deviation<br>(ppm) |
| T nom<br>(°C)   | 20 | V nom (V) | 15.56 | 5500.0185                    | 5500 | 0.01850                    | 3.3636                     |
|                 |    | V max (V) | 17.89 | 5500.0031                    | 5500 | 0.00310                    | 0.5636                     |
|                 |    | V min (V) | 13.23 | 5500.0292                    | 5500 | 0.02920                    | 5.3091                     |
| Limits          |    |           |       | Within 5470-5725MHz          |      |                            |                            |
| Result          |    |           |       | Complies                     |      |                            |                            |

Temperature vs. Frequency Stability

| TEST CONDITIONS |       |        |     | Reference Frequency: 5500MHz |      |                            |                            |
|-----------------|-------|--------|-----|------------------------------|------|----------------------------|----------------------------|
|                 |       |        |     | f                            | fc   | Max.<br>Deviation<br>(MHz) | Max.<br>Deviation<br>(ppm) |
| V nom (V)       | 15.56 | T (°C) | -20 | 5500.0108                    | 5500 | 0.01080                    | 1.9636                     |
|                 |       | T (°C) | -10 | 5500.0248                    | 5500 | 0.02480                    | 4.5091                     |
|                 |       | T (°C) | 0   | 5500.0155                    | 5500 | 0.01550                    | 2.8182                     |
|                 |       | T (°C) | 10  | 5500.0248                    | 5500 | 0.02480                    | 4.5091                     |
|                 |       | T (°C) | 20  | 5500.0104                    | 5500 | 0.01040                    | 1.8909                     |
|                 |       | T (°C) | 30  | 5500.0201                    | 5500 | 0.02010                    | 3.6545                     |
|                 |       | T (°C) | 40  | 5500.0324                    | 5500 | 0.03240                    | 5.8909                     |
|                 |       | T (°C) | 50  | 5500.0172                    | 5500 | 0.01720                    | 3.1273                     |
|                 |       | T (°C) | 60  | 5500.0149                    | 5500 | 0.01490                    | 2.7091                     |
|                 |       | T (°C) | 70  | 5500.0242                    | 5500 | 0.02420                    | 4.4000                     |
| Limits          |       |        |     | Within 5470-5725MHz          |      |                            |                            |
| Result          |       |        |     | Complies                     |      |                            |                            |

Voltage vs. Frequency Stability

| TEST CONDITIONS |    |           |       | Reference Frequency: 5600MHz |      |                            |                            |
|-----------------|----|-----------|-------|------------------------------|------|----------------------------|----------------------------|
|                 |    |           |       | f                            | fc   | Max.<br>Deviation<br>(MHz) | Max.<br>Deviation<br>(ppm) |
| T nom<br>(°C)   | 20 | V nom (V) | 15.56 | 5600.0188                    | 5600 | 0.01880                    | 3.3571                     |
|                 |    | V max (V) | 17.89 | 5600.0399                    | 5600 | 0.03990                    | 7.1250                     |
|                 |    | V min (V) | 13.23 | 5600.0105                    | 5600 | 0.01050                    | 1.8750                     |
| Limits          |    |           |       | Within 5470-5725MHz          |      |                            |                            |
| Result          |    |           |       | Complies                     |      |                            |                            |

Temperature vs. Frequency Stability

| TEST CONDITIONS |       |        |     | Reference Frequency: 5600MHz |      |                            |                            |
|-----------------|-------|--------|-----|------------------------------|------|----------------------------|----------------------------|
|                 |       |        |     | f                            | fc   | Max.<br>Deviation<br>(MHz) | Max.<br>Deviation<br>(ppm) |
| V nom (V)       | 15.56 | T (°C) | -20 | 5600.0280                    | 5600 | 0.02800                    | 5.0000                     |
|                 |       | T (°C) | -10 | 5600.0303                    | 5600 | 0.03030                    | 5.4107                     |
|                 |       | T (°C) | 0   | 5600.0286                    | 5600 | 0.02860                    | 5.1071                     |
|                 |       | T (°C) | 10  | 5600.0085                    | 5600 | 0.00850                    | 1.5179                     |
|                 |       | T (°C) | 20  | 5600.0042                    | 5600 | 0.00420                    | 0.7500                     |
|                 |       | T (°C) | 30  | 5600.0079                    | 5600 | 0.00790                    | 1.4107                     |
|                 |       | T (°C) | 40  | 5600.0087                    | 5600 | 0.00870                    | 1.5536                     |
|                 |       | T (°C) | 50  | 5600.0063                    | 5600 | 0.00630                    | 1.1250                     |
|                 |       | T (°C) | 60  | 5600.0289                    | 5600 | 0.02890                    | 5.1607                     |
|                 |       | T (°C) | 70  | 5600.0315                    | 5600 | 0.03150                    | 5.6250                     |
| Limits          |       |        |     | Within 5470-5725MHz          |      |                            |                            |
| Result          |       |        |     | Complies                     |      |                            |                            |

Voltage vs. Frequency Stability

| TEST CONDITIONS |    |           |       | Reference Frequency: 5700MHz |      |                            |                            |
|-----------------|----|-----------|-------|------------------------------|------|----------------------------|----------------------------|
|                 |    |           |       | f                            | fc   | Max.<br>Deviation<br>(MHz) | Max.<br>Deviation<br>(ppm) |
| T nom<br>(°C)   | 20 | V nom (V) | 15.56 | 5700.0071                    | 5700 | 0.00710                    | 1.2456                     |
|                 |    | V max (V) | 17.89 | 5700.0447                    | 5700 | 0.04470                    | 7.8421                     |
|                 |    | V min (V) | 13.23 | 5700.0287                    | 5700 | 0.02870                    | 5.0351                     |
| Limits          |    |           |       | Within 5470-5725MHz          |      |                            |                            |
| Result          |    |           |       | Complies                     |      |                            |                            |

Temperature vs. Frequency Stability

| TEST CONDITIONS |       |        |     | Reference Frequency: 5700MHz |      |                            |                            |
|-----------------|-------|--------|-----|------------------------------|------|----------------------------|----------------------------|
|                 |       |        |     | f                            | fc   | Max.<br>Deviation<br>(MHz) | Max.<br>Deviation<br>(ppm) |
| V nom (V)       | 15.56 | T (°C) | -20 | 5700.0375                    | 5700 | 0.03750                    | 6.5789                     |
|                 |       | T (°C) | -10 | 5700.0277                    | 5700 | 0.02770                    | 4.8596                     |
|                 |       | T (°C) | 0   | 5700.0190                    | 5700 | 0.01900                    | 3.3333                     |
|                 |       | T (°C) | 10  | 5700.0155                    | 5700 | 0.01550                    | 2.7193                     |
|                 |       | T (°C) | 20  | 5700.0110                    | 5700 | 0.01100                    | 1.9298                     |
|                 |       | T (°C) | 30  | 5700.0318                    | 5700 | 0.03180                    | 5.5789                     |
|                 |       | T (°C) | 40  | 5700.0074                    | 5700 | 0.00740                    | 1.2982                     |
|                 |       | T (°C) | 50  | 5700.0040                    | 5700 | 0.00400                    | 0.7018                     |
|                 |       | T (°C) | 60  | 5700.0179                    | 5700 | 0.01790                    | 3.1404                     |
|                 |       | T (°C) | 70  | 5700.0342                    | 5700 | 0.03420                    | 6.0000                     |
| Limits          |       |        |     | Within 5470-5725MHz          |      |                            |                            |
| Result          |       |        |     | Complies                     |      |                            |                            |

|               |                            |                     |             |
|---------------|----------------------------|---------------------|-------------|
| EUT :         | Notebook                   | Model Name. :       | ZERO 16 Pro |
| Temperature : | 25 °C                      | Relative Humidity : | 56%         |
| Pressure :    | 1012 hPa                   | Test Voltage :      | DC 15.56V   |
| Test Mode :   | TX Frequency(5745-5850MHz) |                     |             |

#### Voltage vs. Frequency Stability

| TEST CONDITIONS |    |           |       | Reference Frequency: 5745MHz |      |                            |                            |
|-----------------|----|-----------|-------|------------------------------|------|----------------------------|----------------------------|
|                 |    |           |       | f                            | fc   | Max.<br>Deviation<br>(MHz) | Max.<br>Deviation<br>(ppm) |
| T nom<br>(°C)   | 20 | V nom (V) | 15.56 | 5745.0163                    | 5745 | 0.01630                    | 2.8372                     |
|                 |    | V max (V) | 17.89 | 5745.0372                    | 5745 | 0.03720                    | 6.4752                     |
|                 |    | V min (V) | 13.23 | 5745.0183                    | 5745 | 0.01830                    | 3.1854                     |
| Limits          |    |           |       | Within 5745-5850MHz          |      |                            |                            |
| Result          |    |           |       | Complies                     |      |                            |                            |

#### Temperature vs. Frequency Stability

| TEST CONDITIONS |       |        |     | Reference Frequency: 5745MHz |      |                            |                            |
|-----------------|-------|--------|-----|------------------------------|------|----------------------------|----------------------------|
|                 |       |        |     | f                            | fc   | Max.<br>Deviation<br>(MHz) | Max.<br>Deviation<br>(ppm) |
| V nom (V)       | 15.56 | T (°C) | -20 | 5745.0327                    | 5745 | 0.03270                    | 5.6919                     |
|                 |       | T (°C) | -10 | 5745.0294                    | 5745 | 0.02940                    | 5.1175                     |
|                 |       | T (°C) | 0   | 5745.0042                    | 5745 | 0.00420                    | 0.7311                     |
|                 |       | T (°C) | 10  | 5745.0192                    | 5745 | 0.01920                    | 3.3420                     |
|                 |       | T (°C) | 20  | 5745.0299                    | 5745 | 0.02990                    | 5.2045                     |
|                 |       | T (°C) | 30  | 5745.0091                    | 5745 | 0.00910                    | 1.5840                     |
|                 |       | T (°C) | 40  | 5745.0371                    | 5745 | 0.03710                    | 6.4578                     |
|                 |       | T (°C) | 50  | 5745.0185                    | 5745 | 0.01850                    | 3.2202                     |
|                 |       | T (°C) | 60  | 5745.0164                    | 5745 | 0.01640                    | 2.8547                     |
|                 |       | T (°C) | 70  | 5745.0117                    | 5745 | 0.01170                    | 2.0366                     |
| Limits          |       |        |     | Within 5745-5850MHz          |      |                            |                            |
| Result          |       |        |     | Complies                     |      |                            |                            |

## Voltage vs. Frequency Stability

| TEST CONDITIONS |    |           |       | Reference Frequency: 5785MHz |      |                            |                            |
|-----------------|----|-----------|-------|------------------------------|------|----------------------------|----------------------------|
|                 |    |           |       | f                            | fc   | Max.<br>Deviation<br>(MHz) | Max.<br>Deviation<br>(ppm) |
| T nom<br>(°C)   | 20 | V nom (V) | 15.56 | 5785.0178                    | 5785 | 0.01780                    | 3.0769                     |
|                 |    | V max (V) | 17.89 | 5785.0208                    | 5785 | 0.02080                    | 3.5955                     |
|                 |    | V min (V) | 13.23 | 5785.0027                    | 5785 | 0.00270                    | 0.4667                     |
| Limits          |    |           |       | Within 5745-5850MHz          |      |                            |                            |
| Result          |    |           |       | Complies                     |      |                            |                            |

## Temperature vs. Frequency Stability

| TEST CONDITIONS |       |        |     | Reference Frequency: 5785MHz |      |                            |                            |
|-----------------|-------|--------|-----|------------------------------|------|----------------------------|----------------------------|
|                 |       |        |     | f                            | fc   | Max.<br>Deviation<br>(MHz) | Max.<br>Deviation<br>(ppm) |
| V nom (V)       | 15.56 | T (°C) | -20 | 5785.0272                    | 5785 | 0.02720                    | 4.7018                     |
|                 |       | T (°C) | -10 | 5785.0345                    | 5785 | 0.03450                    | 5.9637                     |
|                 |       | T (°C) | 0   | 5785.0154                    | 5785 | 0.01540                    | 2.6621                     |
|                 |       | T (°C) | 10  | 5785.0248                    | 5785 | 0.02480                    | 4.2869                     |
|                 |       | T (°C) | 20  | 5785.0045                    | 5785 | 0.00450                    | 0.7779                     |
|                 |       | T (°C) | 30  | 5785.0068                    | 5785 | 0.00680                    | 1.1755                     |
|                 |       | T (°C) | 40  | 5785.0153                    | 5785 | 0.01530                    | 2.6448                     |
|                 |       | T (°C) | 50  | 5785.0094                    | 5785 | 0.00940                    | 1.6249                     |
|                 |       | T (°C) | 60  | 5785.0087                    | 5785 | 0.00870                    | 1.5039                     |
|                 |       | T (°C) | 70  | 5785.0342                    | 5785 | 0.03420                    | 5.9118                     |
| Limits          |       |        |     | Within 5745-5850MHz          |      |                            |                            |
| Result          |       |        |     | Complies                     |      |                            |                            |

## Voltage vs. Frequency Stability

| TEST CONDITIONS |    |           |       | Reference Frequency: 5825MHz |      |                            |                            |
|-----------------|----|-----------|-------|------------------------------|------|----------------------------|----------------------------|
|                 |    |           |       | f                            | fc   | Max.<br>Deviation<br>(MHz) | Max.<br>Deviation<br>(ppm) |
| T nom<br>(°C)   | 20 | V nom (V) | 15.56 | 5825.0271                    | 5825 | 0.02710                    | 4.6524                     |
|                 |    | V max (V) | 17.89 | 5825.0524                    | 5825 | 0.05240                    | 8.9957                     |
|                 |    | V min (V) | 13.23 | 5825.0370                    | 5825 | 0.03700                    | 6.3519                     |
| Limits          |    |           |       | Within 5745-5850MHz          |      |                            |                            |
| Result          |    |           |       | Complies                     |      |                            |                            |

## Temperature vs. Frequency Stability

| TEST CONDITIONS |       |        |     | Reference Frequency: 5825MHz |      |                            |                            |
|-----------------|-------|--------|-----|------------------------------|------|----------------------------|----------------------------|
|                 |       |        |     | f                            | fc   | Max.<br>Deviation<br>(MHz) | Max.<br>Deviation<br>(ppm) |
| V nom (V)       | 15.56 | T (°C) | -20 | 5825.0063                    | 5825 | 0.00630                    | 1.0815                     |
|                 |       | T (°C) | -10 | 5825.0070                    | 5825 | 0.00700                    | 1.2017                     |
|                 |       | T (°C) | 0   | 5825.0178                    | 5825 | 0.01780                    | 3.0558                     |
|                 |       | T (°C) | 10  | 5825.0109                    | 5825 | 0.01090                    | 1.8712                     |
|                 |       | T (°C) | 20  | 5825.0085                    | 5825 | 0.00850                    | 1.4592                     |
|                 |       | T (°C) | 30  | 5825.0111                    | 5825 | 0.01110                    | 1.9056                     |
|                 |       | T (°C) | 40  | 5825.0376                    | 5825 | 0.03760                    | 6.4549                     |
|                 |       | T (°C) | 50  | 5825.0235                    | 5825 | 0.02350                    | 4.0343                     |
|                 |       | T (°C) | 60  | 5825.0084                    | 5825 | 0.00840                    | 1.4421                     |
|                 |       | T (°C) | 70  | 5825.0217                    | 5825 | 0.02170                    | 3.7253                     |
| Limits          |       |        |     | Within 5745-5850MHz          |      |                            |                            |
| Result          |       |        |     | Complies                     |      |                            |                            |

## 9. DYNAMIC FREQUENCY SELECTION(DFS)

### 9.1 APPLICABILITY OF DFS REQUIREMENTS

EUT is client and operates as client without radar detection function.

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

| Requirement                     | Operational Mode |                                |                             |
|---------------------------------|------------------|--------------------------------|-----------------------------|
|                                 | Master           | Client Without Radar Detection | Client With Radar Detection |
| Non-Occupancy Period            | Yes              | Not required                   | Yes                         |
| DFS Detection Threshold         | Yes              | Not required                   | Yes                         |
| Channel Availability Check Time | Yes              | Not required                   | Not required                |
| U-NII Detection Bandwidth       | Yes              | Not required                   | Yes                         |

Table 2: Applicability of DFS requirements during normal operation

| Requirement                       | Operational Mode |                                |                             |
|-----------------------------------|------------------|--------------------------------|-----------------------------|
|                                   | Master           | Client Without Radar Detection | Client With Radar Detection |
| DFS Detection Threshold           | Yes              | Not required                   | Yes                         |
| Channel Closing Transmission Time | Yes              | Yes                            | Yes                         |
| Channel Move Time                 | Yes              | Yes                            | Yes                         |
| U-NII Detection Bandwidth         | Yes              | Not required                   | Yes                         |
| Client Beacon Test                | N/A              | Yes                            | Yes                         |

| Additional requirements for devices with multiple bandwidth modes                                                                                                                                                                                                                                                                                              | Operational Mode                      |                                                      |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|------------------------------------------------------|
|                                                                                                                                                                                                                                                                                                                                                                | Master or Client With Radar Detection | Client Without Radar Detection                       |
| U-NII Detection Bandwidth and Statistical Performance Check                                                                                                                                                                                                                                                                                                    | All BW modes must be tested           | Not required                                         |
| Channel Move Time and Channel Closing Transmission Time                                                                                                                                                                                                                                                                                                        | Test using widest BW mode available   | Test using the widest BW mode available for the link |
| All other tests                                                                                                                                                                                                                                                                                                                                                | Any single BW mode                    | Not required                                         |
| <b>Note</b><br>Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency. |                                       |                                                      |

### 9.2 INTERFERENCE THRESHOLD VALUES, MASTER OR CLIENT INCORPORATING IN-SERVICE MONITORING

| Maximum Transmit Power                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Value (see notes 1, 2, and 3) |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|
| EIRP $\geq$ 200 milliwatt                                                                                                                                                                                                                                                                                                                                                                                                                                               | -64 dBm                       |
| EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz                                                                                                                                                                                                                                                                                                                                                                                                            | -62 dBm                       |
| EIRP < 200 milliwatt that do not meet the power spectral density requirement                                                                                                                                                                                                                                                                                                                                                                                            | -64 dBm                       |
| <b>Note 1:</b> This is the level at the input of the receiver assuming a 0 dBi receive antenna.<br><b>Note 2:</b> Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.<br><b>Note 3:</b> EIRP is based on the highest antenna gain. |                               |

### 9.3 DFS RESPONSE REQUIREMENT VALUES

| Parameter                         | Value                                                                                                  |
|-----------------------------------|--------------------------------------------------------------------------------------------------------|
| Non-occupancy period              | Minimum 30 minutes                                                                                     |
| Channel Availability Check Time   | 60 seconds                                                                                             |
| Channel Move Time                 | 10 seconds See Note 1.                                                                                 |
| Channel Closing Transmission Time | 200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2. |
| U-NII Detection Bandwidth         | Minimum 100% of the 99% power bandwidth See Note 3.                                                    |

**Note 1:** The instant that the Channel Move Time and the Channel Closing Transmission Time begins is as follows:

- For the Short pulse radar Test Signals this instant is the end of the Burst.
- For the Frequency Hopping radar Test Signal, this instant is the end of the last radar Burst generated.
- For the Long Pulse radar Test Signal this instant is the end of the 12 second period defining the radar transmission.

**Note 2:** The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate Channel changes (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

**Note 3:** During the U-NII Detection Bandwidth detection test, radar type 0 is used and for each frequency step the minimum percentage of detection is 90%. Measurements are performed with no data traffic.

### 9.4 SHORT PULSE RADAR TEST WAVEFORMS

As the EUT is a Client Device with no Radar Detection, only one type radar pulse is required for the testing. Radar Pulse type 0 was used in the evaluation of the Client device for the purpose of measuring the Channel Move Time and the Channel Closing Transmission Time.

| Radar Type                  | Pulse Width (μsec) | PRI (μsec)       | Number of Pulses                                                                               | Minimum Percentage of Successful Detection | Minimum Trials |
|-----------------------------|--------------------|------------------|------------------------------------------------------------------------------------------------|--------------------------------------------|----------------|
| 0                           | 1                  | 1428             | 18                                                                                             | 60%                                        | 30             |
| 1                           | 1                  | Test A<br>Test B | $\text{Roundup}\left(\frac{1}{360} \cdot \frac{19 \cdot 10^6}{\text{PRI}_{\text{min}}}\right)$ | 60%                                        | 30             |
| 2                           | 1-5                | 150-230          | 23-29                                                                                          | 60%                                        | 30             |
| 3                           | 6-10               | 200-500          | 16-18                                                                                          | 60%                                        | 30             |
| 4                           | 11-20              | 200-500          | 12-16                                                                                          | 60%                                        | 30             |
| Aggregate (Radar Types 1-4) |                    |                  |                                                                                                | 80%                                        | 120            |

Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a

Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A

A minimum of 30 unique waveforms are required for each of the short pulse radar types 2 through 4. For short pulse radar type 1, the same waveform is used a minimum of 30 times. If more than 30 waveforms are used for short pulse radar types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms.


If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B. The aggregate is the average of the percentage of successful detections of short pulse radar types 1-4.

## 9.5 CALIBRATION SETUP AND DFS TEST RESULTS

### Radar Waveform Calibration Procedure

- 1) A 50 ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected to place of the master
- 2) The interference Radar Detection Threshold Level is  $-62\text{dBm} - 2\text{dBi} + 1\text{dB} = -63\text{dBm}$  that had been taken into account the output power range and antenna gain.
- 3) The following equipment setup was used to calibrate the conducted radar waveform. A vector signal generator was utilized to establish the test signal level for radar type 0. During this process there were no transmissions by either the master or client device. The spectrum analyzer was switched to the zero spans (time domain) at the frequency of the radar waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3 MHz. The spectrum analyzer had offset -1.0dB to compensate RF cable loss 1.0dB.
- 4) The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was  $-62\text{dBm} - 2\text{dBi} + 1\text{dB} = -63\text{dBm}$ . Capture the spectrum analyzer plots on short pulse radar waveform.

## 9.6 CONDUCTED CALIBRATION SETUP

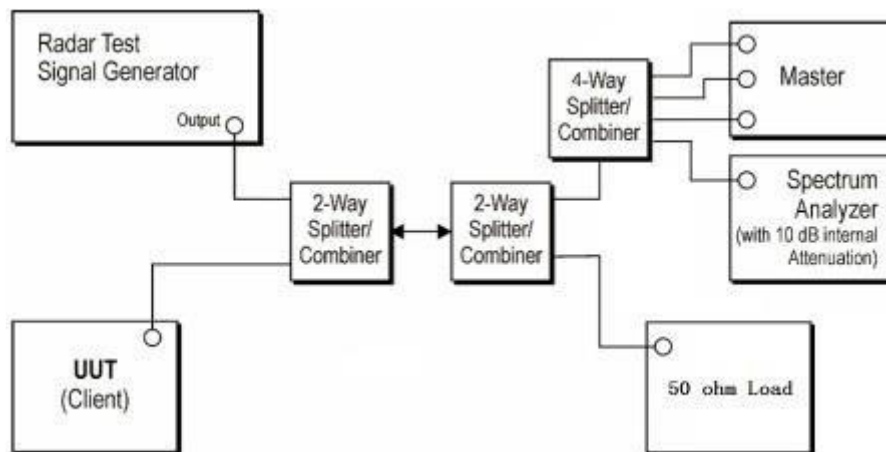

|             |              |                      |
|-------------|--------------|----------------------|
| Wireless AP | Manufacturer | ASUSTek Computer Inc |
|             | Model NO.    | AX5400               |
|             | FCC ID       | MSQ-RTAXJ300         |

Note:1. The Slave device associated with the EUT during these tests does not have radar detection capability.

2. WLAN traffic is generated by using the iperf software to send packets from the Master IP address to the Slave IP address.

3. The time required for the master and slave devices to fully start up is 120s.

4. EUT does not support TPC.


## 9.7 RADAR WAVEFORM CALIBRATION RESULT

Test data reference attachment.

## 9.8 IN-SERVICE MONITORING: CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME AND NON-OCCUPANCY PERIOD

### TEST CONFIGURATION:

Setup for Client with injection at the Master

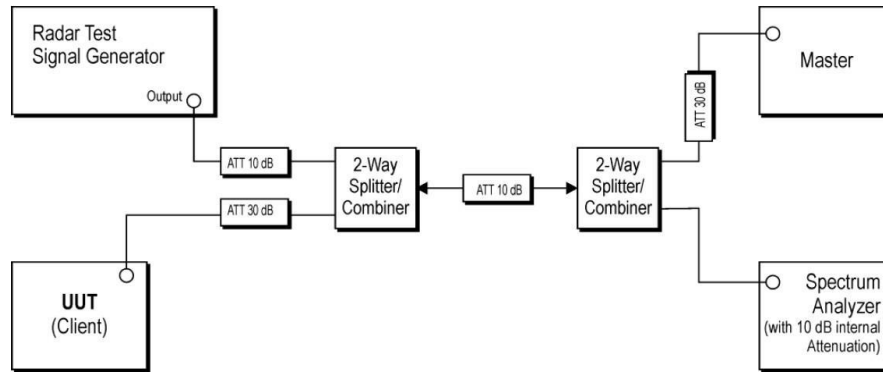

### TEST PROCEDURE:

1. The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
2. The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device
3. A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
4. EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is Streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using NotebookClassic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
5. When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
6. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom In 600ms plot of the Short Pulse Radar Type
7. Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by:  $Dwell (0.3ms) = S (12000ms) / B (4000)$ ; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by:  $C (ms) = N \times Dwell (0.3ms)$ ; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
8. Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

TEST MODE:

| Mode | Frequency (MHz) |
|------|-----------------|
| ac80 | 5290            |
| ac80 | 5530            |
| n40  | 5310            |
| n40  | 5510            |
| a    | 5320            |
| a    | 5500            |

**9.9 RESULT OF CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME AND NON-OCCUPANCY PERIOD FOR CLIENT BEACON TEST**

Test data reference attachment.

## 10. ANTENNA REQUIREMENT

### 10.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 10.2 EUT ANTENNA

The EUT antenna is permanent attached PIFA Antenna. It comply with the standard requirement.

## 11. TEST RESULTS

Refer to attachment

END OF REPORT