中国认可
国际互认
检测
TESTING
CNAS L3163

CE Radio Test Report

Project No.	:	2310G131
Equipment	:	AX3000 Ceiling Mount Wi-Fi 6 Access Point with 2.5G Port
Brand Name	:	Cudy
Test Model	:	AP3000
Series Model	:	AP3000_P, AP3000P
Applicant	:	Shenzhen Cudy Technology Co., Ltd.
Address	:	Room A606, Gaoxinqi Industrial Park, Liuxianyi Road, Baoan District, Shenzhen, China
Manufacturer	:	Shenzhen Cudy Technology Co., Ltd.
Address	:	Room A606, Gaoxinqi Industrial Park, Liuxianyi Road, Baoan District, Shenzhen, China
Factory	:	Shenzhen Cudy Technology Co., Ltd.
Address	:	Room A606, Gaoxinqi Industrial Park, Liuxianyi Road, Baoan District, Shenzhen, China
Date of Receipt	:	Oct. 26, 2023
Date of Test	:	Oct. 26, 2023 ~ Dec. 19, 2023
Issued Date	:	Dec. 27, 2023
Report Version	:	R00
Test Sample	:	Engineering Sample No.: SSL202310261 for permitted range of operating frequencies, SSL2023102616 for others.
Standard(s)	:	ETSI EN 300 440 V2.2.1 (2018-07)

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.(Dongguan).

Prepared by : Nick Chen
Nick Chen

Approved by : Steven Lu
Steven Lu

No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong, China.
Tel: +86-769-8318-3000 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by CNAS.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.
Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents Page

REPORT ISSUED HISTORY 6
1 . RF EMISSIONS MEASUREMENT 7
1.1 TEST FACILITY 7
1.2 MEASUREMENT UNCERTAINTY 7
1.3 TEST CONDITIONS 7
1.4 TEST CHANNEL 9
1.5 TEST METHODOLOGY AND RESULTS 10
2 . GENERAL INFORMATION 11
2.1 GENERAL DESCRIPTION OF EUT 11
2.2 DESCRIPTION OF TEST MODES 14
2.3 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING 15
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED 16
2.5 DESCRIPTION OF SUPPORT UNITS 16
3 . EQUIVALENT ISOTROPICALLY RADIATED POWER (E.I.R.P.) 17
3.1 LIMITS 17
3.2 TEST PROCEDURES 17
3.3 TEST SETUP LAYOUT 17
3.4 TEST DEVIATION 18
3.5 EUT OPERATION DURING TEST 18
3.6 TEST RESULTS 18
4 . PERMITTED RANGE OF OPERATING FREQUENCIES 19
4.1 LIMITS 19
4.2 TEST PROCEDURES 19
4.3 TEST SETUP LAYOUT 19
4.4 TEST DEVIATION 19
4.5 EUT OPERATION DURING TEST 19
4.6 TEST RESULTS 19
5 . UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN 20
5.1 LIMITS 20
5.2 TEST PROCEDURES 20
5.3 TEST SETUP LAYOUT 20
5.4 TEST DEVIATION 21
5.5 EUT OPERATION DURING TEST 21
5.6 TEST RESULTS (25MHZ TO 1000MHZ) 21
5.7 TEST RESULTS (ABOVE 1000MHZ) 21
6 . DUTY CYCLE 22
6.1 LIMITS 22
6.2 TEST PROCEDURES 22
6.3 TEST SETUP LAYOUT 22
6.4 TEST DEVIATION 22

Table of Contents Page

6.5 EUT OPERATION DURING TEST 22
6.6 TEST RESULTS 22
7 . ADJACENT CHANNEL SELECTIVITY 23
7.1 LIMITS 23
7.2 TEST PROCEDURES 23
7.3 TEST SETUP LAYOUT 23
7.4 TEST DEVIATION 23
7.5 EUT OPERATION DURING TEST 23
7.6 TEST RESULTS 23
8 . BLOCKING OR DESENSITIZATION 24
8.1 LIMITS 24
8.2 TEST PROCEDURES 24
8.3 TEST SETUP LAYOUT 24
8.4 TEST DEVIATION 24
8.5 EUT OPERATION DURING TEST 24
8.6 TEST RESULTS 24
9 . SPURIOUS RADIATIONS 25
9.1 LIMITS 25
9.2 TEST PROCEDURES 25
9.3 TEST SETUP LAYOUT 25
9.4 TEST DEVIATION 25
9.5 EUT OPERATION DURING TEST 25
9.6 TEST RESULTS (25MHZ TO 1000MHZ) 25
9.7 TEST RESULTS (ABOVE 1000MHZ) 25
10 . MEASUREMENT INSTRUMENTS LIST 26
11 . EUT TEST PHOTO 28
APPENDIX A - EQUIVALENT ISOTROPICALLY RADIATED POWER 29
APPENDIX B - PERMITTED RANGE OF OPERATING FREQUENCIES 35
APPENDIX C - UNWANTED EMISSIONS IN THE SPRIOUS DOMAIN - OPERATING (25MHZ TO 1000MHZ) 43
APPENDIX D - UNWANTED EMISSIONS IN THE SPRIOUS DOMAIN - STANDBY (25MHZ TO 1000MHZ) 46
APPENDIX E - UNWANTED EMISSIONS IN THE SPRIOUS DOMAIN - OPERATING (ABOVE 1000MHZ) 47
APPENDIX F - UNWANTED EMISSIONS IN THE SPRIOUS DOMAIN - STANDBY (ABOVE 1000MHZ) 72
APPENDIX G - DUTY CYCLE 73
APPENDIX H - ADJACENT CHANNEL SELECTIVITY 75

Table of Contents Page

APPENDIX I - BLOCKING 77
APPENDIX J - SPURIOUS EMISSIONS - RECEIVER (25MHZ TO 1000MHZ) 79
APPENDIX K - SPURIOUS EMISSIONS - RECEIVER (ABOVE 1000MHZ) 82

REPORT ISSUED HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-ETSP-4-2310G131	R00	Original Report.	Dec. 27, 2023	Valid

1. RF EMISSIONS MEASUREMENT

1.1 TEST FACILITY

The test facilities used to collect the test data in this report is **DG-CB15 / TR13 / TR15 / TR17** at the location of No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong, China.

1.2 MEASUREMENT UNCERTAINTY

The measurement uncertainty figures shall be calculated according the methods described in the ETSI TR 100 028 and shall correspond to an expansion factor (coverage factor) k=1.96 or k=2(which provide confidence levels of respectively 95% and 95.45% in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian)).
Measurement Uncertainty for a Level of Confidence of 95.45%, $U=2\times u_c(y)$.

The BTL measurement uncertainty as below table:

Parameters	**Uncertainty**
Radio frequency	2.7 ppm
RF power (conducted)	1.3 dB
Radiated emission of transmitter/receiver (25MHz ~ 1GHz)	3.50 dB
Radiated emission of transmitter/receiver (1GHz ~ 18GHz)	3.54 dB
Radiated emission of transmitter/receiver (18GHz ~ 40GHz)	4.00 dB
Temperature	0.8 °C
Humidity	2.2 %
Voltage (DC)	1 %
Voltage (AC, < 10 kHz)	2 %

1.3 TEST CONDITIONS

	Normal Test Conditions	Extreme Test Conditions
Temperature	+15°C to +35°C	0°C to 40°C
Relative Humidity	20% to 75%	N/A
Supply Voltage	AC 230V	AC 207-253V Note: (2)

Test Item	Temperature	Humidity	Test Voltage	Tested By
Equivalent isotropically radiated power (e.i.r.p.)	Normal & Extreme	50~59%	Normal & Extreme	Evan Fang
Permitted range of operating frequencies	Normal & Extreme	58%	Normal & Extreme	Complex Qin
Unwanted emissions in the spurious domain	26°C	50%	AC 230V/50Hz	Meers Zhang
Duty cycle	25°C	58%	AC 230V/50Hz	Jensen Zhou
Adjacent channel selectivity	23°C	48%	AC 230V/50Hz	Zack Zhang
Blocking or desensitization	23°C	48%	AC 230V/50Hz	Zack Zhang
Spurious radiations	26°C	50%	AC 230V/50Hz	Meers Zhang

Note:

(1) For tests at extreme temperatures, measurements shall be made in accordance with the procedures specified in clause 5.7.1.1, at the upper and lower temperatures of one of the following ranges, either:

The temperature range as declared by the manufacturer	0°C to +40°C	√
Category I (General):	-20°C to +55°C	
Category II (Portable):	-10°C to +55°C	
Category III (Equipment for normal indoor use):	5°C to +35°C	

(2) **Mains voltage:**

1) The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages, for which the equipment was designed.
2) The extreme test voltages for equipment to be connected to an ac mains source shall be the nominal mains voltage ±10 %. For equipment that operates over a range of mains voltages clause 5.7.2.4 applies.

Battery power sources

1) When the radio equipment is intended for operation with the usual types of battery power source, the normal test voltage shall be 1,1 multiplied by the nominal voltage of the battery (e.g. 6 V, 12 V, etc.).
2) When the radio equipment is intended for operation from the usual type of battery power sources the extreme test voltages shall be 1,3 and 0,9 multiplied by the nominal voltage of the battery (6 V, 12 V, etc.).
For float charge applications using "gel-cell" type batteries the extreme voltage shall be 1,15 and 0,85 multiplied by the nominal voltage of the declared battery voltage.

Power sources using other types of batteries

The lower extreme test voltages for equipment with power sources using batteries shall be as follows:

- for equipment with a battery indicator, the end point voltage as indicated;
- for equipment without a battery indicator the following end point voltages shall be used:
  - for the Leclanché or the lithium type of battery:
    - 0,85 multiplied by the nominal voltage of the battery;
  - for the nickel-cadmium type of battery:
    - 0,9 multiplied by the nominal voltage of the battery;
- for other types of battery or equipment, the lower extreme test voltage for the discharged condition shall be declared by the equipment manufacturer.

The nominal voltage is considered to be the upper extreme test voltage in this case.

Other power sources

1) For operation from other power sources or types of battery (primary or secondary), the normal test voltage shall be that declared by the equipment manufacturer and agreed to by the accredited test laboratory. Such values shall be stated in the test report.
2) For equipment using other power sources, or capable of being operated from a variety of power sources, the extreme test voltages shall be those agreed between the equipment manufacturer and the test laboratory. This shall be recorded in the test report.

1.4 TEST CHANNEL

IEEE 802.11a / IEEE 802.11ac(VHT20) / IEEE 802.11ax(HE20)		
Test Channel	EUT Channel	Test Frequency
Low	CH149	5745 MHz
Middle	CH157	5785 MHz
High	CH165	5825 MHz

IEEE 802.11ac(VHT40) / IEEE 802.11ax(HE40)		
Test Channel	EUT Channel	Test Frequency
Low	CH151	5755 MHz
High	CH159	5795 MHz

IEEE 802.11ac(VHT80) / IEEE 802.11ax(HE80)		
Test Channel	EUT Channel	Test Frequency
High	CH155	5775 MHz

1.5 TEST METHODOLOGY AND RESULTS

Harmonised Standard ETSI EN 300 440					
Requirement			Requirement Conditionality		Observations
No	Description	Reference: Clause No	U/C	Condition	
1	e.i.r.p.	4.2.2	C	Applies to all devices with transmitters	PASS
2	Permitted range of operating frequencies	4.2.3	C	Applies to all devices with transmitters	PASS
3	Unwanted emissions in the spurious domain	4.2.4	C	Applies to all devices with transmitters	PASS **Note (2)**
4	Duty cycle	4.2.5.4	C	Transmitting devices which do not use LBT, DAA, or RFID transmitters operating in the 2 446 to 2 454 MHz band transmitting more than 500 mW e.i.r.p. power level	PASS
5	Additional requirements for FHSS equipment	4.2.6	C	Equipment utilizing FHSS modulation	N/A
6	Adjacent channel selectivity	4.3.3	C	Applies to equipment Category 1 receivers	PASS
7	Blocking or desensitization	4.3.4	C	Applies to category 1, 2, and 3 SRD communication media receivers	PASS
8	Spurious radiations	4.3.5	C	Applies to all receivers, except receivers used in combination with permanently co-located transmitters continuously transmitting	PASS
9	Spectrum access techniques	4.4	C	Equipment which are not using duty cycle restrictions for media access	N/A
10	GBSAR antenna pattern	4.6.4	C	Applies only GBSAR systems	N/A
11	Limits for GBSAR	Annex I	C	Applies only GBSAR systems	N/A

Note:
(1) “U/C”: Indicates whether the requirement is unconditionally applicable (U) or is conditional upon the manufacturer's claimed functionality of the equipment (C).
”N/A”: indicates test is not applicable to this device.
(2) The emission of the transmitter on standby mode is equal to that of receiving mode.

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	AX3000 Ceiling Mount Wi-Fi 6 Access Point with 2.5G Port
Brand Name	Cudy
Test Model	AP3000
Series Model	AP3000_P, AP3000P
Model Difference(s)	Only differ in model name. Model AP3000 with AC adapter. Model AP3000_P and AP3000P with PoE adapter.
Hardware Version	V1
Software Version	FW1.16.4
Power Source	1# DC voltage supplied from AC adapter. Model: TPA259-18120-EU 2# DC voltage supplied from PoE adapter. Model: RP023-4800320ZG
Power Rating	1# I/P: 100-240V~50/60Hz 0.6A O/P: 12V ⎓ 1.5A 2# I/P: 100-240V~50/60Hz 0.5A Max O/P: 48V ⎓ 0.32A
Operation Frequency	5725 MHz ~ 5850 MHz
Modulation Type	IEEE 802.11a/n/ac: OFDM IEEE 802.11ax: OFDMA
Bit Rate of Transmitter	IEEE 802.11a: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 300 Mbps IEEE 802.11ac: up to 866.7 Mbps IEEE 802.11ax: up to 1201 Mbps
Max. e.i.r.p. _Non Beamforming	IEEE 802.11a: 13.96 dBm (24.89 mW) IEEE 802.11ac(VHT20): 13.89 dBm (24.49 mW) IEEE 802.11ac(VHT40): 13.61 dBm (22.96 mW) IEEE 802.11ac(VHT80): 13.97 dBm (24.95 mW) IEEE 802.11ax(HE20): 13.96 dBm (24.89 mW) IEEE 802.11ax(HE40): 13.96 dBm (24.89 mW) IEEE 802.11ax(HE80): 13.84 dBm (24.21 mW)
Max. e.i.r.p. _Beamforming	IEEE 802.11ac(VHT20): 13.67 dBm (23.28 mW) IEEE 802.11ac(VHT40): 13.49 dBm (22.34 mW) IEEE 802.11ac(VHT80): 13.44 dBm (22.08 mW) IEEE 802.11ax(HE20): 13.75 dBm (23.71 mW) IEEE 802.11ax(HE40): 13.71 dBm (23.50 mW) IEEE 802.11ax(HE80): 13.28 dBm (21.28 mW)
Categorization	☒ Receiver category 1 ☐ Receiver category 2 ☐ Receiver category 3

Note:
1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax(HE20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax(HE40)		IEEE 802.11ac(VHT80) IEEE 802.11ax(HE80)	
Band 4		Band 4		Band 4	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

3. Table for Filed Antenna:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	PCB	N/A	5.27
2	N/A	N/A	PCB	N/A	5.69
3	N/A	N/A	PCB	N/A	4.68

Note:

1) The EUT supportsMIMO. Physically, the EUT provides three completed transmitters and receivers (3T3R).
2) Beamforming Gain: 3 dBi.
3) The antenna gain and beamforming gain are provided by the manufacturer.
4) Any one of the three antennas is used as an intelligent switching antenna, and the antenna data stream is NSS2 when used.

4. The worst case for 3TX as follow:

Non Beamforming:

Operating Mode / TX Mode	3TX
IEEE 802.11a	V (Ant. 1+Ant. 2+Ant. 3)
IEEE 802.11n(HT20)	V (Ant. 1+Ant. 2+Ant. 3)
IEEE 802.11n(HT40)	V (Ant. 1+Ant. 2+Ant. 3)
IEEE 802.11ac(VHT20)	V (Ant. 1+Ant. 2+Ant. 3)
IEEE 802.11ac(VHT40)	V (Ant. 1+Ant. 2+Ant. 3)
IEEE 802.11ac(VHT80)	V (Ant. 1+Ant. 2+Ant. 3)
IEEE 802.11ax(HE20)	V (Ant. 1+Ant. 2+Ant. 3)
IEEE 802.11ax(HE40)	V (Ant. 1+Ant. 2+Ant. 3)
IEEE 802.11ax(HE80)	V (Ant. 1+Ant. 2+Ant. 3)

Beamforming:

Operating Mode / TX Mode	3TX
IEEE 802.11n(HT20)	V (Ant. 1+Ant. 2+Ant. 3)
IEEE 802.11n(HT40)	V (Ant. 1+Ant. 2+Ant. 3)
IEEE 802.11ac(VHT20)	V (Ant. 1+Ant. 2+Ant. 3)
IEEE 802.11ac(VHT40)	V (Ant. 1+Ant. 2+Ant. 3)
IEEE 802.11ac(VHT80)	V (Ant. 1+Ant. 2+Ant. 3)
IEEE 802.11ax(HE20)	V (Ant. 1+Ant. 2+Ant. 3)
IEEE 802.11ax(HE40)	V (Ant. 1+Ant. 2+Ant. 3)
IEEE 802.11ax(HE80)	V (Ant. 1+Ant. 2+Ant. 3)

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test Items	Mode	Data Rate	Channel
Equivalent isotropically radiated power	IEEE 802.11a	6 Mbps	149/157/165
	IEEE 802.11ac(VHT20)	MCS8	
	IEEE 802.11ax(HE20)	MCS0	
	IEEE 802.11ac(VHT40)	MCS8	151/159
	IEEE 802.11ax(HE40)	MCS0	
	IEEE 802.11ac(VHT80)	MCS8	155
	IEEE 802.11ax(HE80)	MCS0	
Permitted range of operating frequencies	IEEE 802.11a	6 Mbps	149/165
	IEEE 802.11ac(VHT20)	MCS8	
	IEEE 802.11ax(HE20)	MCS0	
	IEEE 802.11ac(VHT40)	MCS8	151/159
	IEEE 802.11ax(HE40)	MCS0	
	IEEE 802.11ac(VHT80)	MCS8	155
	IEEE 802.11ax(HE80)	MCS0	
Unwanted emissions in the spurious domain - Operating / Standby (25MHz~1GHz)	IEEE 802.11ac(VHT80)	MCS8	155
Unwanted emissions in the spurious domain - Operating / Standby (Above 1GHz)	IEEE 802.11a	6 Mbps	149/165
	IEEE 802.11ac(VHT20)	MCS8	
	IEEE 802.11ax(HE20)	MCS0	
	IEEE 802.11ac(VHT40)	MCS8	151/159
	IEEE 802.11ax(HE40)	MCS0	
	IEEE 802.11ac(VHT80)	MCS8	155
	IEEE 802.11ax(HE80)	MCS0	
Duty cycle	IEEE 802.11a	6 Mbps	149
Adjacent channel selectivity	IEEE 802.11a	6 Mbps	157
Blocking	IEEE 802.11a	6 Mbps	149/165
Spurious radiation - Receiver (25MHz~1GHz)	IEEE 802.11ac(VHT80)	MCS8	155
Spurious radiation - Receiver (Above 1GHz)	IEEE 802.11ac(VHT80)	MCS8	155

Note :

(1) VHT20/VHT40 covers HT20/HT40, due to same modulation. The power setting for 802.11n HT20 and HT40 are the same or lower than 802.11ac VHT20 and VHT40.

(2) For radiated spurious emissions below 1 GHz and receiver spurious emissions above 1 GHz test, the IEEE 802.11ac(VHT80) channel 155 is found to be the worst case and recorded.

(3) IEEE 802.11ax mode only supports full RU, so only the full RU is evaluated and measured inside report.

(4) The measurements for RF Output Power are tested, the Non Beamforming and Beamforming are recorded in the report. The worst case is Non Beamforming and only the worst case is documented for other test items.

(5) For radiated spurious emissions below 1 GHz test, AC adapter and PoE adapter had been evaluated. The worst case is AC adapter and recorded.

2.3 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.


Non Beamforming

Test Software Version	QATool_UIv2.78_DLLv6.83_ap_2023-0113		
Frequency (MHz)	5745	5785	5825
IEEE 802.11a	-2	-2	-1
IEEE 802.11ac(VHT20)	0.5	0.5	0.5
IEEE 802.11ax(HE20)	1	1	
Frequency (MHz)	5755	5795	
IEEE 802.11ac(VHT40)	0.5	0.5	
IEEE 802.11ax(HE40)	1	1	
Frequency (MHz)	5775		
IEEE 802.11ac(VHT80)	1.5		
IEEE 802.11ax(HE80)	1		

Beamforming

Test Software Version	QATool_UIv2.78_DLLv6.83_ap_2023-0113		
Frequency (MHz)	5745	5785	5825
IEEE 802.11ac(VHT20)	-1.5	-1.5	-1.5
IEEE 802.11ax(HE20)	-1	-1	-1
Frequency (MHz)	5755	5795	
IEEE 802.11ac(VHT40)	-1	-1	
IEEE 802.11ax(HE40)	-1	-1	
Frequency (MHz)	5775		
IEEE 802.11ac(VHT80)	-1.5		
IEEE 802.11ax(HE80)	-1		

2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

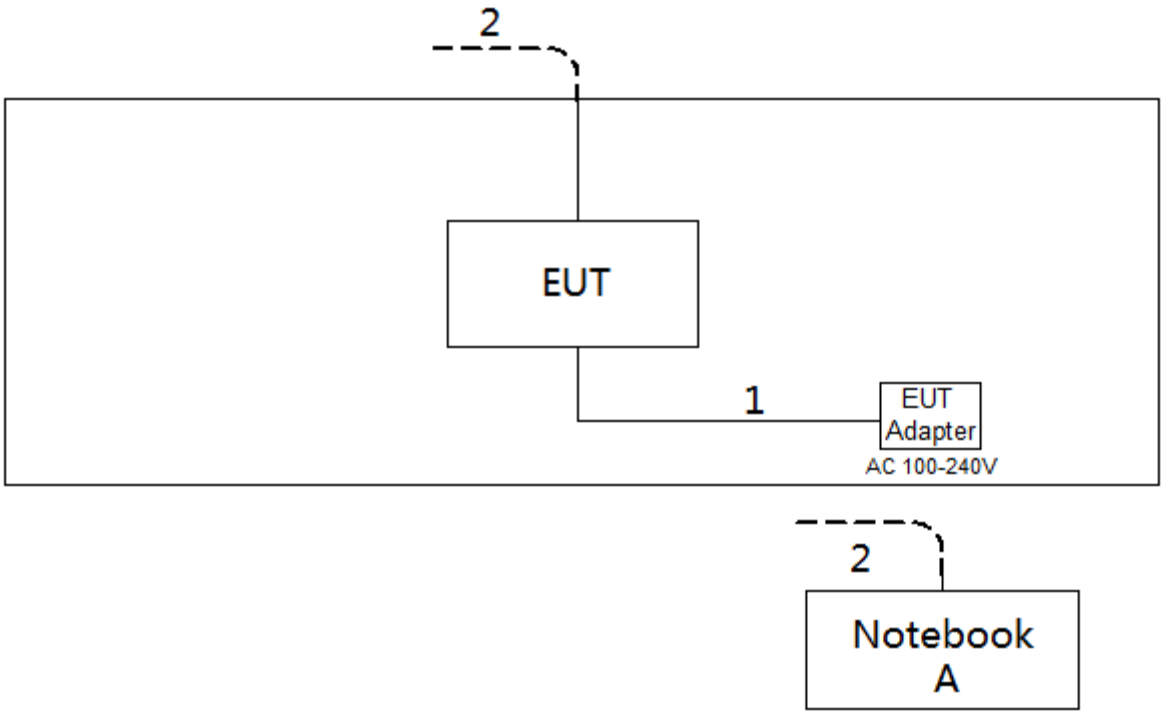

2.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model No.	Series No.
A	Notebook	Dell	Inspiron 15-7559	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC Cable	NO	NO	1.5m
2	RJ45 Cable	NO	NO	10m

3. EQUIVALENT ISOTROPICALLY RADIATED POWER (E.I.R.P.)

3.1 LIMITS

Clause	4.2.2.4
Test Item	Equivalent isotropically radiated power (e.i.r.p.)
Limits	The transmitter maximum e.i.r.p. under normal and extreme test conditions.

Entry	Frequency Bands	Power	Application	Notes
1	2 400 MHz to 2 483,5 MHz	10 mW e.i.r.p.	Non-specific short range devices	
2	2 400 MHz to 2 483,5 MHz	25 mW e.i.r.p.	Radiodetermination devices	
3	(a) 2 446 MHz to 2 454 MHz	500 mW e.i.r.p.	Radio Frequency Identification (RFID) devices	See also table 4 and Annex G
4	(b) 2 446 MHz to 2 454 MHz	4 W e.i.r.p.	Radio Frequency Identification (RFID) devices	See also table 4 and Annex G
5	5 725 MHz to 5 875 MHz	25 mW e.i.r.p.	Non-specific short range devices	
6	9 200 MHz to 9 500 MHz	25 mW e.i.r.p.	Radiodetermination devices	
7	9 500 MHz to 9 975 MHz	25 mW e.i.r.p.	Radiodetermination devices	
8	10,5 GHz to 10,6 GHz	500 mW e.i.r.p.	Radiodetermination devices	
9	13,4 GHz to 14,0 GHz	25 mW e.i.r.p.	Radiodetermination devices	
10	17,1 GHz to 17,3 GHz	400 mW e.i.r.p.	Radiodetermination devices	See Annex H
11	24,00 GHz to 24,25 GHz	100 mW e.i.r.p.	Non-specific short range devices and radiodetermination devices	

NOTE: The spectrum ranges in some entries are not harmonised throughout all EU territory, specifically entries 4, 9, and 11 have been identified as such. Implementers are cautioned to refer to CEPT/ERC Recommendation 70-03 [i.2] as well as current National Radio plans to verify acceptance within intended regions of use.

3.2 TEST PROCEDURES


Refer to ETSI EN 300 440, chapter 4.2.2.3.

3.3 TEST SETUP LAYOUT

Normal Condition:



Extreme Condition:

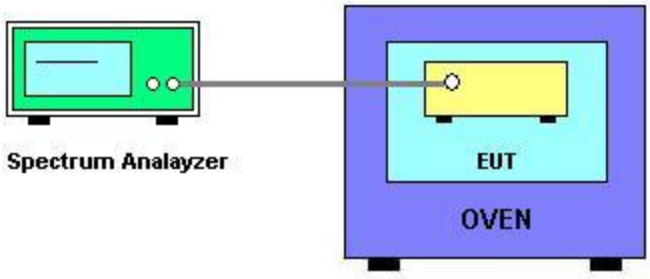

3.4 TEST DEVIATION

There is no deviation with the original standard.

3.5 EUT OPERATION DURING TEST

The measurements shall be performed during continuously transmitting.

3.6 TEST RESULTS

Please refer to the Appendix A.

4. PERMITTED RANGE OF OPERATING FREQUENCIES

4.1 LIMITS

Clause	4.2.3.5
Test Item	Permitted range of operating frequencies
Limits	The width of the power spectrum envelope is f_H -f_L for a given operating frequency. In equipment that allows adjustment or selection of different operating frequencies, the power envelope takes up different positions in the allowed band. The frequency range is determined by the lowest value of f_L and the highest value of f_H resulting from the adjustment of the equipment to the lowest and highest operating frequencies. The occupied bandwidth (i.e. the bandwidth in which 99 % of the wanted emission is contained) of the transmitter shall fall within the assigned frequency band. For all equipment the frequency range shall lie within the frequency band given by clause 4.2.2.4, table 2. For non-harmonized frequency bands the available frequency range may differ between national administrations.

4.2 TEST PROCEDURES


Refer to ETSI EN 300 440, chapter 4.2.3.3.

4.3 TEST SETUP LAYOUT

Normal Condition:



Extreme Condition:

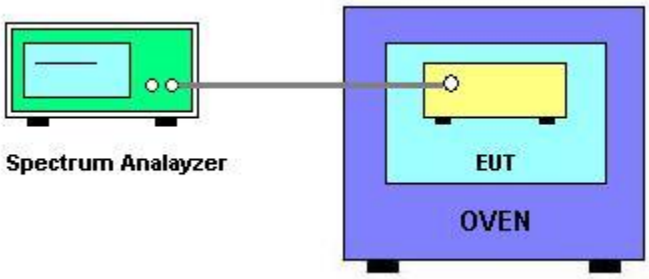

4.4 TEST DEVIATION

There is no deviation with the original standard.

4.5 EUT OPERATION DURING TEST

The measurements shall be performed during continuously transmitting.

4.6 TEST RESULTS

Please refer to the Appendix B.

5. UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN

5.1 LIMITS


<table>
<tr><td>Clause</td><td>4.2.4.4</td></tr>
<tr><td>Test Item</td><td>Unwanted emissions in the spurious domain</td></tr>
<tr><td>Limits</td><td>The maximum power limits of any unwanted emissions in the spurious domain are given.
<table>
<tr><th>Frequency ranges
State</th><th>47 MHz to 74 MHz
87,5 MHz to 108 MHz
174 MHz to 230 MHz
470 MHz to 862 MHz</th><th>Other frequencies
≤ 1 000 MHz</th><th>Frequencies
> 1 000 MHz</th></tr>
<tr><td>Operating</td><td>4 nW</td><td>250 nW</td><td>1 µW</td></tr>
<tr><td>Standby</td><td>2 nW</td><td>2 nW</td><td>20 nW</td></tr>
</table>
Note: Operating: transmitter switched on, Standby: transmitter switched off.</td></tr>
</table>

5.2 TEST PROCEDURES


Refer to ETSI EN 300 440, chapter 4.2.4.3.

5.3 TEST SETUP LAYOUT

Radiated Measurement Test Set-Up Frequency Below 1 GHz

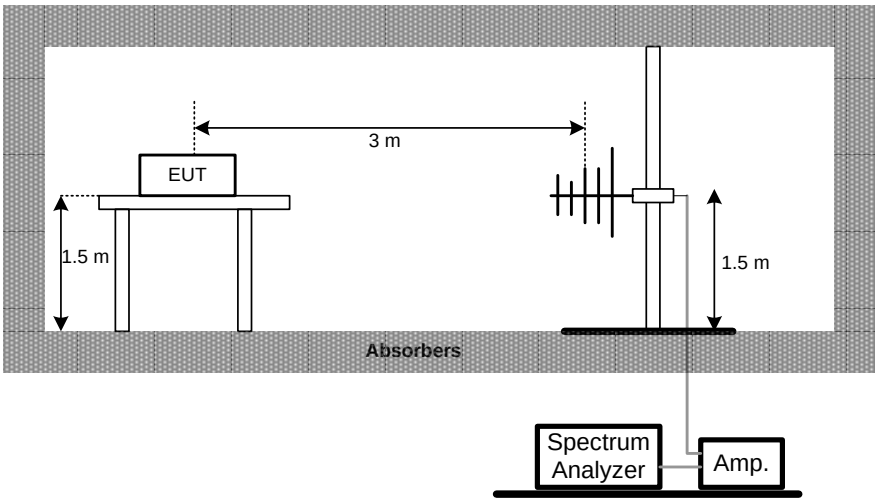

Radiated Measurement Test Set-Up Frequency Above 1 GHz

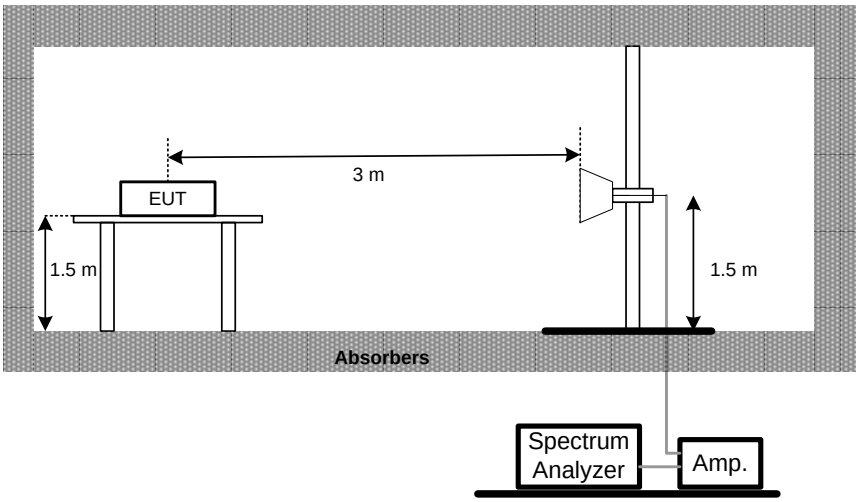

5.4 TEST DEVIATION

There is no deviation with the original standard.

5.5 EUT OPERATION DURING TEST

The measurements shall be performed during continuously transmitting.

5.6 TEST RESULTS (25MHZ TO 1000MHZ)

Please refer to the Appendix C for operating mode.
Please refer to the Appendix D for standby mode.

5.7 TEST RESULTS (ABOVE 1000MHZ)

Please refer to the Appendix E for operating mode.
Please refer to the Appendix F for standby mode.

6. DUTY CYCLE

6.1 LIMITS

<table>
<tr><td>Clause</td><td>4.2.5.4</td></tr>
<tr><td>Test Item</td><td>Duty cycle</td></tr>
<tr><td>Limits</td><td>
<table>
<tr><th>Frequency Band</th><th>Duty cycle</th><th>Application</th><th>Notes</th></tr>
<tr><td>2 400 MHz to 2 483,5 MHz</td><td>No Restriction</td><td>Generic use</td><td></td></tr>
<tr><td>2 400 MHz to 2 483,5 MHz</td><td>No Restriction</td><td>Radiodetermination</td><td></td></tr>
<tr><td>(a) 2 446 MHz to 2 454 MHz</td><td>No Restriction</td><td>RFID</td><td>Limits shown in Annex G shall apply</td></tr>
<tr><td>(b) 2 446 MHz to 2 454 MHz</td><td>≤ 15 %</td><td>RFID</td><td>Limits shown in Annex G shall apply</td></tr>
<tr><td>5 725 MHz to 5 875 MHz</td><td>No Restriction</td><td>Generic use</td><td></td></tr>
<tr><td>9 200 MHz to 9 500 MHz</td><td>No Restriction</td><td>Radiodetermination</td><td></td></tr>
<tr><td>9 500 MHz to 9 975 MHz</td><td>No Restriction</td><td>Radiodetermination</td><td></td></tr>
<tr><td>10,5 GHz to 10,6 GHz</td><td>No Restriction</td><td>Radiodetermination</td><td></td></tr>
<tr><td>13,4 GHz to 14,0 GHz</td><td>No Restriction</td><td>Radiodetermination</td><td></td></tr>
<tr><td>17,1 GHz to 17,3 GHz</td><td>DAA or equivalent techniques</td><td>Radiodetermination, limited to GBSAR detecting and movement and alert applications</td><td>Limits shown in Annex I shall apply</td></tr>
<tr><td>24,00 GHz to 24,25 GHz</td><td>No Restriction</td><td>Generic use and for radiodetermination</td><td></td></tr>
<tr><td colspan="4">NOTE: The spectrum ranges in some entries are not harmonised throughout all EU territory, specifically entries 4, 9, and 11 have been identified as such. Implementers are cautioned to refer to CEPT/ERC Recommendation 70-03 [i.2] as well as current National Radio plans to verify acceptance within intended regions of use.</td></tr>
</table>
Note: The maximum duty cycle within a 1 hour period.
</td></tr>
</table>

6.2 TEST PROCEDURES

Refer to ETSI EN 300 440, chapter 4.2.5.3.

6.3 TEST SETUP LAYOUT



6.4 TEST DEVIATION

There is no deviation with the original standard.

6.5 EUT OPERATION DURING TEST

The measurements shall be performed during normal transmitting.

6.6 TEST RESULTS

Please refer to the Appendix G.

7. ADJACENT CHANNEL SELECTIVITY


7.1 LIMITS

Clause	4.3.3.4
Test Item	Adjacent channel selectivity
Limits	The adjacent channel selectivity of the equipment under specified conditions shall not be less than -30 dBm + k. The correction factor, k, is as follows: $k = -20\log f - 10\log BW$ Where: - *f* is the frequency in GHz; - *BW* is the occupied bandwidth in MHz. The factor *k* is limited within the following: - -40 dB < k < 0 dB.

7.2 TEST PROCEDURES

Refer to ETSI EN 300 440, chapter 4.3.3.3.

7.3 TEST SETUP LAYOUT

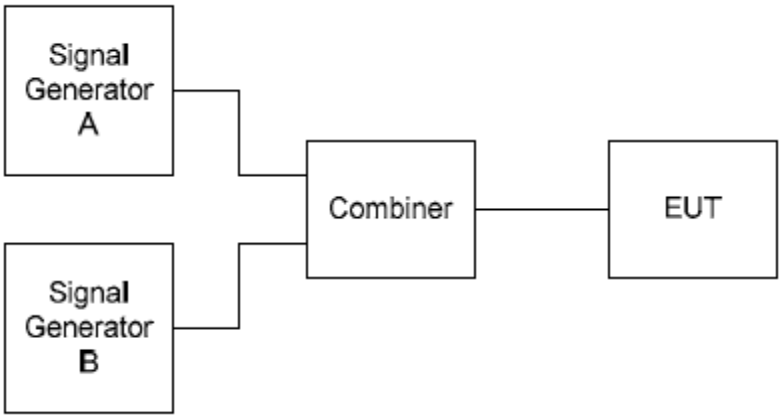

7.4 TEST DEVIATION

There is no deviation with the original standard.

7.5 EUT OPERATION DURING TEST

The measurements shall be performed during normal receiving.

7.6 TEST RESULTS

Please refer to the Appendix H.

8. BLOCKING OR DESENSITIZATION


8.1 LIMITS

<table>
<tr><td>Clause</td><td>4.3.4.4</td></tr>
<tr><td>Test Item</td><td>Blocking or desensitization</td></tr>
<tr><td>Limits</td><td>The blocking level, for any frequency within the specified ranges, shall not be less than the values given in table, except at frequencies on which spurious responses are found.
<table>
<tr><th>Receiver category</th><th>Limit</th></tr>
<tr><td>1</td><td>-30 dBm + k</td></tr>
<tr><td>2</td><td>-45 dBm + k</td></tr>
<tr><td>3</td><td>-60 dBm + k</td></tr>
</table>
The correction factor, k, is as follows:
$k = -20\log f - 10\log BW$
Where:
- f is the frequency in GHz;
- BW is the occupied bandwidth in MHz.
The factor k is limited within the following:
- -40 dB < k < 0 dB.</td></tr>
</table>

8.2 TEST PROCEDURES

Refer to ETSI EN 300 440, chapter 4.3.4.3.

8.3 TEST SETUP LAYOUT

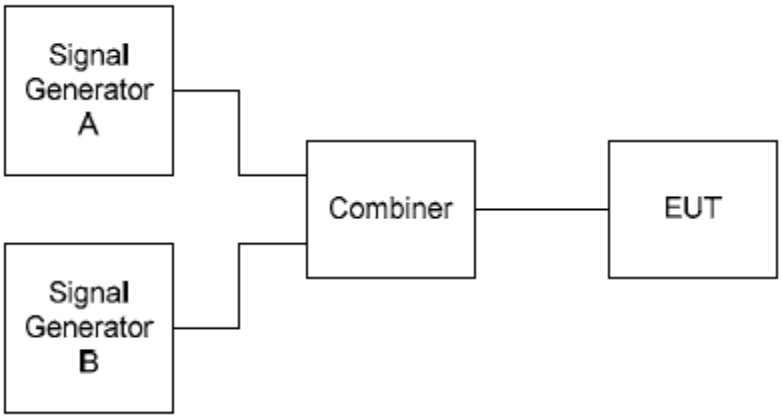

8.4 TEST DEVIATION

There is no deviation with the original standard.

8.5 EUT OPERATION DURING TEST

The measurements shall be performed during normal receiving.

8.6 TEST RESULTS

Please refer to the Appendix I.

9. SPURIOUS RADIATIONS

9.1 LIMITS

<table>
<tr><td>Clause</td><td>4.3.5.4</td></tr>
<tr><td>Test Item</td><td>Spurious radiations</td></tr>
<tr><td>Limit</td><td>The power of any spurious emission shall not exceed 2 nW in the range 25 MHz to 1 GHz and shall not exceed 20 nW on frequencies above 1 GHz.
<table>
<tr><th>Other frequencies
25 MHz to 1000 MHz</th><th>Frequencies
Above 1000 MHz</th></tr>
<tr><td>2 nW (-57dBm)</td><td>20 nW (-47dBm)</td></tr>
</table></td></tr>
</table>

9.2 TEST PROCEDURES

Refer to ETSI EN 300 440, chapter 4.3.5.3.

9.3 TEST SETUP LAYOUT

Refer to clause 5.3.

9.4 TEST DEVIATION

There is no deviation with the original standard.

9.5 EUT OPERATION DURING TEST

The measurements shall be performed during continuously receiving.

9.6 TEST RESULTS (25MHZ TO 1000MHZ)

Please refer to the Appendix J.

9.7 TEST RESULTS (ABOVE 1000MHZ)

Please refer to the Appendix K.

10. MEASUREMENT INSTRUMENTS LIST

Equivalent Isotropically Radiated Power (e.i.r.p.)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Table top type high and low temperature test chamber	CEPREI	CEEC-M64T-40	15-008	Jan. 07, 2024
2	Peak Power Analyzer	Keysight	8990B	MY51000506	Jun. 17, 2024
3	Wideband power sensor	Keysight	N1923A	MY58310004	Jun. 17, 2024
4	Attenuator	Talent Microwave	TA10A2-S-18	N/A	Attenuator

Permitted Range of Operating Frequency					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EXA Spectrum Analyzer	Agilent	N9010A	MY54200164	Jan. 07, 2024
2	Table top type high and low temperature test chamber	CEPREI	CEEC-M64T-40	15-008	Jan. 07, 2024
3	Cable	RegalWay	S02-1081212-050	RWP50-402-SM SM-1M	N/A
4	Attenuator	Talent Microwave	TA10A2-S-18	N/A	N/A

Duty Cycle					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP38	100852	Jun. 16, 2024
2	Cable	RegalWay	S02-181212-308	RWP50-402-SM SM-1M	N/A


Adjacent channel selectivity & Blocking					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	wideband radio communication tester	R&S	CMW500	152372	Jan. 07, 2024
2	EXG-B RF Vector Signal Generator	Keysight	N5172B	MY53051637	Jan. 07, 2024
3	Shielding box	Jiachen	JC-PB2009	200917D0184A	
4	Power divider	N/A	PD-2SF-2080	N/A	Jan. 07, 2024
5	Cable	RegalWay	20210802 013	RWP50-402-SM SM-1M	N/A
6	Cable	RegalWay	S02-1081212-050	RWP50-402-SM SM-1M	N/A
7	Cable	REBES	N/A	S02-1090322-018	N/A


Transmitter and Receiver Spurious Emission (Radiated Measurement)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Amplifier	HP	8447D	2944A11203	Jan. 07, 2024
2	EXA Spectrum Analyzer	Agilent	N9010A	MY50520044	Jan. 07, 2024
3	EXA Spectrum Analyzer	Keysight	N9010A	MY55150209	Jun. 16, 2024
4	Preamplifier	EMC INSTRUMENT	EMC001330	980986	Nov. 18, 2023 Nov. 17, 2024
5	MXA Signal Analyzer	KEYSIGHT	N9020B	MY63380204	Nov. 18, 2023 Nov. 17, 2024
6	EXA Signal Analyzer	Keysight	N9010A	MY56480488	Jan. 15, 2024
7	Trilog-Broadband Antenna	Schwarzbeck	VULB9160	9160-3232	Feb. 23, 2024
8	Cable	Talent microwave	L6-NMNM-10M	N/A	N/A
9	Cable	RegalWay	LMR400-NMRANM-0.8M	N/A	N/A
10	Filter	STI	STI15-9923	N/A	Jan. 08, 2024
11	Filter	STI	STI15-9923	N/A	Jun. 17, 2024
12	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
13	Controller	Innco Systems Gmbh	CO3000-4port	CO3000/1155/45430119/P	N/A
14	DRG Horn Antenna	ETS	3117-PA	221576	Jul. 07, 2024
15	Preamplifier	ETS	3117-PA	221576	Jul. 12, 2024
16	Cable	Talent microwave	A81-SMAMSMAM-12.5M	N/A	N/A
17	Filter	STI	STI15-9938	N/A	Jun. 17, 2024
18	Pre-Amplifier	EMC INSTRUMENT	EMC184045SE	980409	Jan. 07, 2024
19	DRG Horn Antenna	ETS	3116C	218942	Mar. 01, 2024
20	Cable	Tonscend	HF160-KMKM-5.00M	N/A	N/A
21	Cable	Tonscend	HF160-KMKM-0.5M	N/A	N/A

Remark: “N/A” denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

11. EUT TEST PHOTO

Radiated Emissions Test Photos

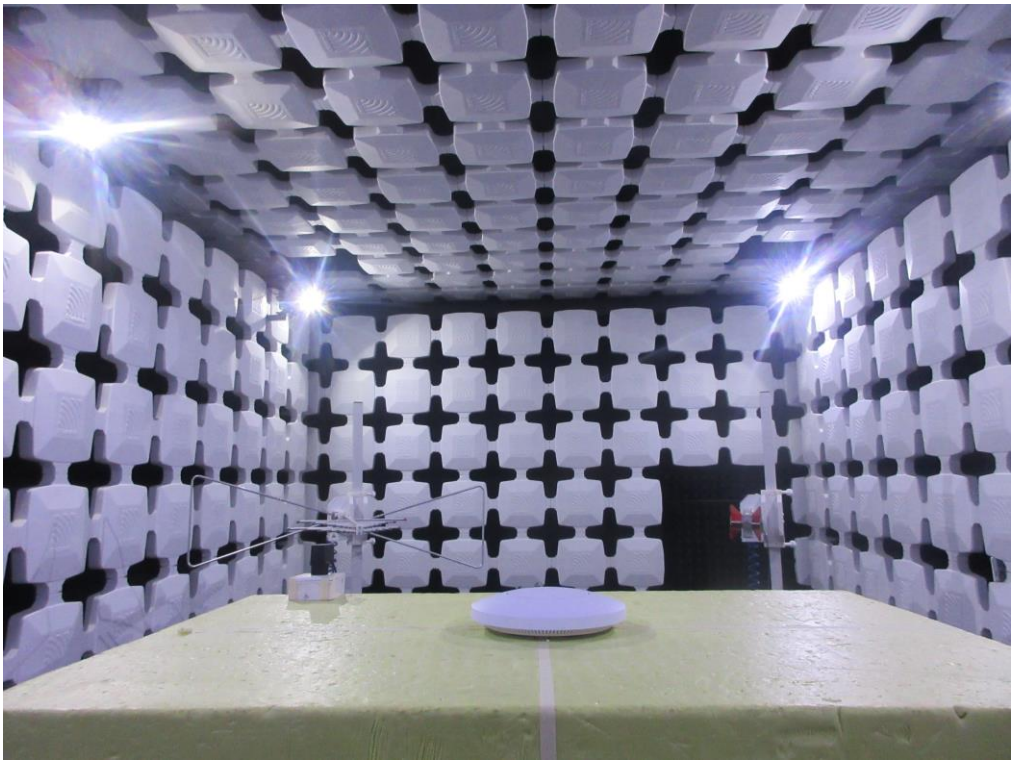

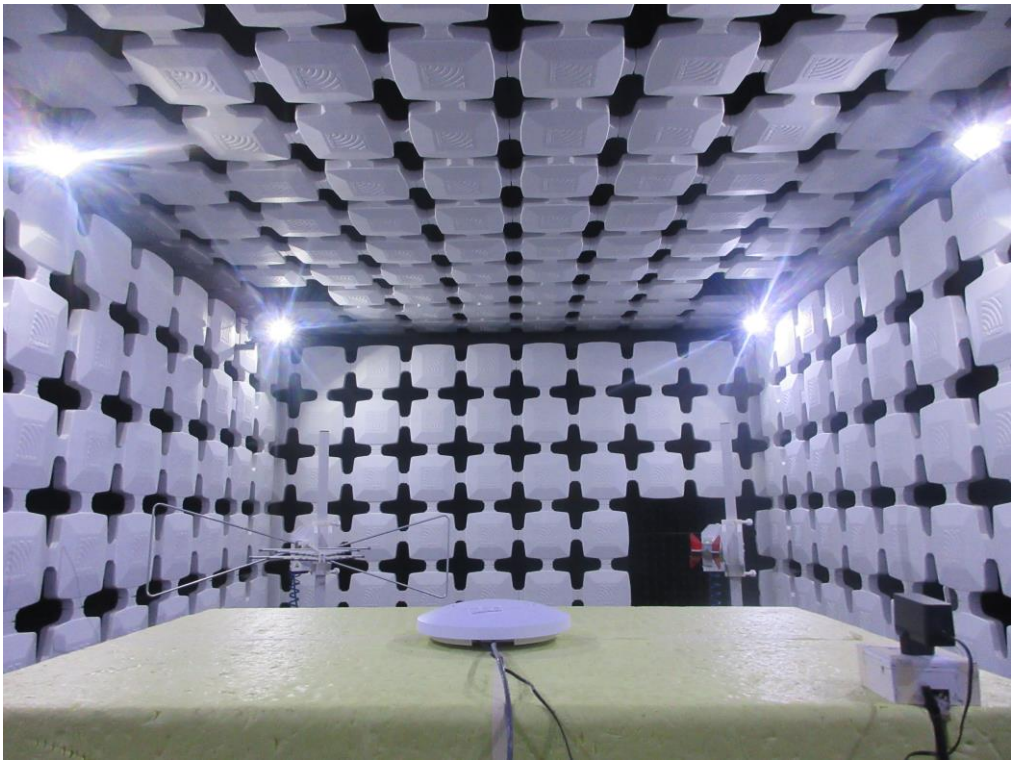

APPENDIX A - EQUIVALENT ISOTROPICALLY RADIATED POWER

Non Beamforming

Test Mode: IEEE 802.11a Mode_Total						
Test Conditions				e.i.r.p. (dBm)		
				CH149	CH157	CH165
T_{nom} (°C)	23	V_{nom} (V)	230	13.69	13.57	13.86
T_{min} (°C)	0	V_{max} (V)	253	13.80	13.67	13.96
		V_{min} (V)	207	13.55	13.47	13.74
T_{max} (°C)	40	V_{max} (V)	253	13.58	13.46	13.78
		V_{min} (V)	207	13.78	13.68	13.88
Max. e.i.r.p.				13.96		
Limits				13.98dBm (25mW)		
Result				Pass		

Test Mode: IEEE 802.11ac(VHT20) Mode_Total						
Test Conditions				e.i.r.p. (dBm)		
				CH149	CH157	CH165
T_{nom} (°C)	23	V_{nom} (V)	230	13.54	13.76	13.45
T_{min} (°C)	0	V_{max} (V)	253	13.64	13.89	13.61
		V_{min} (V)	207	13.44	13.63	13.36
T_{max} (°C)	40	V_{max} (V)	253	13.43	13.66	13.35
		V_{min} (V)	207	13.64	13.87	13.53
Max. e.i.r.p.				13.89		
Limits				13.98dBm (25mW)		
Result				Pass		

Test Mode: IEEE 802.11ac(VHT40) Mode_Total					
Test Conditions				e.i.r.p. (dBm)	
				CH151	CH159
T_{nom} (°C)	23	V_{nom} (V)	230	13.44	13.46
T_{min} (°C)	0	V_{max} (V)	253	13.56	13.61
		V_{min} (V)	207	13.35	13.37
T_{max} (°C)	40	V_{max} (V)	253	13.34	13.35
		V_{min} (V)	207	13.56	13.58
Max. e.i.r.p.				13.61	
Limits				13.98dBm (25mW)	
Result				Pass	

Test Mode: IEEE 802.11ac(VHT80) Mode_Total				
Test Conditions				e.i.r.p. (dBm)
				CH155
T_{nom} (°C)	23	V_{nom} (V)	230	13.72
T_{min} (°C)	0	V_{max} (V)	253	13.87
		V_{min} (V)	207	13.63
T_{max} (°C)	40	V_{max} (V)	253	13.63
		V_{min} (V)	207	13.84
Max. e.i.r.p.				13.87
Limits				13.98dBm (25mW)
Result				Pass

Test Mode: IEEE 802.11ax(HE20) Mode_Total						
Test Conditions				e.i.r.p. (dBm)		
				CH149	CH157	CH165
T_{nom} (°C)	23	V_{nom} (V)	230	13.72	13.90	13.57
T_{min} (°C)	0	V_{max} (V)	253	13.86	13.94	13.68
		V_{min} (V)	207	13.61	13.83	13.47
T_{max} (°C)	40	V_{max} (V)	253	13.64	13.78	13.47
		V_{min} (V)	207	13.84	13.96	13.67
Max. e.i.r.p.				13.96		
Limits				13.98dBm (25mW)		
Result				Pass		

Test Mode: IEEE 802.11ax(HE40) Mode_Total					
Test Conditions				e.i.r.p. (dBm)	
				CH151	CH159
T_{nom} (°C)	23	V_{nom} (V)	230	13.89	13.96
T_{min} (°C)	0	V_{max} (V)	253	13.96	13.94
		V_{min} (V)	207	13.80	13.84
T_{max} (°C)	40	V_{max} (V)	253	13.78	13.84
		V_{min} (V)	207	13.95	13.96
Max. e.i.r.p.				13.96	
Limits				13.98dBm (25mW)	
Result				Pass	

Test Mode: IEEE 802.11ax(HE80) Mode_Total				
Test Conditions				e.i.r.p. (dBm)
				CH155
T_{nom} (°C)	23	V_{nom} (V)	230	13.71
T_{min} (°C)	0	V_{max} (V)	253	13.84
		V_{min} (V)	207	13.60
T_{max} (°C)	40	V_{max} (V)	253	13.62
		V_{min} (V)	207	13.79
Max. e.i.r.p.				13.84
Limits				13.98dBm (25mW)
Result				Pass

Beamforming

Test Mode: IEEE 802.11ac(VHT20) Mode_Total						
Test Conditions				e.i.r.p. (dBm)		
				CH149	CH157	CH165
T_{nom} (°C)	23	V_{nom} (V)	230	13.14	13.16	13.54
T_{min} (°C)	0	V_{max} (V)	253	13.28	13.31	13.67
		V_{min} (V)	207	13.05	13.08	13.44
T_{max} (°C)	40	V_{max} (V)	253	12.99	13.04	13.36
		V_{min} (V)	207	13.25	13.27	13.62
Max. e.i.r.p.				13.67		
Limits				13.98dBm (25mW)		
Result				Pass		

Test Mode: IEEE 802.11ac(VHT40) Mode_Total					
Test Conditions				e.i.r.p. (dBm)	
				CH151	CH159
T_{nom} (°C)	23	V_{nom} (V)	230	13.30	13.35
T_{min} (°C)	0	V_{max} (V)	253	13.44	13.49
		V_{min} (V)	207	13.19	13.24
T_{max} (°C)	40	V_{max} (V)	253	13.13	13.21
		V_{min} (V)	207	13.44	13.46
Max. e.i.r.p.				13.49	
Limits				13.98dBm (25mW)	
Result				Pass	

Test Mode: IEEE 802.11ac(VHT80) Mode_Total				
Test Conditions				e.i.r.p. (dBm)
				CH155
T_{nom} (°C)	23	V_{nom} (V)	230	13.30
T_{min} (°C)	0	V_{max} (V)	253	13.44
		V_{min} (V)	207	13.21
T_{max} (°C)	40	V_{max} (V)	253	13.14
		V_{min} (V)	207	13.43
Max. e.i.r.p.				13.44
Limits				13.98dBm (25mW)
Result				Pass

Test Mode: IEEE 802.11ax(HE20) Mode_Total						
Test Conditions				e.i.r.p. (dBm)		
				CH149	CH157	CH165
T_{nom} (°C)	23	V_{nom} (V)	230	13.26	13.64	13.63
T_{min} (°C)	0	V_{max} (V)	253	13.35	13.73	13.69
		V_{min} (V)	207	13.37	13.71	13.74
T_{max} (°C)	40	V_{max} (V)	253	13.12	13.48	13.46
		V_{min} (V)	207	13.39	13.74	13.75
Max. e.i.r.p.				13.75		
Limits				13.98dBm (25mW)		
Result				Pass		

Test Mode: IEEE 802.11ax(HE40) Mode_Total					
Test Conditions				e.i.r.p. (dBm)	
				CH151	CH159
T_{nom} (°C)	23	V_{nom} (V)	230	13.59	13.44
T_{min} (°C)	0	V_{max} (V)	253	13.69	13.55
		V_{min} (V)	207	13.66	13.54
T_{max} (°C)	40	V_{max} (V)	253	13.41	13.34
		V_{min} (V)	207	13.71	13.53
Max. e.i.r.p.				13.71	
Limits				13.98dBm (25mW)	
Result				Pass	

Test Mode: IEEE 802.11ax(HE80) Mode_Total				
Test Conditions				e.i.r.p. (dBm)
				CH155
T_{nom} (°C)	23	V_{nom} (V)	230	13.17
T_{min} (°C)	0	V_{max} (V)	253	13.26
		V_{min} (V)	207	13.28
T_{max} (°C)	40	V_{max} (V)	253	13.05
		V_{min} (V)	207	13.28
Max. e.i.r.p.				13.28
Limits				13.98dBm (25mW)
Result				Pass

APPENDIX B - PERMITTED RANGE OF OPERATING FREQUENCIES

Test Mode: IEEE 802.11a Mode					
Test Conditions				Frequency Range (MHz)	
				f_L CH149	f_H CH165
T_{nom} (°C)	25	V_{nom} (V)	230	5736.5000	5833.6000
T_{min} (°C)	0	V_{max} (V)	253	5736.5000	5833.8000
		V_{min} (V)	207	5736.5000	5833.8000
T_{max} (°C)	40	V_{max} (V)	253	5736.5000	5833.7000
		V_{min} (V)	207	5736.5000	5833.7000
Min. f_L / Max. f_H Band Edges				5736.5000	5833.8000
Limits				f_L > 5725.0 MHz	f_H < 5875.0 MHz
Result				Pass	

Test Mode: IEEE 802.11a Mode			
Test Conditions		Occupied Channel Bandwidth (MHz)	
		CH149	CH165
T_{nom} (°C)	25	17.50	17.60
F_L OBW		5736.40	-
F_H OBW		-	5833.70
Limits		f_L > 5725.0 MHz	f_H < 5875.0 MHz

Test Mode: IEEE 802.11ac(VHT20) Mode					
Test Conditions				Frequency Range (MHz)	
				f_L CH149	f_H CH165
T_{nom} (°C)	25	V_{nom} (V)	230	5735.9000	5834.2000
T_{min} (°C)	0	V_{max} (V)	253	5735.9000	5834.2000
		V_{min} (V)	207	5735.9000	5834.2000
T_{max} (°C)	40	V_{max} (V)	253	5735.8000	5834.2000
		V_{min} (V)	207	5735.8000	5834.2000
Min. f_L / Max. f_H Band Edges				5735.8000	5834.2000
Limits				f_L > 5725.0 MHz	f_H < 5875.0 MHz
Result				Pass	

Test Mode: IEEE 802.11ac(VHT20) Mode			
Test Conditions		Occupied Channel Bandwidth (MHz)	
		CH149	CH165
T_{nom} (°C)	25	18.60	18.60
F_L OBW		5735.90	-
F_H OBW		-	5834.20
Limits		f_L > 5725.0 MHz	f_H < 5875.0 MHz

Test Mode: IEEE 802.11ac(VHT40) Mode					
Test Conditions				Frequency Range (MHz)	
				f_L CH151	f_H CH159
T_{nom} (°C)	25	V_{nom} (V)	230	5736.8000	5813.4000
T_{min} (°C)	0	V_{max} (V)	253	5736.8000	5813.4000
		V_{min} (V)	207	5736.8000	5813.4000
T_{max} (°C)	40	V_{max} (V)	253	5736.6000	5813.4000
		V_{min} (V)	207	5736.6000	5813.4000
Min. f_L / Max. f_H Band Edges				5736.6000	5813.4000
Limits				f_L > 5725.0 MHz	f_H < 5875.0 MHz
Result				Pass	

Test Mode: IEEE 802.11ac(VHT40) Mode			
Test Conditions		Occupied Channel Bandwidth (MHz)	
		CH151	CH159
T_{nom} (°C)	25	38.20	37.20
F_L OBW		5774.60	-
F_H OBW		-	5813.80
Limits		f_L > 5725.0 MHz	f_H < 5875.0 MHz

Test Mode: IEEE 802.11ac(VHT80) Mode					
Test Conditions				Frequency Range (MHz)	
				f_L CH155	f_H CH155
T_{nom} (°C)	25	V_{nom} (V)	230	5736.6000	5813.4000
T_{min} (°C)	0	V_{max} (V)	253	5736.4000	5813.4000
		V_{min} (V)	207	5736.6000	5813.4000
T_{max} (°C)	40	V_{max} (V)	253	5736.6000	5813.4000
		V_{min} (V)	207	5736.6000	5813.4000
Min. f_L / Max. f_H Band Edges				5736.4000	5813.4000
Limits				f_L > 5725.0 MHz	f_H < 5875.0 MHz
Result				Pass	

Test Mode: IEEE 802.11ac(VHT80) Mode			
Test Conditions		Occupied Channel Bandwidth (MHz)	
		CH155	
T_{nom} (°C)	25	77.20	
F_L OBW		5736.60	
F_H OBW		5813.80	
Limits		f_L > 5725.0 MHz	f_H < 5875.0 MHz

Test Mode: IEEE 802.11ax(HE20) Mode					
Test Conditions				Frequency Range (MHz)	
				f_L CH149	f_H CH165
T_{nom} (°C)	25	V_{nom} (V)	230	5735.4000	5834.7000
T_{min} (°C)	0	V_{max} (V)	253	5735.4000	5834.7000
		V_{min} (V)	207	5735.4000	5834.7000
T_{max} (°C)	40	V_{max} (V)	253	5735.3000	5834.7000
		V_{min} (V)	207	5735.3000	5834.7000
Min. f_L / Max. f_H Band Edges				5735.3000	5834.7000
Limits				f_L > 5725.0 MHz	f_H < 5875.0 MHz
Result				Pass	

Test Mode: IEEE 802.11ax(HE20) Mode			
Test Conditions		Occupied Channel Bandwidth (MHz)	
		CH149	CH165
T_{nom} (°C)	25	19.30	19.40
F_L OBW		5754.80	-
F_H OBW		-	5834.70
Limits		f_L > 5725.0 MHz	f_H < 5875.0 MHz

Test Mode: IEEE 802.11ax(HE40) Mode					
Test Conditions				Frequency Range (MHz)	
				f_L CH151	f_H CH159
T_{nom} (°C)	25	V_{nom} (V)	230	5736.0000	5814.2000
T_{min} (°C)	0	V_{max} (V)	253	5736.0000	5814.2000
		V_{min} (V)	207	5736.0000	5814.2000
T_{max} (°C)	40	V_{max} (V)	253	5735.8000	5814.2000
		V_{min} (V)	207	5735.8000	5814.2000
Min. f_L / Max. f_H Band Edges				5735.8000	5814.2000
Limits				f_L > 5725.0 MHz	f_H < 5875.0 MHz
Result				Pass	


Test Mode: IEEE 802.11ax(HE40) Mode			
Test Conditions		Occupied Channel Bandwidth (MHz)	
		CH151	CH159
T_{nom} (°C)	25	38.40	38.20
F_L OBW		5774.40	-
F_H OBW		-	5814.20
Limits		f_L > 5725.0 MHz	f_H < 5875.0 MHz

Test Mode: IEEE 802.11ax(HE80) Mode					
Test Conditions				Frequency Range (MHz)	
				f_L CH155	f_H CH155
T_{nom} (°C)	25	V_{nom} (V)	230	5735.8000	5814.2000
T_{min} (°C)	0	V_{max} (V)	253	5735.6000	5814.2000
		V_{min} (V)	207	5735.8000	5814.2000
T_{max} (°C)	40	V_{max} (V)	253	5735.8000	5814.2000
		V_{min} (V)	207	5735.8000	5814.2000
Min. f_L / Max. f_H Band Edges				5735.6000	5814.2000
Limits				f_L > 5725.0 MHz	f_H < 5875.0 MHz
Result				Pass	

Test Mode: IEEE 802.11ax(HE80) Mode			
Test Conditions		Occupied Channel Bandwidth (MHz)	
		CH155	
T_{nom} (°C)	25	78.00	
F_L OBW		5736.20	
F_H OBW		5814.20	
Limits		f_L > 5725.0 MHz	f_H < 5875.0 MHz


APPENDIX C - UNWANTED EMISSIONS IN THE SPRIOUS DOMAIN - OPERATING (25MHZ TO 1000MHZ)

Test Mode	TX IEEE 802.11ac(VHT80) Mode 5775 MHz	Polarization	Vertical

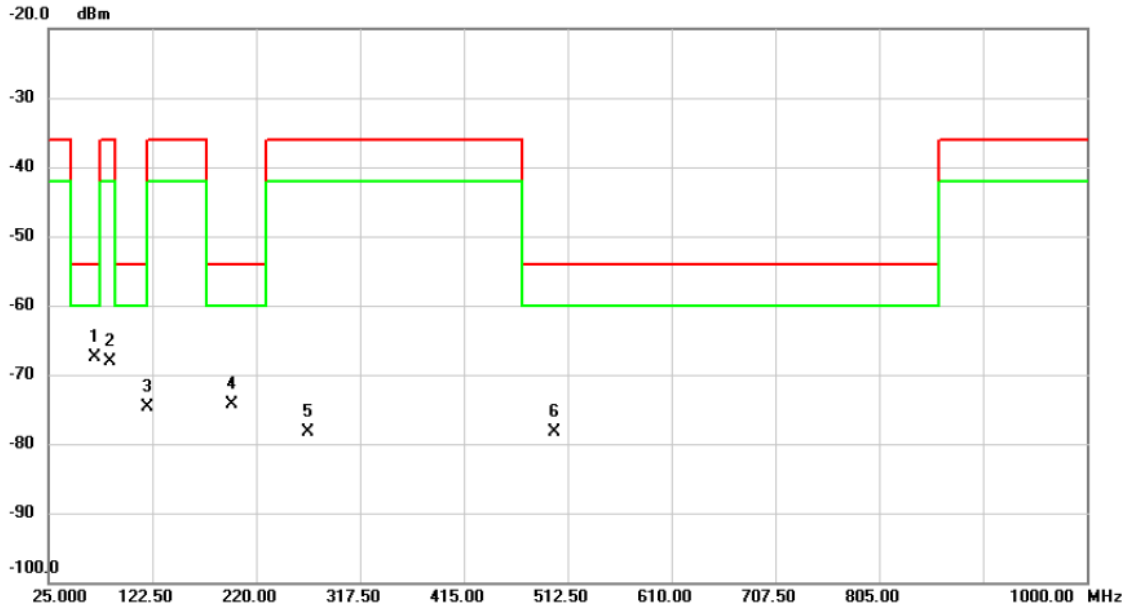

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	67.998	-61.71	-5.77	-67.48	-54.00	-13.48	RMS	
2		83.207	-61.31	-6.74	-68.05	-36.00	-32.05	RMS	
3		117.528	-69.60	-5.08	-74.68	-54.00	-20.68	RMS	
4		196.990	-67.93	-6.42	-74.35	-54.00	-20.35	RMS	
5		268.165	-73.97	-4.23	-78.20	-36.00	-42.20	RMS	
6		499.923	-77.37	-0.95	-78.32	-54.00	-24.32	RMS	

Test Mode	TX IEEE 802.11ac(VHT80) Mode 5775 MHz	Polarization	Horizontal

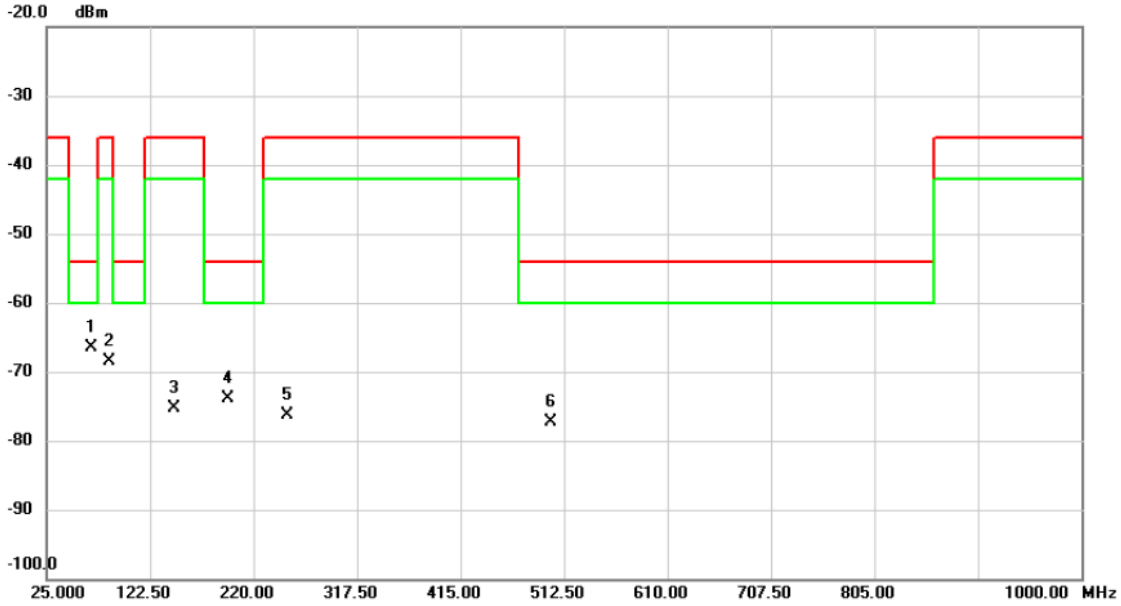

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	67.120	-58.72	-7.74	-66.46	-54.00	-12.46	RMS	
2		84.767	-59.93	-8.63	-68.56	-36.00	-32.56	RMS	
3		145.803	-72.38	-2.93	-75.31	-36.00	-39.31	RMS	
4		196.113	-68.43	-5.41	-73.84	-54.00	-19.84	RMS	
5		252.175	-71.61	-4.59	-76.20	-36.00	-40.20	RMS	
6		499.923	-76.13	-1.15	-77.28	-54.00	-23.28	RMS	


APPENDIX D - UNWANTED EMISSIONS IN THE SPRIOUS DOMAIN - STANDBY (25MHZ TO 1000MHZ)

Test Mode: N/A

Note: “N/A” denotes test is not applicable to this device.


APPENDIX E - UNWANTED EMISSIONS IN THE SPRIOUS DOMAIN - OPERATING (ABOVE 1000MHZ)

Test Mode	TX IEEE 802.11a Mode 5745 MHz	Polarization	Vertical

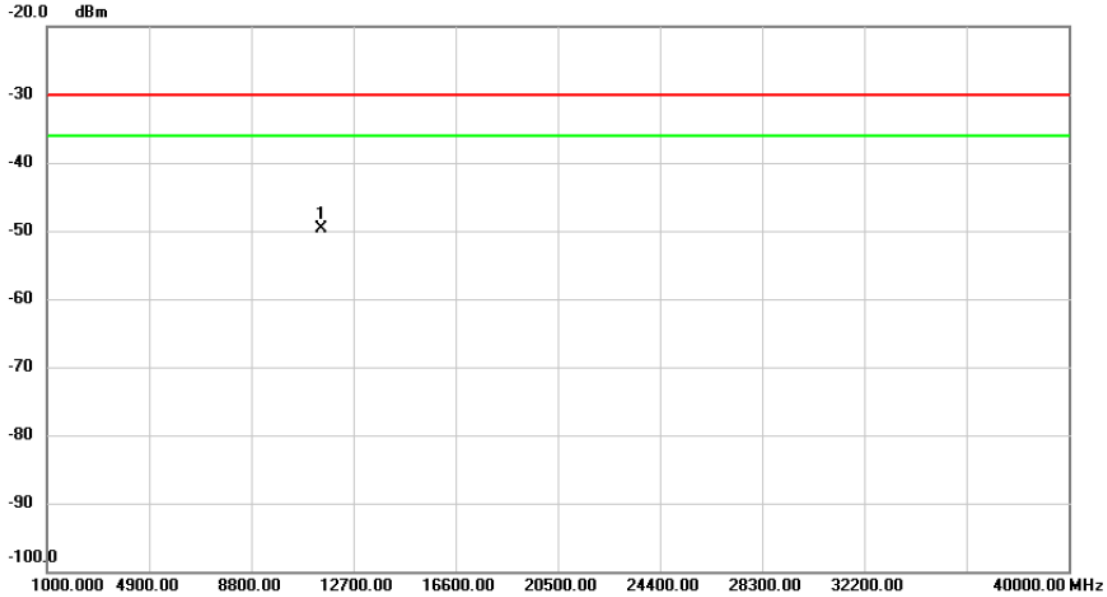


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	11472.815	-57.71	7.92	-49.79	-30.00	-19.79	peak	

Test Mode	TX IEEE 802.11a Mode 5745 MHz	Polarization	Horizontal

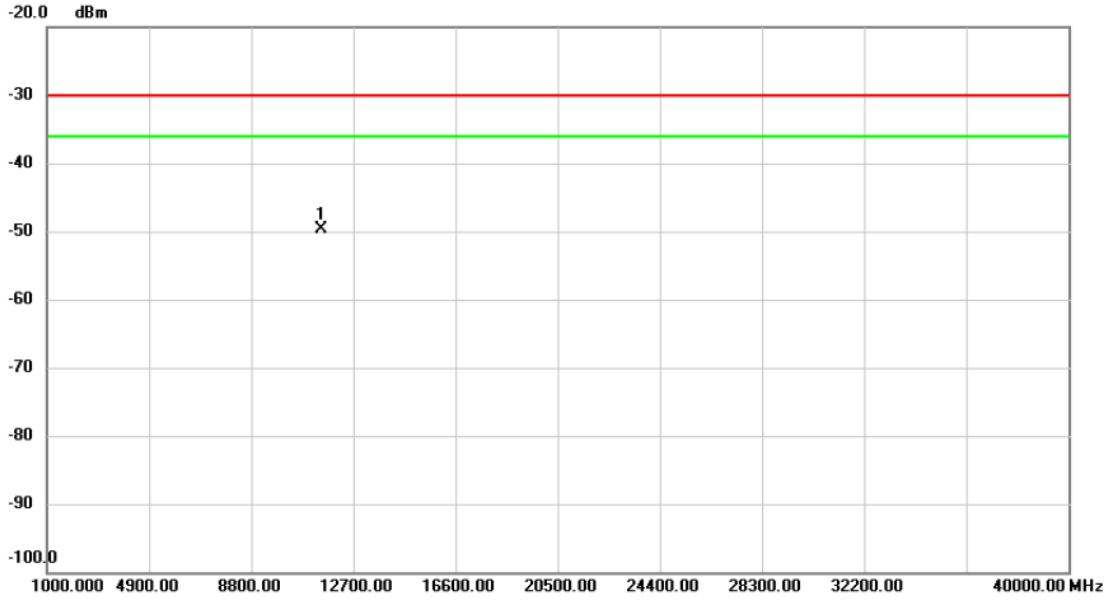


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	11481.735	-57.80	8.15	-49.65	-30.00	-19.65	peak	

Test Mode	TX IEEE 802.11a Mode 5825 MHz	Polarization	Vertical

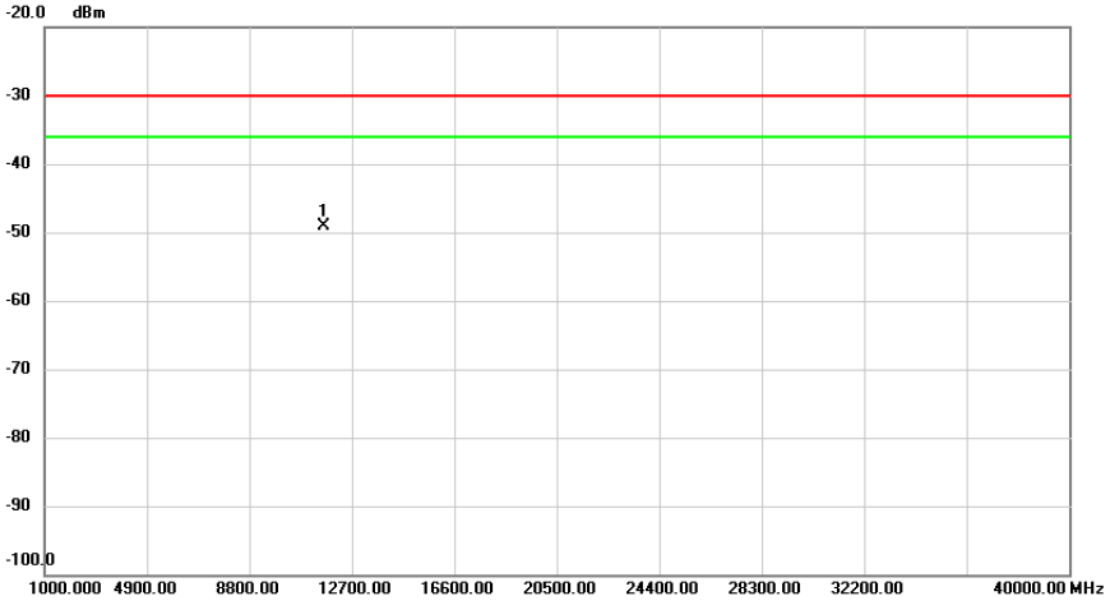


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	11649.636	-57.57	8.49	-49.08	-30.00	-19.08	peak	

Test Mode	TX IEEE 802.11a Mode 5825 MHz	Polarization	Horizontal

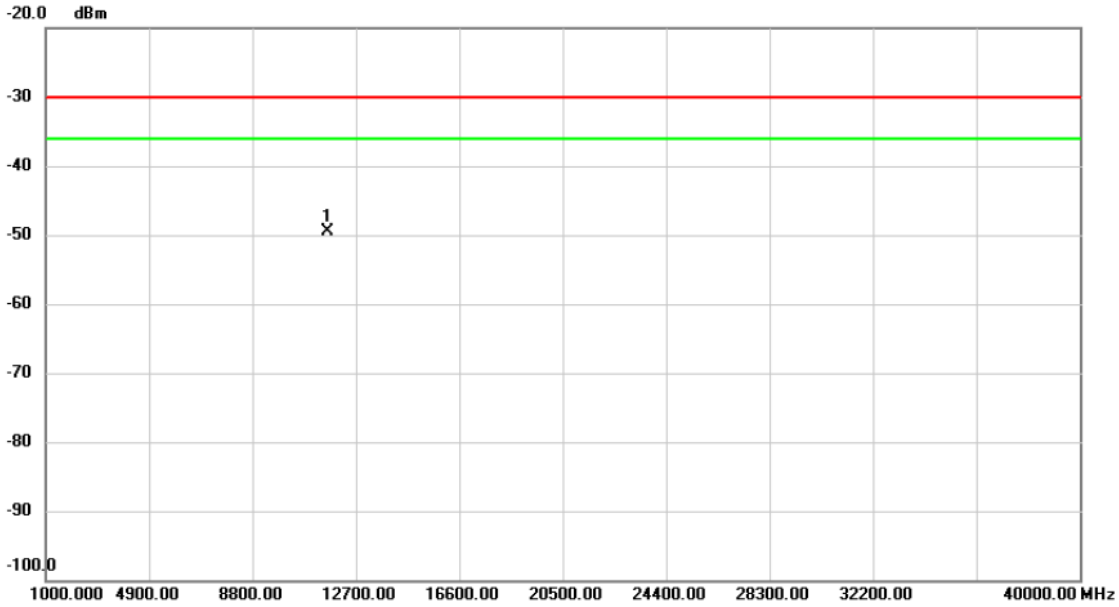


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	11649.900	-58.19	8.63	-49.56	-30.00	-19.56	peak	

Test Mode	TX IEEE 802.11ac(VHT20) Mode 5745 MHz	Polarization	Vertical

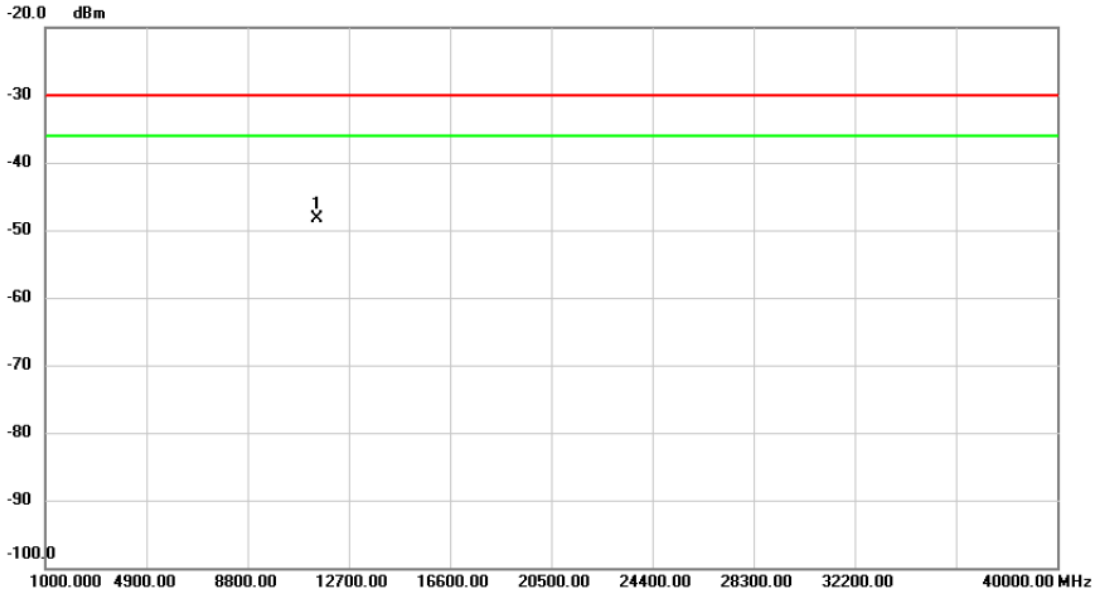


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	11489.304	-56.19	7.94	-48.25	-30.00	-18.25	peak	

Test Mode	TX IEEE 802.11ac(VHT20) Mode 5745 MHz	Polarization	Horizontal

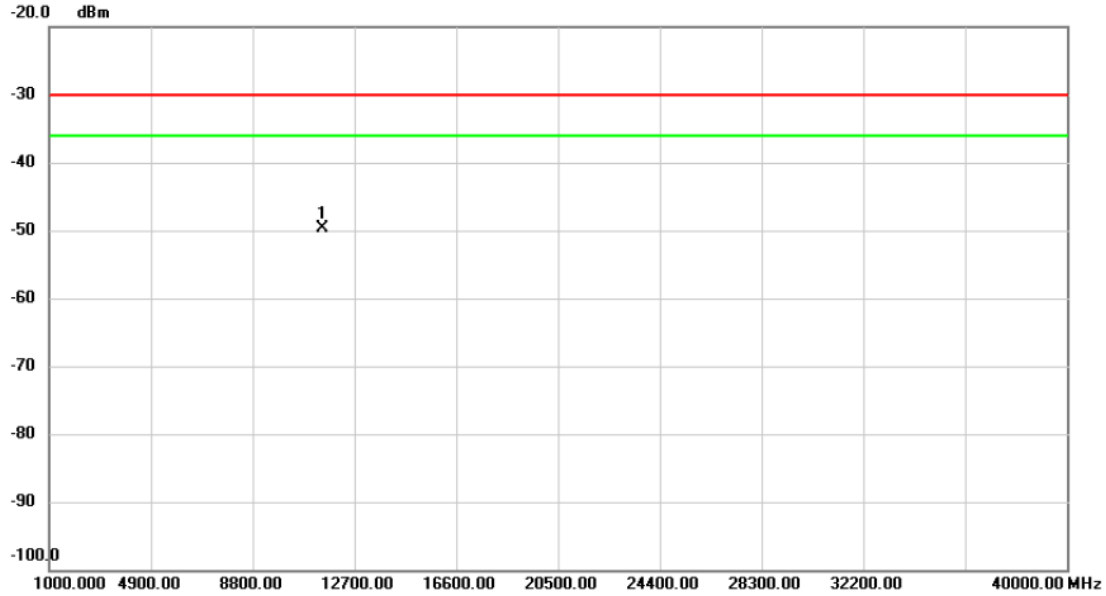


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	11490.229	-57.82	8.16	-49.66	-30.00	-19.66	peak	

Test Mode	TX IEEE 802.11ac(VHT20) Mode 5825 MHz	Polarization	Vertical

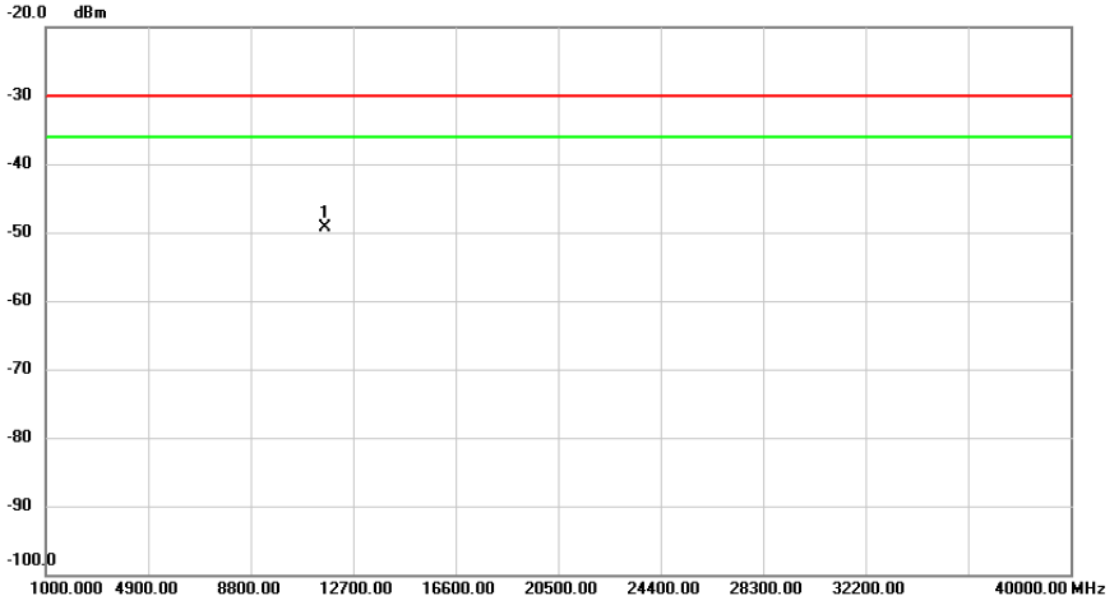


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	11649.650	-57.78	8.49	-49.29	-30.00	-19.29	peak	

Test Mode	TX IEEE 802.11ac(VHT20) Mode 5825 MHz	Polarization	Horizontal

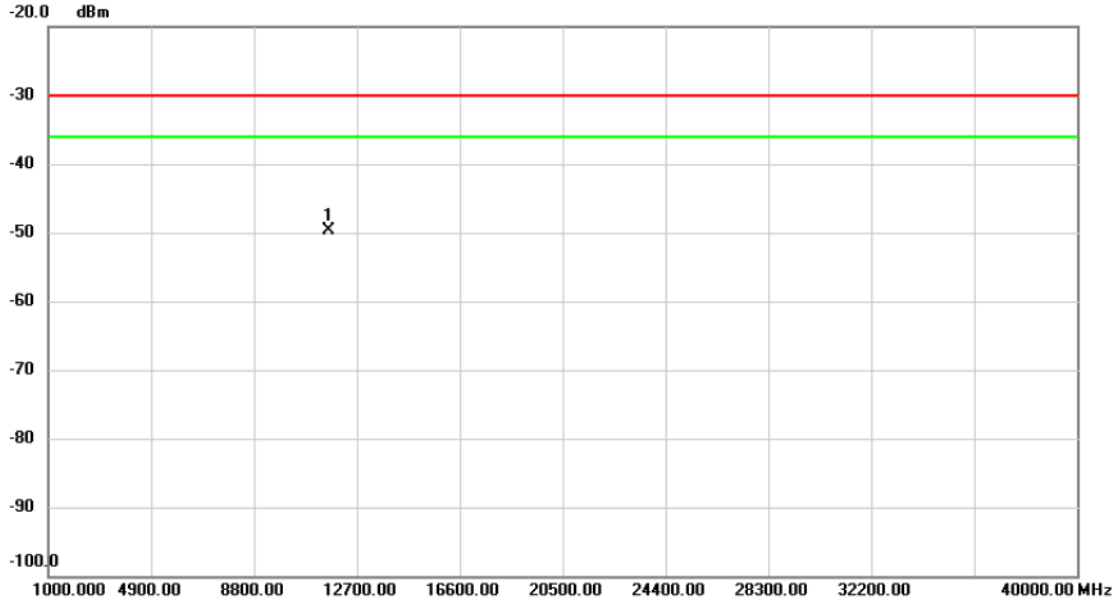


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	11650.285	-58.42	8.64	-49.78	-30.00	-19.78	peak	

Test Mode	TX IEEE 802.11ac(VHT40) Mode 5755 MHz	Polarization	Vertical

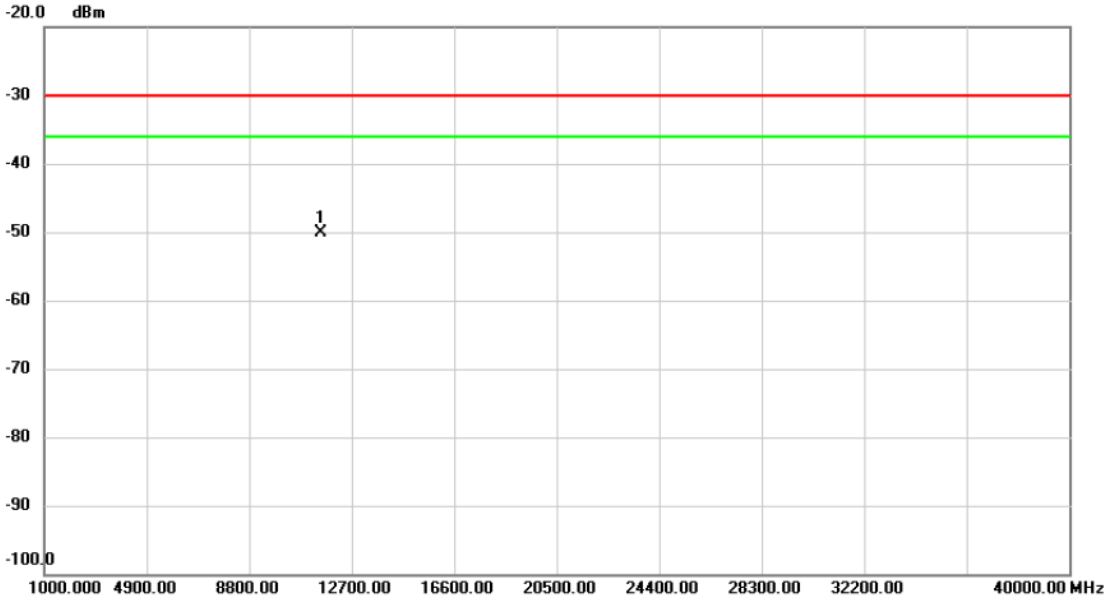


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	11549.830	-58.26	8.13	-50.13	-30.00	-20.13	peak	

Test Mode	TX IEEE 802.11ac(VHT40) Mode 5755 MHz	Polarization	Horizontal

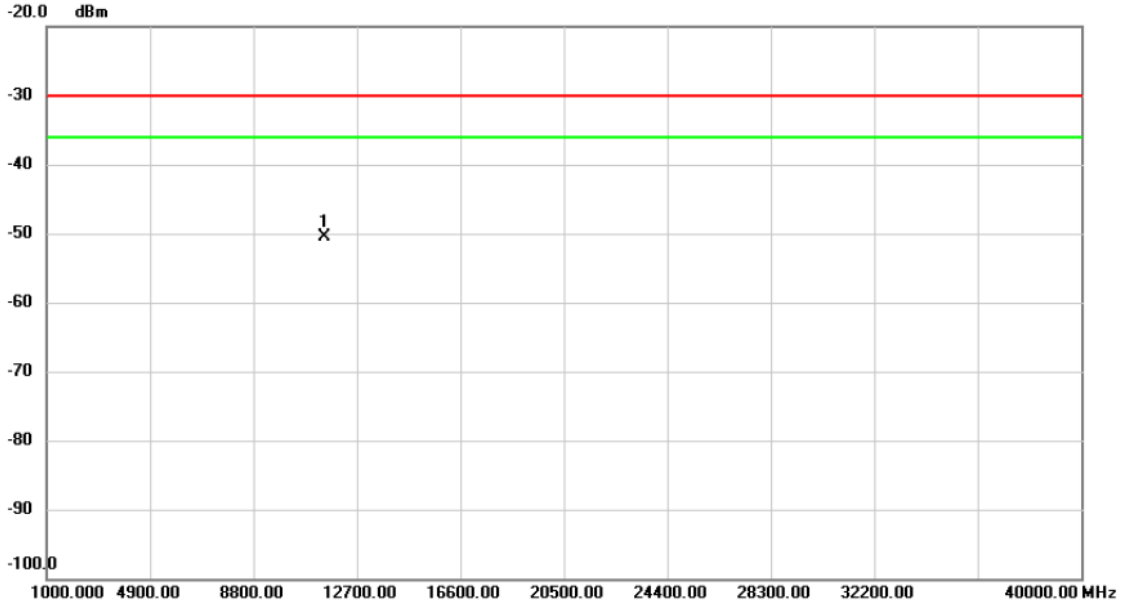


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	11479.830	-58.66	8.15	-50.51	-30.00	-20.51	peak	

Test Mode	TX IEEE 802.11ac(VHT40) Mode 5795 MHz	Polarization	Vertical

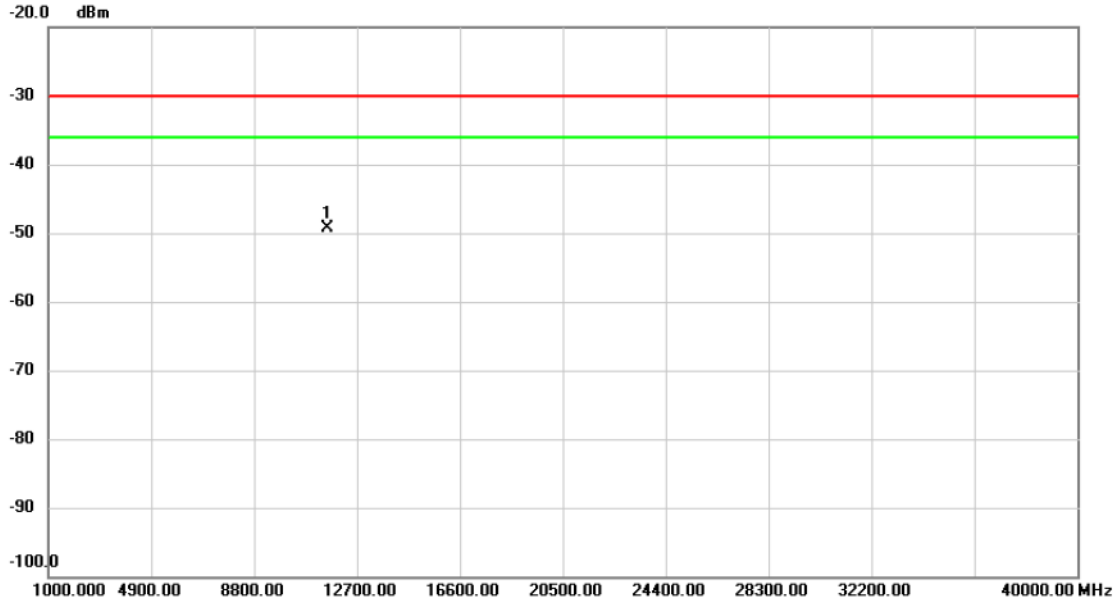


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	11603.840	-57.64	8.32	-49.32	-30.00	-19.32	peak	

Test Mode	TX IEEE 802.11ac(VHT40) Mode 5795 MHz	Polarization	Horizontal

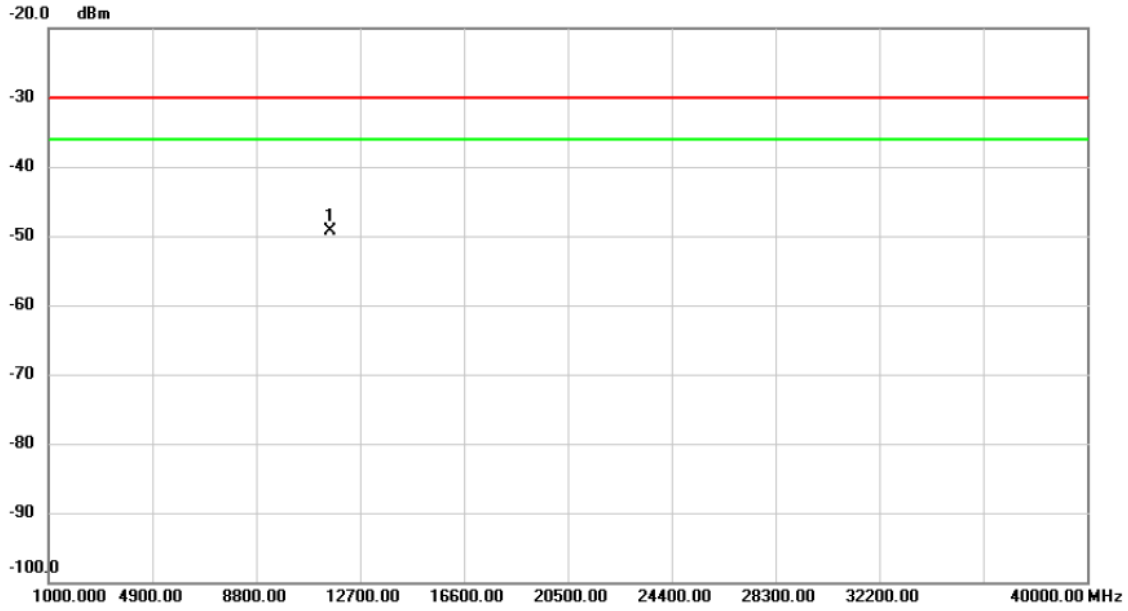


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	11595.650	-57.86	8.47	-49.39	-30.00	-19.39	peak	

Test Mode	TX IEEE 802.11ac(VHT80) Mode 5775 MHz	Polarization	Vertical

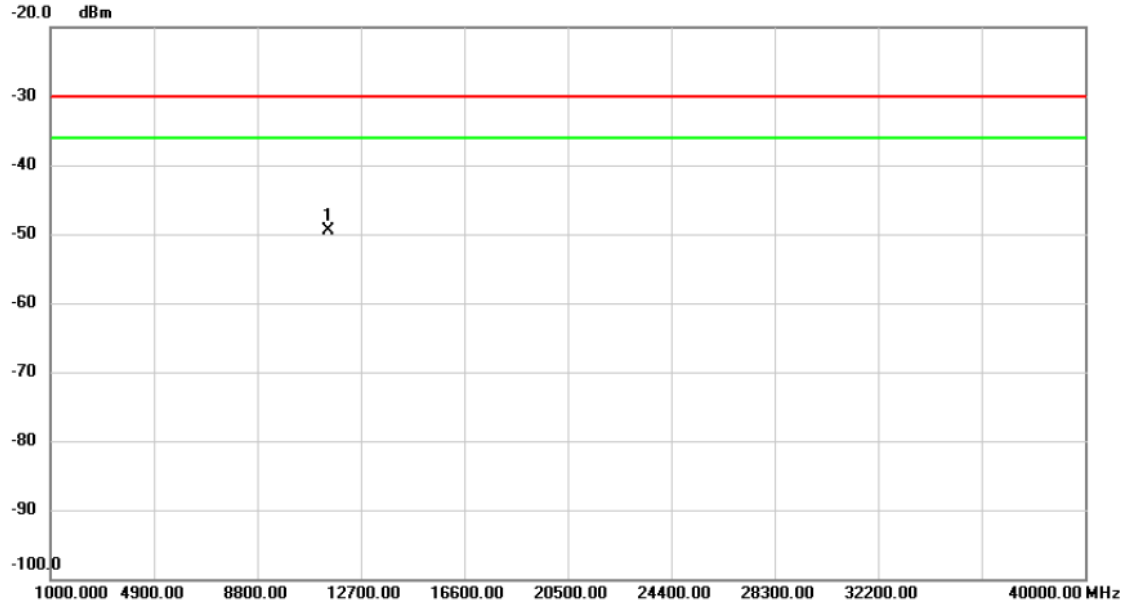


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	11472.280	-57.50	7.92	-49.58	-30.00	-19.58	peak	

Test Mode	TX IEEE 802.11ac(VHT80) Mode 5775 MHz	Polarization	Horizontal

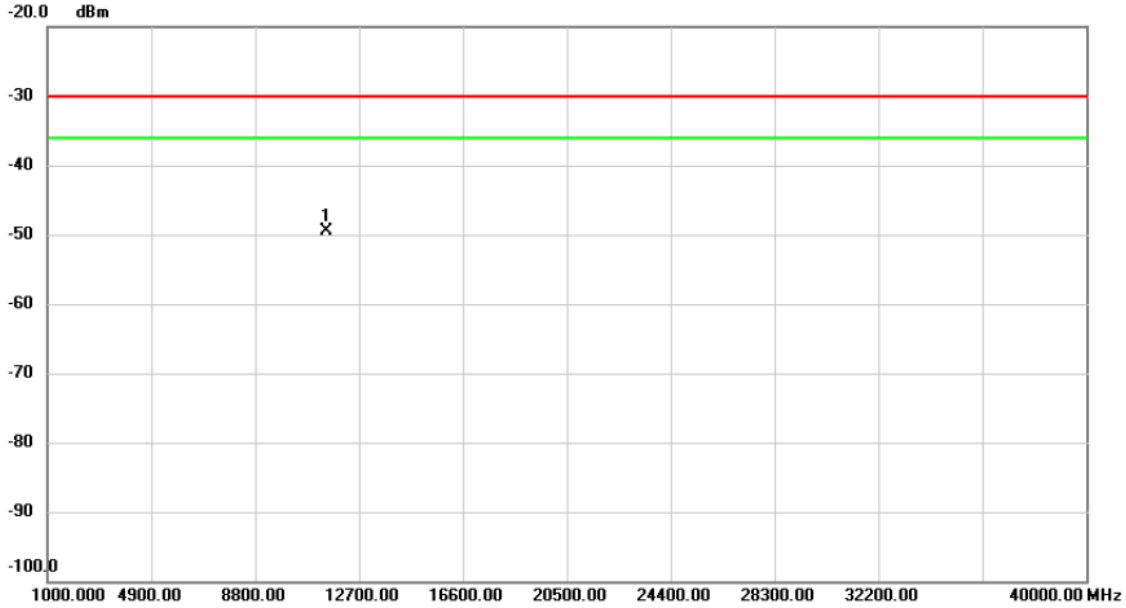


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	11475.300	-57.68	8.14	-49.54	-30.00	-19.54	peak	

Test Mode	TX IEEE 802.11ax(HE20) Mode 5745 MHz	Polarization	Vertical

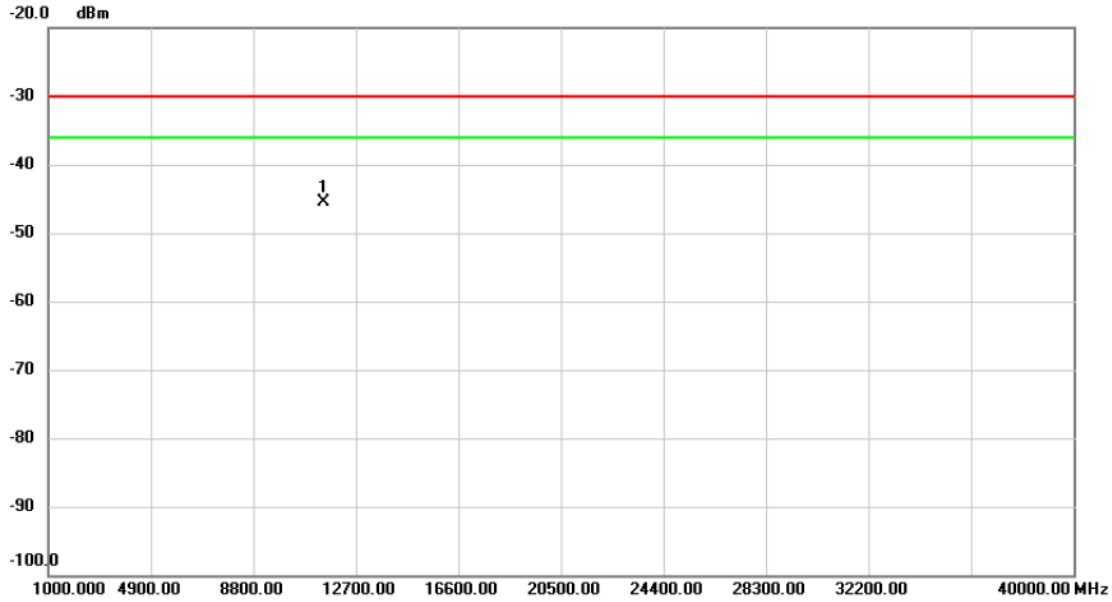


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	11470.220	-53.44	7.92	-45.52	-30.00	-15.52	peak	

Test Mode	TX IEEE 802.11ax(HE20) Mode 5745 MHz	Polarization	Horizontal

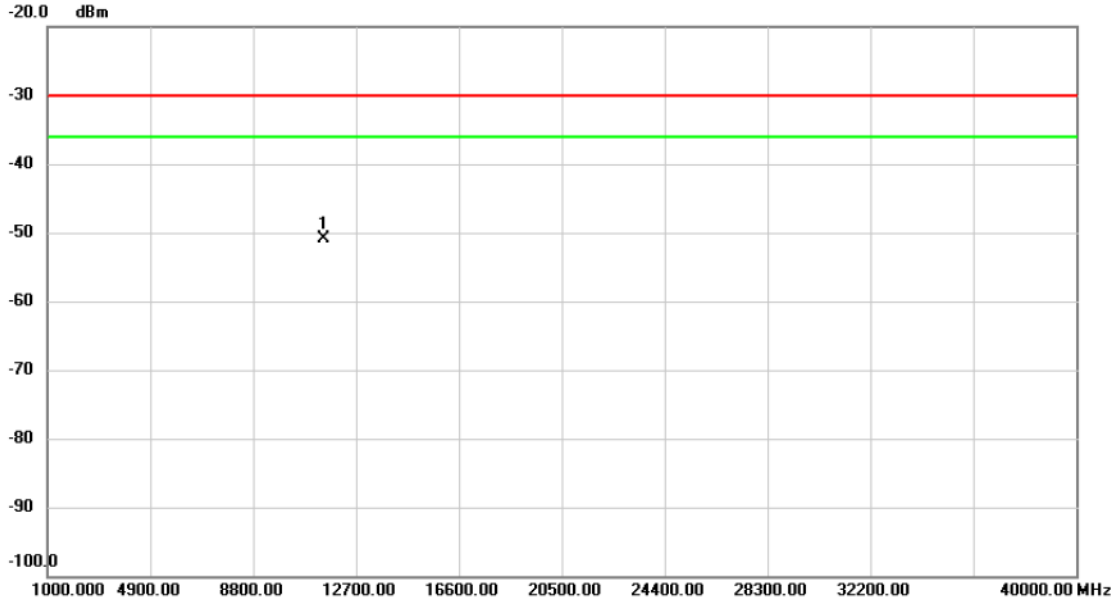


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	11474.200	-59.07	8.14	-50.93	-30.00	-20.93	peak	

Test Mode	TX IEEE 802.11ax(HE20) Mode 5825 MHz	Polarization	Vertical

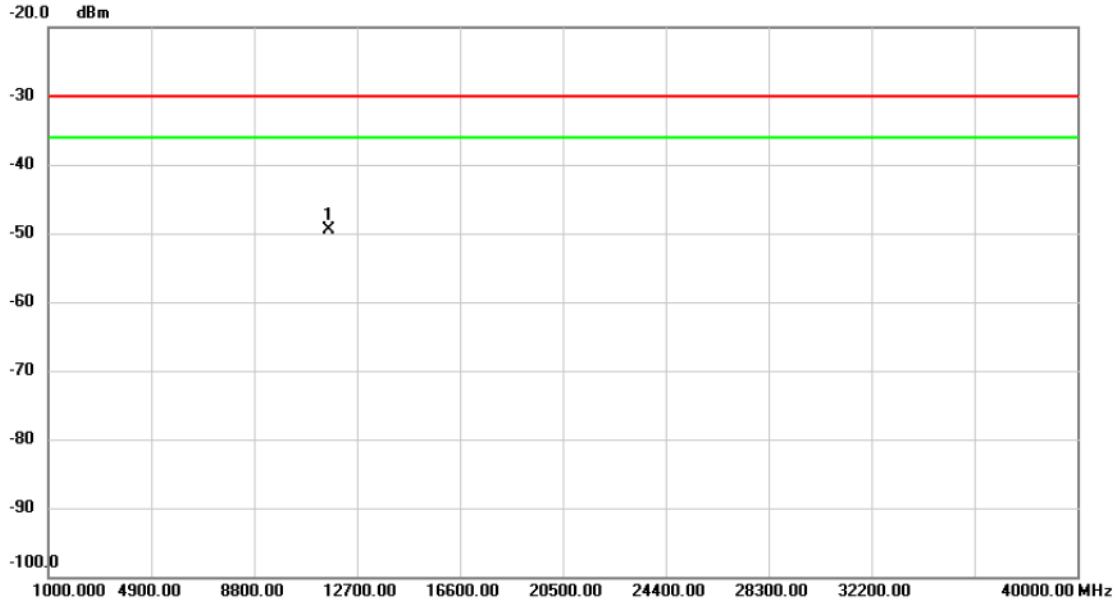


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	11649.455	-58.02	8.49	-49.53	-30.00	-19.53	peak	

Test Mode	TX IEEE 802.11ax(HE20) Mode 5825 MHz	Polarization	Horizontal

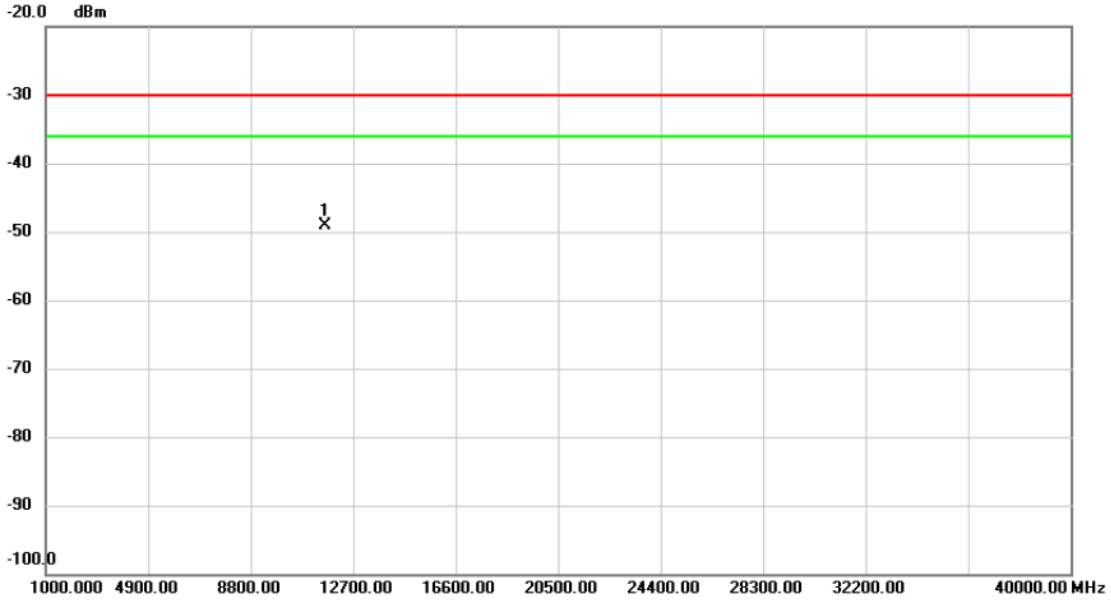


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	11649.245	-57.76	8.63	-49.13	-30.00	-19.13	peak	

Test Mode	TX IEEE 802.11ax(HE40) Mode 5755 MHz	Polarization	Vertical

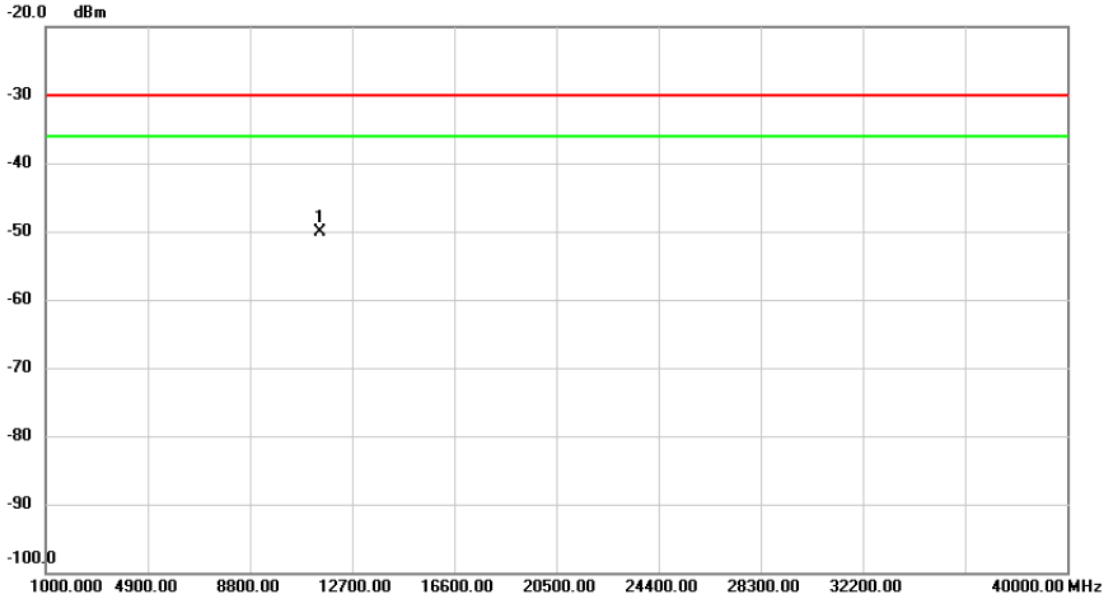


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	11483.155	-58.07	7.93	-50.14	-30.00	-20.14	peak	

Test Mode	TX IEEE 802.11ax(HE40) Mode 5755 MHz	Polarization	Horizontal

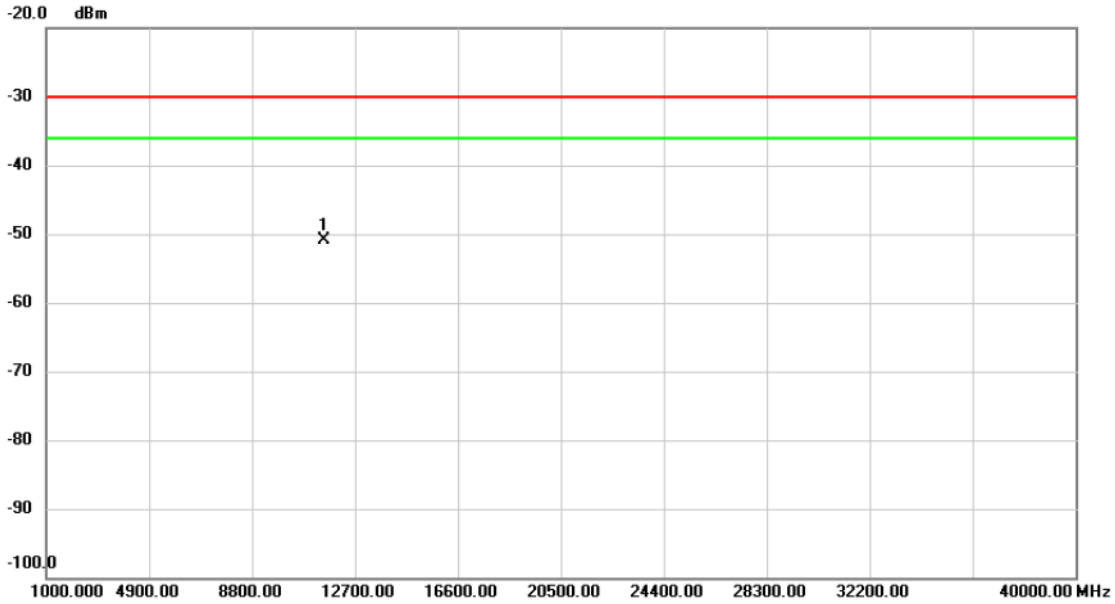


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	11531.155	-59.11	8.27	-50.84	-30.00	-20.84	peak	

Test Mode	TX IEEE 802.11ax(HE40) Mode 5795 MHz	Polarization	Vertical

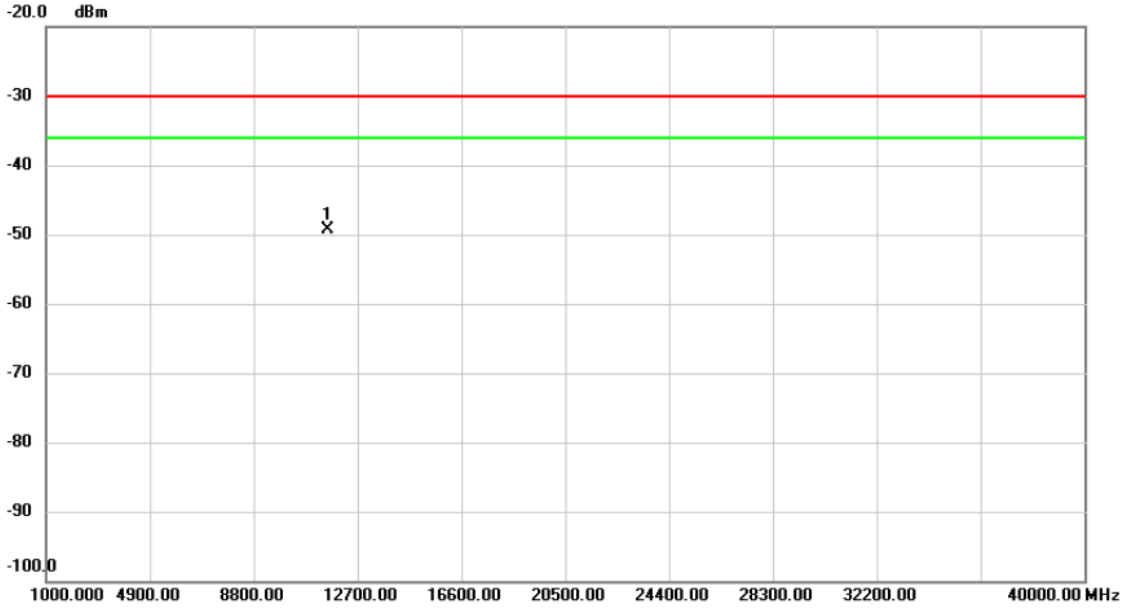


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	11589.536	-57.60	8.27	-49.33	-30.00	-19.33	peak	

Test Mode	TX IEEE 802.11ax(HE40) Mode 5795 MHz	Polarization	Horizontal

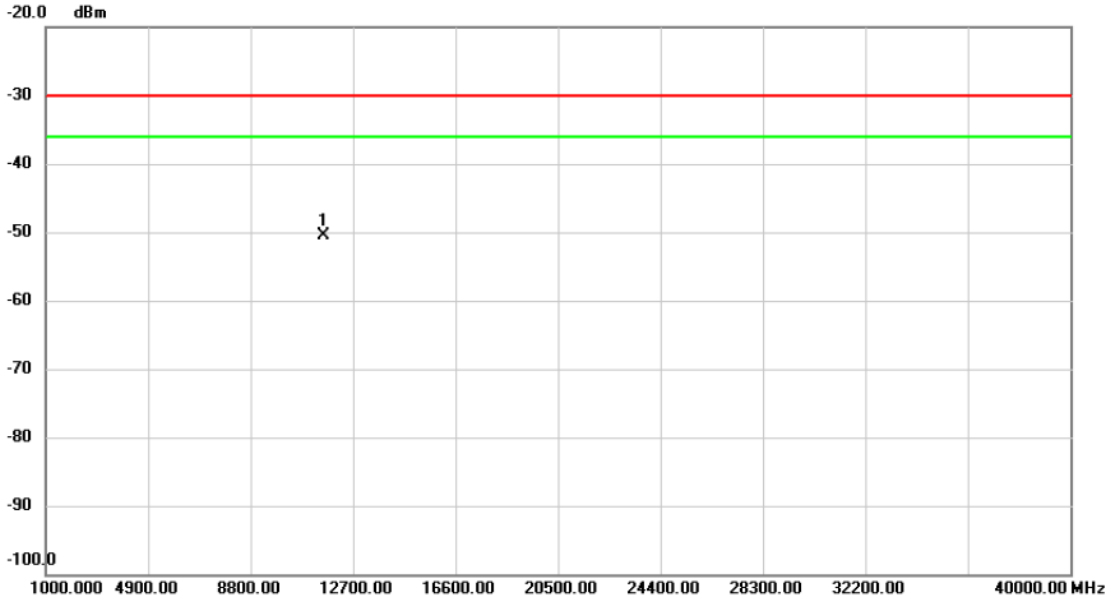


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	11589.291	-58.93	8.45	-50.48	-30.00	-20.48	peak	

Test Mode	TX IEEE 802.11ax(HE80) Mode 5775 MHz	Polarization	Vertical

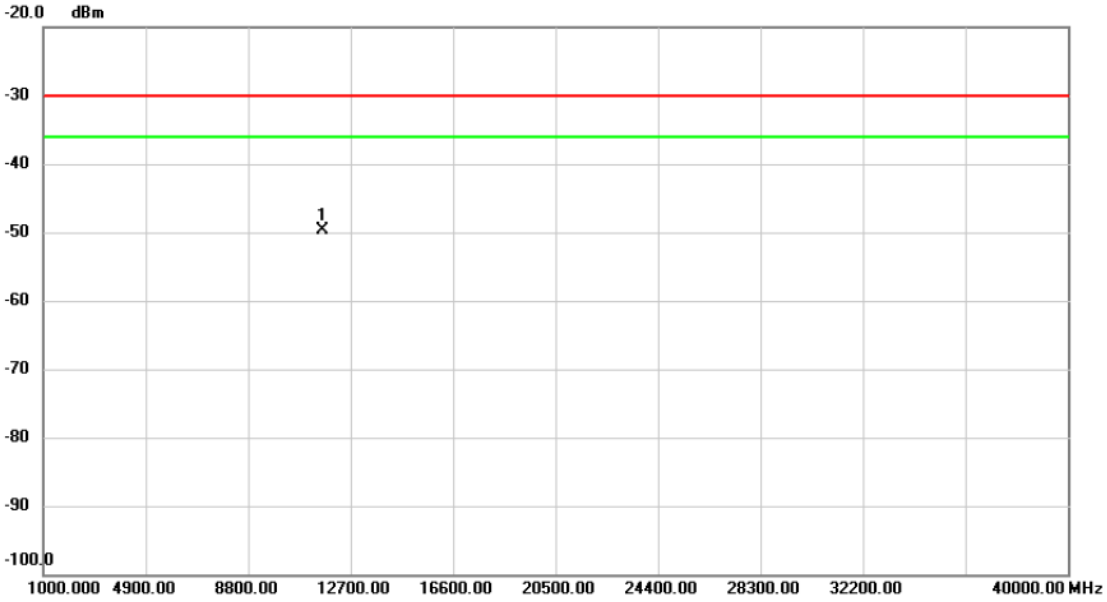

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	11643.420	-58.20	8.46	-49.74	-30.00	-19.74	peak	

Test Mode	TX IEEE 802.11ax(HE80) Mode 5775 MHz	Polarization	Horizontal

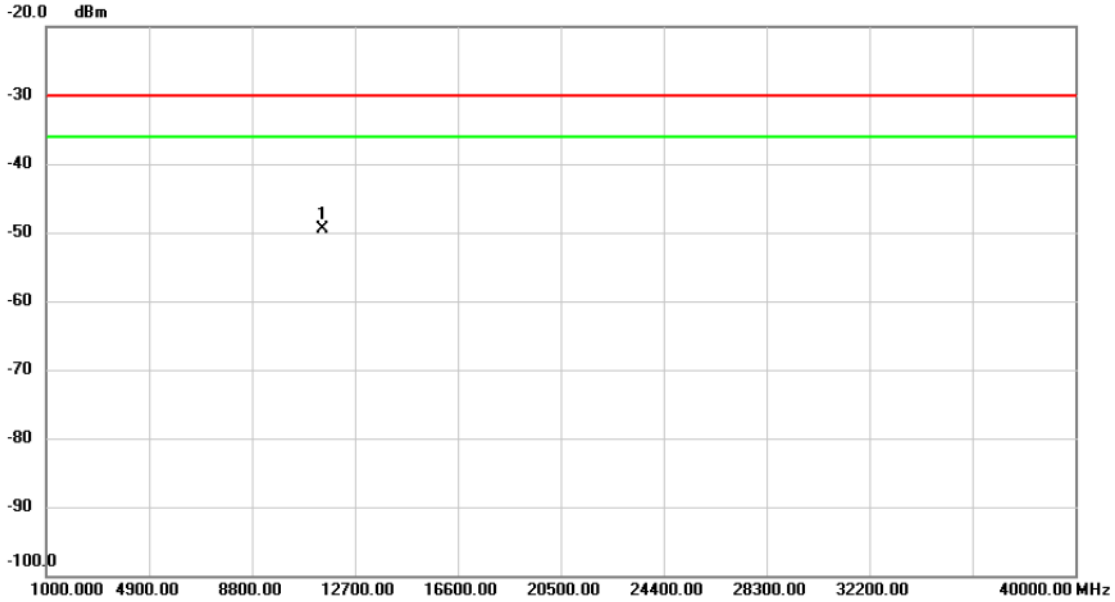

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	11488.170	-57.59	8.16	-49.43	-30.00	-19.43	peak	


APPENDIX F - UNWANTED EMISSIONS IN THE SPRIOUS DOMAIN - STANDBY (ABOVE 1000MHZ)

Test Mode: N/A


Note: “N/A” denotes test is not applicable to this device.

APPENDIX G - DUTY CYCLE

Test Mode	TX IEEE 802.11a Mode 5745 MHz

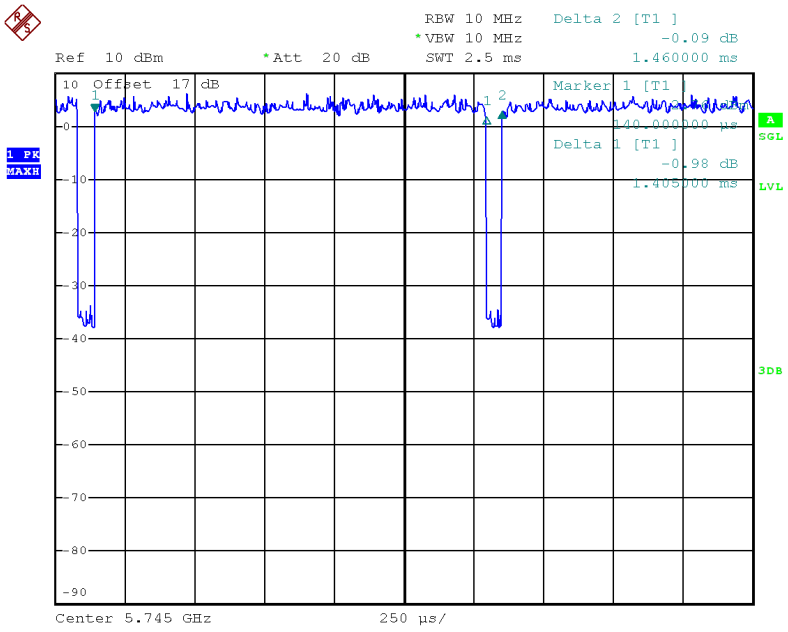

Date: 4.NOV.2023 11:42:23

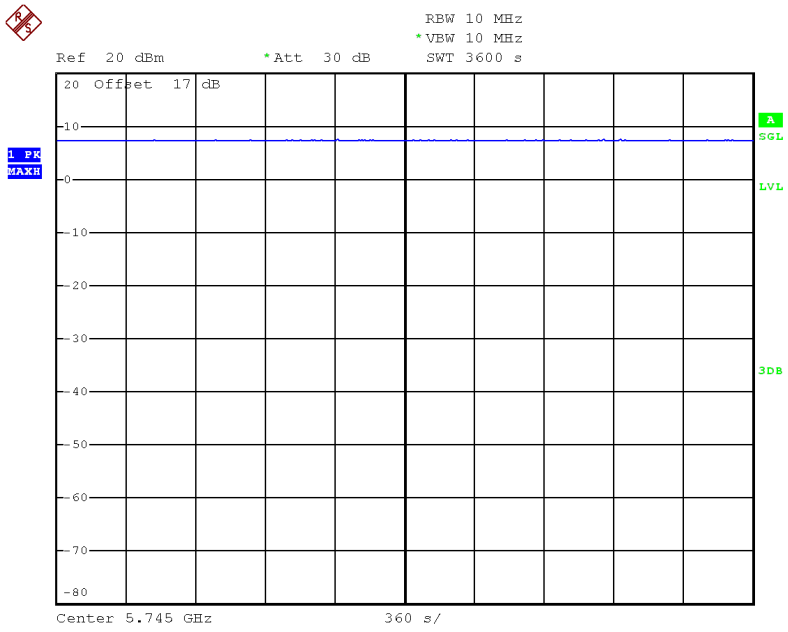

Date: 4.NOV.2023 11:40:15

On time (ms)	Total time (ms)	1H On time (s)	Duty Cycle (%)	Limit	Test Result
1.405	1.46	3600.00	100.00	No Restriction	Pass

APPENDIX H - ADJACENT CHANNEL SELECTIVITY

Test Mode	RX IEEE 802.11a Mode 5785 MHz

Frequency (MHz)	99% OBW (MHz)
5785	17.10

Adjacent channel centre freq. (MHz)		k(-40<k<0) (dB)	Power level of unwanted signal (dBm)	Limit (dBm)	Result
Lower	5765	-27.55	-30.00	-57.55	Complies
Upper	5805	-27.61	-30.00	-57.61	Complies

APPENDIX I - BLOCKING

Test Mode	RX IEEE 802.11a Mode 5745 MHz


Frequency (MHz)	99% OBW (MHz)	99% OBW-F_L (MHz)	99% OBW-F_H (MHz)		
5745	17.50	5736.40	5753.90		
Times of OBW	Unwanted signal freq. (MHz)	k(-40<k<0) (dB)	Power level of unwanted signal (dBm)	Limit (dBm)	Result
10	5561.40	-27.33	-26.00	-57.33	Complies
	5928.90	-27.89	-24.00	-57.89	Complies
20	5386.40	-27.06	-27.00	-57.06	Complies
	6103.90	-28.14	-27.00	-58.14	Complies
50	4861.40	-26.17	-26.00	-56.17	Complies
	6628.90	-28.86	-28.00	-58.86	Complies

Test Mode	RX IEEE 802.11a Mode 5825 MHz

Frequency (MHz)	99% OBW (MHz)	99% OBW-F_L (MHz)	99% OBW-F_H (MHz)		
5825	17.60	5816.10	5833.70		
Times of OBW	Unwanted signal freq. (MHz)	k(-40<k<0) (dB)	Power level of unwanted signal (dBm)	Limit (dBm)	Result
10	5640.10	-27.48	-25.00	-57.48	Complies
	6009.70	-28.03	-28.00	-58.03	Complies
20	5464.10	-27.21	-28.00	-57.21	Complies
	6185.70	-28.28	-29.00	-58.28	Complies
50	4936.10	-26.32	-26.00	-56.32	Complies
	6713.70	-28.99	-28.00	-58.99	Complies


APPENDIX J - SPURIOUS EMISSIONS - RECEIVER (25MHZ TO 1000MHZ)

Test Mode	RX IEEE 802.11ac(VHT80) Mode 5775 MHz	Polarization	Vertical

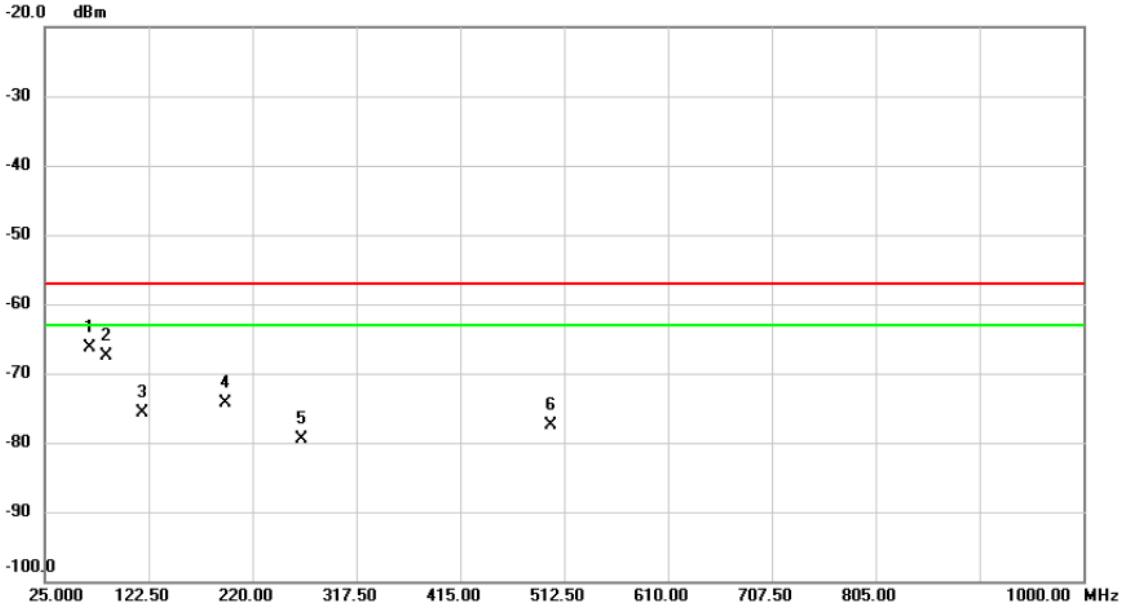

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	67.315	-60.70	-5.59	-66.29	-57.00	-9.29	RMS	
2		82.915	-60.75	-6.77	-67.52	-57.00	-10.52	RMS	
3		116.455	-70.45	-5.22	-75.67	-57.00	-18.67	RMS	
4		194.162	-67.98	-6.30	-74.28	-57.00	-17.28	RMS	
5		266.410	-75.19	-4.21	-79.40	-57.00	-22.40	RMS	
6		499.923	-76.54	-0.95	-77.49	-57.00	-20.49	RMS	


Test Mode	RX IEEE 802.11ac(VHT80) Mode 5775 MHz	Polarization	Horizontal

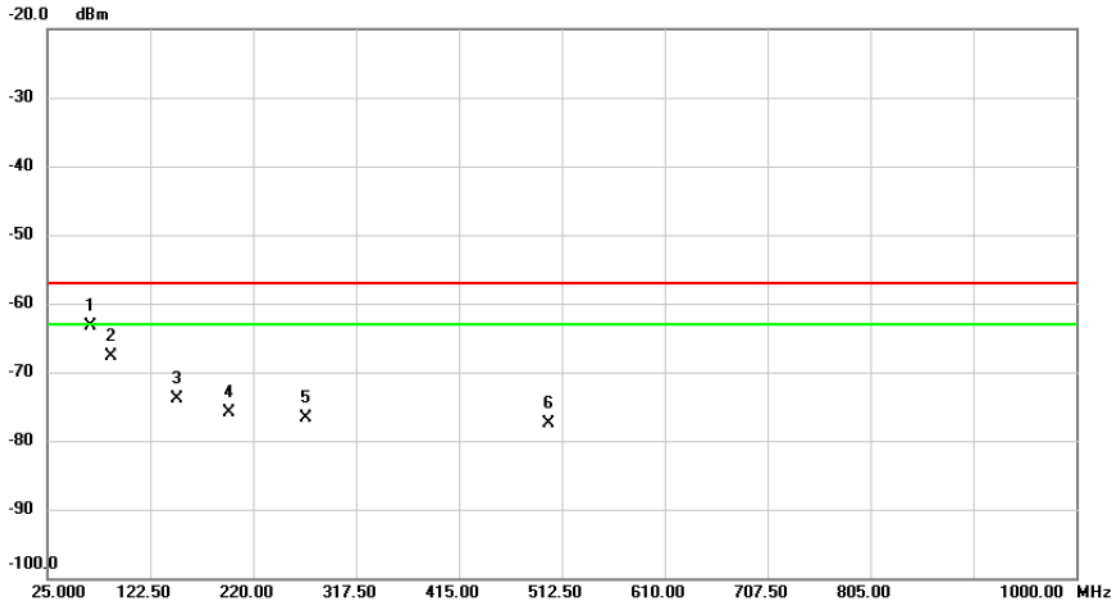

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	66.438	-58.00	-5.35	-63.35	-57.00	-6.35	RMS	
2		85.255	-61.22	-6.54	-67.76	-57.00	-10.76	RMS	
3		148.338	-72.48	-1.44	-73.92	-57.00	-16.92	RMS	
4		197.575	-69.37	-6.45	-75.82	-57.00	-18.82	RMS	
5		270.115	-72.47	-4.24	-76.71	-57.00	-19.71	RMS	
6		500.020	-76.64	-0.95	-77.59	-57.00	-20.59	RMS	


APPENDIX K - SPURIOUS EMISSIONS - RECEIVER (ABOVE 1000MHZ)

Test Mode	RX IEEE 802.11ac(VHT80) Mode 5775 MHz	Polarization	Vertical

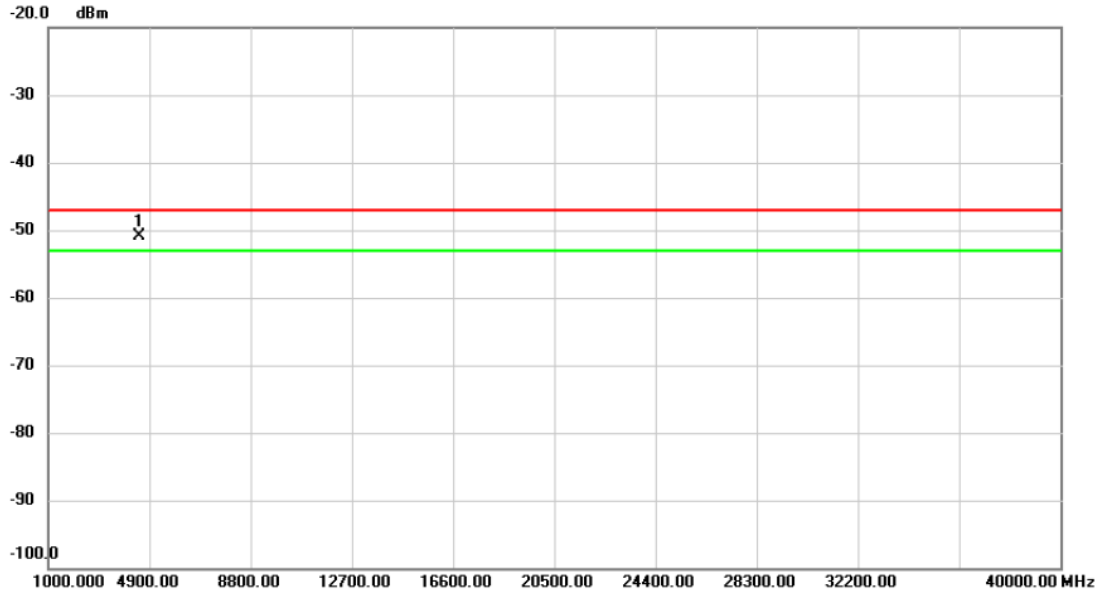

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	4530.000	-53.44	2.64	-50.80	-47.00	-3.80	peak	

Test Mode	RX IEEE 802.11ac(VHT80) Mode 5775 MHz	Polarization	Horizontal

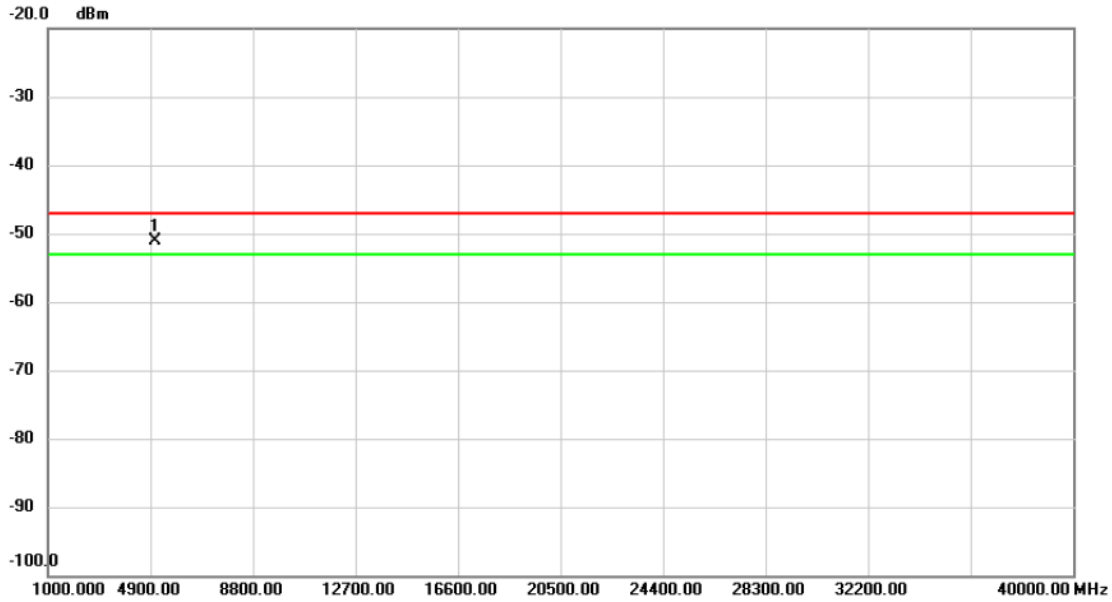

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5066.000	-53.58	2.40	-51.18	-47.00	-4.18	peak	

End of Test Report